


A (1 : 1)

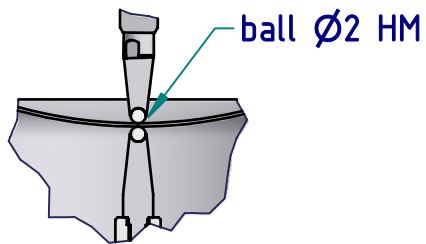

subject to technical alterations

type: ODITEST
range: 0-20 mm
range of indication: 0-20 mm
digital step:
scale interval: 0,01 mm
measuring force: 0.9-1.5 N
weight: 356g

acceptable deviations
VDI/VDE/DGQ 2618 Bl. 12.1/13.1)
max. permissible
errors "G": 0,06 mm
repeatability "r": 0,05 mm
reference temperature: 20° C
operation temperature: 10° C - 30° C
storage temperature: -10° C - 50° C

scale: 1:2
drawing-nr.: A1190
date of issue: 17.11.2010
name: j.heuser
revision status: 002
revision date: 05.02.2003