

Dial gauges – Electronic and Analogue



EASY-TO-USE AND VERSATILE

For more than 50 years we have been producing and distributing a wide range of easy-to-use and versatile dial gauges. Our experience allows us to offer a wide choice of different models.

- Electronic indicators with combined analogue/digital display using the most up-to-date technology.
- Mechanical dial gauges equipped with high-precision movements and double-action shockproof mechanisms. Measuring spans up to 100 mm.

CHOICE OF DIAL GAUGE OR ELECTRONIC INDICATOR

- Digital indication provides error-free reading of the measured value. There is no need to read fractions of scale divisions.
- Analogue indication offers the advantage of being able to smoothly adjust the increase or decrease of the dimension to be measured on the workpiece. This type of indication is best suited for dynamic measurements such as determining axial and radial runout errors.
- Electronic indicators provide many additional functions compared to the mechanical models. For more information, refer to the section on electronic indicators.
- The inspection of axial and radial runout errors frequently requires the use of instruments with the lowest hysteresis characteristic. Our electronic indicators, precision dial gauges and dial test indicators meet this requirement.
- In order to significantly reduce the effect of systematic errors, it is recommended to carry out comparative measurements. Only deviations from the nominal dimension will be displayed. High precision, small range electronic indicators are the ideal instruments for these types of measurements.
- These same instruments also enable avoiding major errors in reading millimetres.

STANDARDS AND DEFINITIONS

The international ISO 463:2006 standard replaces national standards dealing with mechanical dial gauges. All the same, new definitions and standard requirements pertaining to measuring procedures, although valid, imply changes in design and metrological characteristics, which cannot be entirely indicated in this catalogue. This standard, is defined in the matrix "Product Specification (GPS) – dimensional measuring instruments". It only defines the requirements for the most important characteristics.

Therefore, all tolerance limits indicated in this catalogue which refer to metrological characteristics are based on our own internal standards.

Electronic indicators and short range precision indicators. Definitions used in this section:



Total permissible error in 1 measuring direction over the entire measuring range within the partial measuring range


in the 2 measuring directions



Repeatability limit



Max. hysteresis

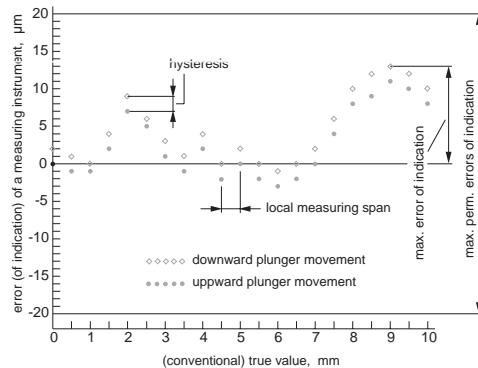

Mechanical dial gauges.

Definitions used in this section for the maximum permissible errors of a metrological characteristic (MPE):



Deviation span (error of indication within the measuring range)



Deviation span (error of indication) within the partial measuring range




Total deviation span (error of indication within the measuring range)



Repeatability limit (reliability) of indication



Hysteresis of indication

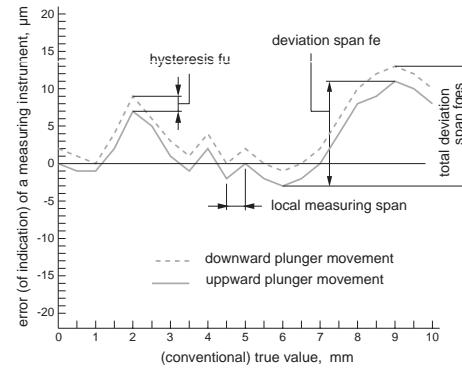



Resolution 0,01 mm = $\pm 0,25$ mm
Resolution to 0,001 mm = $\pm 0,025$ mm

6-decade LC display field, plus minus sign

Digit size 10 x 5 mm (H x L)

Combined analogue and numerical display

Glass scale with incremental divisions, capacitive

MI or MIE type: metric/inch conversion

≤ 2 N

≤ 2 m/s

Full-metal housing with front face in polyamide. Stainless steel plunger. M2,5 mounting thread for measuring insert.

RS232, opto-coupled

3V lithium battery type CR2032

1 year to 2 years

10°C to 40°C

-10°C to 60°C

~ 80 %

EN 50081-1
EN 50082-1

150 g

Transport case with 1 lithium battery 01961000

Identification number


Inspection report with declaration of conformity

TESA DIGICO 205 / 305

- Dual LC Display, digital and analogue.
- Mechanical tolerance markers.
- Dimensions according to DIN 878.

Main functions

ON/Auto OFF – Data output – Counting sense reversal – Keypad lock.

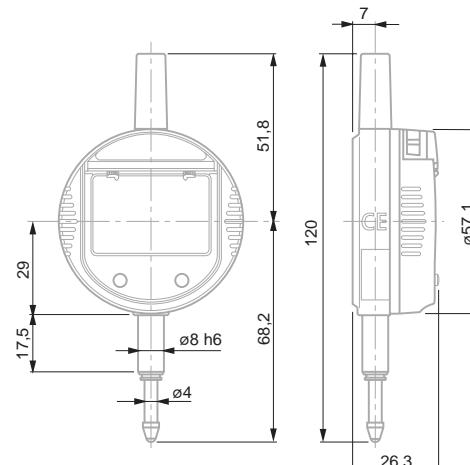



01930230	DIGICO 205 MI			12,5	0,5	0,01	0,0005	20	10
01930231	DIGICO 305 MI			12,5	0,5	0,001	0,00005	8	2

TESA DIGICO 400 / 500

- Measuring modes ABS/REL.
- Dual LC Display, digital and analogue
- Rotation through 270° of display and key functions.
- Mechanical tolerance marks.
- Graphical display of tolerance limits.

Measuring functions and modes

ON – Auto OFF – PRESET mode – Tolerance mode – Data output – Counting sense reversal – Keypad lock – Metric/Inch units – Full RESET.

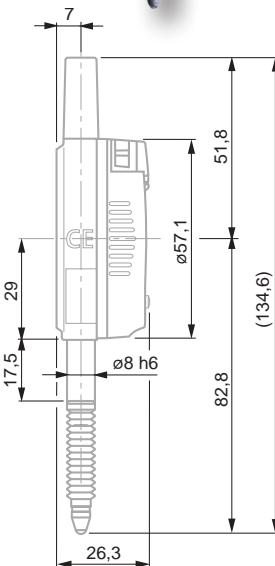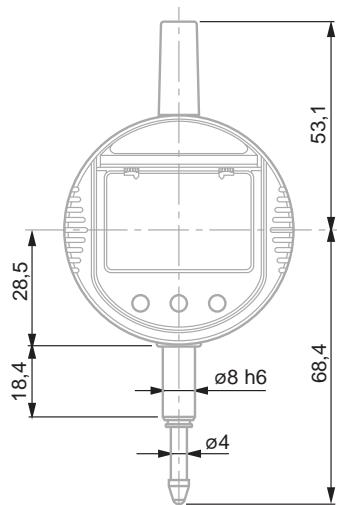

mm	in	mm	in	μm	μm	–	–	–	–	–	–
01930241 DIGICO 410 MI	25	1	0,01	0.0005	20	10	–	–	–	–	162
01930255 DIGICO 505 MIP, protected	12,5	0,5	0,001	0.00005	4	2	IP62	–	–	–	150

- Resolution 0,01 mm = ±0,25 mm Resolution 0,001 mm = ±0,025 mm
- 6-decade LC display field plus minus sign
- Digit size 10 x 5 (H x L)
- Combined analogue and numerical display
- Glass scale with incremental divisions, capacitive
- Conversion mm/in
- Measuring force: < 2 N
- ≤ 2 m/s
- Full-metal housing, front face in polyamide. Stainless steel plunger. M2,5 mounting thread for measuring insert.
- RS232, opto-coupled
- 3V lithium battery, type CR2032
- 1 year to 2 years
- 10°C to 40°C
- 10°C to 60°C
- 80 %
- EN 50081-1
EN 50082-1
- Shipping case including one lithium battery 01961000
- Identification number
- Inspection report with declaration of conformity



Resolution 0,01 mm
 $\pm 0,25 \text{ mm}$ Resolution 0,001 mm
 $\pm 0,025 \text{ mm}$



6-decade LC display field plus minus sign



Digit size 10 x 5 mm (H x L)



Combined analogue and numerical display



Glass scale with incremental divisions, capacitive



Conversion mm/in



Measuring force:
 $< 2 \text{ N}$



$\leq 2 \text{ m/s}$



Full-metal housing with front face in polyamide. Stainless steel plunger. M2,5 mounting thread for measuring insert.



RS232, opto-coupled



3V lithium battery, type CR2032



1 year to 2 years



10°C to 40°C



-10°C to 60°C



80 %



EN 50081-1
 EN 50082-1



Transport case with 1 lithium battery 01961000



Identification number




Inspection report with declaration of conformity

TESA DIGICO 600

- Measuring modes ABS/REL.
- Dual LC Display.
- Display rotation through 270°. Same goes for the key functions.
- Mechanical tolerance marks.
- Graphical display of tolerance limits.

Measuring functions and modes

- ON – Auto OFF – PRESET mode – Tolerance mode – Measured value storage
- Max • Min • Max-Min (TIR) – Data output – Counting sense reversal – Keypad lock – Metric/Inch units – Full RESET.

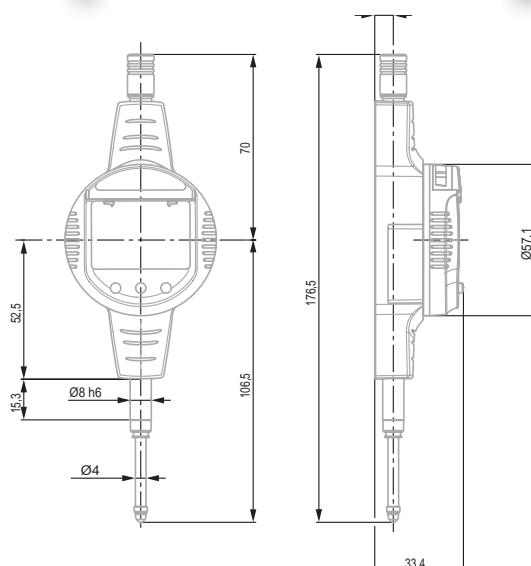

			mm	in	mm	in	μm	μm	g
01930256	DIGICO 605 MI		12,5	0.5	0,001	0.00005	4	2	150
01930257	DIGICO 610 MI		25	1	0,001	0.00005	5	2	162

TESA DIGICO 705


For use with 2-point contact bore gauges. Allows setting of the dial gauge to the smallest setting ring value.

- Same functions as DIGICO 600.



01930258	DIGICO 705 MI	mm	in	mm	in	µm	µm	g

Accessories for TESA DIGICO 200 – 700

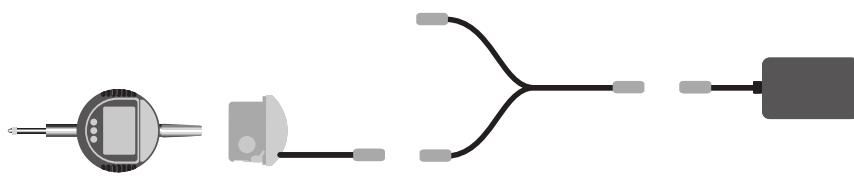

01962002	External power supply
01961000	Lithium battery, 3V, CR2032
04761054	Battery charger 100 ÷ 200 VAC / 50 ÷ 60 Hz, 6,6 Vdc, 750 mAh supplied without power cable
04761055	Cable EU for charger 0471054
04761056	Power cable US for charger 0471054

- Measuring inserts, see chapter "Measuring inserts for dial gauges, axial probes and other hand tools".
- Backs and retraction devices, see chapter "Devices for plunger retraction" and "Backs for Dial Gauges".
- Connectivity, see corresponding chapter.


	Resolution to 0,01 mm = ± 0,25 mm Resolution 0,001 mm = ± 0,025 mm
	6-decade LC display field, plus minus sign
	Digit size 10 x 5 mm (H x L)
	Combined analogue and numerical display
	Glass scale with incremental divisions, capacitive
	Conversion mm/in
	Measuring force < 2 N
	≤ 2 m/s
	Full-metal housing with front face in polyamide. Stainless steel plunger, M2,5 mounting thread for the measuring insert.
	RS232, opto-coupled
	3V lithium battery, type CR2032
	1 to 2 years
	10°C to 40°C
	-10°C to 60°C
	80 %
	EN 50081-1 EN 50082-1
	Transport case with 1 lithium battery 01961000
	Identification number
	Inspection report with declaration of conformity

	According to selected tolerances
	30,4 mm (DIGICO 1) or 60,4 mm (DIGICO 2)
	40 mm scale length
	25 divisions
	According to selected tolerances
	6 decades plus minus sign
	See table
	9 x 4,5 mm digit size (H x W)
	LC display with backlight
	Incremental glass scale
	Metric/inch conversion
	DIGICO 1: 2 µm DIGICO 2: 3 µm
	1 µm
	1 µm
	See table for measuring forces
	DIGICO 1: max. 1 m/s DIGICO 2: max. 2 m/s
	Plunger guided on a plain bearing M2,5 mounting thread for measuring insert.
	RS232
	3,6 V lithium battery or mains adapter
	≈ 1000 h with lithium battery
	0,002%/°C
	10°C to 40°C
	-10°C to 50°C
	DIGICO case in standard execution: IP54 (IEC 60529)
	290 g (DIGICO 1) 310 g (DIGICO 2)
	Moved mass through the plunger: 28 g (DIGICO 1) 27 g (DIGICO 2)
	Supplied in transport packing with 1 lithium battery 01960007 1 lift lever 01960005
	Identification number
	Inspection report with a declaration of conformity

TESA DIGICO 1 / 2

These two indicators are remarkable for their multiple simple functions, long measuring travel and high accuracy.

- Analogue/digital display combined with the possibility of orienting the analogue display in different positions.
- Zero setting at any point within the measuring span.
- Data input via the keypad.
- Counting direction reversible.
- Entry of limit values for classification through displayed symbols. Additional green, red or amber coloured background whenever the instrument is connected to mains.
- Storage of measured values through the functions: "Maximum value", "Minimum value" or "Maximum value minus minimum value".

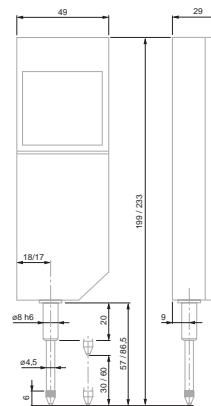

No	=	mm	in	mm	in
01930000	DIGICO 1	30	1.18	0,001	0.00005
01930001	DIGICO 2	60	3.36	0,001	0.00005

OPTIONAL ACCESSORIES:

04761037	Mains adaptor 230V for DIGICO 1 or 2
04761057	Mains adaptor 110V for DIGICO 1 or 2
01960007	3.5 V lithium battery, LR6, AA
01960005	Bottom mounted lift lever
04768000	Hand switch for manually triggering data transfer. Jack plug connector, 1,8 m - TESA SPC PRINTER printer - TESATRONIC TT display units

Force de mesure



DIGICO 1



DIGICO 2

Measuring force* close to measuring plunger stop

- | | | |
|----------|-----------------|-----------------|
| - Bottom | 0.85 N ± 0.15 N | 0.90 N ± 0.20 N |
| - Top | 1.10 N ± 0.20 N | 1.45 N ± 0.25 N |

Hysteresis*

0.10 N	0.15 N
--------	--------


* Valid with indicator in vertical position, measuring plunger oriented downwards and in static measurement.

TESA DIGICO 12

Designed to operate in a rugged environment, resistant to spray of liquids (IP65)
– 44 mm dial diameter – Provides the advantages of mechanical precision with digital reading

TESA DIGICO 12 – Standard

- 44 mm dial casing diameter.
- Resistant against cutting oils and coolants (IP65).
- RS232 SIMPLEX data output combined with external power supply.
- Inductive measuring system, patented.
- Choice between absolute "ABS" and relative "REL" measuring modes.
- Digital display.
- Setting of PRESET value (± 130 mm).
- Inverse measuring direction.
- Direct conversion of metric/inch units.
- Automatic shutdown.

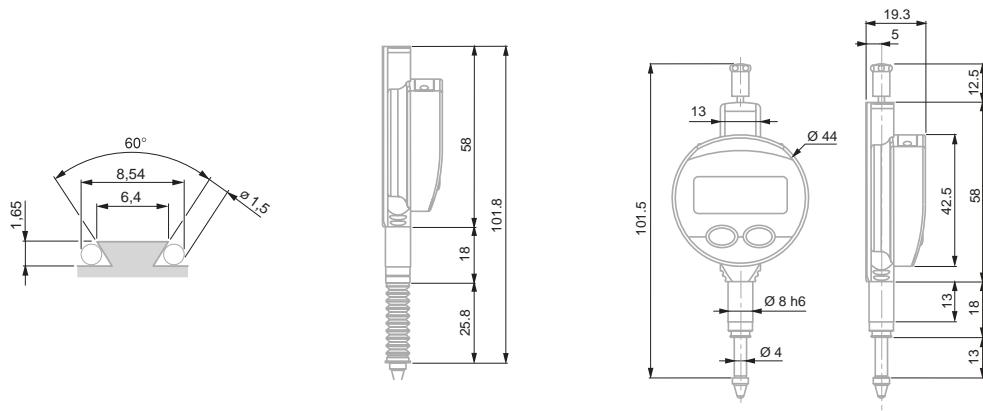


		mm	in	mm	in	Protection bellows
01930130	12,5	0.5		0,01	0.0005	IP65
01930132	12,5	0.5		0,001	0.00005	IP65
01930131	12,5	0.5		0,01	0.0005	With
01930133	12,5	0.5		0,001	0.00005	With
						IP65

- 5-digit LC display + sign
- Digit height 6 mm
- 20 µm
- Repeatability: 5 µm
- 0,5 to 0,9 ($\pm 0,15$) N
- Max. 2 m/sec
- Number of measurements per second: 7
- Zero setting of display
- RS232
- 3 V lithium battery, type CR 3032
- Battery life > 3500 hours
- Working temperature range: 5°C to 40°C
- Protection level: IP65 (CEI 629)
- EN 61326-1
- 70 g
- Supplied in transport packing with 1 lithium battery, type CR 3032 (No 01961000)
- Identification number
- Declaration of conformity
- Models 0,01 mm with report, models 0,001 mm without report

-  LCD, 5 digits + sign
-  Digit height: 6 mm
-  Max. permissible error: 4 µm
-  Repeatability limit: 2 µm
-  0,4 to 0,75 (± 0,15) N
-  Max. 2 m/sec
-  Number of measurements per second: 9
-  Zero-setting of display
-  RS232
-  3 V lithium battery, type CR 2032
-  Battery life: > 4000 hours
-  Working temperature range: 5°C to 40°C
-  IP65 (CEI 529)
-  EN 61326-1
-  70 g
-  Supplied in transport packing with 1 lithium battery, type CR 2032 (No 01961000)
-  Identification number
-  Inspection report with a declaration of conformity

TESA DIGICO 12 – HP

- High precision measuring system.
- Resistant to cutting oils and coolants (IP65).
- Combined analogue/digital display.
- Analogue reading from ±0.025 to ±1.25 mm.
- NOR/MIN/MAX/MAX-MIN measuring modes.
- 44 mm dial casing diameter.
- RS 232 data output combined with external power supply.
- Inductive measuring system, patented.
- Zero-setting of display.
- Direct conversion of metric/inch units.
- Shut down: either automatic or blocked.


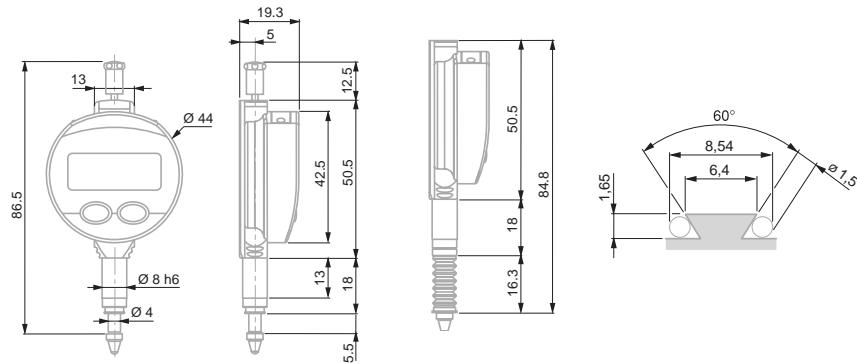


No	mm	in	mm	in	Protection bellows	
01930134	5	0.210	0.001	0.00005	IP65	
01930135	5	0.210	0,001	0.00005	With	IP65

Accessories for TESA DIGICO 12



03238013	Mounting lug
01961012	Upper lift lever
01960005	Bottom mounted lift lever
04761060	RS 232 cable with external power supply
01961000	Lithium battery, 3V, CR2032



01961012

ETALON HP

High precision comparators

ETALON with short measuring travel

The ultimate in high precision.

Remarkably reliable, even when constantly used for series inspection – Specially designed for comparative measurements requiring a very low measurement uncertainty – Measures axial and radial runouts with very low hysteresis.


- Shockproof movement. Lever and gear transmission system. Long dead travel.
- Non-reflecting dial for easy readout.
- Measuring travel limited to less than one revolution of pointer. No possibility of reading errors.
- Fine adjustment with protective knob to prevent accidental displacement of the pointer.



01419051	0,1	0,001	3,0	50 ÷ 0 ÷ 50	●	62	–
01419052	0,1	0,001	3,0	50 ÷ 0 ÷ 50	●	62	IP54

Accuracy

	0,001 mm
	Max. perm. errors in one direction throughout the measuring range, G_e
	1 µm
	over any selected local range including 10 scale divisions, G_t
	0,7 µm
	in both measuring directions throughout the total measuring range, G_{ges}
	Repeatability limit, r_w
	0,5 µm
	Max. hysteresis, f_u
	0,5 µm

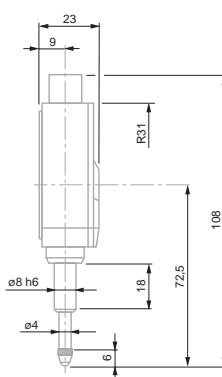

	EN ISO 463
	Factory standard
	Rotating dial. With or without dial lock for standard models
	0,01 mm
	Full-metal dial casing. Mounting shank and plunger in hardened stainless steel
	See table for tolerance limits
	With or without shockproof mechanism
	Adjustable tolerance markers. Thread M2,5 for measuring insert
	Measuring insert with 3 mm dia. ball tip already mounted
	Cardboard box
	Identification number
	Inspection report with a declaration of conformity

DIAL GAUGES - PREMIUM QUALITY

The TOP quality of our dial gauges guarantee the use of the best and most wear-resistant materials in order to ensure that the most demanding metrological criteria are respected along with a product life that exceeds all other dial gauges

Dial Ø 40 mm – Reading 0,01 mm

Precision dial gauges

These precision dial gauges combine excellent metrological properties with extra-long life.

- Smooth and regular travel, entirely jewel-mounted movement.
- Full-metal dial casing and bezel.
- Shockproof mechanism in both directions of plunger movement.
- Non-reflecting dial.
- Swiss-made.




01410210 353 353E


							N
01410210	TESA YR	5	5,4	0,01	0,5	0 ÷ 25 ÷ 50	● ●
01416013	MERCER X185-1	5	5,4	0,01	0,5	0 ÷ 25 ÷ 0	- ●
01416014	MERCER 186-1	5	5,4	0,01	0,5	0 ÷ 25 ÷ 50	- ●
01412010	TESA YE	5	5,4	0,01	0,5	0 ÷ 25 ÷ 50	- -
353	COMPAC 353	5	5,4	0,01	0,5	0 ÷ 25 ÷ 50	● -
353E	COMPAC 353E IP54	5	5,4	0,01	0,5	0 ÷ 25 ÷ 50	● IP54

Permissible limits of a metrological characteristic (MPE/MPL)

	0,01 mm
	Deviation span 12 µm
	Deviation span within partial measuring span 0,10 mm 6 µm
	Total deviation span 14 µm
	Repeatability limit 3 µm
	Max. hysteresis 3 µm
	Measuring force = 1,4 N - IP54 model = 2 N

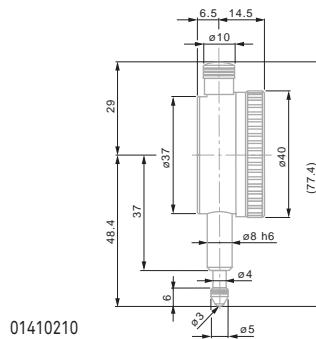

01410210

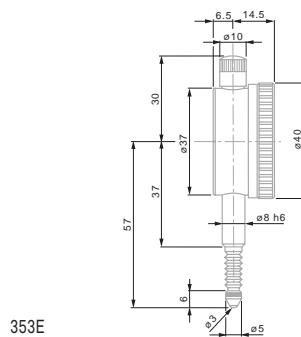

353E

Dial Ø 57 and 58 mm – Reading 0,01 mm

Precision dial gauges



01410610

512K

532E




01416021

01410610	TESA YR		10	10,5	0,01	1	0 ÷ 50 ÷ 100	●	●				
01410611	TESA YR		10	10,5	0,01	1	0 ÷ 50 ÷ 0	●	●				
01412310	TESA YE		10	10,5	0,01	1	0 ÷ 50 ÷ 100	-	-				
01416021	MERCER 251-1		10	10,5	0,01	1	0 ÷ 50 ÷ 100	-	●				
512K	COMPAC 512K		10	10,5	0,01	1	0 ÷ 50 ÷ 100	-	-				
532	COMPAC 532		10	10,5	0,01	1	0 ÷ 50 ÷ 100	●	-				
532E	COMPAC 532E IP54		10	10,5	0,01	1	0 ÷ 50 ÷ 100	●	-	IP54			
533S	COMPAC 533S limited travel		± 0,5	4	0,01	1,27	50 ÷ 0 ÷ 50	●	-				

512K

01410610 – 01410611

532E

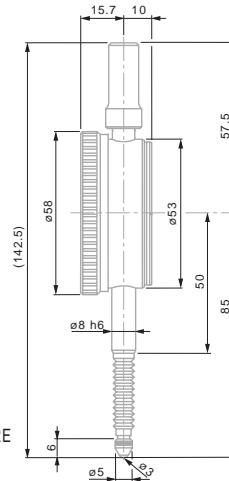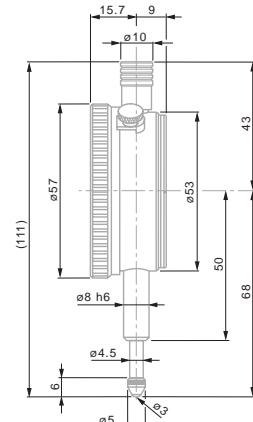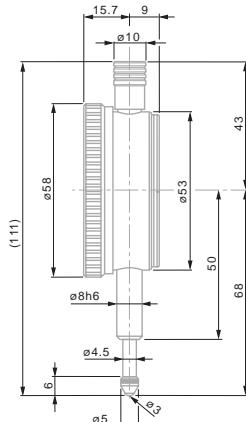

Permissible limits of a metrological characteristic (MPE/MPL)

	$\pm 0,5$	7 µm	3 µm	= 1 N
	10 mm	15 µm	3 µm	$\leq 1,5$ N
		8 µm	3 µm	$\leq 2,2$ N
	5 µm	9 µm	3 µm	
		8 µm	3 µm	
		17 µm	3 µm	

- EN ISO 463
- Factory standard
- Rotating dial. With or without dial lock for standard models
- 0,01 mm
- Full-metal dial casing. Mounting shank and plunger in hardened stainless steel
- See table for tolerance limits
- With or without anti-shock mechanism
- Adjustable tolerance markers. Thread M2,5 for measuring insert
- Measuring insert with Ø 3 mm ball tip already mounted
- Cardboard box
- Identification number
- Inspection report with declaration of conformity

Dial Ø 58 mm – Reading 0,01 mm – Long travel

Long range precision dial gauges



EN ISO 463

Factory standard



0,01 mm



Full-metal dial casing. Mounting shank and plunger in hardened stainless steel



See table for

tolerance limits



Adjustable tolerance markers. Thread M2,5 for measuring insert



Measuring insert with 3 mm ball tip already mounted



Cardboard box




Identification number



Inspection report with declaration of conformity



712

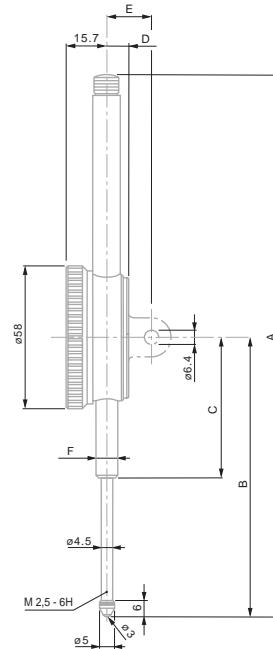

No.			mm	mm	mm	mm				Ø
712	COMPAC 712	30	30,5	0,01	1	0 ÷ 50 ÷ 100	●	-	58	
722	COMPAC 722	50	50,5	0,01	1	0 ÷ 50 ÷ 100	●	-	58	
732	COMPAC 732	100	100,5	0,01	1	0 ÷ 50 ÷ 100	●	-	58	

Dimensions

	30 mm	50 mm	100 mm
A	148	228	390
B	88	117,2	211,6
C	50	60	103,6
D	10	9	9
E	20	19	19
F	Ø 8h6	Ø 8h6	Ø 8h6

Permissible limits of a metrological characteristic (MPE/MPL)

	30 mm	50 mm	100 mm
Deviation span	20 µm	25 µm	30 µm
Total deviation span	25 µm	30 µm	35 µm
Repeatability limit	3 µm	3 µm	3 µm
Max. hysteresis	5 µm	5 µm	8 µm
Measuring force	≤ 2,2 N	≤ 2,5 N	≤ 3,2 N




Dial Ø 82 mm – Reading 0,01 mm

Precision dial gauges



01410910

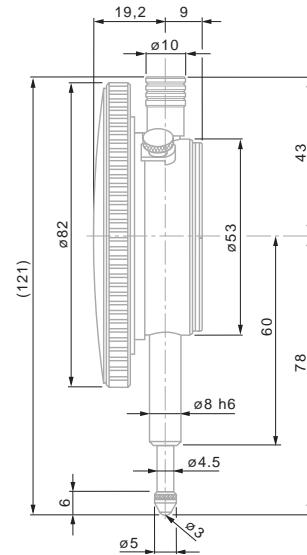

01410910

- EN ISO 463
- Factory Standard
- Rotating dial. With or without dial lock
- 0,01 mm
- Full-metal dial casing. Stainless steel fixing shank and plunger, hardened
- See table for tolerance limits
- High performance shock-proof system in the 2 directions
- M2,5 thread for measuring insert
- Measuring insert with Ø 3 mm ball tip, already mounted
- Cardboard box
- Identification number
- Inspection report with declaration of conformity

	mm	mm	mm	mm	mm	0 ÷ 50 ÷ 100	●	●
01410910	10	10,5	0,01	0,1				

Permissible limits of a metrological characteristic (MPE/MPL)

	10 mm
Deviation span	15 µm
Deviation span within partial measuring span of 0,10 mm	8 µm
Total deviation span	17 µm
Repeatability limit	3 µm
Max. hysteresis	3 µm
Measuring force	≤ 1,4 N

-  EN ISO 463
-  Factory standard
-  Rotating dial
-  0,002 mm
-  Full-metal casing.
Fixing shank and plunger in hardened stainless steel
-  See table for tolerance limits
-  Adjustable tolerance markers. Thread M2,5 for measuring insert
-  Measuring insert with Ø 3 mm ball tip already mounted
-  Cardboard box
-  Identification number
-  Inspection report with declaration of conformity

Dial Ø 40 mm – Reading 0,002 mm


Precision dial gauges



355E



365S

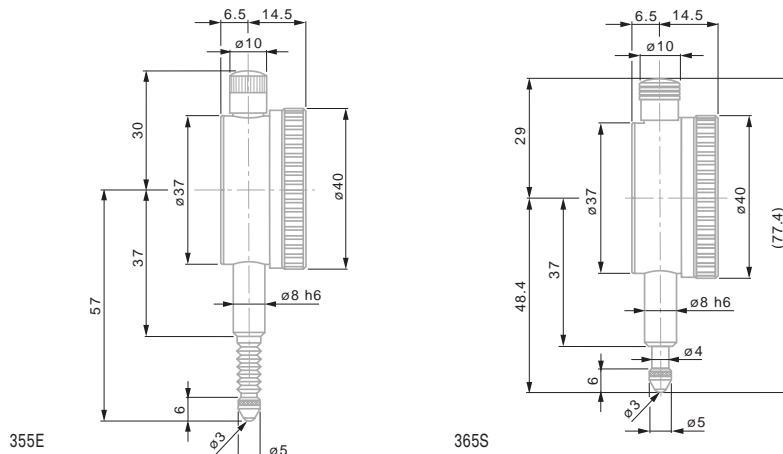

									
355	3	3,3	0,002	0,2	0 ÷ 10 ÷ 20	●	-	40	
355E	3	3,3	0,002	0,2	0 ÷ 10 ÷ 20	●	-	40	IP 54
365S	±0,08	1,5	0,002	0,2	8 ÷ 0 ÷ 8	●	-	40	

Permissible limits of a metrological characteristic (MPE/MPL)

			
		±0,08 mm	3 mm
	Deviation span	2 µm	10 µm
	Deviation span within the selected local measuring span 0,10 mm	2 µm	6 µm
	Total deviation span	4 µm	12 µm
	Repeatability limit	1 µm	1,5 µm
	Max. hysteresis	1 µm	2 µm
	Measuring force – Model IP54	≤ 1,4 N –	≤ 1,4 N ≤ 1,7 N



Dial Ø 58 mm – Reading 0,002 mm

Precision dial gauges



01416034




555




565S




555E

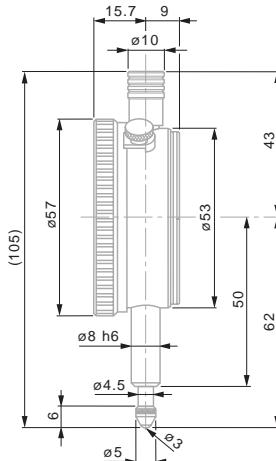

01416034

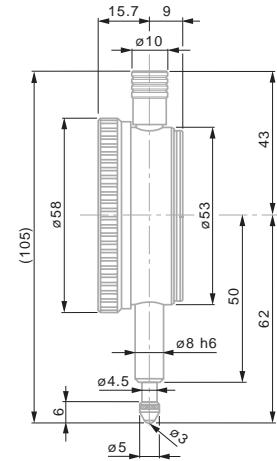

555

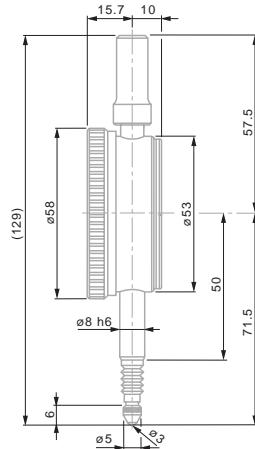

555E

- EN ISO 463
- Factory standard
- Rotating dial. With or without dial lock.
- 0,002 mm
- Full-metal dial casing. Mounting shank and plunger in hardened stainless steel
- See table for tolerance limits
- Adjustable tolerance markers. Thread M2,5 for measuring insert
- Measuring insert with 3 mm ball tip already mounted
- Cardboard box
- Identification number
- Inspection report with declaration of conformity

	No	=									
			mm	mm	mm	mm					
01416034	MERCER 253-1		5	5,3	0,002	0,2	0 ÷ 10 ÷ 0	-	●	58	-
555	COMPAC 555		5	5,3	0,002	0,2	0 ÷ 10 ÷ 20	●	-	58	
555E	COMPAC 555E IP54		5	5,3	0,002	0,2	0 ÷ 10 ÷ 20	●	-	58	IP 54
565S	COMPAC 565S limited travel		±0,08	3,3	0,002	0,2	8 ÷ 0 ÷ 8	●	-	58	-

Permissible limits of a metrological characteristic (MPE/MPL)

			$\pm 0,08 \text{ mm}$	5 mm
	Deviation span		4 μm	12 μm
	Total deviation span		4 μm	14 μm
	Repeatability limit		1 μm	2 μm
	Max. hysteresis		1 μm	2 μm
	Measuring force – Model IP54		$\leq 1,5 \text{ N}$	$\leq 1,5 \text{ N}$ $\leq 1,7 \text{ N}$



EN ISO 463
Factory standard



0,001 mm

Full-metal dial
casing. Mounting
shank and plunger
in hardened stain-
less steel



With shock-proof
mechanism, in both
directions

Adjustable tolerance
markers. Thread
M2,5 for measuring
insert

Measuring insert
with 3 mm steel ball
tip already mounted



Identification
number

Inspection report
with declaration of
conformity

Dial Ø 40 mm – Reading 0,001 mm


Precision dial gauges




01410010



01410120

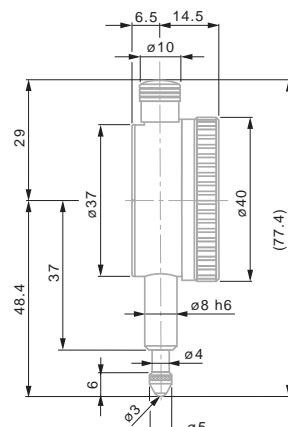

01410010

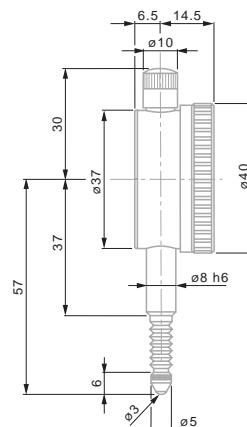

01410120



	No	=										
			mm	mm	mm	mm	mm	mm	0 ÷ 50 ÷ 100	●	●	40
01410010	TESA YR		1	1,5	0,001	0,1	40	0 ÷ 50 ÷ 100	●	●	40	–
01412510	TESA YE		1	1,5	0,001	0,1	40	0 ÷ 50 ÷ 100	●	–	40	–
01410120	TESA YR IP54		1	1,5	0,001	0,1	40	0 ÷ 50 ÷ 100	●	–	40	IP 54
367	COMPAC 367		1	1,5	0,001	0,1	40	0 ÷ 5 ÷ 10	●	–	40	–
367E	COMPAC 367E IP54	1	1,5	0,001	0,1	40	0 ÷ 5 ÷ 10	●	–	40	–	IP 54

Permissible limits of a metrological characteristic (MPE/MPL)



1 mm

	Deviation span	4 µm
	Deviation span within the selected local measuring span 0,10 mm	4 µm
	Total deviation span	5 µm
	Repeatability limit	1 µm
	Max. hysteresis	1 µm
	Measuring force – Model IP54	≤ 1,7 N ≤ 2 N



Dial Ø 58 mm – Reading 0,001 mm

Precision dial gauges




01412511




556



01412611

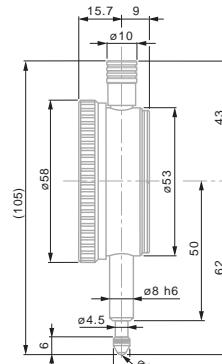

567

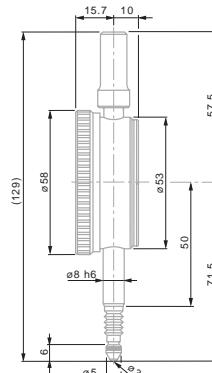

556E

- EN ISO 463
- Factory standard
- 0,001 mm
- Full-metal dial casing. Mounting shank and plunger in hardened stainless steel
- See table for tolerance limits
- Effective anti-shock in the 2 directions
- Adjustable tolerance markers. Thread M2,5 for measuring insert
- Measuring insert with 3 mm Ø ball tip, already mounted
- Cardboard box
- Identification number
- Inspection report with declaration of conformity

		mm	mm	mm	mm					
01412511	TESA YE	1	1,5	0,001	0,1	58	0 ÷ 50 ÷ 100	●	-	
01412611	TESA YE	5	5,3	0,001	0,2	58	0 ÷ 100 ÷ 200	●	-	
556	COMPAC 556	5	5,3	0,001	0,2	58	0 ÷ 10 ÷ 20	●	-	
567	COMPAC 567	1	3,3	0,001	0,1	58	0 ÷ 5 ÷ 10	●	-	
556E	COMPAC 556E IP54	5	5,3	0,001	0,2	58	0 ÷ 10 ÷ 20	●	-	IP54
01412711	TESA YE IP54	1	1,5	0,001	0,1	58	0 ÷ 50 ÷ 100	●	-	IP54
01410520	TESA YR IP54	1	3,3	0,001	0,1	58	0 ÷ 50 ÷ 100	●	-	IP54

Permissible limits of a metrological characteristic (MPE/MPL)

	1 mm	5 mm	
	Deviation span	4 µm	12 µm
	Deviation span within the selected local measuring span 0,10 mm	4 µm	-
	Total deviation span	5 µm	14 µm
	Repeatability limit	1 µm	2 µm
	Max. hysteresis	1 µm	2 µm
	Measuring force – Models IP54	≤ 1,7 N –	≤ 1,5 N ≤ 1,7 N



EN ISO 463
Factory standard



Rotating dial. With or without dial lock.



0,001 mm



Full-metal dial casing. Stainless steel fixing shank and plunger, hardened



See table for tolerance limits



High performance anti-shock system in both directions



M2,5 thread for measuring inserts



Measuring insert with Ø 3 mm ball tip, already mounted



Cardboard box



Identification number



Inspection report with a declaration of conformity

Dial Ø 82 mm – Reading 0,001 mm


Precision dial gauges



556G



01410810

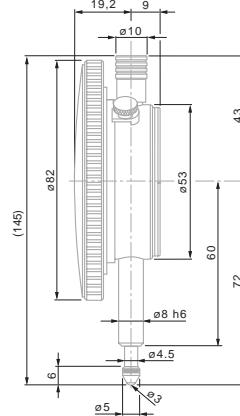

01410810



		mm	mm	mm	mm					
01410810	TESA YR	1	3,3	0,001	0,1	0 ÷ 50 ÷ 100	●	●	82	
556G	COMPAC 556G	5	5,3	0,001	0,2	0 ÷ 10 ÷ 20	●	-	82	

Permissible limits in a metrological characteristic (MPE/MPL)

		1 mm	5 mm
	Deviation span	4 µm	12 µm
	Deviation span within partial measuring span of 0,10 mm	4 µm	-
	Total deviation span	5 µm	14 µm
	Repeatability limit	1 µm	2 µm
	Max. hysteresis	1 µm	2 µm
	Measuring force	≤ 1,7 N	≤ 1,5 N






STANDARD DIAL GAUGES

The Standard product line offers a range of heavy duty and competitively priced dial gauges.

Dial Ø 40 / 58 – Reading 0,1 mm

Precision dial gauges

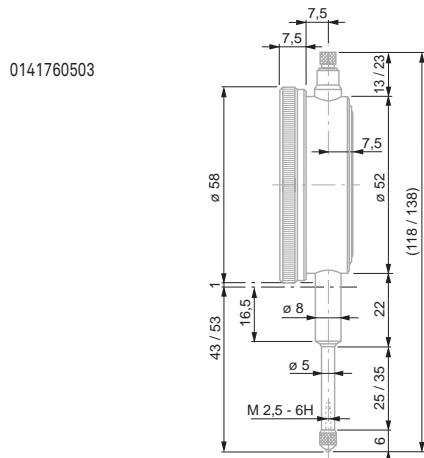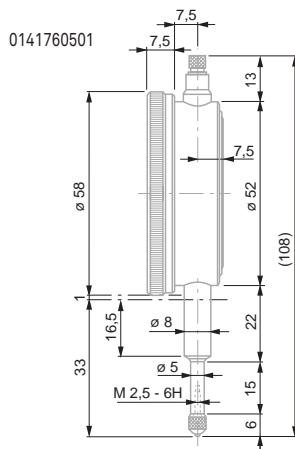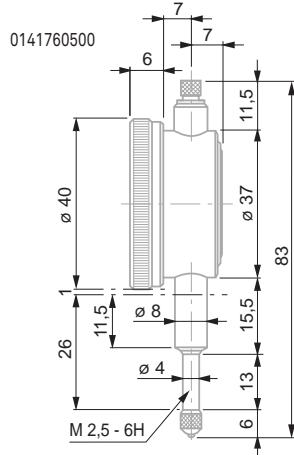

	mm	mm	mm	mm	mm	N	
0141760500	10	10,5	0,1	10	0 ÷ 5 ÷ 10	–	≤ 1,0 40
0141760501	10	10,5	0,1	10	0 ÷ 5 ÷ 10	–	≤ 1,0 58
0141760503	30	30,5	0,1	10	0 ÷ 5 ÷ 10	–	≤ 1,5 58

Permissible limits of a metrological characteristic (MPE/MPL)

	10 mm
	40 µm
	25 µm
	55 µm
	15 µm
	15 µm

- EN ISO 463
- Factory standard
- Rotating dial
- 0,1 mm
- Full-metal casing. Mounting shank and plunger in hardened stainless steel
- See table for tolerance limits
- Without anti-shock mechanism
- Thread M2,5 for measuring insert
- Measuring insert with 3,175 mm Ø ball tip already mounted
- Plastic case
- Identification number
- Declaration of conformity



EN ISO 463
Factory standard



0,01 mm

Full-metal casing.
Mounting shank and
plunger in hardened
stainless steel

See table for
maximum deviations

With or without an-
ti-shock mechanism

Adjustable tolerance
markers. Thread
M2,5 for measuring
insert

Measuring insert
with 3,175 mm
Ø ball tip already
mounted

Plastic case or
cardboard box

Identification
number

Inspection report
with declaration of
conformity

Dial Ø 40 mm – Reading 0,01 mm

Precision dial gauges


Model 0141760560 provides excellent value for money.




0141760560



01419047

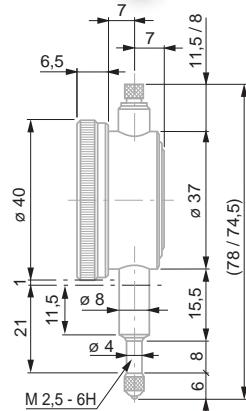

0141760560

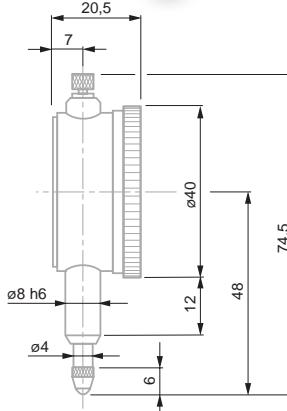

01419047



No			mm	mm	mm	mm	mm	mm
0141760560 *	ROCH	3	3,4	0,01	0,5	0 ÷ 25 ÷ 50	-	
01419047	ETALON	5	-	0,01	0,5	0 ÷ 25 ÷ 50	●	

* With extra reverse numbering in red

Permissible limits of a metrological characteristic (MPE/MPL)

		3 mm	5 mm
	Deviation span	10 µm	12 µm
	Deviation span within the selected partial measuring span of 0,1 mm	5 µm	6 µm
	Total deviation span	12 µm	-
	Repeatability limit	3 µm	3 µm
	Max.hysteresis	3 µm	-
	Measuring force	≤ 1,4 N	≈ 1

Dial Ø 58 mm - Reading 0,01 mm - Long travel

Long travel precision dial gauges



0141760635



0141760661





0141760624




0141760651




0141761213

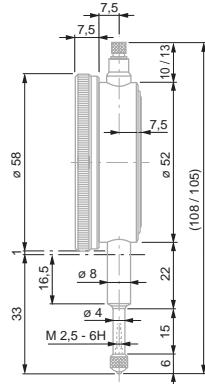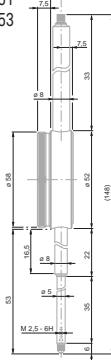0141760631
01417606350141760651
0141760653


0141760661

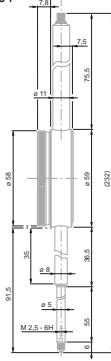

0141761213

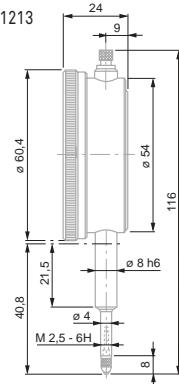

0141760624

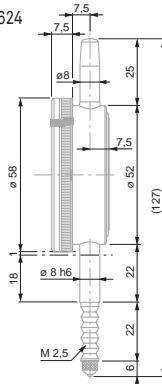

		mm	mm	mm	mm	N
0141760631 *	ROCH	10	10,5	0,01	1	0 ÷ 50 ÷ 100
0141760635 *	ROCH	10	10,5	0,01	1	0 ÷ 50 ÷ 100
0141761213 **	ROCH	15	15,5	0,01	1	0 ÷ 50 ÷ 100
0141760651	ROCH	30	30,5	0,01	1	0 ÷ 50 ÷ 100
0141760653	ROCH	30	30,5	0,01	1	0 ÷ 50 ÷ 100
0141760624 *	ROCH IP54	10	10,5	0,01	1	0 ÷ 50 ÷ 100
0141760661	ROCH	50	51	0,01	1	0 ÷ 50 ÷ 100

* With extra reverse numbering in red

** Ø Dial 60,4 mm

Permissible limits of a metrological characteristic (MPC/MPE)

	10 mm	15 mm	30 mm	50 mm	80 mm
Deviation span	15 µm	20 µm	20 µm	25 µm	30 µm
Deviation span within the selected local measuring span 0,10 mm	5 µm				
Repeatability limit	3 µm				

- EN ISO 463
- Factory standard
- Rotating dial
- 0,01 mm
- Full-metal casing. Mounting shank and plunger in hardened stainless steel
- See reference table
- With or without anti-shock mechanism
- Adjustable tolerance markers. Model No. 0141760640 with fine adjust for dial reading mounted under protective cap. Thread M2,5 for measuring insert
- Accuracy: see table for max. deviations. If measurements are carried out with a downward plunger, the same must be mechanically coupled to the measuring point to eliminate all hysteresis
- Measuring insert with Ø 3,175 mm steel ball tip, already mounted. Exceptions: Model numbers 0141760631 / 0141761213 with ruby ball tips.
- Plastic case or cardboard box
- Identification number
- Declaration of conformity





EN ISO 463
Factory standard



0,01 mm

Full-metal casing.
Mounting shank and
plunger in hardened
stainless steel



Adjustable tolerance
markers. Thread
M2,5 for measuring
insert

Measuring insert
with Ø 3,175 mm
steel ball tip,
already mounted



Identification
number





Dial Ø 58 mm – Reading 0,01 mm – Standard and long travel

Precision dial gauges

Standard and long travel models



01419048

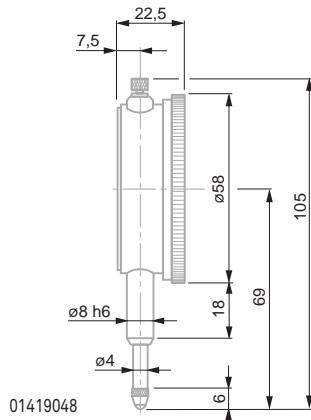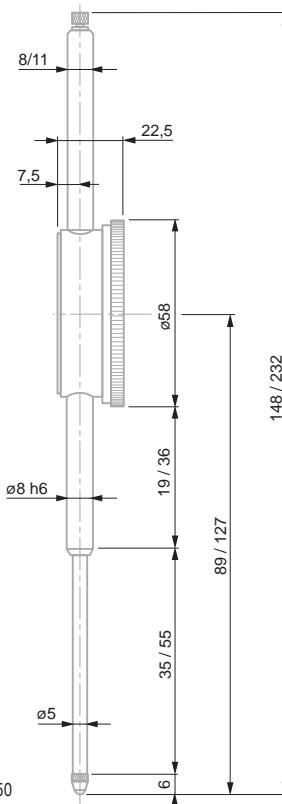

01419048 01419050



No	mm	mm	mm		N	Ø
01419048	10	0,01	1	0 ÷ 50 ÷ 100	–	58
01419050	50	0,01	1	0 ÷ 50 ÷ 100	●	58

For magnetic or central lug backs, see backs for ROCH and ETALON dial gauges

Permissible limits for a metrological characteristic (MPE/MPL)

	mm	10	50
	µm	15	25
Deviation span within selected partial measuring span 0,10 mm	µm	8	12
	µm	3	3



DIAL GAUGES – ANALOGUE WITH BACK MOUNTED PLUNGER

Mechanical dial gauges with back mounted plungers differentiate by their concept of presenting a display which is perpendicular to the movement of the measuring stem.

Dial Ø 40 mm – Reading 0,01 or 0,002 mm




CP352S



CP353



CP355

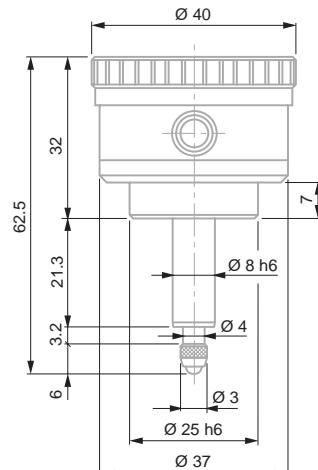

CP353

										N
mm	mm	mm	μm	μm	μm	mm	(1)	0 ÷ 25 ÷ 50	0,9	
CP 353 COMPAC CP353	3	3,2	0,01	14	3	3	0,5	0 ÷ 10 ÷ 20	0,9	
CP 355 COMPAC CP355	3	3,2	0,002	14	2,2,	2,5	0,2	40 ÷ 0 ÷ 40	0,9	
CP 352S COMPAC CP352S with limited travel	± 0,4	3,2	0,01	9	3	3	(1)			


S: Limited range of indication, restricted reading.

The needle makes less than one revolution of the dial, all reading errors due to revolution counter are eliminated.


- EN ISO 463
- Factory standard
- Rotating dial
- Full-metal casing. Mounting shank and plunger in hardened stainless steel
- See reference table
- With anti-shock mechanism
- Adjustable tolerance markers. Thread M2,5 for measuring insert. Fastening with sleeve Ø 8h6 and 25h6
- Measuring insert with Ø 3 mm steel ball tip, already mounted
- Cardboard box
- Identification diameter
- Inspection report with declaration of conformity

INSERTS FOR DIAL GAUGES, AXIAL PROBES, ETC. - EXECUTION WITH M2,5 THREAD


Spherical measuring inserts, standard.




Spherical measuring insert, short

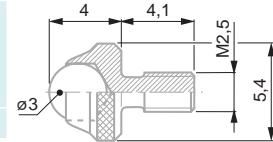

Spherical measuring inserts, long




Spherical measuring inserts, R = 0,5 mm.



No		L mm
03560035	Steel	5
03560036	Steel	10
03560037	Steel	15
03560038	Steel	20
03560039	Steel	30
03560040	Steel	40




Spherical measuring inserts

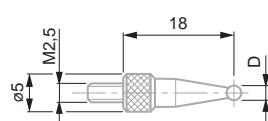

No		D, mm
03560051	Carbide	1
03560052	Carbide	2
03560053	Carbide	3
03560054	Carbide	4
03560055	Carbide	5
03560056	Carbide	6
03560057	Carbide	7
03560058	Carbide	8


Spherical measuring insert with 4 interchangeable pins, R = 1,5 mm

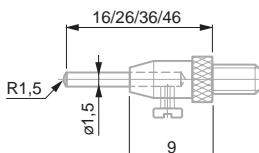

No		L, mm
03510201	Steel	16, 26, 36, 46


Spherical measuring inserts

No	
03510101	Steel
03510102	Carbide



Spherical measuring inserts


No	
03560017	Steel
03560018	Carbide



Measuring insert with offset (A)
Pointed measuring face
Lock nut for radial alignment.




03510401 Steel



Measuring insert with needle contact point




03560030 Steel




Measuring insert with offset (A)
Pointed measuring face
Lock nut for radial alignment.



03560063 Steel



Measuring inserts with ball-bearing rollers
Lock nut for radial alignment

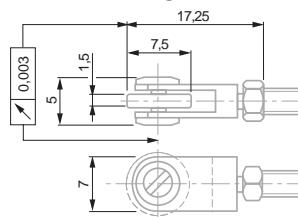

Shape

 03560010 Cylindrical Steel
 03560011 Domed Steel



Inserts with a knife blade measuring face
Lock nut for radial alignment



B, mm

03560024 Steel 0,3

03560025 Steel 0,3

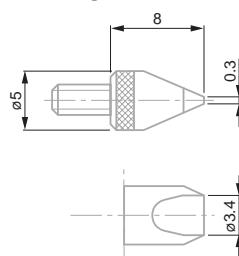

Inserts with a knife blade steel face
Lock nut for radial alignment




L, mm

03560031 5

03560032 10

03560033 15


03560034 20



Insert with a cylindrical measuring face
Lock nut for radial alignment




03510502 Carbide



Insert with a narrow, off-centre measuring face
Lock nut for radial alignment




03510602 Carbide

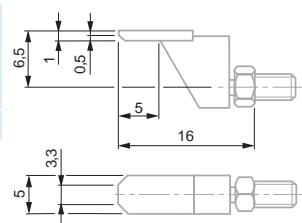


Insert with a narrow measuring face
Parallelism adjustable
Lock nut for radial alignment



03510702 Carbide



Inserts with a flat measuring face.




03510801	2,5	Steel
03510802	2,5	Carbide
03560022	3,4	Steel
03560023	3,4	Carbide


Insert with a flat measuring face
Parallelism adjustable
Counter-nut for radial alignment



03510902 Métal dur

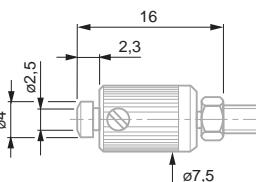

Inserts with a flat measuring face, in steel




L, mm	L1, mm
03560026	5
03560027	10
03560028	15
03560029	20



Inserts with interchangeable pins
Flat measuring face




03560008 Steel
03560009 Carbide

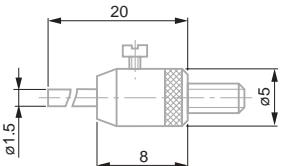

Inserts with flat measuring face




03560012	5	Steel
03560013	5	Carbide
03560014	10	Steel
03560015	10	Carbide
03560016	20	Steel




Extensions for measuring inserts



L, mm
03560042
03560043
03560044
03560045
03560046
03560047
03560048
03560049
03560050




Connectors for measuring inserts



Outside Inside
03560092 M2,5 M2
03560065 M3 M2,5

Extensions for measuring inserts.


		L, mm
03540501		10
03540502		15
03540503		20
03540504		40



- EXECUTIONS WITH A M2 COUPLING THREAD




Spherical measuring inserts, M2 thread

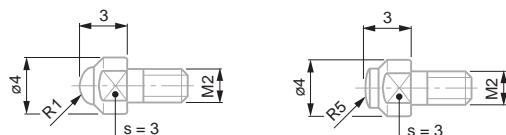

			mm
03510204	R 1	Carbide	
03510103	R 5	Carbide	


Spherical measuring inserts, R = 5 mm, M2 thread

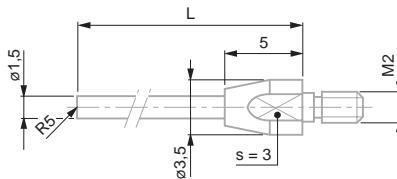

			L, mm
03510202	Carbide		16
03510203	Carbide		26


Measuring insert with cylindrical measuring face. Lock nut for radial alignment, M2 thread

03510503	Carbide



Extensions for measuring inserts, M2

		L, mm
03540505		10
03540506		15





ADDITIONAL ACCESSORIES FOR DIAL GAUGES

Device for plunger retraction for mounting on the bottom stem



Consisting of:

- 03540104 - 03540101: Lever
- 03540102: Washer

Device for plunger retraction for mounting on the top stem



mm

- | | |
|----------|------|
| 03560004 | Ø 40 |
| 03560005 | Ø 58 |



Retraction lever Bottom mounted lift lever



- | | | |
|----------|---------------------------|-----------------------------|
| 01960005 | Bottom mounted lift lever | Contains only lifting lever |
|----------|---------------------------|-----------------------------|



90° angle probe. For the transmission of movements of the measuring plunger. Max. travel up to 10 mm. For dial gauges of 0,01 mm



- | | | |
|----------|-------------------|---|
| 03560006 | 90° angular probe | 03560012; Insert with flat measuring face, Ø 5 mm |
|----------|-------------------|---|




Magnetic force = 150 N





Matt chrome plated except for tinted model numbers 01460010, 01460011

Backs for ROCH and ETALON Dial Gauges

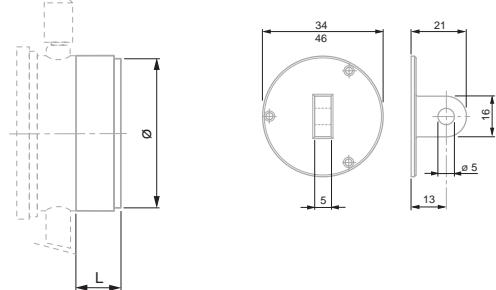

Backs for dial gauges TESA YR – YE / MERCER / COMPAC / DIGICO 200-700 – Ø 40 mm dial models



A

B



Bezel diameter, mm



Back, mm



Back with central lug



- | | |
|----------|--------------------------|
| 01460008 | A – back with centre lug |
| 01460009 | B – Back with offset lug |



Magnetic holding force = 150 N




Dull chrome-plated except for model numbers 01460016, 01460017.


Backs for dial gauges TESA YR – YE / MERCER / COMPAC / DIGICO 200-700 – Ø 58 and 82mm dial models



- | | |
|----------|---|
| 01460014 | C |
| 01460015 | D |



C



D