

sale@technobearing.ru

www.technobearing.ru

For New Technology Network
8 (800) 700-72-07 (бесплатно)



NTNcorporation

Bearing Units





sale@technobearing.ru

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)
CAT. NO. 2400-X7E

Dimension Table

HOUSING ▼ BEARING			Page		Page		Page		Page		Page		Page		
Set screw type		UCP2 UCPL2 UCPG2 F-UCPM2 F-UCPR2 UCIP2 UCIPG2 UCPE2	56 72 76 80 82 84 90 102	UCHP2	92			UCF2	112	UCFC2	142	UCFL2 UCFLG2 F-UCFM2 F-UCFLR2 UCFE2	156 170 174 176 190		
		UC3	406	UCUP2	96			UCFG2	130	UCFCG2	154	UCFL3 UCFLG3	162 172		
		UCX	412	UCPX	68			UCF3	118			UCFLX	168		
		AS2	418	ASPL2	104			UCFG3	132			ASFB2	186		
				ASPP2	108			UCFS3	134			ASFD2	188		
				ASRPP2	110			UCFSG3	140						
Eccentric locking collar type		UEL2	426	UELP2	230	UELHP2	244			UELNU2	262	UELFC2	282	UELFLU2	286
		UEL3	430	UELPL2	240	UELUP2	246			UELNU2	266			UELFL2	290
		AEL2	436	UEL3	234					UELNU3	270			UELFL3	294
		JEL2	440	AELPL2	248			AELPP2	258					AELFD2	302
				JELPL2	252					AELFS3	276			AELFB2	300
				AELPB2	256			AELRPP2	260					JELFD2	303
Adapter type		UK2	448	UKP2	332					UKF2	344	UKFC2	360	UKFL2	368
		UK3	452	UKP3	336					UKF3	348			UKFL3	372
		UKX	456	UKPX	340					UKFS3	356				
Other bearings				AR2	422	REL2	444	UCS2	460	UCS3	464	ASS2	468		

	Page		Page		Page		Page		Page		Page
---	------	---	------	---	------	---	------	--	------	---	------

Technical Data

UCFA2	178			UCHB2	198	UCT2	202	UCC2	222	UCT2	394
UCFH2	182					UCTG2	218			UCL2	396
						UCT3	208	UCC3	224	UCM2	397
						UCTG3	220			UCM3	398
						UCTX	214	UCCX	227		
		ASPF2 192								ASPT2	229
		ASRPF2 194									
		ASPFL2 196									

Set screw type

					UEL2	314	UELC2	324			
					UEL3	318	UELC3	326			
		AELPF2 304								AELPT2	330
		AELRPF2 308								JELPT2	331
		AELPFL2 310									
		JELPF2 306									
		JELPFL2 312									

Eccentric locking collar type

					UKT2	378	UKC2	390			
					UKT3	382	UKC3	391			
					UKTX	386	UKCX	393			

Adapter type

UELS2	472	UELS3	476	AELS2	480	JELS2	484	CS2	488	Farm implement bearings	490
-------	-----	-------	-----	-------	-----	-------	-----	-----	-----	-------------------------	-----

Ball bearings

Warranty

NTN warrants, to the original purchaser only, that the delivered product which is the subject of this sale (a) will conform to drawings and specifications mutually established in writing as applicable to the contract, and (b) be free from defects in material or fabrication. The duration of this warranty is one year from date of delivery. If the buyer discovers within this period a failure of the product to conform to drawings or specifications, or a defect in material or fabrication, it must promptly notify NTN in writing. In no event shall such notification be received by NTN later than 13 months from the date of delivery. Within a reasonable time after such notification, NTN will, at its option, (a) correct any failure of the product to conform to drawings, specifications or any defect in material or workmanship, with either replacement or repair of the product, or (b) refund, in part or in whole, the purchase price. Such replacement and repair, excluding charges for labor, is at NTN's expense. All warranty service will be performed at service centers designated by NTN. These remedies are the purchaser's exclusive remedies for breach of warranty.

NTN does not warrant (a) any product, components or parts not manufactured by NTN, (b) defects caused by failure to provide a suitable installation environment for the product, (c) damage caused by use of the product for purposes other than those for which it was designed, (d) damage caused by disasters such as fire, flood, wind, and lightning, (e) damage caused by unauthorized attachments or modification, (f) damage during shipment, or (g) any other abuse or misuse by the purchaser.

THE FOREGOING WARRANTIES ARE IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

In no case shall NTN be liable for any special, incidental, or consequential damages based upon breach of warranty, breach of contract, negligence, strict tort, or any other legal theory, and in no case shall total liability of NTN exceed the purchase price of the part upon which such liability is based. Such damages include, but are not limited to, loss of profits, loss of savings or revenue, loss of use of the product or any associated equipment, cost of capital, cost of any substitute equipment, facilities or services, downtime, the claims of third parties including customers, and injury to property. Some states do not allow limits on warranties, or on remedies for breach in certain transactions. In such states, the limits in this paragraph and in paragraph (2) shall apply to the extent allowable under case law and statutes in such states.

Any action for breach of warranty or any other legal theory must be commenced within 15 months following delivery of the goods.

Unless modified in a writing signed by both parties, this agreement is understood to be the complete and exclusive agreement between the parties, superceding all prior agreements, oral or written, and all other communications between the parties relating to the subject matter of this agreement. No employee of NTN or any other party is authorized to make any warranty in addition to those made in this agreement.

This agreement allocates the risks of product failure between NTN and the purchaser. This allocation is recognized by both parties and is reflected in the price of the goods. The purchaser acknowledges that it has read this agreement, understands it, and is bound by its terms.

© NTN Corporation. 2007

Although care has been taken to assure the accuracy of the data compiled in this catalog, NTN does not assume any liability to any company or person for errors or omissions.

sale@technobearing.ru

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

NTN

Bearing Units

sale@technobearing.ru

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

Bearing units stainless series (Stainless bearings + Stainless steel housing)

This new series from NTN provides corrosion resistance and longer lubrication life in a clean unit with low torque characteristics.



Guards against corrosion

NTN bearing units in the stainless series feature ball bearings inserted into housings made of stainless that provide superior resistance to corrosion as compared to standard series cast iron units. This series is especially useful in a wide variety of applications because of the rust free properties of the housing.

Longer lubrication life

The solid grease lubricating the bearing has been heat-hardened and is a mixture of lubricant and ultra high molecular weight polyethylene. The solid grease reduces leakage, prolonging lubricant life especially when used under conditions of vibration or centrifugal force. Also, this grease will not homogenize when water penetrates into the bearing raceway.

Maintains a clean operating environment

The solid grease lubricant in the ball bearing, solely developed by NTN, reduces leakage from the bearing, significantly reducing environmental pollution.

Low torque characteristics


The standard solid grease type for these ball bearing units is spot-pack which places the lubricant on the bearing cage. Torque consumption capabilities of spot-pack bearings is low due to reduced whip resistance in comparison to standard grease lubricated ball bearings.

Interchangeability

The basic dimensions are the same as current NTN units and are also compatible with units from other manufacturers ISO standard.

Bearing units plastic housing series (Stainless bearings + Glass fiber reinforced plastic housing)

The NTN plastic series ensures a clean operating environment.

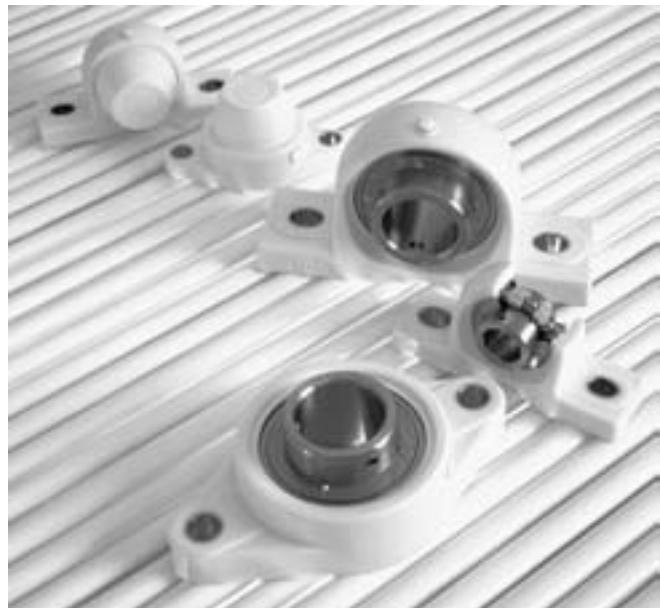

Guards against corrosion

NTN bearing units in the plastic series feature ball bearings inserted into housings made of plastics that provide superior resistance to corrosion as compared to standard series cast iron units. This series is especially useful in a wide variety of applications because of the nonmagnetic and rust free properties of the housing.

Maintains a clean operating environment

The solid grease lubricant in the ball bearing, solely developed by NTN, reduces leakage from the bearing, significantly reducing environmental pollution. Also, the housing will not stain, nor is there paint to peel and contaminate the environment.

Low torque characteristics

The standard solid grease type for these ball bearing units is spot-pack which places the lubricant on the bearing cage. Torque consumption capabilities of spot-pack bearings is low due to reduced whip resistance in comparison to standard grease lubricated ball bearings.

Light weight

Weight is reduced more than 30% to 60% over standard series units.

Water resistant

The glass filled polyester housing not only reduces corrosion but offers better water resistance.

Bearing units with ductile cast iron housing (Spheroidal graphite cast iron housing)

The NTN ductile series helps with design optimization!



Housing weight is reduced by 40%, with a compact design

When compared with the standard NTN housing the ductile series housing enjoys a 40% weight reduction . Additionally the housing is useful for a size reduction in machine equipment. This is achieved by minimizing as much as possible non-critical dimensions of the housing allowing the housing to be placed in tight locations.

High fracture strength of housing

Spheroidal graphite cast iron is used for the bearing housing. It is designed to have high strength with fine material structure and uniformed thickness. The average fracture strength for the series is increased by approximately. 30% when compared with NTN's standard product (FC200, Gray cast iron).

Two lubrication types : Relubricatable type maintenance free type

The relubricatable type is suitable for high temperature and high speed application, and the maintenance free type is optimized for a long period under normal using conditions without re-greasing.

Interchangeability

This series is interchangeable with NTN standard product and other domestic suppliers' product. This is achieved by keeping the dimensions related to mounting the same as for standard product made according to JIS B 1559 (Housings for rolling bearing units).

Bearing units steel series (Rolled steel housing for general structures)

NTN rolled steel housings ensure a safer design



Superior Housing Strength

Made of precision gas cut rolled steel, NTN steel housings offer superior strength characteristics when compared to cast iron and cast steel housings.

Consistent Microstructure

The rolled steel microstructure is more consistent than cast iron or cast steel, reducing the risk of housing fracture under severe conditions.

Interchangeability

Rolled steel housing dimensions are consistent with cast units, allowing them to be interchanged with NTN standard housings and other manufacturers ISO standard.

Applications

NTN rolled steel housings provide superior strength to cast steel and cast iron. Their ability to resist impact loads makes them suitable for applications involving heavy loads and vibration. Possible applications for NTN rolled steel housings include but are not limited to conveyors, trucks and overhead cranes at steel mills, mining machinery and pollution control equipment.


NTN Triple-Sealed Bearings for Bearing Units

These reliable triple-sealed bearings are dustproof and waterproof.

They ensure a longer bearing life even when exposed to heavy airborne dust and splashes of foul water.



1. Construction

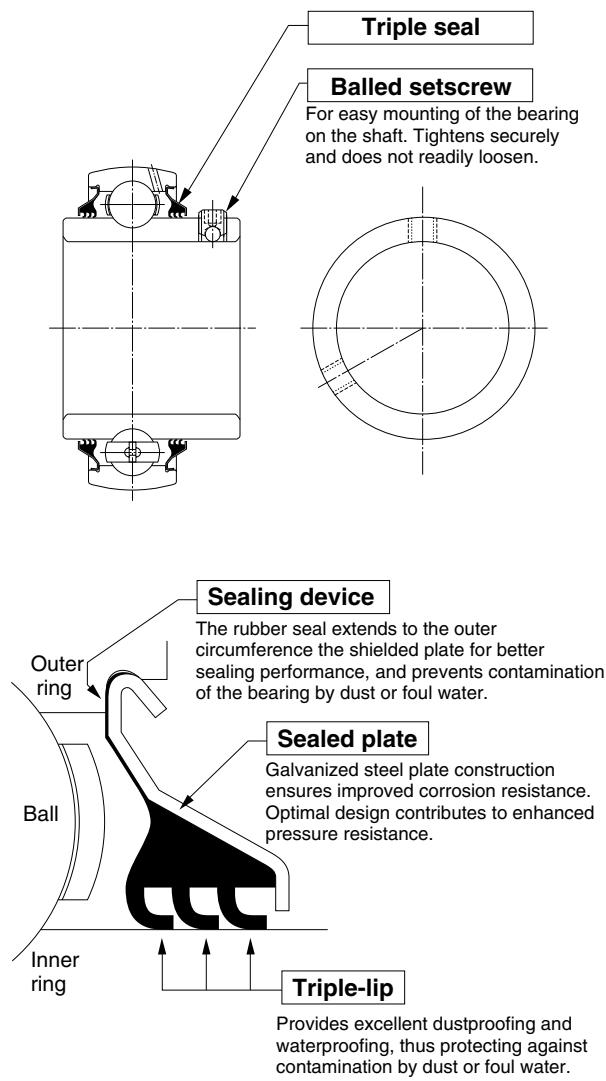

2. Features

Better dustproofing and waterproofing ensure a longer bearing life.

Triple-sealed bearings feature a secure bearing seal with three lips. This special seal offers reliable dustproofing and waterproofing superior to those of standard bearings used in bearing units. In addition, it ensures a longer service life, even when exposed to heavy airborne dust and splashes of foul water. (Patent pending)

Reduces maintenance cost.

A bearing life longer than that of a standard bearing unit configurations means extended maintenance intervals, greatly reduced maintenance costs (of inspection, relubrication, replacement, etc.), and increased availability of machinery.

Decreases price of the bearing unit and contributes to more compact machinery.

The triple-sealed bearing unit replaces conventional covered bearing units in certain operating conditions, greatly decreasing the cost of bearing units. In addition, if the cover is not required, the machinery can be made more compact.

Secure balled setscrew

The triple-sealed bearing is mounted on the shaft with NTN's unique balled setscrew, which features an embedded ball in its tip. Compared with knurled cup point or cup-point setscrews, the balled setscrew provides much greater resistance to loosening, as it does not readily loosen due to vibration or impact.

Interchangeability

The triple-sealed bearing unit conforms to the JIS (Japanese Industrial Standard) for UC-type bearings. It is not only ready to use as a relubricable bearing, but it also replaces the conventional bearing units of NTN and other manufacturers. It therefore serves as a ready replacement for existing bearing units.

3. Allowable Operating Temperature Range and Speed

The triple-sealed bearing can be used in a temperature range of -15°C to 100°C.

- Allowable speed

Low-torque triple-sealed bearing unit $\cdots d_n$ value : 36000

High-torque triple-sealed bearing unit $\cdots d_n$ value : 21000

TECHNICAL DATA INDEX

	Page
1. Construction -----	6
2. Design Features and Advantages -----	7
2.1 Maintenance free type -----	7
2.2 Relubricatable type -----	7
2.3 Special sealing feature -----	7
2.4 Secure fitting -----	8
2.5 Self-aligning -----	8
2.6 Higher rated load capacity -----	8
2.7 Light weight yet strong housing -----	8
2.8 Easy mounting -----	8
2.9 Accurate fitting of the housing -----	8
2.10 Bearing replaceability -----	8
3. Material -----	9
3.1 Materials of ball bearings for units -----	9
3.2 Materials of housings for units -----	9
4. Bearing unit number code -----	10
4.1 Bearing unit number code -----	10
4.2 Ball bearing number code for unit. -----	10
4.3 Housing number code for unit. -----	10
4.4 Supplementary code -----	10
5. Tolerance -----	17
5.1 Tolerances of ball bearings for the unit -----	17
5.2 Tolerances of housings -----	20
6. Basic Load Rating and Life -----	24
6.1 Bearing life -----	24
6.2 Basic rating life and basic dynamic load rating -----	24
6.3 Machine applications and requisite life -----	26
6.4 Adjusted life rating factor -----	26
6.5 Basic static load rating -----	27
6.6 Allowable static equivalent load -----	27
7. Loads -----	28
7.1 Load acting on the bearing -----	28
7.2 Dynamic equivalent radial load -----	30
7.3 Static equivalent radial load -----	30
8. Bearing Internal Clearance -----	31
8.1 Bearing internal clearance -----	31
8.2 Internal clearance selection -----	31
8.3 Bearing internal clearance selection standards -----	32
9. Lubrication -----	34
9.1 Maximum permissible speed of rotation -----	34
9.2 Replenishment of grease -----	35
9.3 Grease fitting -----	36
9.4 Standard location of the grease fitting -----	37
10. Shaft Designs -----	38
10.1 Set screw system bearing units -----	38
10.2 Eccentric collar system -----	42
10.3 Adapter system bearing units -----	42
11. Handling of the Bearing Unit -----	43
11.1 Mounting of the housing -----	43
11.2 Mounting the bearing unit on the shaft -----	46
11.3 Running tests -----	51
11.4 Inspection during operation -----	51
11.5 Dismounting the bearing unit -----	51
11.6 Replacement of the bearing -----	51

1. Construction


The NTN bearing unit is a combination of a radial ball bearing, seal, and a housing of high-grade cast iron or pressed steel, which comes in various shapes.

The outer surface of the bearing and the internal surface of the housing are spherical, so that the unit is self-aligning.

The inside construction of the ball bearing for the unit is such that steel balls and retainers of the same type as in series 62 and 63 of the NTN deep groove ball bearing are used. A duplex seal consisting of a combination of an oil-proof synthetic rubber seal and a slinger, unique to NTN, is provided on both sides.

Depending on the type, the following methods of fitting to the shaft are employed:

- (1) The inner ring is fastened onto the shaft in two places by set screws.
- (2) The inner ring has a tapered bore and is fitted to the shaft by means of an adapter.
- (3) In the eccentric locking collar system the inner ring is fastened to the shaft by means of eccentric grooves provided at the side of the inner ring and on the collar.

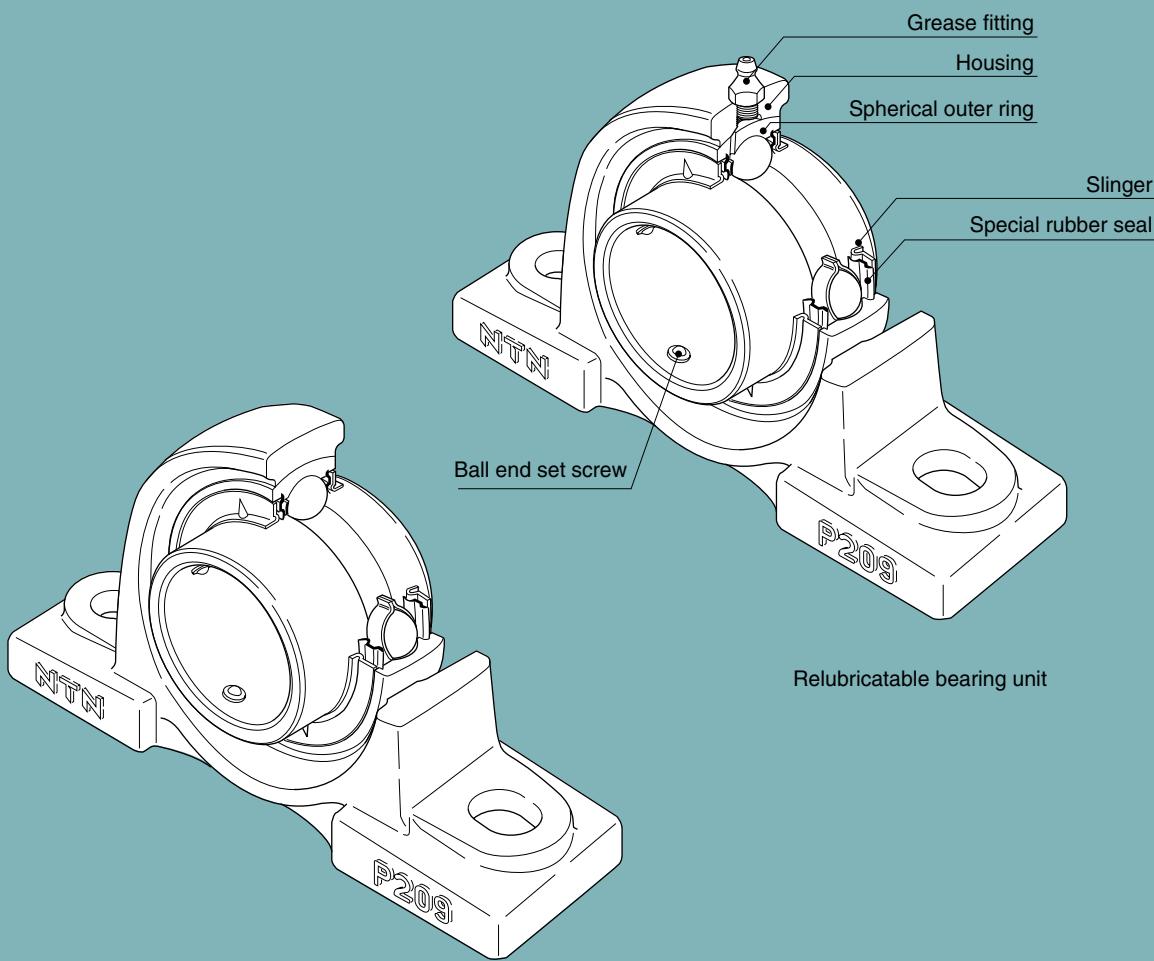

2. Design Features and Advantages

2.1 Maintenance free type

The NTN Maintenance free bearing unit contains a high-grade lithium-based grease, good for use over a long period, which is ideally suited to sealed-type bearings. Also provided is an excellent sealing device, unique to NTN, which prevents any leakage of grease or penetration of dust and water from outside.

It is designed so that the rotation of the shaft causes the sealed-in grease to circulate through the inside space, effectively providing maximum lubrication. The lubrication effect is maintained over a long period with no need for replenishment of grease.

To summarize the advantages of the NTN maintenance free bearing unit:

- (1) As an adequate amount of good quality grease is sealed in at the time of manufacture, there is no need for replenishment. This means savings in terms of time and maintenance costs.
- (2) Since there is no need for any regreasing facilities, such as piping, a more compact design is possible.
- (3) The sealed-in design eliminates the possibility of grease leakage, which could lead to stained products.

2.2 Relubricatable type

The NTN relubricatable type bearing unit has an advantage over other similar units being so designed as to permit regreasing even in the case of misalignment of 2° to the right or left. The hole through which the grease fitting is mounted usually causes structural weakening of the housing.

However, as a result of extensive testing, in the NTN bearing unit the hole is positioned so as to minimize this adverse effect. In addition, the regreasing groove has been designed to minimize weakening of the housing.

While the NTN maintenance free type bearing unit is satisfactory for use under normal operating conditions indoors, in the following circumstances it is necessary to use the relubricatable type bearing unit:

- (1) Cases where the temperature of the bearing rises above 100°C, 212°F:
*- Normal temperature of up to 200°C, 392°F heatresistant bearing units.
- (2) Cases where there is excessive dust, but space does not permit using a bearing unit with a cover.
- (3) Cases where the bearing unit is constantly exposed to splashes of water or any other liquid, but space does not permit using a bearing unit with a cover.
- (4) Cases in which the humidity is very high, and the machine in which the bearing unit is used is run only intermittently.
- (5) Cases involving a heavy load of which the C_r/P_r value is about 10 or below, and the speed is 10 rpm or below, or the movement is oscillatory.

- (6) Cases where the number of revolutions is relatively high and the noise problem has to be considered; for example, when the bearing is used with the fan of an air conditioner.

2.3 Special sealing feature

2.3.1 Standard bearing units

The sealing device of the ball bearing for the NTN bearing unit is a combination of a heat-resistant and oil-proof synthetic rubber seal and a slinger of an exclusive NTN design.

The seal, which is fixed in the outer ring, is steelreinforced, and its lip, in contact with the inner ring, is designed to minimize frictional torque.

The slinger is fixed to the inner ring of the bearing with which it rotates. There is a small clearance between its periphery and the outer ring.

These two types of seals on both sides of the bearing prevent grease leakage, and foreign matter is prevented from entering the bearing from outside.

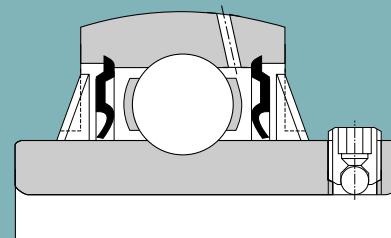


Fig. 2.1

2.3.2 Bearing units with covers

The NTN bearing unit with a cover consists of a standard bearing unit and an outside covering for extra protection against dust. Special consideration has been given to its design with respect to dust-proofing.

Sealing devices are provided in both the bearing and the housing, so that units of this type operate satisfactorily even in such adverse environments as flour mills, steel mills, foundries, galvanizing plants and chemical plants, where excessive dust is produced and/or liquids are used. They are also eminently suitable for outdoor environments where dust and rain are inevitable, and in heavy industrial machinery such as construction and transportation equipment.

The rubber seal of the cover contacts with the shaft by its two lips, as shown in Fig. 2.2 and 2.3. By filling the groove between the two lips with grease, an excellent sealing effect is obtained and, at the same time, the contacting portions of the lips are lubricated. Furthermore, the groove is so

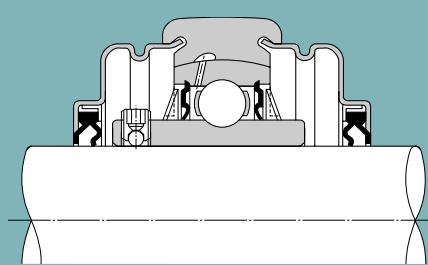


Fig. 2.2 Pressed steel cover

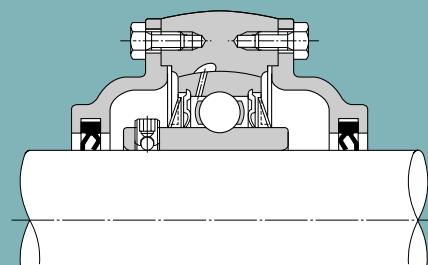


Fig. 2.3 Cast iron cover

designed that when the shaft is inclined the rubber seal can move in the radial direction.

When bearing units are exposed to splashes of water rather than to dust, a drain hole (5 to 8 mm, 0.2 to 0.3 inches in diameter) is provided at the bottom of the cover, and grease should be applied to the side of the bearing itself instead of into the cover.

2.4 Secure fitting

Fastening the bearing to the shaft is effected by tightening the ball-end set screw, situated on the inner ring. This is a unique NTN feature which prevents loosening, even if the bearing is subjected to intense vibrations and shocks.

2.5 Self-aligning

With the NTN bearing unit, the outer surface of the ball bearing and the inner surface of the housing are spherical, thus this bearing unit has self-aligning characteristic. Any misalignment of axis that may arise from poor workmanship on the shaft or errors in fitting will be properly adjusted.

2.6 Higher rated load capacity

The bearing used in the unit is of the same internal construction as those in NTN bearing series 62 and 63, and is capable of accommodating axial load as well as radial load, or composite load. The rated load capacity of this bearing is considerably higher than that of the corresponding self-aligning ball bearings used for standard plummer blocks.

2.7 Light weight yet strong housing

Housings for NTN bearing units come in various shapes. They consist of either high-grade cast iron, one-piece casting, or of precision finished pressed steel, the latter being lighter in weight. In either case, they are practically designed to combine lightness with maximum strength.

2.8 Easy mounting

The NTN bearing unit is an integrated unit consisting of a bearing and a housing.

As the bearing is prelubricated at manufacture with the correct amount of high-grade lithium base, it can be mounted on the shaft just as it is. It is sufficient to carry out a short test run after mounting.

2.9 Accurate fitting of the housing

In order to simplify the fitting of the pillow block and flange type bearing units, the housings are provided with a seat for a dowel pin, which may be utilized as needed.

2.10 Bearing replaceability

The bearing used in the NTN bearing unit is replaceable. In the event of bearing failure, a new bearing can be fitted to the existing housing.

3. Material

3.1 Raceway and rolling element materials

Materials with high hardness and appropriate toughness are used for the inner rings, outer rings and balls of the insert bearings since large compression forces and repetitive stresses are applied to a small contact. In general Cold-rolled steel is used for the cages. For special applications, stainless steel is also available for use in the insert bearings.

3.2 Housing materials

The most common materials used in NTN bearing unit housings are cast iron or steel plate, with cast iron being the standard.

For special applications, materials such as spheroidal graphite iron, structural steel, stainless steel cast iron or plastic resin are also available for use in the housings. The chemical

resistance properties of glass-fiber reinforced resin are shown in Table 3.1.

3.2.1 Cast iron housing

NTN uses gray cast iron as the standard material for cast iron housings.

Among metallic materials cast iron has a high damping capacity, which is an ideal characteristic for mechanical components. This means cast iron, exhibits superior performance when absorbing vibration, compared with other materials. Additionally cast iron is suitable for high temperatures of up to 300°C.

3.2.2 Steel plate housing

Cold-rolled steel sheet or hot-rolled mild steel sheet is used for steel plate housings.

Table 3.1 Water and chemical resistance of glass fiber reinforcing resin housing (VALOX 420®)

	Chemicals	Temperature °C	Deterioration ratio ¹⁾ %			Chemicals	Temperature °C	Deterioration ratio ¹⁾ %				
			Number of days soaked					30 days	90 days			
			30 days	90 days				30 days	90 days			
Acid	Hydrochloric acid, 10%	23	89	85	Organic solven	Ethyl alcohol	23	99	96			
	Sulfuric acid, 36%	23	97	97		Methyl alcohol	23	91	82			
		60	84	60		Isopropyl alcohol	23	100	100			
	Acetic acid 10%	23	88	88		Acetone	23	86	74			
Alkaline	Potassium hydroacid, 5%	23	88	10		Methyl Ethyl Keton	23	90	80			
	Sodium hydroacid, 10%	23	※	※		Ethyl acetate	23	96	86			
	Ammonia hydroacid, 10%	23	96	87		Methylene chloride	23	54	54			
Oil	Motor oil	23	100	100		ethylene grycole	23	100	100			
	Brake oil	23	100	100	Sodium	Zinc chrolide 10%	23	97	94			
	Gasoline (Regular)	23	100	100		Calcium chrolide 10%	23	98	98			
		60	93	90		Sodium chrolide 5%	23	97	97			

Remarks 1) Deterioration (%) is the strength after test divided by the strength before test.

The ※ symbol indicates that results could not be measured as the test piece dissolved.

Remarks 2) The values listed in the table are not guaranteed as they are the result of soaking without operating stresses on the sample. Because this strength data is general, it does not apply under all operating conditions. Actual housing strength will vary depending on the type and concentration of liquid, temperature, load, etc.

Remarks 3) Technical data provided by General Electric Company.

Among engineering plastics, VALOX has better water absorption characteristics (0.06% at 23°C over 24 hours) and better dimensional stability. VALOX is made of crystallized polymer and while not affected by organic solvents, is affected by alkaline, making it important to consider the operating environment. The table demonstrates VALOX's chemical resistance when soaked in solvent at 30 or 90 days.

Table 3.2 Anti-Corrosion capability

NTN recommends ratings of ◎ to × for optimum corrosion resistance.

◎ excellent ← → poor

Materials	Condition	Atmosphere		Water		Acid		
		Dry	Wet	Natural water	Sodium water	Nitric acid	Sulfuric acid	Hydrochloric acid
Martensite stainless steel	SUS440C, SUS410	○	△	△	▲	▲	×	×
Austenite stainless steel	SUS304, SCS13	○	○	○	○	○	○	△
Polyester plastics	VALOX 420	○	○	○	○	▲	○	○
Polypropylene, polyethylene		○	○	○	○	○	○	○
High carbon steel	SUJ2	△	▲	▲	×	×	×	×
Carbon steel, Cast iron		▲	×	×	×	×	×	×

Remarks: This data is obtained by observation of the surface conditions of materials.

Note that these anti-corrosion capabilities are altered by anti-corrosion surface treatment.


Not recommended for use in liquid.

4. Bearing unit part numbering

4.1 Bearing unit part numbering


NTN Bearing unit part numbers are in accordance with the Japanese Industrial Standard JIS. The code for the bearing type, housing type, diameter series and bore diameter are expressed from left to right within the part number.

Example 1

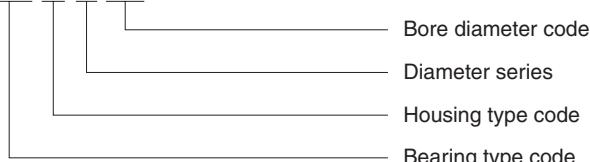UC P 2 05

Bore diameter code
Diameter series
Housing type code
Bearing type code

Example 2

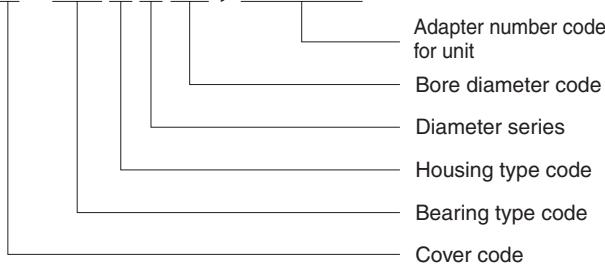S - UK F 2 05 ; H2305X

Adapter number code for unit
Bore diameter code
Diameter series
Housing type code
Bearing type code
Cover code

4.2 Ball bearing insert part numbering

The part number for the insert bearing matches the part number for the bearing unit.

Example

UC 2 05 D1

Supplementary code
Bore diameter code
Diameter series
Bearing type code


Each bearing unit can take any number of different ball bearing inserts. The available insert types are shown in Fig. 4.3(1)-4.3(9).

4.3 Housing part numbering

Housing part numbers are expressed by the housing type code, the bearing outer diameter series code and the bore diameter codes of the insert bearing that would be used for the unit.

The available housings are shown in Table 4.3(1)-4.3(9).

Example

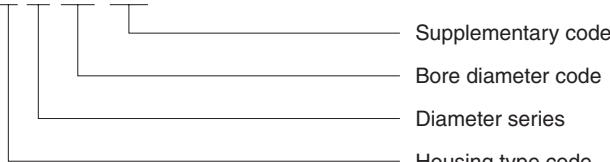P 2 05 D1

Supplementary code
Bore diameter code
Diameter series
Housing type code


4.4 Supplemental codes

Typical supplementary codes added after the Bearing unit part number are shown below.

Table 4.1 Examples of supplementary codes


Item	Supplementary code	Content
For heat resistance and cold resistance	HT2	Heat resistance
	CT1	Cold resistance
Housing material	N1	Spheroidal graphite cast iron (FCD450)
Lubrication method	No code	Maintenance free type
	D1	Relubricatable type
	No code	Standard nitrile rubber seal
Bearing seal	U	Non-contact shield plate
	LLJ	Triple lip seal
	No code	Set screw with ball (Except for stainless bearing)
Set screw	W3	Cup point
	W4	Double point
	W5	Round head dog point set screw (With one piece)
	W6	Round head key bolt (With one piece)

Example 1

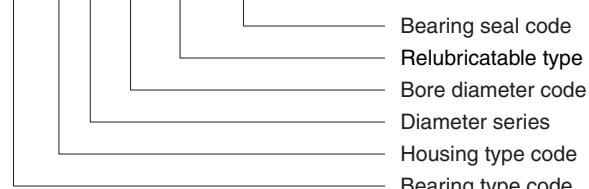UC P 2 05 D1 LLJ

Bearing seal code
Relubricatable type
Bore diameter code
Diameter series
Housing type code
Bearing type code

Example 2

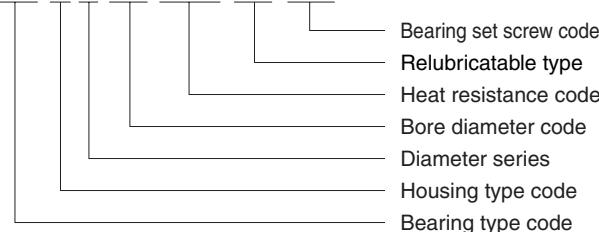UC F 2 05 HT2 D1 W5

Bearing set screw code
Relubricatable type
Heat resistance code
Bore diameter code
Diameter series
Housing type code
Bearing type code

Bearing specifications for heat resistance and cold resistance are shown in Table 4.2.

Table 4.2 Bearing specifications for heat resistance and cold resistance

Item	Code	Operating range (°C)	Grease	Bearing seal	Bearing clearance
Heat resistance	HT2	Room temp. ~180°C	Li soap + Silicon oil	Non-contact shield plate	C4
Cold resistance	CT1	-60°C ~Room temp.	Li soap + Silicon oil	Non-contact shield plate	CN

Table 4.3 (1) Cast iron pillow block type units

Housing Type Material : Cast Iron		Cover	Bearing Type					
			UC	UEL REL	UK	AS AR	AEL JEL	CS
Pillow Block		—	UCP	UEL P REL P	UKP	ASP ARP	AEL P JEL P	—
		Steel	S(M)-UCP	—	S(M)-UKP	S(M)-ASP S(M)-ARP	—	—
		Cast Iron	C(M)-UCP	—	C(M)-UKP	C(M)-ASP C(M)-ARP	—	—
Thick Pillow Block		—	UCIP	UEL IP REL IP	UKIP	—	—	—
		Steel	S(M)-UCIP	—	S(M)-UKIP	—	—	—
		Cast Iron	C(M)-UCIP	—	C(M)-UKIP	—	—	—
High-Center Pillow Block		—	UCHP	UEL HP REL HP	UKHP	ASH P AR HP	AEL HP JEL HP	—
		Steel	S(M)-UCHP	—	S(M)-UKHP	S(M)-ASH P S(M)-AR HP	—	—
Narrow Pillow Block		—	UCUP	UEL UP REL UP	UKUP	AS UP AR UP	AEL UP JEL UP	—
		Steel	S(M)-UCUP	—	S(M)-UKUP	S(M)-AS UP S(M)-AR UP	—	—
Light Pillow Block		—	—	—	—	AS PB AR PB	AEL PB JEL PB	CSPB
Pillow Block Low-Center		—	UCPL	UEL PL REL PL	UKPL	AS PL AR PL	AEL PL JEL PL	—




Remarks 1. The codes "S-" and "C-" at the head of the type codes indicate steel plate covered bearing units and cast iron covered bearing units, respectively.

2. Single-sided closed covered bearing units made of steel and cast iron are also available.

These bearing units are identified with the codes "SM-"(steel plate) and "CM-"(cast iron) at the head of the type codes, respectively.

3. "UC" type stainless steel bearings are also available. For further details, consult NTN (Stainless Series Bearing unit)

Table 4.3 (2) Cast iron flange type units

Housing Type Material : Cast Iron		Cover	Bearing Type					
			 UC	 UEL  REL	 UK	 AS  AR	 AEL  JEL	 CS
Square Flange		—	UCF	UELF RELF	UKF	ASF ARF	AELF JELF	—
		Steel	S(M)-UCF	—	S(M)-UKF	S(M)-ASF S(M)-ARF	—	—
		Cast Iron	C(M)-UCF	—	C(M)-UKF	C(M)-ASF C(M)-ARF	—	—
Square Flange W/Spigot Joint		—	UCFS	UELFS	UKFS	—	—	—
		Cast Iron	C(M)-UCFS	—	C(M)-UKFS	—	—	—
Round Flange W/Spigot Joint		—	UCFC	UELFC RELFC	UKFC	ASFC ARFC	AELFC JELFC	—
		Steel	S(M)-UCFC	—	S(M)-UKFC	S(M)-ASFC S(M)-ARFC	—	—
		Cast Iron	C(M)-UCFC	—	C(M)-UKFC	C(M)-ASFC C(M)-ARFC	—	—
Rhombus Flange		—	UCFL	UELFL RELFL	UKFL	ASFL ARFL	AELFL JELFL	—
		Steel	S(M)-UCFL	—	S(M)-UKFL	S(M)-ASFL S(M)-ARFL	—	—
		Cast Iron	C(M)-UCFL	—	C(M)-UKFL	C(M)-ASFL C(M)-ARFL	—	—
Square Flange		—	UCFU	UEL FU REL FU	UK FU	ASF U AR FU	AEL FU JEL FU	—
Rhombus Flange		—	UCFLU	UEL FLU REL FLU	UKFLU	ASFLU ARFLU	AEL FLU JEL FLU	—
Modified Rhombus Flange		—	UCFA	UEL FA REL FA	UK FA	ASF A AR FA	AEL FA JEL FA	—
		Steel	S(M)-UCFA	—	S(M)-UKFA	S(M)-ASFA S(M)-ARFA	—	—
Light Rhombus Flange		—	—	—	—	ASFB ARFB	AELFB JELFB	CSFB
Light Rhombus Flange		—	—	—	—	ASFD ARFD	AELFD JELFD	—
Modified Flange		—	UCFH	UEL FH REL FH	UK FH	ASF H AR FH	AEL FH JEL FH	—

Remarks 1. The codes "S-" and "C-" at the head of the type codes indicate steel plate covered bearing units and cast iron covered bearing units, respectively.

2. Single-sided closed covered bearing units made of steel and cast iron are also available.

These bearing units are identified with the codes "SM-"(steel plate) and "CM-"(cast iron) at the head of the type codes, respectively.

3. "UC" type stainless steel bearings are also available. For further details, consult NTN (Stainless Series Bearing unit)

Table 4.3 (3) Other cast iron units

Housing Type		Cover	Bearing Type					
			UC	UEL REL	UK	AS AR	AEL JEL	CS
Take-up		—	UCT	UEL REL	UKT	AST ART	AELT JELT	—
		Steel	S(M)-UCT	—	S(M)-UKT	S(M)-AST S(M)-ART	—	—
		Cast Iron	C(M)-UCT	—	C(M)-UKT	C(M)-AST C(M)-ART	—	—
Cartridge		—	UCC	UELC RELC	UKC	ASC ARC	AECLC JELC	—
Hanger		—	UCHB	UELHB RELHB	UKHB	ASHB ARHB	AELHB JELHB	—

Remarks 1. The codes "S-" and "C-" at the head of the type codes indicate steel plate covered bearing units and cast iron covered bearing units, respectively.
 2. Single-sided closed covered bearing units made of steel and cast iron are also available.
 These bearing units are identified with the codes "SM-"(steel plate) and "CM-"(cast iron) at the head of the type codes, respectively.
 3. "UC" type stainless steel bearings are also available. For further details, consult NTN (Stainless Series Bearing unit)

Table 4.3 (4) Bearing units with ductile cast iron housing (Ductile series)

Housing Type		Cover	Bearing Type					
			UC	UEL REL	UK	AS AR	AEL JEL	CS
Pillow Block		—	UCPE	UELPE RELPE	UKPE	ASPE ARPE	AELPE JELPE	—
Rhombus Flange		—	UCFE	UELFE RELFE	UKFE	ASFE ARFE	AELFE JELFE	—

Remarks 1. "UC" type stainless steel bearings are also available. For further details, consult NTN (Stainless Series Bearing unit).

Table 4.3 (5) Bearing units steel series

Housing Type Material : General Structural Rolled Steel		Cover	Bearing Type					
			UC	UEL REL	UK	AS AR	AEL JEL	CS
Pillow Block		—	UCPG	UELPG RELPG	UKPG	ASPG ARPG	AELPG JELPG	—
		Steel	S(M)-UCPG	—	S(M)-UKPG	S(M)-ASPG S(M)-ARPG	—	—
		Cast Iron	C(M)-UCPG	—	C(M)-UKPG	C(M)-ASPG C(M)-ARPG	—	—
Thick Pillow Block		—	UCIPG	UELIPG REЛИPG	UKIPG	—	—	—
		Steel	S(M)-UCIPG	—	S(M)-UKIPG	—	—	—
		Cast Iron	C(M)-UCIPG	—	C(M)-UKIPG	—	—	—
Square Flange		—	UCFG	UELFG RELFГ	UKFG	ASFG ARFG	AELFG JELFG	—
		Steel	S(M)-UCFG	—	S(M)-UKFG	S(M)-ASFG S(M)-ARFG	—	—
		Cast Iron	C(M)-UCFG	—	C(M)-UKFG	C(M)-ASFG C(M)-ARFG	—	—
Square Flange W/Spigot Joint		—	UCFSG	UELFSГ	UKFSG	—	—	—
		Cast Iron	C(M)-UCFSG	—	C(M)-UKFSG	—	—	—
Round Flange W/Spigot Joint		—	UCFCG	UELFCG RELFCG	UKFCG	ASFCG ARFCG	AELFCG JELFCG	—
		Steel	S(M)-UCFCG	—	S(M)-UKFCG	S(M)-ASFCG S(M)-ARFCG	—	—
		Cast Iron	C(M)-UCFCG	—	C(M)-UKFCG	C(M)-ASFCG C(M)-ARFCG	—	—
Rhombus Flange		—	UCFLG	UELFLG RELFЛG	UKFLG	ASFLG ARFLG	AELFLG JELFLG	—
		Steel	S(M)-UCFLG	—	S(M)-UKFLG	S(M)-ASFLG S(M)-ARFLG	—	—
		Cast Iron	C(M)-UCFLG	—	C(M)-UKFLG	C(M)-ASFLG C(M)-ARFLG	—	—
Take-up		—	UCTG	UELTG RELTG	UKTG	ASTG ARTG	AELTG JELTG	—
		Steel	S(M)-UCTG	—	S(M)-UKTG	S(M)-ASTG S(M)-ARTG	—	—
		Cast Iron	C(M)-UCTG	—	C(M)-UKTG	C(M)-ASTG C(M)-ARTG	—	—

Remarks 1. The codes "S-" and "C-" at the head of the type codes indicate steel plate covered bearing units and cast iron covered bearing units, respectively.

2. Single-sided closed covered bearing units made of steel and cast iron are also available.

3. "UC" type stainless steel bearings are also available. For further details, consult NTN (Stainless Series Bearing unit)

Table 4.3 (6) Bearing units stainless series

Housing Type Material : Stainless Steel		Cover	Bearing Type					
			UC	UEL REL	UK	AS AR	AEL JEL	CS
Pillow Block		—	F-UCPM	—	—	—	—	—
Rhombus Flange		—	F-UCFM	—	—	—	—	—

Table 4.3 (7) Bearing units plastic housing series







Housing Type Material : Glass Fiber Reinforcing Resin		Cover	Bearing Type					
			UC	UEL REL	UK	AS AR	AEL JEL	CS
Pillow Block		—	F-UCPR	—	—	—	—	—
		Resin	F-RM-UCPR	—	—	—	—	—
Rhombus Flange		—	F-UCFLR	—	—	—	—	—
		Resin	F-RM-UCFLR	—	—	—	—	—

Remarks 1. The code "RM-" at the head of the type codes indicates single-side closed resin covered unit.

Table 4.3 (8) Steel plate units

Housing Type Material : Steel Plate		Cover	Bearing Type					
			UC	UEL REL	UK	AS AR	AEL JEL	CS
Pillow Block		—	—	—	—	ASPP	AELPP	CSPP
Pillow Block W/Rubber Ring		—	—	—	—	ASRPP	AELRPP	CSRPP
Round Flange		—	—	—	—	ASPF	AELPF	CSPF
Round Flange W/Rubber Ring		—	—	—	—	ASRPF	AELRPF	CSRPF
Rhombus Flange		—	—	—	—	ASPFL	AELPFL	CSPFL
Rhombus Flange W/Rubber Ring		—	—	—	—	ASRPFL	AELRPFL	CSRPF

Table 4.3 (9) Stretcher units®

	Cover	Bearing Type				
		 UC	 UEL REL	 UK	 AS AR	 AEL JEL
Mini Type		—	—	—	—	ASPT
Angle Steel Frame Type		—	UCT-00	UEL-T-00 REL-T-00	UKT-00	AST-00 ART-00
		Steel	S(M)-UCT-00	—	S(M)-UKT-00	S(M)-AST-00 S(M)-ART-00
		Cast Iron	C(M)-UCT-00	—	C(M)-UKT-00	C(M)-AST-00 C(M)-ART-00
Light Channel Steel Frame Type		—	UCL-00	UELL-00 RELL-00	UKL-00	ASL-00 ARL-00
		Steel	S(M)-UCL-00	—	S(M)-UKL-00	S(M)-ASL-00 S(M)-ARL-00
		Cast Iron	C(M)-UCL-00	—	C(M)-UKL-00	C(M)-ASL-00 C(M)-ARL-00
Channel Steel Frame Type		—	UCM-00	UELM-00 RELM-00	UKM-00	ASM-00 ARM-00
		Steel	S(M)-UCM-00	—	S(M)-UKM-00	S(M)-ASM-00 S(M)-ARM-00
		Cast Iron	C(M)-UCM-00	—	C(M)-UKM-00	C(M)-ASM-00 C(M)-ARM-00

Remarks 1. The codes "S-" and "C-" at the head of the type codes indicate steel plate covered bearing units and cast iron covered bearing units, respectively.

2. Single-sided closed covered bearing units made of steel and cast iron are also available.

These bearing units are identified with the codes "SM-"(steel plate) and "CM-"(cast iron) at the head of the type codes, respectively.


3. "UC" type stainless steel bearings are also available. For further details, consult NTN (Stainless Series Bearing unit)

5. Tolerance

The tolerances of the NTN bearing units are in accordance with the following JIS specifications :

5.1 Tolerances of ball bearings for the unit

The tolerances of ball bearings used in the unit are shown in the following tables, 5.1 to 5.4.



Set screw type

Table 5.1 (1) Cylindrical bore (UC, UCS, AS, ASS, UEL, UELS, AEL, AELS)

Unit: $\mu\text{m}/0.0001 \text{ inch}$

Nominal bore diameter <i>d</i>				Cylindrical bore						Radial runout <i>Kia</i> (reference) (max)	
				Bore diameter			Width				
over		incl.		Δ_{dmp} Deviations		V_{dp} Variations	Δ_{Bs}, Δ_{Cs} Deviations (reference)				
mm	inch	mm	inch	high	low	max.	high	low			
10	0.3937	18	0.7087	+15 + 6	0 0	10 4	0 0	-120 - 47	15 6		
18	0.7087	31.750	1.2500	+18 + 7	0 0	12 5	0 0	-120 - 47	18 7		
31.750	1.2500	50.800	2.0000	+21 + 8	0 0	14 6	0 0	-120 - 47	20 8		
50.800	2.0000	80	3.1496	+24 + 9	0 0	16 6	0 0	-150 - 59	25 10		
80	3.1496	120	4.7244	+28 +11	0 0	19 7	0 0	-200 - 79	30 12		
120	4.7244	180	7.0866	+33 +13	0 0	22 9	0 0	-250 - 98	35 14		

Note: Symbols

Δ_{dmp} : Mean bore diameter deviation V_{dp} : Bore diameter variation

Δ_{Bs} : Inner ring width deviation

Δ_{Cs} : Outer ring width deviation

Table 5.1 (2) Cylindrical bore (AR, ARS, JEL, JELS, REL, RELS)

Unit: $\mu\text{m}/0.0001 \text{ inch}$

Nominal bore diameter <i>d</i>				Cylindrical bore diameter				Radial runout <i>Kia</i> (reference) (max)
				Δ_{dmp} Deviations		V_{dp} Variations		
over		incl.		high	low	max.		
mm	inch	mm	inch	high	low	max.		
10	0.3937	18	0.7087	+13 + 5	0 0	6 2		
18	0.7087	31.750	1.2500	+13 + 5	0 0	6 2		
31.750	1.2500	50.800	2.0000	+13 + 5	0 0	6 2		
50.800	2.0000	80	3.1496	+15 + 6	0 0	8 3		

Table 5.1 (3) Cylindrical bore (CS)

Unit: $\mu\text{m}/0.0001 \text{ inch}$

Nominal bore diameter <i>d</i>				Cylindrical bore						Radial runout <i>Kia</i> (reference)	
				Bore diameter			Width				
over		incl.		Δd_{imp} Deviations		V_{dp} Variations	$\Delta B_s, \Delta C_s$ Deviations (reference)				
mm	inch	mm	inch	high	low	max.	high	low	max.		
10	0.3937	18	0.7087	0	-8	10	0	-120	15	6	
18	0.7087	31.75	1.2500	0	-10	12	0	-120	18	7	
31.75	1.2500	50.8	2.0000	0	-12	14	0	-120	20	8	
50.8	2.0000	80	3.1496	0	-15	16	0	-150	25	10	

Table 5.2 Tapered bore (UK, UKS)

Unit: $\mu\text{m}/0.0001 \text{ inch}$

Nominal bore diameter <i>d</i>		Δd_{imp} Deviations		$\Delta d_{\text{imp}} - \Delta d_{\text{imp}}$		$V_{dp}^{(1)}$	over			incl.	
							high	low	max.	mm	inch
18	0.7087	30	1.1811	+33	0	+21	0	13	5	+13	0
30	1.1811	50	1.9685	+39	0	+25	0	16	6	+15	0
50	1.9685	80	3.1496	+46	0	+30	0	19	7	+18	0
80	3.1496	120	4.7244	+54	0	+35	0	22	9	+21	0
120	4.7244	180	7.0866	+63	0	+40	0	40	16	+25	0

1) Applies to all radial flat planes of inner ring tapered bore.

Note: 1. To be applied for tapered bore of 1/12.


2. Symbols of quantity or values

 d_1 : Basic diameter at the theoretical large end of the tapered bore


$$d_1 = d + \frac{1}{12}B$$

 Δd_{imp} : Dimensional difference of the average bore diameter within the flat surface at the theoretical small-end of the tapered bore Δd_{imp} : Dimensional difference of the average bore diameter within the flat surface at the theoretical large-end of the tapered bore V_{dp} : Unevenness of the bore diameter with the flat surface B : Nominal width of inner ring α : Half of the tapered bore's nominal taper angle

$$\begin{aligned}\alpha &= 2^\circ 23' 9.4'' \\ &= 2.38594^\circ \\ &= 0.041643 \text{ rad}\end{aligned}$$

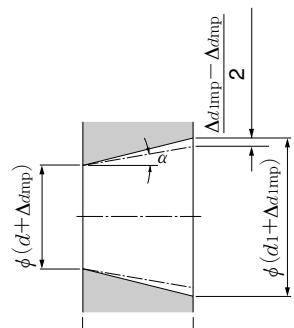

Tapered bore having dimensional difference of the average bore diameter within the flat surface




Theoretical tapered bore

Table 5.3 Outer ring


Unit: $\mu\text{m}/0.0001 \text{ inch}$

Nominal outside diameter <i>D</i>		Mean outside diameter deviation ΔD_m	Radial runout <i>Kea</i> (reference)	
over	incl.		high	low
mm	inch	mm	inch	max.
18	0.7087	30	1.1811	0 — 9 0 — 4 15 6
30	1.1811	50	1.9685	0 — 11 0 — 4 20 8
50	1.9685	80	3.1496	0 — 13 0 — 5 25 10
80	3.1496	120	4.7244	0 — 15 0 — 6 35 14
120	4.7244	150	5.9055	0 — 18 0 — 7 40 16
150	5.9055	180	7.0866	0 — 25 0 — 10 45 18
180	7.0866	250	9.8425	0 — 30 0 — 12 50 20
250	9.8425	315	12.4016	0 — 35 0 — 14 60 24

Note: 1) The low deviation of outside diameter D_m does not apply within the distance of 1/4 the width of the outer ring from the side.

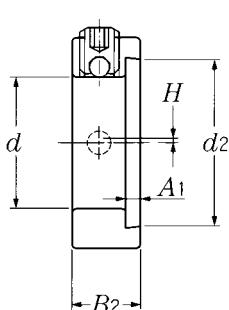

Eccentric locking collar

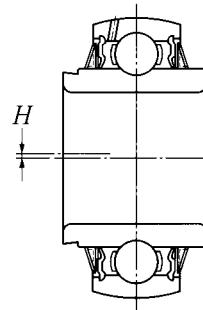

Eccentric locking collar type

Table 5.4 Eccentric locking collar

Unit: mm/inch

Nominal bore diameter <i>d</i>		Bore diameter deviation Δds	Small bore diameter of eccentric surface deviation Δd_{2s}		Eccentricity deviation ΔH_s		Collar width deviation ΔB_{2s}		Collar eccentric surface width deviation ΔA_{1s}				
over	incl.		high	low	high	low	high	low	high	low			
mm	inch	mm	inch	high	low	high	low	high	low	high			
10	0.3937	36.512	1.4375	+0.250 +0.010	+0.025 +0.001	+0.3 +0.012	0 0	+0.1 +0.004	-0.1 -0.004	+0.270 +0.011	-0.270 -0.011	0 0	-0.180 -0.007
36.512	1.4375	55.562	2.1875	+0.300 +0.012	+0.025 +0.001	+0.4 +0.016	0 0	+0.1 +0.004	-0.1 -0.004	+0.330 +0.013	-0.330 -0.013	0 0	-0.180 -0.007
55.562	2.1875	61.912	2.4375	+0.300 +0.012	+0.025 +0.001	+0.4 +0.016	0 0	+0.1 +0.004	-0.1 -0.004	+0.330 +0.013	-0.330 -0.013	0 0	-0.220 -0.009

5.2 Tolerances of housings

Table 5.5 Spherical bore diameter of housings

Unit: $\mu\text{m}/0.0001 \text{ inch}$

Nominal spherical bore diameter D_a				D_a Deviations ΔD_{am}							
over		incl.		Tolerance class H7		Tolerance class J7		Tolerance class K7			
mm	inch	mm	inch	high	low	high	low	high	low		
30	1.1811	50	1.9685	+25 +10	0 0	+14 + 6	-11 - 4	+ 7 + 3	-18 - 7		
50	1.9685	80	3.1496	+30 +12	0 0	+18 + 7	-12 - 5	+ 9 + 4	-21 - 8		
80	3.1496	120	4.7244	+35 +14	0 0	+22 + 9	-13 - 5	- -	- -		
120	4.7244	180	7.0866	+40 +16	0 0	+26 +10	-14 - 6	- -	- -		
180	7.0866	250	9.8425	+46 +18	0 0	+30 +12	-16 - 6	- -	- -		
250	9.8425	315	12.4016	+52 +20	0 0	+36 +14	-16 - 6	- -	- -		

Note: 1) Symbols ΔD_{am} : Mean spherical bore diameter deviation

2) Dimensional tolerances for spherical bore diameter of housing are classified as H7 for clearance fit, and J7 for intermediate fit.

3) The housing bore diameter for a spherical OD bearing insert would use the following fit;

Housing bore diameter $\leq 52\text{mm}$: K7 fit52mm $<$ Housing bore diameter $\leq 180\text{mm}$: J7 fitHousing bore diameter $> 180\text{mm}$: H7 fit

Table 5.6 (1) Pillow block housings


Unit: mm/inch

Housing numbers			H Deviations ΔH_s
P, IP, HP, UP PB, PM, PL PE, PG, IPG	P, IP PG, IPG	P	
201	—	—	± 0.15 ± 0.006
203	—	—	
204	—	—	
205	305	X05	
206	306	X06	
207	307	X07	
208	308	X08	
209	309	X09	
210	310	X10	
211	311	X11	
212	312	X12	± 0.2 ± 0.008
213	313	X13	
214	314	X14	
215	315	X15	
216	316	X16	
217	317	X17	
218	318	X18	
—	319	—	± 0.3 ± 0.012
—	320	X20	
—	321	—	
—	322	—	
—	324	—	
—	326	—	
—	328	—	

Table 5.6 (2) Pillow block resin housings

Unit: mm/inch

Housing numbers	H Deviations ΔH_s
PR204	± 0.25 ± 0.010
PR205	
PR206	
PR207	
PR208	

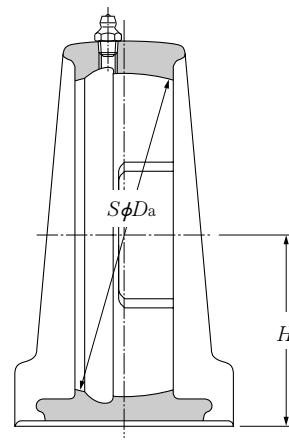Note: 1) H is height of the shaft center line.

2) This table can be applied for bearing units with dust covers.

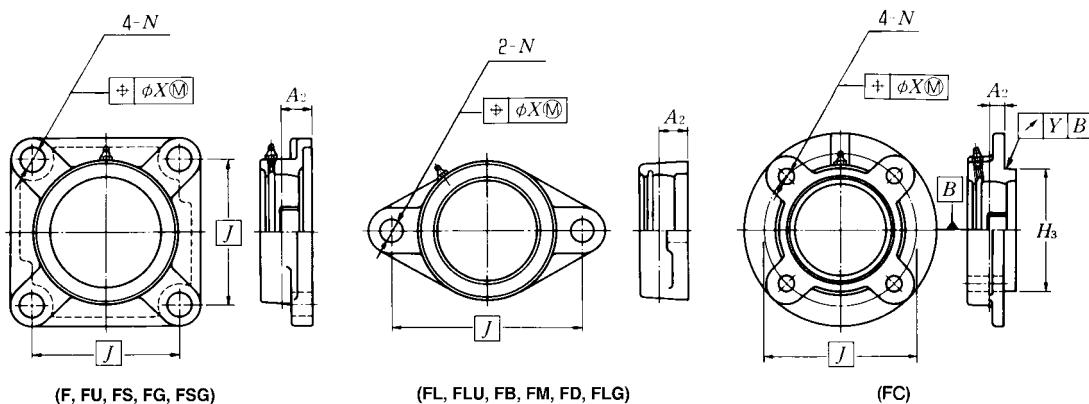


Table 5.7 (1) Flange unit housings

Unit: mm/inch

Housing numbers			location tolerance of bolt hole	A_2 Deviations Δ_{A2s}	H_3 Deviations						Radial runout of spigot joint Δ_{is} (max.)
F, FU, FC FL, FLU FB, FM, FD FG, FCG, FLG		F, FL, FS FG, FLG FSG			FC2, FCG2		FS3, FSG3		FCX		
high	low	high	low	high	low	high	low	high	low		
201	—	—	X05 X06 X07 X08 X09 X10	0.7 0.028 ± 0.5 ± 0.020	0	-0.046 -0.0018	—	—	—	—	0.2 0.008
204	—	—			0	-0.046 -0.0018	0	0	-0.046 -0.0018	—	
205	305	X05			0	-0.054 -0.0021	0	0	-0.054 -0.0021	0	
206	306	X06			0	-0.054 -0.0021	0	0	-0.054 -0.0021	0	
207	307	X07			0	-0.063 -0.0025	0	0	-0.063 -0.0025	0	
208	308	X08			0	-0.072 -0.0028	0	0	-0.072 -0.0028	0	
209	309	X09			0	-0.081 -0.0032	0	0	-0.081 -0.0032	0	
210	310	X10			0	-0.089 -0.0035	—	—	-0.089 -0.0035	—	
211	311	X11	X12 X13 X14 X15 X16 X17 X18	1 0.039 ± 0.8 ± 0.032	0	-0.063 -0.0025	0	0	-0.063 -0.0025	0	0.3 0.012
212	312	X12			0	-0.072 -0.0028	0	0	-0.072 -0.0028	0	
213	313	X13			0	-0.081 -0.0032	0	0	-0.081 -0.0032	0	
214	314	X14			0	-0.089 -0.0035	—	—	-0.089 -0.0035	—	
215	315	X15			—	—	—	—	—	—	
216	316	X16			—	—	—	—	—	—	
217	317	X17			—	—	—	—	—	—	
218	318	X18			—	—	—	—	—	—	
—	319	—	X20	—	—	—	—	—	—	—	0.4 0.016
—	320	X20			—	—	—	—	—	—	
—	321	—			—	—	—	—	—	—	
—	322	—			—	—	—	—	—	—	
—	324	—			—	—	—	—	—	—	
—	326	—			—	—	—	—	—	—	
—	328	—			—	—	—	—	—	—	

Note: 1) J is the bolt hole's center line dimension, and P, C, D, A_2 is distance between the center line of spherical bore diameter of the housing and mounting surfaces, and H_3 is outside diameter of the spigot joint.

2) Radial runout of spigot joint is applied for flange units with spigot joints.

3) This table can be applied for bearing units with dust covers.

Table 5.7 (2) Flange unit housings (diameter of bolt hole)

Unit: mm/inch

Housing type	Nominal bore diameter N		N Deviations Δ_{Ns}	
	over mm	inch	mm	inch
F, FL, FC, FS, FB, FD FA, FH, FU, FLU, FM FG, FLG, FCG, FSG	—	—	30	1.1811
	30	1.1811	51	2.008

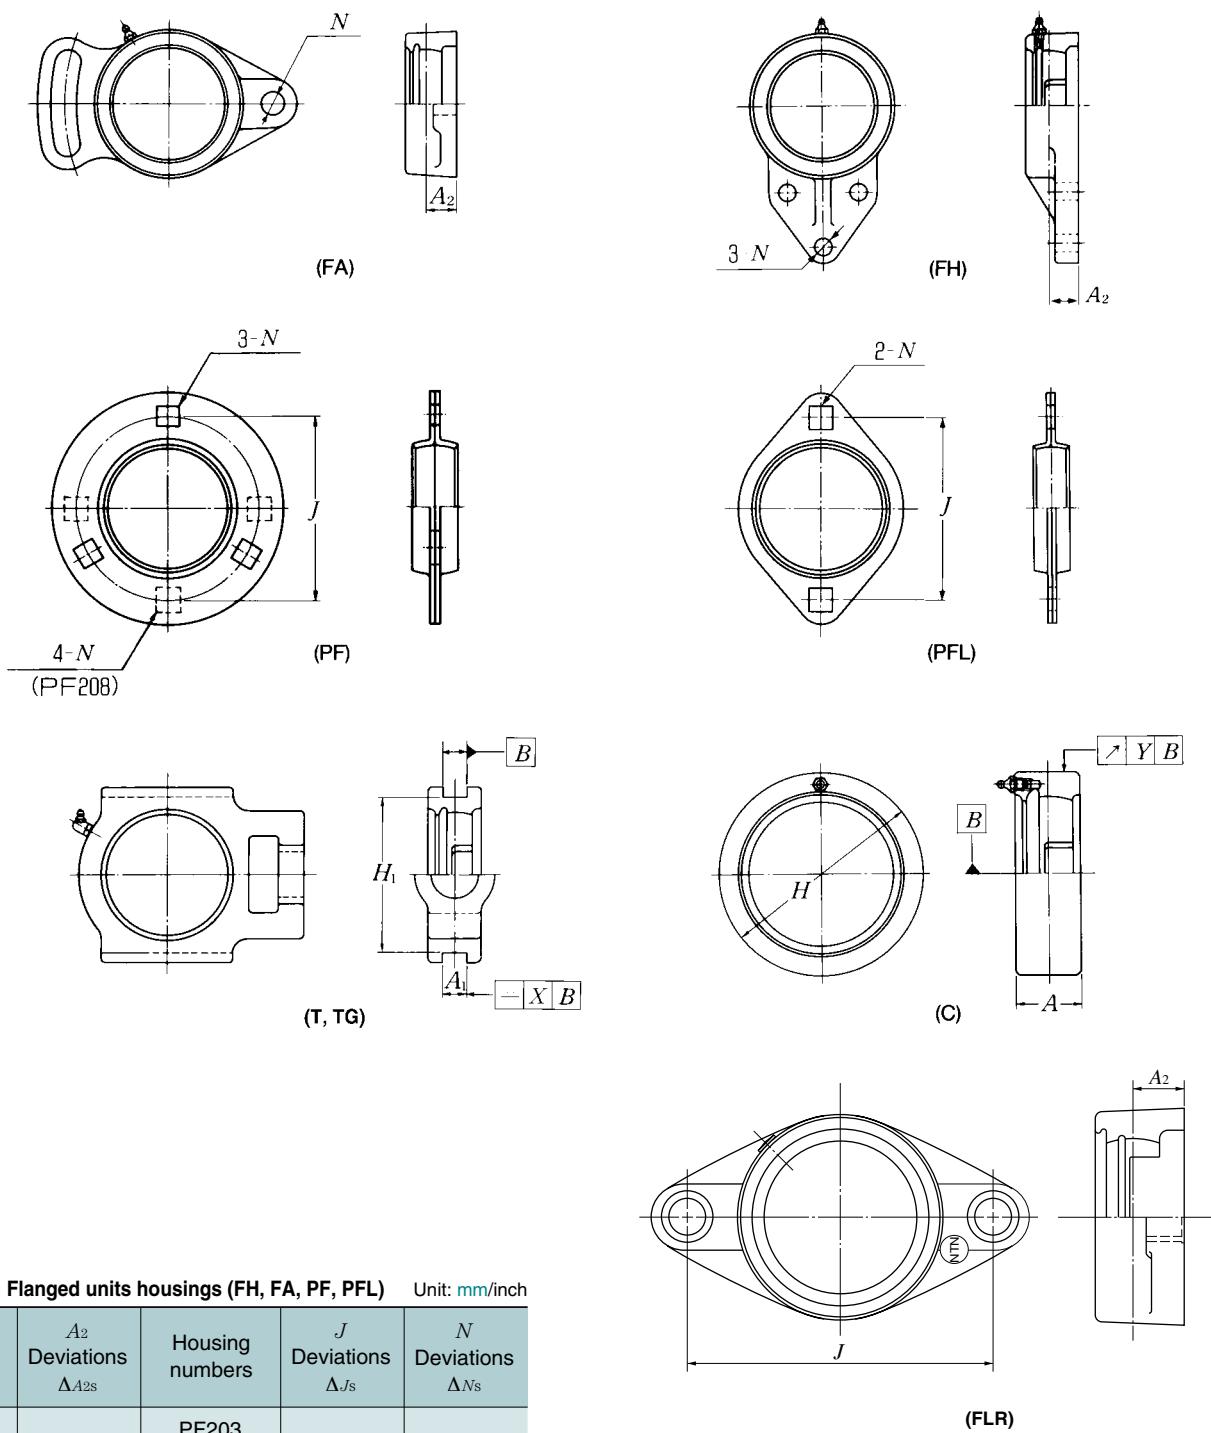


Table 5.8 (1) Flanged units housings (FH, FA, PF, PFL) Unit: mm/inch

Housing numbers	A_2 Deviations ΔA_{2s}	Housing numbers	J Deviations ΔJ_s	N Deviations ΔN_s
—		PF203		
FH, FA204		PF204		
FH, FA205		PF205		
FH, FA206	± 0.5	PF206		
FH, FA207	± 0.020	PF207	± 0.4	± 0.25
FH, FA208		PF208	± 0.016	± 0.010
FH, FA209		PFL203		
FH, FA210		PFL204		
FA211	± 0.8	PFL205		
	± 0.032	PFL206		
		PFL207		

Note: 1) A_2 is distance between the center line of spherical bore diameter of housings.

2) J is the bolt hole's center line dimension.

Table 5.8 (2) Flanged units housings (FLR) Unit: mm/inch

Housing numbers	J Deviations ΔJ_s	A_2 Deviations ΔA_{2s}
FLR204		
FLR205	± 0.7	± 0.5
FLR206	± 0.028	± 0.020
FLR207		
FLR208		

Table 5.9 Take-up unit housings (T, TG)

Unit: mm/inch

Housing numbers			A_1 Deviations ΔA_{1s}	H_1 Deviations ΔH_{1s}		Parallelism of guide
T, TG	T, TG	T		high	low	
204	—	—				
205	305	X05	+0.2 0	0	-0.5 -0.020	0.5 0.020
206	306	X06				
207	307	X07				
208	308	X08				
209	309	X09				
210	310	X10				
211	311	X11				
212	312	X12				
213	313	X13				
214	314	X14				
215	315	X15				
216	316	X16				
217	317	X17	+0.3 0	0	-0.8 -0.032	0.6 0.024
—	318	—				
—	319	—	+0.012 0	0		0.7 0.028
—	320	—				
—	321	—				
—	322	—				
—	324	—				
—	326	—				
—	328	—				0.8 0.032

Note: 1) A_1 is the width of guide rail grooves.2) H_1 is the maximum span of guide rail grooves.

3) This table can be applied for bearing units with dust covers.

Table 5.10 Cartridge unit housings (C)

Unit: mm/inch

Housing numbers			H Deviations ΔH_s						Radial runout of outside surface	A Deviations ΔA_s		
			C2		C3		CX					
			high	low	high	low	high	low				
C204	—	—	0	-0.030	—	—	—	—	0.2 0.008	± 0.2 ± 0.008		
C205	C305	CX05	0	-0.0012	0	-0.035 -0.0014	0	-0.035 -0.0014				
C206	C306	CX06										
C207	C307	CX07	0	-0.035	0	-0.0014	0	-0.035 -0.0014				
C208	C308	CX08	0	-0.0014								
C209	C309	CX09	0	-0.0014	0	-0.040 -0.0016	0	-0.040 -0.0016				
C210	C310	CX10										
C211	C311	CX11	0	-0.040	0	-0.0016	0	-0.040 -0.0016				
C212	C312	CX12	0	-0.0016								
C213	C313	—	—	—	0	-0.046 -0.0018	0	-0.046 -0.0018	0.3 0.012	± 0.3 ± 0.012		
—	C314	—										
—	C315	—										
—	C316	—										
—	C317	—										
—	C318	—										
—	C319	—										
—	C320	—										
—	C321	—										
—	C322	—										
—	C324	—										
—	C326	—							0.4 0.016			
—	C328	—										

Note: 1) H is the outside diameter of cartridge housings.2) A is width of cartridge housings.

6. Basic Load Rating and Life

6.1 Bearing life

Even in bearings operating under normal conditions, the surfaces of the raceway and rolling elements are constantly being subjected to repeated compressive stresses which cause flaking of these surfaces to occur. This flaking is due to material fatigue and will eventually cause the bearings to fail. The effective life of a bearing is usually defined in terms of the total number of revolutions a bearing can undergo before flaking of either the raceway surface or the rolling element surfaces occurs.

Other causes of bearing failure are often attributed to problems such as seizing, abrasions, cracking, chipping, gnawing, rust, etc. However, these so called "causes" of bearing failure are usually themselves caused by improper installation, insufficient or improper lubrication, faulty sealing or inaccurate bearing selection. Since the above mentioned "causes" of bearing failure can be avoided by taking the proper precautions, and are not simply caused by material fatigue, they are considered separately from the flaking aspect.

6.2 Basic rating life and basic dynamic load rating

A group of seemingly identical bearings when subjected to identical load and operating conditions will exhibit a wide diversity in their durability.

This "life" disparity can be accounted for by the difference in the fatigue of the bearing material itself. This disparity is considered statistically when calculating bearing life, and the basic rating life is defined as follows.

The basic rating life is based on a 90% statistical model which is expressed as the total number of revolutions 90% of the bearings, in an identical group of bearings subjected to identical operating conditions, will attain or surpass before flaking due to material fatigue occurs. For bearings operating at fixed constant speeds, the basic rating life (90% reliability) is expressed in the total number of hours of operation.

The basic dynamic load rating is an expression of the load capacity of a bearing based on a constant load which the bearing can sustain for one million revolutions (the basic life rating). For radial bearings this rating applies to pure radial loads, and for thrust bearings it refers to pure axial loads. The basic dynamic load ratings given in the bearing tables of this catalog are for bearings constructed of NTN standard bearing materials, using standard manufacturing techniques. Please consult NTN for basic load ratings of bearings constructed of special materials or using special manufacturing techniques.

The relationship between the basic rated life, the basic dynamic load rating and the bearing load is given in formula (6.1).

$$L_{10} = \left(\frac{C_r}{P_r} \right)^3 \quad (6.1)$$

where,

L_{10} : Basic rating life 10^6 revolutions

C_r : Basic dynamic load rating, N, lbf

P_r : Equivalent dynamic load, N, lbf

The basic rated life can also be expressed in terms of hours of operation (revolution), and is calculated as shown in formula (6.2).

$$L_{10h} = 500 f_h^3 \quad (6.2)$$

$$f_h = f_n \frac{C_r}{P_r} \quad (6.3)$$

$$f_n = \left(\frac{33.3}{n} \right)^{1/3} \quad (6.4)$$

where,

L_{10h} : Basic rating life, h

f_h : Life factor

f_n : Speed factor

n : Rotational speed, min⁻¹

Formula (6.2) can also be expressed as shown in formula (6.5).

$$L_{10h} = \frac{10^6}{60n} \left(\frac{C_r}{P_r} \right)^3 \quad (6.5)$$

The relation between rotational speed n and speed factor f_n as well as the relation between the basic rated life L_{10h} and the life factor f_h is shown in Fig. 6.1.

When several bearings are incorporated in machines or equipment as complete units, all the bearings in the unit are considered as a whole when computing bearing life (see formula 6.6). The total bearing life of the unit is a life rating based on the viable lifetime of the unit before even one of the bearings fails due to rolling contact fatigue.

$$L = \frac{1}{\left(\frac{1}{L_1^{1.1}} + \frac{1}{L_2^{1.1}} + \dots + \frac{1}{L_n^{1.1}} \right)^{1/1.1}} \quad (6.6)$$

where,

L : Total life of the whole bearing assembly h
 $L_1, L_2 \dots L_n$: Rated life of bearings 1, 2, ..., n, h

In the case where load and the number of revolutions change at regulated intervals, after finding the rated life L_1, L_2, \dots, L_n under conditions of $n_1, p_1 : n_2, p_2 : \dots : n_n, p_n$; the built-in life L_m can be given by the formula (6.7).

$$L_1 = \frac{10^6}{60n_1} \left(\frac{C_r}{P_1} \right)^3$$

$$L_2 = \frac{10^6}{60n_2} \left(\frac{C_r}{P_2} \right)^3$$

$$\vdots$$

$$L_n = \frac{10^6}{60n_n} \left(\frac{C_r}{P_n} \right)^3$$

$$L_m = \left(\frac{\phi_1}{L_1} + \frac{\phi_2}{L_2} + \dots + \frac{\phi_n}{L_n} \right)^{-1} \quad (6.7)$$

where,

L_1, L_2, \dots, L_n : Rated life under condition 1, 2, ..., n, h
 n_1, n_2, \dots, n_n : Number of revolutions under condition 1, 2, ..., n, min^{-1}
 P_1, P_2, \dots, P_n : Equivalent load under condition 1, 2, ..., n, lbf
 $\phi_1, \phi_2, \dots, \phi_n$: Ratio of condition 1, 2, ..., n, accounting for the total operating time
 L_m : Built-in life, h

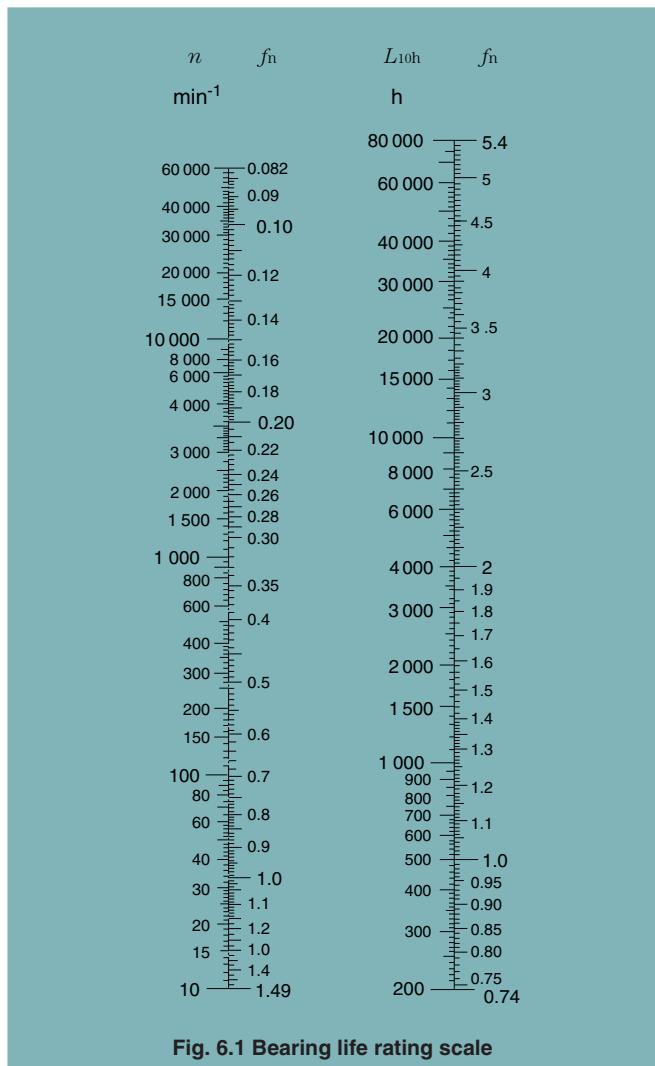


Fig. 6.1 Bearing life rating scale

Table 6.1 Rating life for applications

Service classification	Machine application	Life time L_n
Machines used occasionally	Door mechanisms, Garage shutter	500
Equipment for short period or intermittent service interruption permissible	Household appliances, Electric hand tools, Agricultural machines, Lifting tackles in shops	4 000 ~ 8 000
Intermittent service machines-high reliability	Power-Station auxiliary equipment, Elevators, Conveyors, Deck cranes	8 000 ~ 14 000
Machines used for 8 hours a day, but not always in full operation	Ore wagon axles, Important gear units	14 000 ~ 20 000
Machines fully used for 8 hours	Blowers, General machinery in shops, Continuous operation cranes	20 000 ~ 30 000
Machines continuously used for 24 hours a day	Compressors, Pumps	50 000 ~ 60 000
Machines continuously used for 24 hours a day with maximum reliability	Power-station equipment, Water-supply equipment for urban areas, Mine ventilators	100 000 ~ 200 000

6.3 Machine applications and requisite life

When selecting a bearing, it is essential that the requisite life of the bearing be established in relation to the operating conditions. The requisite life of the bearing is usually determined by the type of machine the bearing is to be used in, and duration of service and operational reliability requirements. A general guide to these requisite life criteria is shown in Table 6.1. When determining bearing size, the fatigue life of the bearing is an important factor; however, besides bearing life, the strength and rigidity of the shaft and housing must also be taken into consideration.

6.4 Adjusted life rating factor

The basic bearing life rating (90% reliability factor) can be calculated through the formulas mentioned earlier in Section 6.2. However, in some applications a bearing life factor of over 90% reliability may be required. To meet these requirements, bearing life can be lengthened by the use of specially improved bearing materials or special construction techniques. Moreover, according to elastohydrodynamic lubrication theory, it is clear that the bearing operating conditions (lubrication, temperature, speed, etc.) all exert an effect on bearing life. All these adjustment factors are taken into consideration when calculating bearing life, and using the life adjustment factor as prescribed in ISO 281, the adjusted bearing life can be arrived at.

$$L_{\text{na}} = a_1 a_2 a_3 \left(\frac{C}{P} \right)^3 \quad (6.8)$$

where,

L_{na} : Adjusted rating life in millions of revolutions (10^6)

a_1 : Reliability factor

a_2 : Bearing characteristics factor

a_3 : Operating conditions factor

6.4.1 Reliability factor a_1

The values for the reliability adjustment factor a_1 (for a reliability factor higher than 90%) can be found in Table 6.2.

6.4.2 Bearing characteristics factor a_2

The life of a bearing is affected by the material type and quality as well as the manufacturing process. In this regard, the life is adjusted by the use of an a_2 factor.

The basic dynamic load ratings listed in the catalog are based on NTN's standard material and process, therefore, the adjustment factor $a_2 = 1$. When special materials or processes are used the adjustment factor a_2 can be larger than 1.

NTN bearings can generally be used up to **120°C**. If bearings are operated at a higher temperature, the bearing

must be specially heat treated (stabilized) so that inadmissible dimensional change does not occur due to micro-structure change. This special heat treatment might cause the reduction of bearing life because of a hardness change.

Table 6.2 Reliability factor a_1

Reliability %	L_{R}	Reliability factor a_1
90	L_{10}	1.00
95	L_5	0.62
96	L_4	0.53
97	L_3	0.44
98	L_2	0.33
99	L_1	0.21

6.4.3 Operating conditions factor a_3

Operating conditions factor a_3 is used to compensate for when lubrication condition worsens due to rise in temperature or rotational speed, lubricant deteriorates, or becomes contaminated with foreign matter.

Generally speaking, when lubricating conditions are satisfactory, the a_3 factor has a value of one; and when lubricating conditions are exceptionally favorable, and all other operating conditions are normal, a_3 can have a value greater than one.

However, when lubricating conditions are particularly unfavorable and the oil film formation on the contact surfaces of the raceway and rolling elements is insufficient, the value of a_3 becomes less than one. This insufficient oil film formation can be caused, for example, by the lubricating oil viscosity being too low for the operating temperature (below 13 mm²/s for ball bearings); or by exceptionally low rotational speed (n min⁻¹ X d_p mm less than 10000). For bearings used under special operating conditions, please consult NTN.

- Bearing operating temperature is too high
If bearing operating temperature is too high, the raceway becomes softened, thereby shortening life.

Life is adjusted by multiplying by the values given in fig.6.2 as the operating condition factor according to operating temperature. This however does not apply to bearings that have been treated to stabilize dimensions.

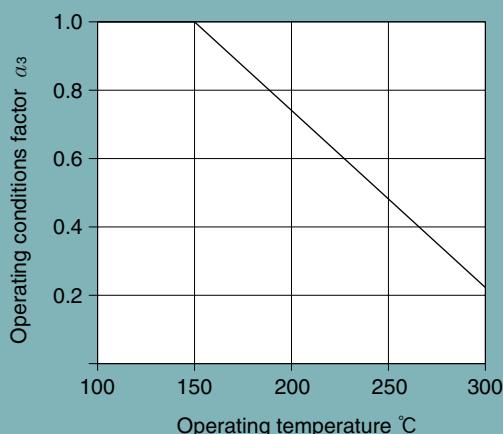


Fig. 6.2 Operating conditions factor according to operating temperature

6.5 Basic static load rating

When stationary rolling bearings are subjected to static loads, they suffer from partial permanent deformation of the contact surfaces at the contact point between the rolling elements and the raceway. The amount of deformity increases as the load increases, and if this increase in load exceeds certain limits, the subsequent smooth operation of the bearing is impaired.

It has been found through experience that a permanent deformity of 0.0001 times the diameter of the rolling element, occurring at the most heavily stressed contact point between the raceway and the rolling elements, can be tolerated without any impairment in running efficiency.

The basic rated static load refers to a fixed static load limit at which a specified amount of permanent deformation occurs. It applies to pure radial loads for radial bearings. The maximum applied load values for contact stress occurring at the rolling element and raceway contact points are given below.

For ball bearings (for bearing unit) : 4200 Mpa.

6.6 Allowable static equivalent load

Generally the static equivalent load which can be permitted (see section 7.3) is limited by the basic static rated load as stated in Section 6.5. However, depending on requirements regarding friction and smooth operation, these limits may be greater or lesser than the basic static rated load.

In the following formula (6.9) and Table 6.4 the safety factor S_0 can be determined considering the maximum static equivalent load.

$$S_0 = \frac{C_0}{P_{0\max}} \dots \quad (6.9)$$

where,

S_0 : Safety factor

C_0 : Basic static load rating, N, lbf

P_{max} : Maximum static equivalent load, N, lbf

Table 6.4 Minimum safety factor values S_{O}

Operating conditions	Ball bearings
High rotational accuracy demand	2
Normal rotating accuracy demand (Universal application)	1
Slight rotational accuracy deterioration permitted (Low speed, heavy loading, etc.)	0.5

Note :1) When vibration and/or shock loads are present, a load factor based on the shock load needs to be included in the P_{max} value.

7. Loads

7.1 Load acting on the bearing

It is very rare that the load on a bearing can be obtained by a simple calculation. Loads applied to the bearing generally include the weight of the rotating element itself, the load produced by the working of the machine, and the load resulting from transmission of power by the belt and gearwheel. Such loads include the radial load, which works on the bearing at right angles to its axis, and the thrust load, which works on the bearing parallel to its axis. These can work either singly or in combination. In addition, the operation of a machine inevitably produces a varying degree of vibrations and shocks. To take this into account, the theoretical value of a load is multiplied by a safety factor that has been derived from past experience. This is known as the "load factor".

Load acting on the bearing =

$$\text{Load factor } f_w \times \text{Calculated load}$$

Table 7.1 below shows the generally accepted load factors f_w which correspond to the degree of shock to which the machine is subjected.

7.1.1 Load applied to the bearing by power transmission

The force working on the shaft when power is transmitted by belts, chains or gearwheels is obtained, in general, by the following formula:

$$T = 9\,550 \frac{H}{n}, \quad 84\,500 \frac{H}{n} \quad \dots \quad (7.1)$$

$$K_t = \frac{T}{r} \quad \dots \quad (7.2)$$

Table 7.1 Load factors f_w

Load conditions	f_w	Examples
Little or no shock	1 to 1.2	Machines tools, electric machines, etc.
Some degree of shock; machines with reciprocating parts	1.2 to 1.5	Vehicles, driving mechanism, metal-working machinery, steel-making machines, paper-making machinery, rubber mixing machines, hydraulic equipment, hoists, transportation machinery, power-transmission equipment, woodworking machines, printing machines, etc.
violent shocks	1.5 to 3	Agricultural machines, vibrator screens, ball and tube mills, etc.

In the case of power transmission by belts, gear wheels, etc., load factors adopted are somewhat different from the above. Factors used for power transmission by belts, gearwheels and chains, respectively, are given in the following sections.

Table 7.2 Belt factors f_b

Belt type	f_b
V-belt	1.5 to 2.0
Timing belt	1.1 to 1.3
Flat belt (with tension pulley)	2.5 to 3.0
Flat belt	3.0 to 4.0

Note :In cases where the distance between shafts is short, the revolution speed is low, or where operating conditions are severe, the higher f_b values should be adopted.

where,

T : Torque, $\text{N}\cdot\text{m}$, $\text{lbf}\cdot\text{inch}$.

H : Transmission power, kW

n : Rotational speed, min^{-1}

K_t : Transmission force (effective transmission force of belt or chain; tangential force of gearwheel), N , lbf

r : effective radius of belt pulley, sprocket wheel or gearwheel, m , inch

Accordingly, the load actually applied to the shaft by the transmission force can be obtained by the following formula:

$$\text{Actual load} = \text{Factor} \times K_t \dots \quad (7.3)$$

Different factors are adopted according to the transmission system in use. These will be dealt with in the following paragraphs.

Belt transmission

When power is transmitted by belt, the effective transmission force working on the belt pulley is calculated by formula (7.2). The term "effective transmission force of the belt" refers to the difference in tension between the tensioned side and the loose side of the belt. Therefore, to obtain the load actually acting on the shaft through the medium of the belt pulley, it is necessary to multiply the effective transmission force by a factor which takes into account the type of belt and the initial tension. This is known as the "belt factor".

Gear transmission

In the case of gear transmissions, the theoretical gear load can be calculated from the transmission force and the type of gear. With spur gears, only a radial load is involved; whereas, with helical gears and bevel gears, an additional axial load is present.

The simplest case is that of spur gears. In this instance, the tangential force K_t is obtained from the formula (7.2) and the radial force K_s can be obtained from the following formula:

$$K_s = K_t \cdot \tan \alpha \quad \dots \quad (7.4)$$

where,

α : is the pressure angle of the gear.

Accordingly, the theoretical composite force, K_r , working on the gear is obtained from the following formula:

$$K_r = \sqrt{K_t^2 + K_s^2} = K_t \cdot \sec \alpha \quad \dots \quad (7.5)$$

Therefore, to obtain the radial load actually working on the shaft, the theoretical composite force, as above, is multiplied by a factor in which the accuracy and the degree of precision of the gear is taken into account. This is called the "gear factor" and is represented by the symbol f_z . In Table 7.3 is below, f_z values for spur wheels are given.

The gear factor is essentially almost the same as the previously described load factor, f_w . In some cases, however, vibrations and shocks are produced also by the machine of which the gear is a part. Here it is necessary to calculate the actual load working on the gear by further multiplying the gear load, as obtained above, by the load factor shown in Table 7.1, according to the degree of shock.

Table 7.3 Gear factors f_z

Gear	f_z
Precision gears (tolerance 0.02 mm 0.0008 inch max., for both pitch and shape)	1.05 to 1.1
Gears finished by ordinary machining work (tolerance 0.02 to 0.1 mm, 0.0008 to 0.0039 inch for both pitch and shape)	1.1 to 1.3



Chain transmission

When power is transmitted by chain, the effective transmission force working on the sprocket wheel is calculated by formula (7.2). To obtain the load actually working, the effective transmission force must be multiplied by the "chain factor", 1.2 to 1.5.

7.1.2 Distribution of the radial load

The load acting on the shaft is distributed to the bearings which support the shaft.

In Fig. 7.1, the load is applied to the shaft between two bearings; in Fig. 7.2 the load is applied to the shaft outside the two bearings. In practice, however, most cases are combinations of Fig. 7.1 and 7.2, and the load is usually a composite load, that is to say, a combination of radial and axial loads. Therefore they are calculated by the methods described in the following sections.

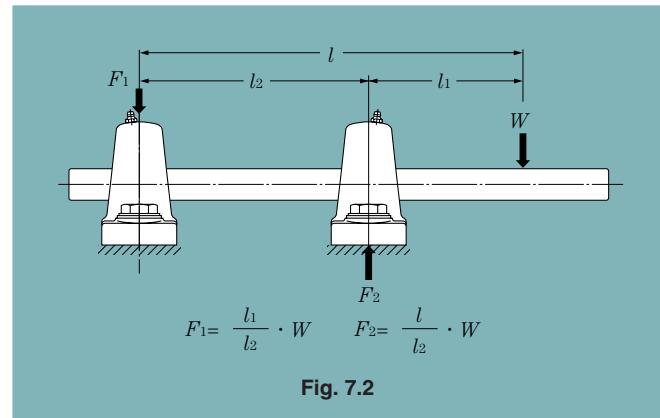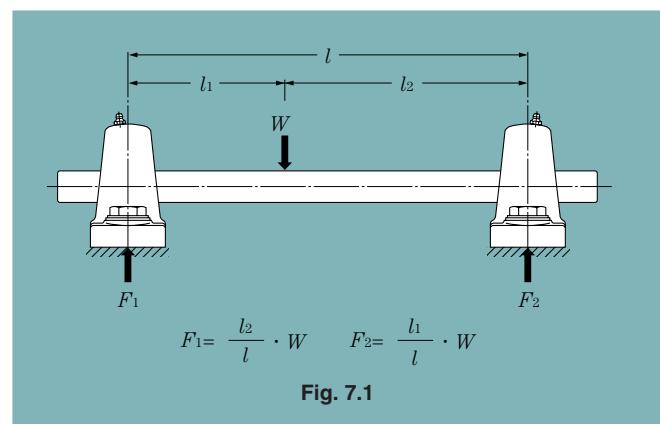

7.2 Dynamic equivalent radial load

For ball bearings used in the NTN unit, the basic rated dynamic loads C_r mentioned in the table of dimensions are applicable only when the load is purely radial. In practice, however, bearings are usually subjected to a composite load. As the table of dimensions is not directly applicable here, it is necessary to convert the values of the radial and axial loads into a single radial load value that would have an effect on the life of bearing equivalent to that of the actual load applied. This is known as the "dynamic equivalent radial load", and from this the life of the ball bearings for the unit is calculated. The dynamic equivalent radial load is calculated by the following formula:

$$P_r = X \cdot F_r + Y \cdot F_a \quad (7.6)$$

where,

P_r : Dynamic equivalent radial load, N, lbf

F_r : Actual radial load, N, lbf

F_a : Actual axial load, N, lbf

X : Radial load factor

Y : Axial load factor

Values of X and Y are shown in Table 7.4 below.

7.3 Static equivalent radial load

In the case of a bearing which is stationary, rotates at a low speed of about 10 rpm, or makes slight oscillating movements, it is necessary to take into account the static equivalent radial load, which is the counterpart of the dynamic equivalent radial load of a rotating bearing. In this case, the following formula is used.

$$P_{or} = X_o \cdot F_r + Y_o \cdot F_a \quad (7.7)$$

where,

P_{or} : Static equivalent radial load, N, lbf

F_r : Actual radial load, N, lbf

F_a : Actual axial load, N, lbf

X_o : Static radial load factor

Y_o : Static axial load factor

With the ball bearings for the NTN unit, the values of X_o and Y_o are $X_o = 0.6$ $Y_o = 0.5$.

However when only radial load is involved, or when $F_a / F_r \leq e$, the following values in used:

$$X_o = 1 \quad Y_o = 0$$

Accordingly, the following equation holds.

$$P_{or} = F_r \quad (7.8)$$

Table 7.4 Dynamic equivalent radial load

$$P_r = X \cdot F_r + Y \cdot F_a$$

$\frac{f_o \cdot F_a}{C_{or}}$	e	$\frac{F_a}{F_r} \leq e$		$\frac{F_a}{F_r} > e$	
		X	Y	X	Y
0.172	0.19				2.30
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.30	1	0	0.56	1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1.00

Note 1) The f_o factor for calculating equivalent radial load has been added to the dimensional tables in the catalog.

2) C_{or} is the basic static load rating. (See the table of dimensions.)

When the value of $\frac{f_o \cdot F_a}{C_{or}}$ or $\frac{F_a}{F_r}$ is not in conformity with those given in Table 7.4 above, find the value by interpolation.

8. Bearing Internal Clearance

8.1 Bearing internal clearance

Bearing internal clearance (initial clearance) is the amount of internal clearance a bearing has before being installed on a shaft or in a housing.

As shown in Fig. 8.1, when either the inner ring or the outer ring is fixed and the other ring is free to move, displacement can take place in either an axial or radial direction. This amount of displacement (radially or axially) is termed the internal clearance and, depending on the direction, is called the radial internal clearance or the axial internal clearance.

When the internal clearance of a bearing is measured, a slight measurement load is applied to the raceway so the internal clearance may be measured accurately. However, at this time, a slight amount of elastic deformation of the bearing occurs under the measurement load, and the clearance measurement value (measured clearance) is slightly larger than the true clearance. This discrepancy between the true bearing clearance and the increased amount due to the elastic deformation must be compensated for. These compensation values are given in Table 8.1.

The internal clearance values for each bearing class are shown in Tables 8.3.

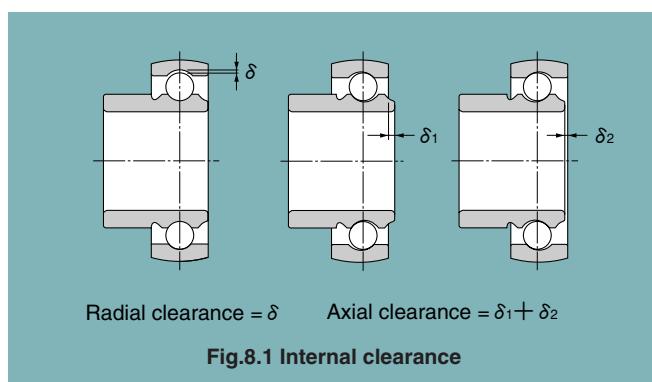


Table 8.1 Adjustment of radial internal clearance based on measured load Unit : μm

Nominal bore diameter d (mm)	Measuring load (N)	Radial clearance increase				
		C2	CN	C3	C4	C5
10	18	24.5	3~4	4	4	4
18	50	49	4~5	5	6	6
50	200	147	6~8	8	9	9

8.2 Internal clearance selection

The internal clearance of a bearing under operating conditions (effective clearance) is usually smaller than the same bearing's initial clearance before being installed and operated. This is due to several factors including bearing fit, the difference in temperature between the inner and outer rings, etc. As a bearing's operating clearance has an effect on bearing life, heat generation, vibration, noise, etc.; care must be taken in selecting the most suitable operating clearance.

Effective internal clearance:

The internal clearance differential between the initial clearance and the operating (effective) clearance (the amount of clearance reduction caused by interference fits, or clearance variation due to the temperature difference between the inner and outer rings) can be calculated by the following formula:

$$\delta_{\text{eff}} = \delta_o - (\delta_f + \delta_t) \quad \dots \quad (8.1)$$

where,

δ_{eff} : Effective internal clearance, mm

δ_o : Bearing internal clearance, mm

δ_f : Reduced amount of clearance due to interference, mm

δ_t : Reduced amount of clearance due to temperature differential of inner and outer rings, mm

Reduced clearance due to interference:

When bearings are installed with interference fits on shafts and in housings, the inner ring will expand and the outer ring will contract; thus reducing the bearings' internal clearance. The amount of expansion or contraction varies depending on the shape of the bearing, the shape of the shaft or housing, dimensions of the respective parts, and the type of materials used. The differential can range from approximately 70% to 90% of the effective interference.

$$\delta_f = (0.70 \sim 0.90) \cdot \Delta_{\text{def}} \quad \dots \quad (8.2)$$

where,

δ_f : Reduced amount of clearance due to interference, mm

Δ_{def} : Effective interference, mm

Reduced internal clearance due to inner/outer ring temperature difference:

During operation, normally the outer ring will be from 5° to 10°C cooler than the inner ring or rotating parts. However, if the cooling effect of the housing is large, the shaft is connected to a heat source, or a heated substance is conducted through the hollow shaft; the temperature difference between the two rings can be even greater. The amount of internal clearance is thus further reduced by the differential expansion of the two rings.

$$\delta_t = \alpha \cdot \Delta_T \cdot D_o \quad \dots \quad (8.3)$$

where,

δ_t : Amount of reduced clearance due to heat differential, mm

α : Bearing steel linear expansion coefficient
 $12.5 \times 10^{-6}/^{\circ}\text{C}$

Δ_T : Inner/outer ring temperature differential, °C

D_o : Outer ring raceway diameter, mm

Outer ring raceway diameter, D_0 , values can be approximated by using formula 8.4.

For ball bearings.

where

d: Bearing bore diameter, mm

D : Bearing outside diameter, mm

8.3 Bearing internal clearance selection standards

Theoretically, in regard to bearing life, the optimum operating internal clearance for any bearing would be a slight negative clearance after the bearing had reached normal operating temperature.

Unfortunately, under actual operating conditions, maintaining such optimum tolerances is often difficult at best. Due to various fluctuating operating conditions this slight minus clearance can quickly become a large minus, greatly lowering the life of the bearing and causing excessive heat to be generated. Therefore, an initial internal clearance which will result in a slightly greater than negative internal operating clearance should be selected.

Under normal operating conditions (e.g. normal load, fit, speed, temperature, etc.), a standard internal clearance will give a very satisfactory operating clearance.

Table 8.2 lists non-standard clearance recommendations for various applications and operating conditions.

Table 8.2 Examples of applications where bearing clearances other than normal clearance are used

Operating conditions	Applications	Selected clearance
Shaft is heated and housing is cooled.	Conveyor of casting machine	C5
Shaft or inner ring is heated.	Annealing pit, Drying pit, Curing pit	C4
Allows for shaft deflection and fitting errors.	Disc harrows	C4
	Combines	C3
Tight-fitted for both inner and outer rings.	Large blowers	C3
To reduce noise and vibration when rotating.	Multi-wing fan of air conditioners	C2

Table 8.3 (1) Cylindrical bore bearingsUnit: $\mu\text{m}/0.0001 \text{ inch}$

Nominal bore diameter <i>d</i>		Radial internal clearance											
		C2		CN		C3		C4		C5			
over	incl.	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.
mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
6	0.2362	10	0.3937	0	0	7	3	2	0.8	13	5	8	3
10	0.3937	18	0.7087	0	0	9	4	3	1	18	7	11	4
18	0.7087	24	0.9449	0	0	10	4	5	2	20	8	13	5
24	0.9449	30	1.1811	1	0	11	4	5	2	20	8	13	5
30	1.1811	40	1.5748	1	0	11	4	6	2	20	8	15	6
40	1.5748	50	1.9685	1	0	11	4	6	2	23	9	18	7
50	1.9685	65	2.5591	1	0	15	6	8	3	28	11	23	9
65	2.5591	80	3.1496	1	0	15	6	10	4	30	12	25	10
80	3.1496	100	3.9370	1	0	18	7	12	5	36	14	30	12
100	3.9370	120	4.7244	2	1	20	8	15	6	41	16	36	14
120	4.7244	140	5.5118	2	1	23	9	18	7	48	19	41	16

Note :Heat-resistant bearings with suffix HT2 have C4 clearances.

Table 8.3 (2) Tapered bore bearingsUnit: $\mu\text{m}/0.0001 \text{ inch}$

Nominal bore diameter <i>d</i>		Radial internal clearance											
		C2		CN		C3		C4		C5			
over	incl.	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.
mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
24	0.9449	30	1.1811	5	2	20	8	13	5	28	11	23	9
30	1.1811	40	1.5748	6	2	20	8	15	6	33	13	28	11
40	1.5748	50	1.9685	6	2	23	9	18	7	36	14	30	12
50	1.9685	65	2.5591	8	3	28	11	23	9	43	17	38	15
65	2.5591	80	3.1496	10	4	30	12	25	10	51	20	46	18
80	3.1496	100	3.9370	12	5	36	14	30	12	58	23	53	21
100	3.9370	120	4.7244	15	6	41	16	36	14	66	26	61	24
120	4.7244	140	5.5118	18	7	48	19	41	16	81	32	71	28

Note :Heat-resistant bearings with suffix HT2 have C4 clearances.

9. Lubrication

As bearings in NTN bearing units have sufficient high-grade grease sealed in at the time of manufacture, there is no need for replenishment while in use. The amount of grease necessary for lubrication is, in general, very small. With the NTN bearing units, the amount of grease occupies about a half to a third of the space inside the bearing.

9.1 Allowable speed

The allowable speed while ensuring the safety and long life of ball bearings used in the unit is limited by their size, the circumferential speed at the point where the seal comes into contact, and the load acting on them.

To indicate the allowable speed, it is customary to use the value of dn or $d_m n$ (d is the bore of the bearing; d_m is the diameter of the pitch circle = (I.D.+O.D.)/2; n is the number of revolutions).

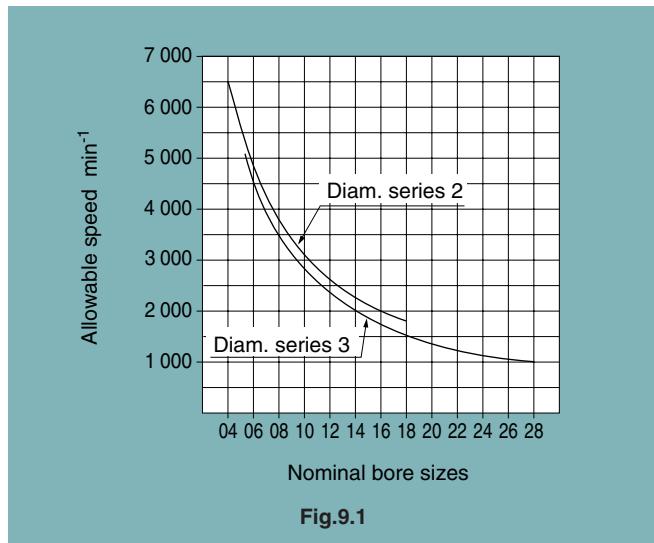


Fig.9.1

Problems connected with the lubrication of bearings are the generation of heat and seizures occurring at the sliding parts inside the bearing, in particular at the points where the ball is in contact with the retainer, inner and outer rings. The contact pressure at the points where friction occurs on the retainer is only slightly affected by the load acting on the bearing; the amount of heat generated there is approximately in proportion to the sliding velocity. Therefore, this sliding velocity serves as a yardstick to measure the limit of the rotating speed of the bearing. In the case of a bearing unit, however, there is another large factor that has to be taken into account—the circumferential speed at the part where the seal is in contact.

The graph in Fig. 9.1 indicates the allowable speed, taking into account the aforementioned factors.

There are two common methods of locking the bearing unit onto the shaft—the set screw system and the eccentric collar system. However, in both of these systems high-speed operation will cause deformation of the inner ring, which may result in vibration of the bearing. For high-speed operation, therefore, it is recommended that an interference fit or a clearance fit with a near-zero clearance be used, with a shaft of the larger size as shown later in this manual in Fig. 10.1, Fig. 10.5.

For standard bearing units with the contact type seal, the allowable speed is $120\ 000/d$. Where a higher speed is required, bearing units with the non-contact type seal, are advised. Please contact NTN regarding the use of the latter type. Additionally, it is necessary that the surface on which the housing is mounted be finished to as a high a degree of accuracy as possible. A regularity of within $\pm 0.05\text{mm}$, ± 0.002 inch is required.

Table 9.1 Brands of grease used in NTN bearing units

Bearing units	Grease		Symbols	Operating temperature range
	Thickening agent	Base oil		
Standard	Li soap	Mineral oil	D1	-15° to +100°C, (+5° to +212°F)
Heat-resistant	Li soap	Silicone oil	HT2D1	Normal temp. to +180°C (356°F)
Cold-resistant	Li soap	Silicone oil	CT1D1	-60°C (-76°F) to normal temp.

9.2 Replenishment of grease

9.2.1 Sealed-in grease

With NTN bearing units, no relubrication is the general rule. The standard self-lubricating type of bearing units contain high-grade lithium-based grease which, being suitable for long-term use, is ideal for sealed-type bearings. They also feature NTN's unique sealing device. Relubrication, therefore, is unnecessary under most operating conditions.

At high temperatures, or where there is exposure to water or excessive dust, the highest quality grease is essential. Therefore, NTN uses its own specially selected brands which are shown in Table 9.1. It is necessary to use the same brand when replenishing grease.

9.2.2 Mixing of different kinds of grease

Whether or not different kinds of grease may be mixed usually depends on their thickeners. The commonly used criteria are shown in Table 9.2. Properties which are most susceptible to influences from mixing are viscosity, dropping

Table 9.2 Mixing properties of grease

Soap base	Ca	Na	Al	Ba	Li
Ca	○	△	△	×	△
Na	△	○	△	×	×
Al	△	△	○	×	×
Ba	×	×	×	○	×
Li	△	×	×	×	○

○ Mixing will not produce any appreciable change of properties.

△ Mixing may produce considerable variations of properties.

×

point and penetration. Water and heat resisting properties as well as mechanical stability are also lowered. Therefore, when mixing in a grease which is different to that which is already in use, it is essential that the thickener (soap base) and the base oil be of the same group.

When relubricating NTN bearing units, it is advisable to use the brands of grease shown in Table 9.1.

9.2.3 Relubrication frequency

Relubrication frequency varies with the kind and quality of grease used as well as the operating conditions. Therefore, it is difficult to establish a general rule, but under ordinary operating conditions, it is desirable that grease be replenished before one third (1/3) of its calculated life elapses. It is necessary, however, to take into consideration such factors as hardening of grease in the oil hole, making replenishment impossible; deterioration of grease while operation of the machine is suspended, and so forth.

In Table 9.3 below are shown standard relubrication frequencies. Irrespective of the calculated life of the grease, this list takes into consideration such factors as the rotational speed of the bearings, operating temperatures and environmental conditions, with a view to safety.

9.2.4 Re-greasing

The performance of a bearing is greatly influenced by the quantity of grease. In order to avoid over-filling, it is advisable to replenish the grease while the machine is in operation.

Continue to insert grease until a little oozes out from between the outer ring raceway and the periphery of the slinger, for optimum performance.

Relubrication quantity is shown Table 9.4

Relubrication pressure : 1 ~ 2MPa {10 ~ 20kgf/cm²}


Table 9.3 Standard relubrication frequencies

Type of unit	Symbol	<i>dn</i> Value (<i>d</i> × <i>n</i>)	Environmental conditions	Operating temp. °C, °F	Relubrication frequency	
					Hours	Period
Standard	D1	40 000 and below	Ordinary	-15 to -80, +5 to +176	1 500 to 3 000	6 to 12 mo.
Standard	D1	70 000 and below	Ordinary	-15 to +80, +5 to +176	1 000 to 2 000	3 to 6 mo.
Standard	D1	70 000 and below	Ordinary	+80 to +100, +176 to +212	500 to 700	1 mo.
Heat-resistant	HT2D1	70 000 and below	Ordinary	+100 to +150, +212 to +302	300 to 700	1 mo.
Heat-resistant	HT2D1	70 000 and below	Ordinary	+150 to +180, +302 to +356	100	1 wk.
Cold-resistant	CT1D1	70 000 and below	Ordinary	-60 to +80, -76 to +176	1 000 to 2 000	3 to 6 mo.
Standard	D1	70 000 and below	Very dusty	-15 to +100, +5 to +212	100 to 500	1 wk. to 1 mo.
Standard	D1	70 000 and below	Exposed to water splashes	-15 to +100, +5 to +212	30 to 100	1 day to 1 wk.

Table 9.4 Relubrication quantity

Bearing number	Quant.	Bearing number	Unit gr	Quant.
UC201D1	1.1	UC305D1		2.0
UC202D1	1.1	UC306D1		3.0
UC203D1	1.1	UC307D1		4.3
UC204D1	1.1	UC308D1		5.5
UC205D1	1.3	UC309D1		7.5
UC206D1	UCX05D1	1.9	UC310D1	10.5
UC207D1	UCX06D1	2.7	UC311D1	13
UC208D1	UCX07D1	3.5	UC312D1	16.5
UC209D1	UCX08D1	4.1	UC313D1	20
UC210D1	UCX09D1	4.6	UC314D1	23.5
UC211D1	UCX10D1	6.0	UC315D1	27.5
UC212D1	UCX11D1	8.5	UC316D1	33
UC213D1	UCX12D1	10.5	UC317D1	38
UC214D1	UCX13D1	12	UC318D1	45
UC215D1	UCX14D1	13	UC319D1	50
UC216D1	UCX15D1	15.5	UC320D1	60
UC217D1	UCX16D1	16.5	UC321D1	70
UC218D1	UCX17D1	21	UC322D1	85
	UCX18D1	22.5	UC324D1	100
	UCX20D1	35.5	UC326D1	125
			UC328D1	150

Note) Relubrication quantity of UK, UEL type is same as UC type.

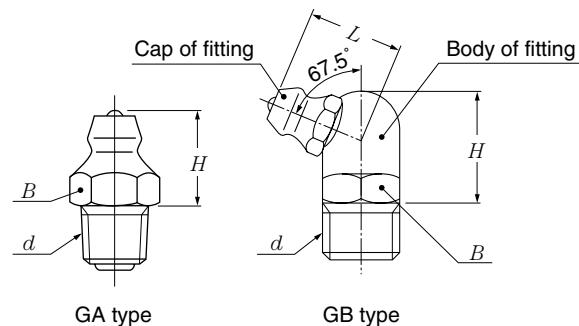**Table 9.6 Grease fitting dimensions and designations of applicable bearing units**

GA type (Vertical type)

NTN Designation	d	H mm inch	B mm inch
GA-1/4-28 UNF	1/4-28 UNF	8.5 0.335	7 0.276
GA-PF1/8	G1/8	12 0.472	10 0.394
GA-PF1/4	G1/4	14 0.551	14 0.551

GB type (67.5°)

NTN Designation	d	H mm inch	L mm inch	B mm inch
GB-1/4-28 UNF	1/4-28 UNF	10.5 0.413	9.3 0.366	8 0.315
GB-PF1/8	G1/8	14.2 0.559	13.5 0.531	10 0.394
GB-PF1/4	G1/4	15 0.591	13.5 0.531	14 0.551

Nominal screw size d	Series 2	Series X	Series 3
1/4-28 UNF	203-209	X05-X08	305-309
G1/8	210-215	X09-X14	310-315
G1/4	216-218	X15-X20	316-328




















Note: Screw size for the cartridge type is 1/4 - 28 UNF.
That for C310D1 to C328D1 is G 1/8 (PF 1/8).

Table 9.5 Grease fitting types available for bearing units

Types of housing	NTN standard grease fitting types
Pillow type	GA type
Flange type	GA type
Take-up type	GB type
Hanger type	GA type
Cartridge type	GA type

9.4 Standard location of the grease fitting

Standard location of grease fitting on the housing for the relubricatable bearing units of each type is illustrated below.

			
P, PL, PX, S-P, type	C-F type	FL, FLU, FLX, S-FL type	T, TX, S-T type
			
C-P type	FS type	C-FL type	C-T type
			
HP type	C-FS type	FH type	C, CX type
			
UP type	FC, FCX, S-FC type	FA type	M, L, S-M, S-L type
			
Except (#204, #205)	C-FC type	FA type	C-M, C-L type
F, FU, FX, S-F type		HB type	

Note 1: Standard grease fitting type is GA. Item marked *, however, have GB type as standard.

2: IPG, PE, PG, PM and PR type are categorized as P type.

sale@technobearing.ru and FLR type are categorized as FL type.

4: FG and FSG type are categorized as FS type.

5: FCG type is categorized as FC type.

6: TG type is categorized as T type.


8 (800) 700-72-07 (бесплатно)

10. Shaft Designs

Although the shafts used for NTN bearing units require no particularly high standards of accuracy, it is desirable that, as far as possible, they be free from bends and flaws.

10.1 Set screw system bearing units

With set screw system bearing units, under normal operating conditions the inner ring is usually fitted onto the shaft by means of a clearance fit to ensure convenience of assembly. In this case the values shown in Fig. 10.1 are appropriate dimensional tolerances for the shaft.

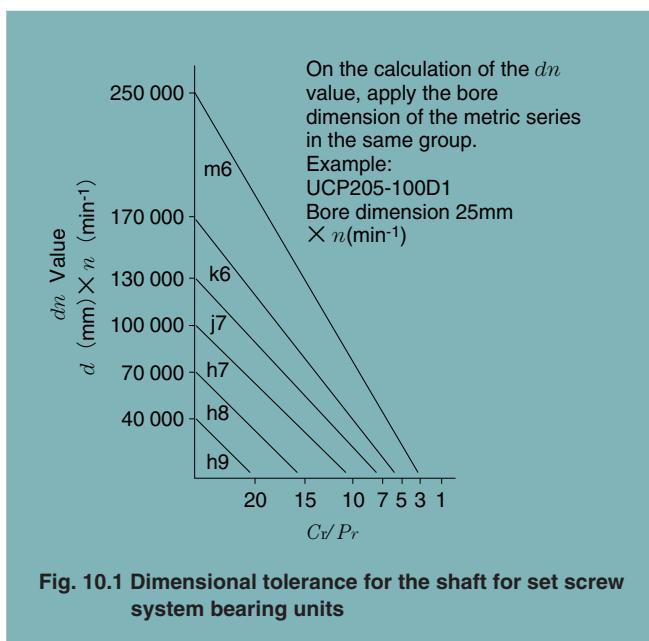

Step shafts

Wherever there is a noticeably large axial load, a step shaft, as shown in Fig. 10.2, should, if practical, be used.

For bearing units with covers, it is recommended that the units shown in Table 10.1 be used with shafts of the corresponding diameters, as shown in the same table.

The values of the radii of the rounded corners of these shafts are shown in Table 10.2.

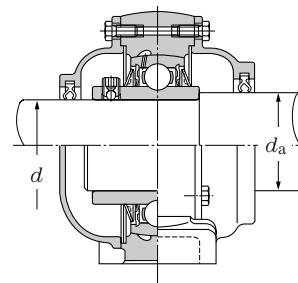
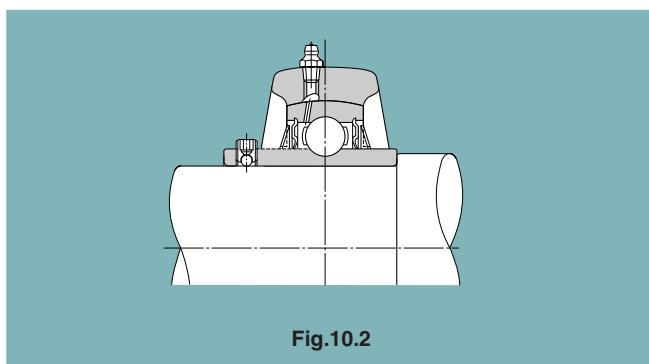


Table 10.1 Bearing units with covers (for use with step shafts) and shaft diameters

A) Metric series

Designation of units		d_a mm
10C-UCP206 to 10C-UCP218	10C-UCT208 to 10C-UCT217	$d+10$
	10C-UCP305 to 10C-UCP311	
15C-UCP312 to 15C-UCP324	15C-UCT312 to 15C-UCT324	$d+15$
	20C-UCP326 to 20C-UCP328	
20C-UCT326 to 20C-UCT328		$d+20$

Remarks : Designation of bearing units with blind covers.
Example : 10CM-UCP206D1

B) Inch series

Designation of units	d_a inch	Designation of units	d_a inch
ZnC-...-206-...	1½	ZnC-...-305-...	1¾
ZnC-...-207-...	1¾	ZnC-...-306-...	1½
ZnC-...-208-...	1⅞	ZnC-...-307-...	1¾
ZnC-...-209-...	2	ZnC-...-308-...	1⅜
ZnC-...-210-...	2⅔	ZnC-...-309-...	2⅔
ZnC-...-211-...	2½	ZnC-...-310-...	2⅔
ZnC-...-212-...	2⅔	ZnC-...-311-...	2⅔
ZnC-...-213-...	3	ZnC-...-312-...	3
ZnC-...-214-...	3⅛	ZnC-...-313-...	3⅛
ZnC-...-215-...	3⅓	ZnC-...-314-...	3⅓
ZnC-...-216-...	3½	ZnC-...-315-...	3½
ZnC-...-217-...	3⅔	ZnC-...-316-...	3⅔
ZnC-...-218-...	4	ZnC-...-317-...	4
		ZnC-...-318-...	4

Note :Designations for all units differ from the normal numbering system.

Example 1 Pillow type : ZnC-UCP206-101D1

ZnCM-UCP206-101D1

Example 2 Flange type : ZnC-UCF206-101D1

ZnC-UCFL206-101D1

Example 3 Take-up type : ZnC-UCT206-101D1

ZnCM-UCT206-101D1

n indicates serial number in designing from 1 onward.




Table 10.2 Radii of the round corners of step shafts

Designation of bearings	r_{as} max. mm inch	Designation of bearings	r_{as} max. mm inch
UC201 to UC203	0.6 0.024	UC305 to UC306	1.5 0.059
UC204 to UC206	1 0.039	UC307 to UC309	2 0.079
UC207 to UC210	1.5 0.059	UC310 to UC311	2.5 0.098
UC211 to UC215	2 0.079	UC312 to UC316	2.5 0.098
UC216 to UC218	2.5 0.098	UC317 to UC324	3 0.118
		UC326 to UC328	4 0.157

When relief is provided in the axial direction by the use of screwed bolts as above, the dimensional relationships applicable are as shown in Tables 10.3 (a) and 10.3 (b) on the following pages.

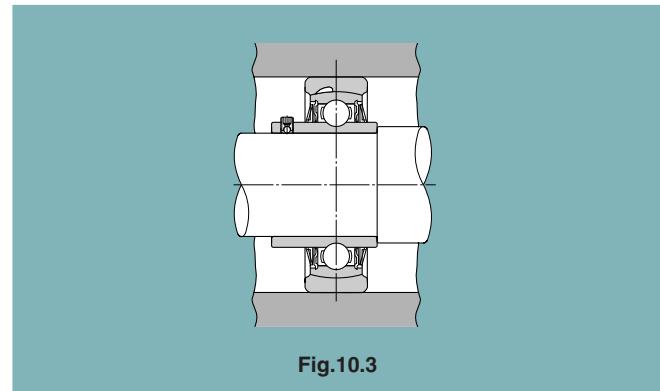


Fig.10.3

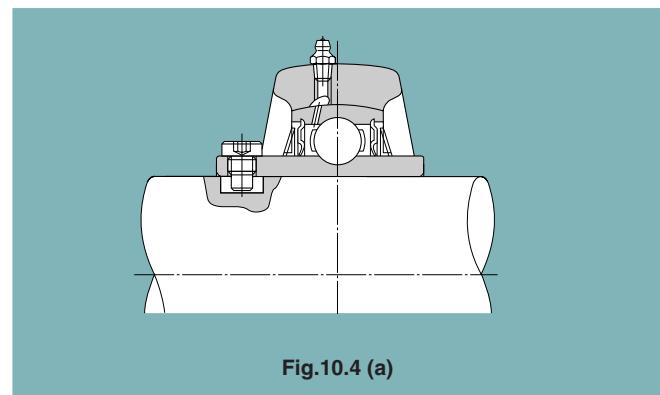


Fig.10.4 (a)

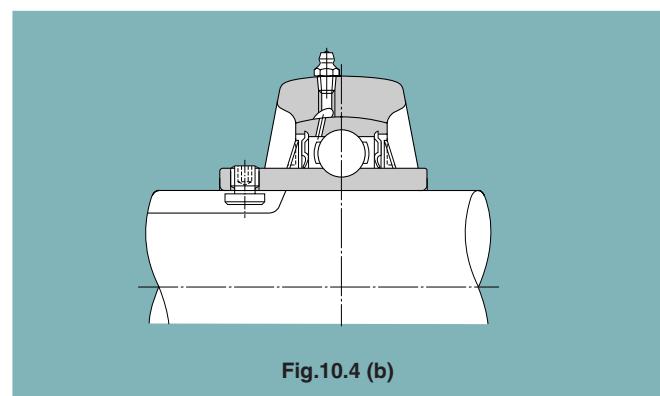
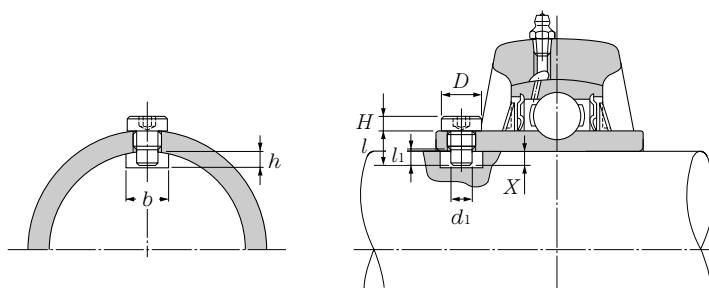



Fig.10.4 (b)

**Table 10.3 (a) Screwed bolt system**

A) Metric series, applied to metric bore size.

Designation of bearings	Key way		Designation and size of bolts	d_1 mm	X mm	l mm	l_1 mm	D mm	H mm
	Width b mm	Depth h mm							
UC201D1W5	3.5	3	S5W5x0.8x11	3.5	2.2	11	5	6	3
UC202D1W5	3.5	4.5	S5W5x0.8x11	3.5	3.7	11	5	6	3
UC203D1W5	3.5	5.5	S5W5x0.8x11	3.5	4.7	11	5	6	3
UC204D1W5	3.5	4.5	S5W5x0.8x8.5	3.5	3.7	8.5	5	6	3
UC205D1W5	3.5	5	S5W5x0.8x8.5	3.5	4	8.5	5	6	3
UC206D1W5	4	5.5	S5W6x0.75x10	4	4.6	10	5.9	8	3
UC207D1W5	4	5	S5W6x0.75x10	4	4.1	10	5.9	8	3
UC208D1W5	6	5.5	S5W8x1x11.5	6	5	11.5	5.5	10	3
UC209D1W5	6	6	S5W8x1x11.5	6	5.2	11.5	5.5	10	3
UC210D1W5	6	6	S5W8x1x11.5	6	5.3	11.5	5.5	10	3
UC211D1W5	6	5.5	S5W8x1x11.5	6	4.5	11.5	5.5	10	3
UC212D1W5	7	5.5	S5W10x1.25x13.5	7	5	13.5	6.5	12	3
UC213D1W5	7	5.5	S5W10x1.25x13.5	7	4.8	13.5	6.5	12	3
UC214D1W5	7	5.5	S5W10x1.25x13.5	7	5	13.5	6.5	12	3
UC215D1W5	7	5	S5W10x1.25x13.5	7	4.5	13.5	6.5	12	3
UC216D1W5	7	6.5	S5W10x1.25x15	7	6	15	7	12	3
UC217D1W5	9	6.5	S5W12x1.5x16.5	9	5.8	16.5	7	14	4
UC218D1W5	9	6.5	S5W12x1.5x16.5	9	5.7	16.5	7	14	4
UC305D1W5	4	6.5	S5W6x0.75x11.5	4	5.6	11.5	6	8	3
UC306D1W5	4	5	S5W6x0.75x11.5	4	4.1	11.5	6	8	3
UC307D1W5	6	5	S5W8x1x11.5	6	4.3	11.5	5.5	10	3
UC308D1W5	7	6	S5W10x1.25x13.5	7	5.5	13.5	6.5	12	3
UC309D1W5	7	6.5	S5W10x1.25x15	7	5.8	15	7	12	3
UC310D1W5	9	7	S5W12x1.5x16.5	9	6.2	16.5	7	14	4
UC311D1W5	9	6.5	S5W12x1.5x16.5	9	5.7	16.5	7	14	4
UC312D1W5	9	6	S5W12x1.5x16.5	9	5.2	16.5	7	14	4
UC313D1W5	9	7	S5W12x1.5x18	9	6.4	18	7.5	14	4
UC314D1W5	9	6.5	S5W12x1.5x18	9	5.6	18	7.5	14	4
UC315D1W5	10	7.5	S5W14x1.5x20	10	6.9	20	8.5	17	5
UC316D1W5	10	7	S5W14x1.5x20	10	6.1	20	8.5	17	5
UC317D1W5	12	9	S5W16x1.5x23	12	8.3	23	9	19	6
UC318D1W5	12	8.5	S5W16x1.5x23	12	7.6	23	9	19	6
UC319D1W5	12	7.5	S5W16x1.5x23	12	6.8	23	9	19	6
UC320D1W5	14	8	S5W18x1.5x25	14	7.2	25	9.5	22	7
UC321D1W5	14	7	S5W18x1.5x25	14	6.4	25	9.5	22	7
UC322D1W5	14	9	S5W18x1.5x29	14	8.2	29	10	22	7
UC324D1W5	14	7	S5W18x1.5x29	14	6.4	29	10	22	7
UC326D1W5	16	9.5	S5W20x1.5x33	16	8.9	33	11	24	7
UC328D1W5	16	8.5	S5W20x1.5x33	16	7.8	33	11	24	7

Remarks: The tolerance for the width (b) of the key way should preferably be set at the range of 0 to +0.2 mm.

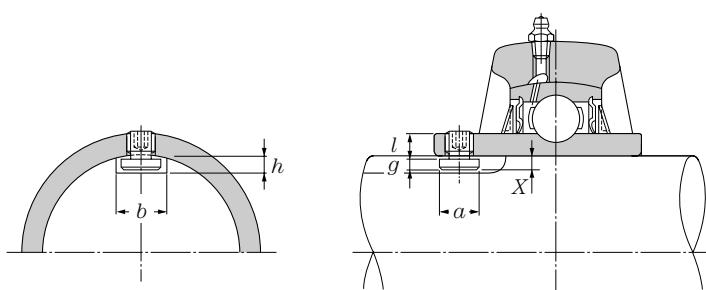**Table 10.3 (b) Key bolt system**


A) Metric series, applied to metric bore size.

Designation of bearings	Key way		Designation and size of bolts	a mm	X mm	g mm	l mm
	Width b mm	Depth h mm					
UC201D1W6	6	4.5	S6W5x0.8x5-1	5.9	3.8	3	6
UC202D1W6	6	4.5	S6W5x0.8x5-1	5.9	3.6	3	6
UC203D1W6	6	4	S6W5x0.8x5-1	5.9	3.5	3	6
UC204D1W6	7	4.5	S6W5x0.8x5	6.9	3.8	3.2	6
UC205D1W6	7	4.5	S6W5x0.8x5	6.9	3.7	3.2	6
UC206D1W6	8	4.5	S6W6x0.75x6	7.9	3.7	3.2	7
UC207D1W6	8	4.5	S6W6x0.75x6	7.9	3.7	3.2	7
UC208D1W6	10	5	S6W8x1x7	9.9	4.2	3.6	8
UC209D1W6	10	5	S6W8x1x7	9.9	4.2	3.6	8
UC210D1W6	10	5	S6W8x1x7	9.9	4.1	3.6	8
UC211D1W6	10	5	S6W8x1x7	9.9	4	3.6	8
UC212D1W6	12	5.5	S6W10x1.25x9	11.9	4.6	4	10
UC213D1W6	12	5.5	S6W10x1.25x9	11.9	4.5	4	10
UC214D1W6	12	5.5	S6W10x1.25x9	11.9	4.5	4	10
UC215D1W6	12	5.5	S6W10x1.25x9	11.9	4.5	4	10
UC216D1W6	12	5.5	S6W10x1.25x9	11.9	4.4	4	10
UC217D1W6	14	6	S6W12x1.5x11	13.9	5.4	4.8	12
UC218D1W6	14	6	S6W12x1.5x11	13.9	5.3	4.8	12
UC305D1W6	8	4.5	S6W6x0.75x6	7.9	3.9	3.2	7
UC306D1W6	8	4.5	S6W6x0.75x6	7.9	3.7	3.2	7
UC307D1W6	10	5	S6W8x1x7	9.9	4.3	3.6	8
UC308D1W6	12	5.5	S6W10x1.25x9	11.9	4.9	4	10
UC309D1W6	12	5.5	S6W10x1.25x9	11.9	4.8	4	10
UC310D1W6	14	6.5	S6W12x1.5x11	13.9	5.8	4.8	12
UC311D1W6	14	6.5	S6W12x1.5x11	13.9	5.7	4.8	12
UC312D1W6	14	6.5	S6W12x1.5x11	13.9	5.6	4.8	12
UC313D1W6	14	6.5	S6W12x1.5x11	13.9	5.6	4.8	12
UC314D1W6	14	6.5	S6W12x1.5x11	13.9	5.5	4.8	12
UC315D1W6	16	7.5	S6W14x1.5x13	15.9	6.7	5.8	14
UC316D1W6	16	7.5	S6W14x1.5x13	15.9	6.6	5.8	14
UC317D1W6	18	8.5	S6W16x1.5x16	17.9	7.5	6.5	17
UC318D1W6	18	8.5	S6W16x1.5x16	17.9	7.4	6.5	17
UC319D1W6	18	8.5	S6W16x1.5x16	17.9	7.4	6.5	17
UC320D1W6	20	10.5	S6W18x1.5x18	19.9	9.5	8.5	19
UC321D1W6	20	10.5	S6W18x1.5x18	19.9	9.5	8.5	19
UC322D1W6	20	10.5	S6W18x1.5x18	19.9	9.4	8.5	19
UC324D1W6	20	10.5	S6W18x1.5x18	19.9	9.4	8.5	19
UC326D1W6	22	11	S6W20x1.5x25	21.9	10.4	9.5	26
UC328D1W6	22	11	S6W20x1.5x25	21.9	10.4	9.5	26

Note: The tolerance for the width (b) of the key way should preferably be set at the range of 0 to +0.2 mm.

10.2 Eccentric collar system

As in the case of the set screw system, it is usual under normal operating conditions to fit the inner ring onto the shaft by means of a clearance fit, for ease of assembly. Fig. 10.5 shows the appropriate values of dimensional tolerances for the shaft.

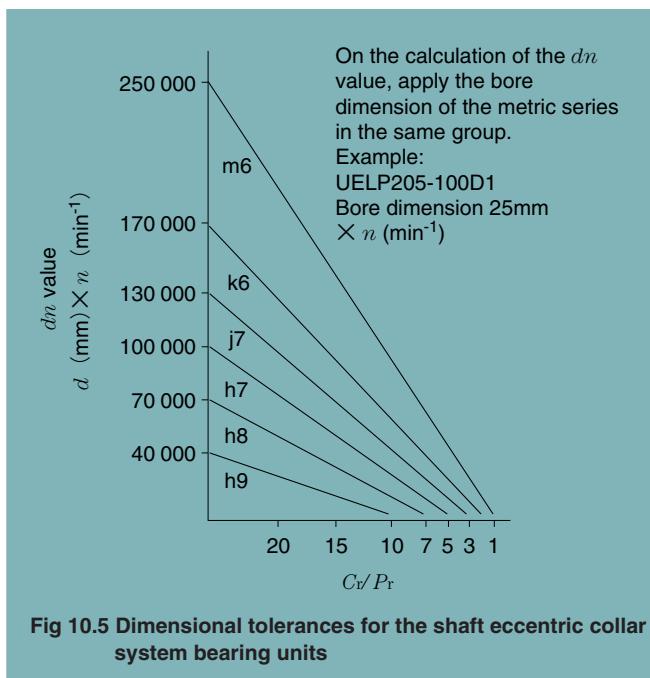

10.3 Adapter system bearing units

Since in the case of the adapter system, the bearing unit is fastened onto the shaft by means of a sleeve, for dimensional tolerances for the shaft, h9 is applicable under all operating conditions.

Note that it is not usable under a loose fit \geq h9.

11. Handling of the Bearing Unit

11.1 Mounting of the housing

11.1.1 Pillow block type and flange type

Although an advantage of the NTN bearing unit is that it can be fitted easily and will function efficiently on any part of a machine, attention must be paid to the following points in order to ensure its normal service life.

- 1) The surface on which the housing is mounted must be sufficiently rigid.
- 2) The surface on which the housing is mounted should be as flat as possible (The housing should set firmly in its position). Deformation of the housing caused by incorrect mounting will in turn cause deformation of the bearing, leading to its premature breakdown.

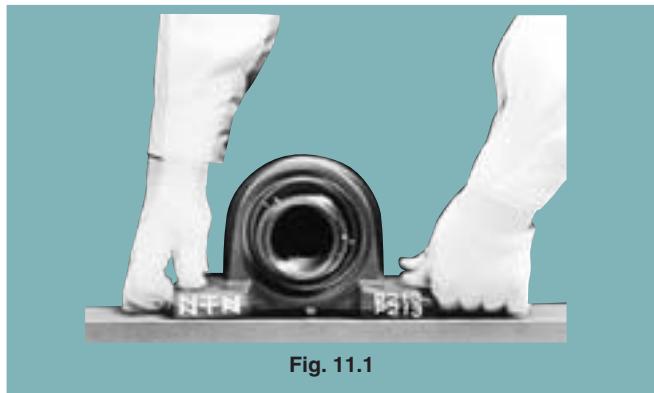


Fig. 11.1

- 3) It is desirable that the angle between the surface on which the housing is mounted and the shaft be maintained to a tolerance of $\pm 2^\circ$.

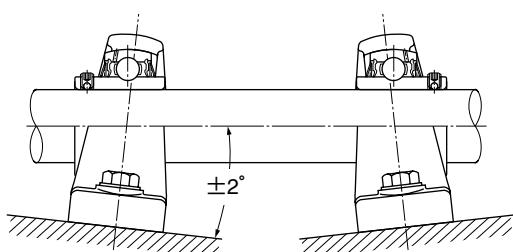


Fig. 11.2

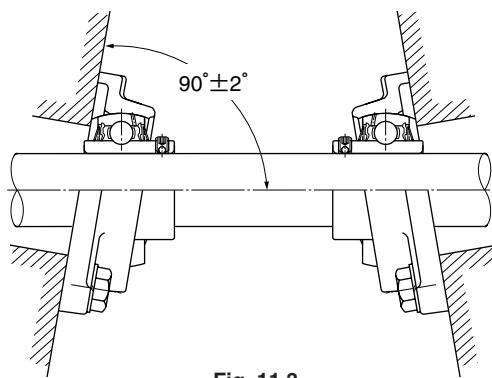


Fig. 11.3

- 4) Excessive tightening of the mounting bolts may cause the housing to deform. Tightening the bolts to the proper torque can avoid this issue. Also, NTN recommends using a washer with the bolt when mounting the housing as the bolt alone may cause damage to the housing.


Table 11.1 Recommended torques for tightening hexagon head bolt Except Resin Housing

Bolt size	Tightening torques		Bolt size	Tightening torques	
	N·m	Ibf·inch		N·m	Ibf·inch
M6	5.4	48	M24	392	3 472
M8	13.8	122	M27	588	5 208
M10	27.5	243	M30	784	6 944
M12	47.1	417	M33	1 078	9 548
M14	76.5	677	M36	1 372	12 151
M16	118	1 042	M39	1 764	15 623
M18	162	1 432	M42	2 156	19 095
M20	226	1 996	M45	2 744	24 303
M22	314	2 777			


Resin Housing

Housing No.	Bolt size	Tightening torques		Housing No.	Bolt size	Tightening torques	
		N·m	Ibf·inch			N·m	Ibf·inch
PR204D1	M10	17.7	156	FLR204D1	M10	17.7	156
PR205D1	M10	24.5	217	FLR205D1	M10	24.5	217
PR206D1	M12	29.4	260	FLR206D1	M10	29.4	260
PR207D1	M12	35.3	312	FLR207D1	M12	35.3	312
PR208D1	M12	45.1	399	FLR208D1	M12	40.2	356


- 5) The pillow block type and flange type housings are provided with a seat for a dowel for accurate location. For the use of dowel pins, refer to Table 11.2.

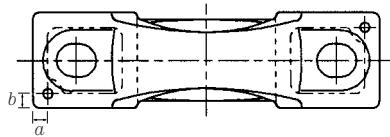

P, C-P

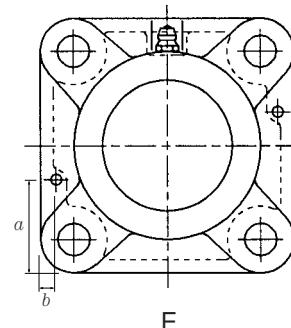

F

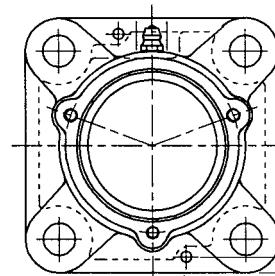


C-F

Table 11.2 Recommended dimensions of dowel pins

Designation of the housings		<i>a</i> mm inch	<i>b</i> mm inch	Recommended pin diameter mm inch	
P203	—	5.5	0.216	3	0.118
P204	C-P204	5.5	0.216	3	0.118
P205	C-P205	5.5	0.216	3	0.118
P206	C-P206	5.5	0.216	3	0.118
P207	C-P207	5.5	0.216	3	0.118
P208	C-P208	7	0.276	5	0.197
P209	C-P209	7	0.276	5	0.197
P210	C-P210	7.5	0.295	5	0.197
P211	C-P211	7.5	0.295	5	0.197
P212	C-P212	9	0.354	7	0.276
P213	C-P213	9	0.354	7	0.276
P214	C-P214	9	0.354	7	0.276
P215	C-P215	9	0.354	7	0.276
P216	C-P216	10	0.394	7	0.276
P217	C-P217	12	0.472	10	0.394
P218	C-P218	12	0.472	10	0.394
P305	C-P305	8	0.315	4	0.157
P306	C-P306	8	0.315	4	0.157
P307	C-P307	10	0.394	5	0.197
P308	C-P308	10	0.394	5	0.197
P309	C-P309	10	0.394	5	0.197
P310	C-P310	12	0.472	6	0.236
P311	C-P311	12	0.472	6	0.236
P312	C-P312	14	0.551	6	0.236
P313	C-P313	14	0.551	6	0.236
P314	C-P314	14	0.551	6	0.236
P315	C-P315	17	0.669	8	0.315
P316	C-P316	17	0.669	8	0.315
P317	C-P317	17	0.669	8	0.315
P318	C-P318	17	0.669	8	0.315
P319	C-P319	17	0.669	8	0.315
P320	C-P320	17	0.669	8	0.315
P321	C-P321	17	0.669	8	0.315
P322	C-P322	19	0.748	10	0.394
P324	C-P324	19	0.748	10	0.394
P326	C-P326	23	0.906	12	0.472
P328	C-P328	23	0.906	12	0.472

Designation of the housings		<i>a</i> mm inch	<i>b</i> mm inch	Recommended pin diameter mm inch	
F204	C-F204	33	1.229	6	0.236
F205	C-F205	35	1.378	6	0.236
F206	C-F206	35	1.378	6	0.236
F207	C-F207	38	1.496	7	0.276
F208	C-F208	40	1.575	8	0.315
F209	C-F209	43	1.693	8	0.315
F210	C-F210	49	1.929	8	0.315
F211	C-F211	49	1.929	8	0.315
F212	C-F212	49	1.929	8	0.315
F213	C-F213	52	2.047	9	0.354
F214	C-F214	52	2.047	9	0.354
F215	C-F215	52	2.047	9	0.354
F216	C-F216	55	2.165	12	0.472
F217	C-F217	55	2.165	12	0.472
F218	C-F218	61	2.402	14	0.551
F305	C-F305	35	1.378	6	0.236
F306	C-F306	40	1.575	6	0.236
F307	C-F307	47	1.805	8	0.315
F308	C-F308	48	1.890	8	0.315
F309	C-F309	48	1.890	8	0.315
F310	C-F310	48	1.890	8	0.315
F311	C-F311	51	2.008	10	0.394
F312	C-F312	51	2.008	10	0.394
F313	C-F313	57	2.244	10	0.394
F314	C-F314	61	2.402	10	0.394
F315	C-F315	65	2.559	8.5	0.335
F316	C-F316	65	2.559	8.5	0.335
F317	C-F317	70	2.756	9	0.354
F318	C-F318	80	3.150	10	0.394
F319	C-F319	80	3.150	10	0.394
F320	C-F320	80	3.150	10	0.394
F321	C-F321	80	3.150	10	0.394
F322	C-F322	90	3.543	10	0.394
F324	C-F324	90	3.543	13	0.512
F326	C-F326	100	3.937	13	0.512
F328	C-F328	108	4.252	13	0.512

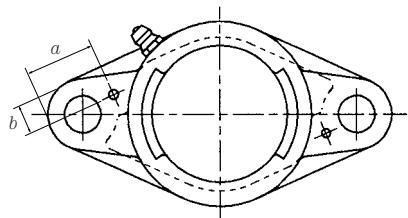

FL

Designation of the housings	<i>a</i>		<i>b</i>		Recommended pin diameter	
	mm	inch	mm	inch	mm	inch
FL204	22	0.866	10	0.394	4	0.157
FL205	32	1.260	10	0.394	4	0.157
FL206	33	1.299	12	0.472	4	0.157
FL207	30	1.181	14	0.551	5	0.197
FL208	33	1.299	15	0.591	5	0.197
FL209	38	1.496	15	0.591	5	0.197
FL210	39	1.535	16	0.630	5	0.197
FL211	44	1.732	18	0.709	5	0.197
FL212	54	2.126	19	0.748	5	0.197
FL213	53	2.087	18	0.709	6	0.236
FL214	53	2.087	18	0.709	6	0.236
FL215	55	2.165	21	0.827	6	0.236
FL216	55	2.165	21	0.827	6	0.236
FL217	55	2.165	21	0.827	6	0.236
FL218	55	2.165	22	0.866	6	0.236
FL305	35	1.378	9	0.354	4	0.157
FL306	44	1.732	11	0.433	4	0.157
FL307	43	1.693	13	0.512	5	0.197
FL308	45	1.772	15	0.591	5	0.197
FL309	51	2.008	18	0.709	5	0.197
FL310	55	2.165	15	0.591	5	0.197
FL311	55	2.165	15	0.591	5	0.197
FL312	60	2.363	18	0.709	5	0.197
FL313	59	2.323	24	0.945	6	0.236
FL314	63	2.480	24	0.945	6	0.236
FL315	66	2.598	23	0.906	6	0.236
FL316	72	2.835	27	1.063	6	0.236
FL317	74	2.913	29	1.142	6	0.236
FL318	74	2.913	29	1.142	8	0.315
FL319	80	3.150	30	1.181	8	0.315
FL320	84	3.307	30	1.181	8	0.315
FL321	84	3.307	30	1.181	8	0.315
FL322	84	3.307	36	1.417	8	0.315
FL324	93	3.661	38	1.496	10	0.394
FL326	94	3.701	39	1.535	10	0.394
FL328	102	4.016	40	1.575	10	0.394

11.1.2 Cartridge type

The inside diameter of the housing into which a cartridge type unit is inserted should be H7 under general operating conditions. It should be so furnished as to permit the bearing unit to move freely in the axial direction.

11.2 Mounting the bearing unit on the shaft

11.2.1 Mounting of the set screw system unit

To mount the set screw system bearing unit on the shaft, it is sufficient to tighten the two set screws uniformly.

The construction of the NTN "Ball-End Set Screw" is illustrated in Fig. 11.4 with the pin design that prevents it from becoming loose even when it is subjected to vibrations or impact loads.

If the fit clearance between the inner ring and the shaft is very small, it is advisable, prior to fastening on the screw, to file off that part of the shaft at which the end of the set screw (ball) strikes, by approximately 0.2 to 0.5mm 0.01 to 0.02 inches, to flatten it, as illustrated in Fig. 11.5.

This will facilitate dismounting of the bearing from the shaft should it become necessary.

The method of mounting the unit on the shaft is as follows:

- 1) Make certain that the end of the set screw is not protruding into the bore of the bearing.




Fig. 11.4

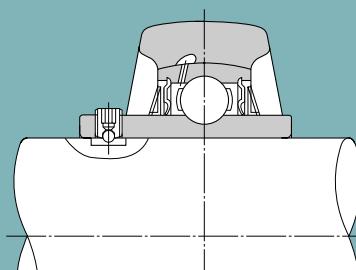


Fig. 11.5

- 2) Holding the unit at right angles to the shaft, insert the shaft into the bore of the bearing without twisting the bearing. Take care not to strike the slinger nor to subject the unit to any shock (Fig. 11.6).

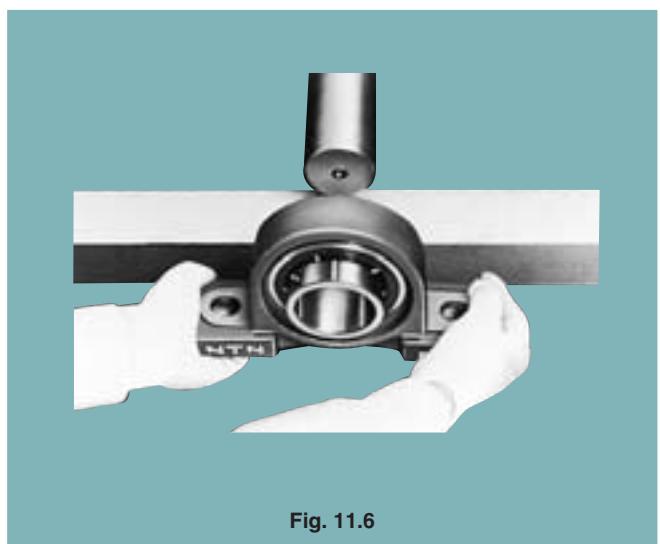


Fig. 11.6

- 3) Insert a hexagonal bar wrench securely into the hexagonal hole of the set screw, and tighten the two screws uniformly. Use the tightening torque shown in Table 11.3.

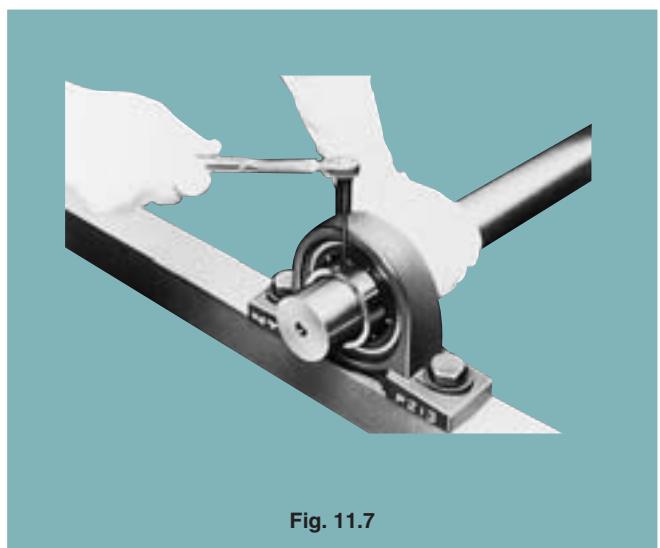


Fig. 11.7

- 4) Mount the housing securely in position on the machine. Sometimes the order of steps 3) and 4) is reversed.

Table 11.3 Recommended torques for tightening set screws

A) Metric series, applied to metric bore size.

Designation of the bearings of applicable units		Designation of set screws	Tightening torques N·m (max.)
UC201 to UC205	—	M 5x0.8 × 7	3.9
UC206	—	UC305 to UC306	M 6x0.75× 8
UC207	UCX05	—	M 6x0.75× 8
UC208 to UC210	—	—	M 8x1 ×10
UC211	UCX06 to UCX08	UC307	M 8x1 ×10
UC212	UCX09	—	M10x1.25×12
UC213 to UC215	—	UC308 to UC309	M10x1.25×12
UC216	UCX10	—	M10x1.25×12
—	UCX11 to UCX12	—	M10x1.25×12
UC217 to UC218	UCX13 to UCX15	UC310 to UC314	M12x1.5 ×13
—	UCX16 to UCX17	—	M12x1.5 ×13
—	UCX18	UC315 to UC316	M14x1.5 ×15
—	UCX20	UC317 to UC319	M16x1.5 ×18
—	—	UC320 to UC324	M18x1.5 ×20
—	—	UC326 to UC328	M20x1.5 ×25
			78.4

B) Inch series, applied to inch bore size.

Designation of the bearings for the unit to which torques given are applicable		Designation of set screws	Tightening torques lbf· inch (max.)
UC201 to UC205	—	—	No.10-32UNF
UC206	—	UC305 to UC306	1/4-28UNF
UC207	UCX05	—	1/4-28UNF
UC208 to UC210	—	—	5/16-24UNF
UC211	UCX06 to UCX08	UC307	5/16-24UNF
UC212	UCX09	—	3/8-24UNF
UC213 to UC215	—	UC308 to UC309	3/8-24UNF
UC216	UCX10	—	3/8-24UNF
—	UCX11 to UCX12	—	3/8-24UNF
UC217 to UC218	UCX13 to UCX15	UC310 to UC314	1/2-20UNF
—	UCX16 to UCX17	—	1/2-20UNF
—	UCX18	UC315 to UC316	9/16-18UNF
—	UCX20	UC317 to UC319	5/8-18UNF
—	—	UC320	5/8-18UNF

Designation of the bearings of applicable units		Designation of set screws	Tightening torques N·m (max.)
AS201 to 205	M5x0.8 × 7	3.4	
AS206	M6x0.75× 8	4.4	
AS207	M6x0.75× 8	4.9	
AS208 to 210	M8x1 ×10	6.8	

Designation of the bearings for the unit to which torques given are applicable		Designation of set screws	Tightening torques lbf· inch (max.)
AS201 to 205	—	No.10-32UNF	30
AS206	—	1/4-28UNF	39
AS207	—	1/4-28UNF	43
AS208 to 210	—	5/16-24UNF	60

11.2.2 Mounting the eccentric locking collar system unit

In this system, unlike the screw system, the shaft and inner ring are fastened together by fastening the eccentric collar in the direction of the rotation of the shaft. They are fastened together securely, and deformation of the inner ring seldom occurs. This system, however, is not recommended for applications where the direction of rotation is sometimes reversed.

Directions for mounting the unit are as follows :

- 1) Make certain that the frame in which the housing is to be mounted is suitable to the operating conditions with regard to rigidity, flatness, etc.
- 2) Make sure that the end of the shaft is not burred and that the end of the set screw in the eccentric collar is not protruding from the interior surface of the collar (Fig. 11.8).

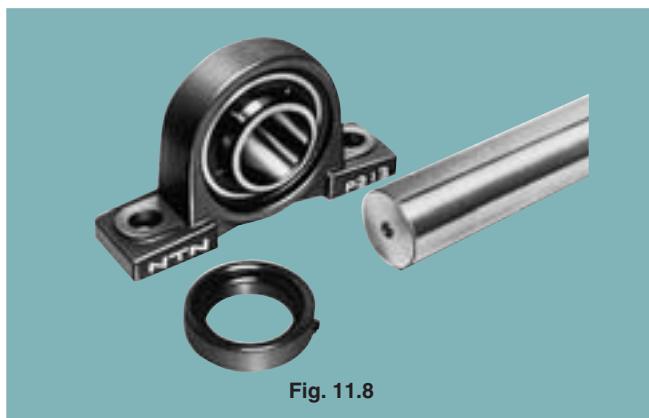


Fig. 11.8

- 3) Mount the housing of the unit securely onto the frame.
- 4) Determine the relative position of the unit and the shaft accurately so that the unit will not be subjected to any thrust, and then insert the eccentric collar (Fig. 11.9).
- 5) Fit the eccentric circular ridge provided on the inner ring into the eccentric circular groove of the eccentric collar, and then provisionally tighten by turning the collar by hand in the direction of the shaft (Fig. 11.10).

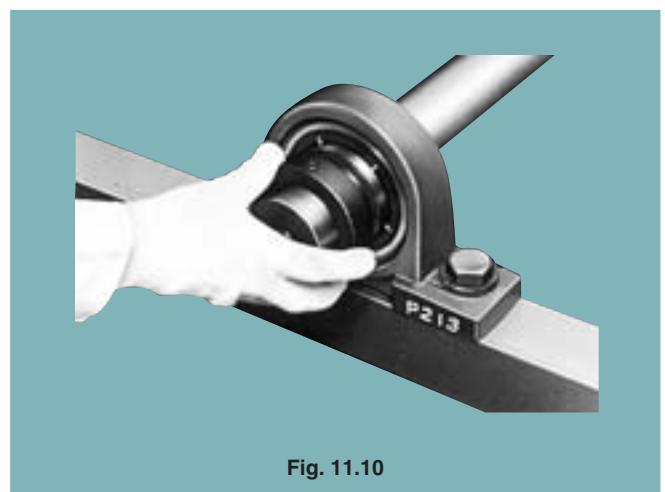


Fig. 11.10

- 6) Insert a bar into the hole provided on the periphery of the eccentric collar and tap the bar so that the collar turns in the direction of rotation of the shaft (see Fig. 11.11).

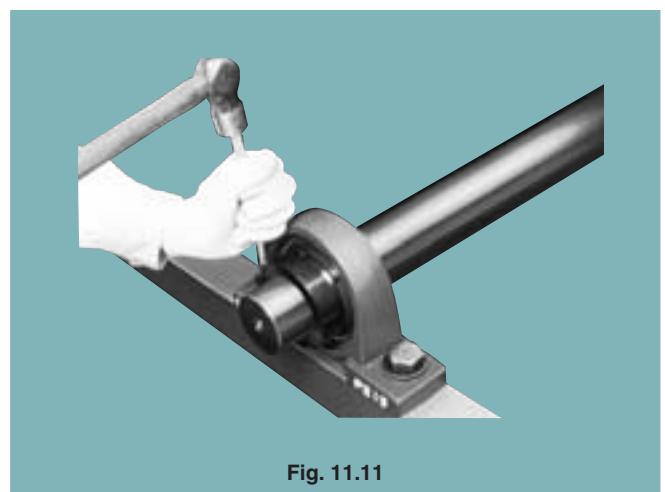


Fig. 11.11

- 7) Fasten the set screw of the eccentric collar onto the shaft. Recommended tightening torques are given in Table 11.4.

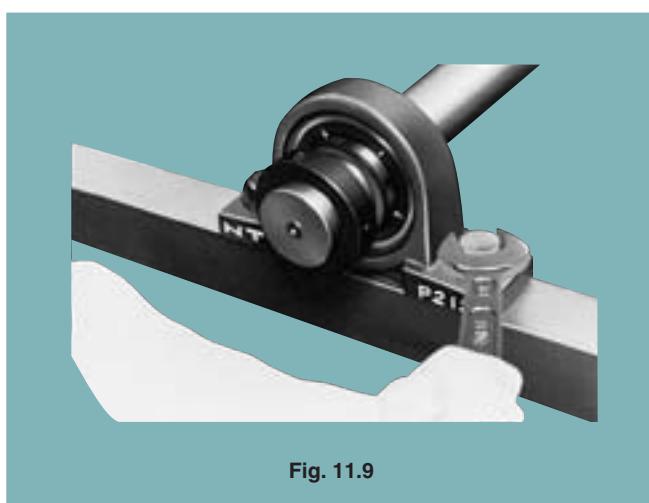


Fig. 11.9

Table 11.4 Recommended torques for tightening set screws of the eccentric collar

A) Metric series, applied to metric bore size.

Designation of the bearings of applicable units		Designation of set screws	Tightening torques N·m (max.)
—	UEL204 to UEL205	AEL201 to AEL205	M 6x0.75x 8
UEL303 to UEL307	UEL206	AEL206	M 8x1 ×10
—	UEL207	AEL207	M10x1.25x12
—	UEL208 to UEL210	AEL208 to AEL210	M10x1.25x12
—	UEL211	AEL211	M10x1.25x12
UEL308 to UEL312	UEL212 to UEL215	AEL212	M10x1.25x12
UEL313 to UEL314	—	—	M12x1.5 ×13
UEL315 to UEL317	—	—	M16x1.5 ×18
UEL318 to UEL320	—	—	M20x1.5 ×25

B) Inch series, applied to inch bore size.


Designation of the bearings for the unit to which torques given are applicable		Designation of set screws	Tightening torques lbf· inch (max.)
—	UEL204 to UEL205	AEL201 to AEL205	1/4-28UNF
UEL303 to UEL307	UEL206	AEL206	5/16-24UNF
—	UEL207	AEL207	3/8-24UNF
—	UEL208 to UEL210	AEL208 to AEL210	3/8-24UNF
—	UEL211	AEL211	3/8-24UNF
UEL308 to UEL312	UEL212 to UEL215	AEL212	3/8-24UNF
UEL313 to UEL314	—	—	1/2-20UNF
UEL315 to UEL317	—	—	5/8-18UNF
UEL318 to UEL328	—	—	3/4-16UNF

11.2.3 Mounting of the adapter system unit


When an adapter system unit is used, there is no danger of the fit between the shaft and the inner ring working loose even if it is subjected to impact loads or vibration. Furthermore, straight shafts of h9 may be used under any operating conditions, except where there is a large axial load.

To mount the adapter system unit onto the shaft, the procedure is as follows:

- 1) Adjust the position of the sleeve so that the tapered part comes to about the center of the bearing. To facilitate the mounting of the sleeve onto the shaft, the opening in the sleeve can be widened using a screwdriver or similar implement. The sleeve should be positioned so that the nut is located on the opposite side from the pulley, etc., for easier handling (Fig. 11.12).

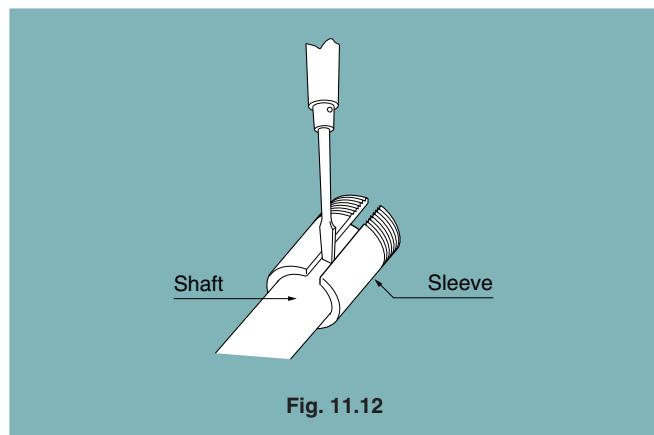

- 2) Place the bearing unit with the tapered bore properly oriented on the sleeve and abut a cylindrical sleeve against the lock nut side face of the inner ring. Tap the adapter sleeve lightly over its entire periphery, as shown in Fig. 11.13, until a positive contact is made between the bearing and the sleeve.

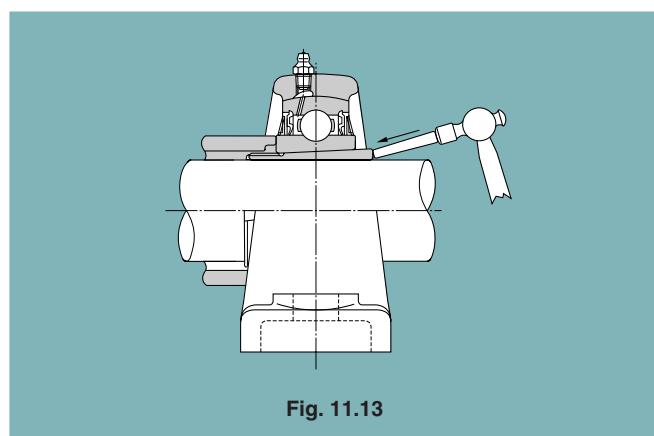

- 3) Insert the washer and tighten the nut fully by hand.
- 4) Apply a jig (or screwdriver where no jig is available) to the notch of the nut and tap it with a hammer. Stop tapping after the nut has turned through from 60° to 90° . Be careful not to strike the slinger. Care should also be taken not to over-tighten the nut, as this will deform the inner ring, causing heat generation and seizure.
- 5) Bend up the tab on the rim of the washer, which is in line with the notch of the nut. This will prevent the nut from turning. The nut must not be turned backwards to bring the notch into line with the tab on the washer.
- 6) Mount the housing securely in position on the machine.



Fig. 11.15

11.2.4 Mounting covered bearing units

For selection of the shaft, mounting the bearing onto the shaft and fitting the housing follow the same procedure as for standard bearing units. Furthermore, fitting the cover presents no special difficulty, with no need for special tools or jigs.

The procedure for mounting covered bearing units is as follows:

- 1) Remove the cover from the bearing unit. The steel cover can usually be removed easily by hand, but should there be any difficulty due to an over-tight fit, insert a screwdriver or similar tool in a twisting motion, as shown in Fig. 11.14.

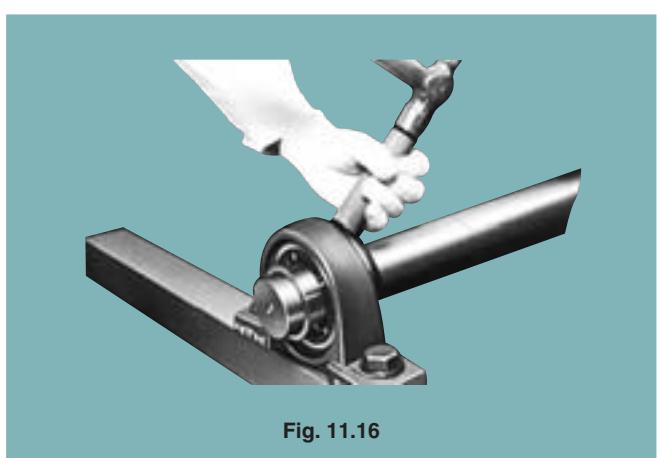


Fig. 11.16



Fig. 11.14

- 2) In order to augment the dust and waterproofing effects, completely fill the space between the two lips of the rubber seal incorporated in the cover with grease, and apply grease to the inside of the cover, filling about two-thirds of the space. Cup grease is commonly used for this purpose (Fig. 11.15).
- 3) First, pass one of the two grease-packed covers along the shaft, and then slide the bearing unit onto the shaft and fix the inner ring fast on the shaft before tightening the bolts holding the housing. Sometimes these steps are reversed for convenience of assembly. It is recommended that the end of the shaft be chamfered beforehand to avoid damaging the lips of the rubber seal.
- 4) Next take the cover which has been passed along the

shaft and press it into the housing as follows: Be careful not to strike the surface of the steel cover directly with a steel hammer but use a synthetic resin or wood block in between. Do not strike only in one place but tap the cover all the way round until it is firmly seated in the housing. (Fig. 11.16)

- The cast iron cover is fastened with three bolts.
- 5) Pack the second cover with grease as in step 2 and pass it along the shaft. In the case of a blind cover, the recess of the housing should be filled with grease (Fig. 11.15).
 - 6) Fit the cover into the recess of the housing using the same procedure as detailed in Step 4) (Fig. 11.17).


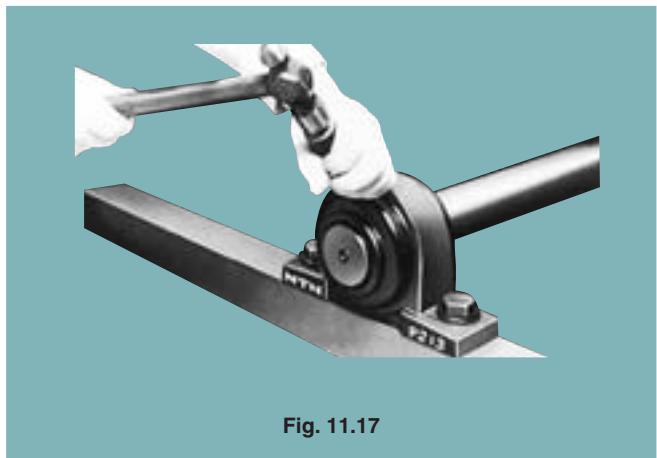


Fig. 11.17

11.2.5 Mounting resin covered bearing units

- ① Insert the edge of the dust cover in the housing's groove.
- ② Insert the other side of the dust cover in the opposite housing groove either by hand or with assistance of a plastic/rubber mallet/hammer.
- ③ To remove the dust cover, pry the edge from the housing groove using a screw driver or similar tool.

* Note: frequent mounting/dismounting of the dust cover may damage the edge of the housing and is not recommended.

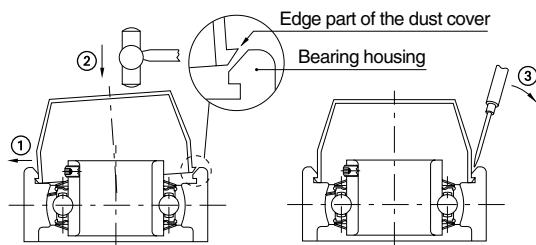

11.3 Running tests

After mounting the bearing unit, check that it has been done correctly.

First, turn the shaft or the rotor by hand to make certain that it rotates smoothly. If there is no irregularity, start up the machine. Run the machine at low speed under no load and gradually bring it up to full operating speed while checking that there are no abnormalities.

Some indications of abnormality or faulty assembly are as follows:

When the shaft is turned by hand a resistance or drag is felt, or the shaft appears to become heavy or light in turn. Or, if the machine is running under power, any abnormal noise, vibration or overheating is evident.

11.4 Inspection during operation

Although the NTN lubrication-free bearing unit does not require refilling with grease while in use, periodic inspections are necessary to ensure safe operation of the unit's most important parts. While the interval between inspections varies from case to case, according to the degree of importance and the rate of operation, it is usually some time between two weeks and a month.

Since the inside of the bearing can be examined only by removing the slinger, seal etc., the condition of the bearing should be judged by checking for the presence of vibration, noise, overheating of the housing, etc., while the machine is running.

11.5 Dismounting the bearing unit

If some abnormality makes it necessary to dismount the bearing unit from the shaft in order to replace it, the procedure used to mount the bearing is followed in reverse order. In this case, special care should be given to the following points:

1) Set screw system units:

If the set screw is protruding into the bore of the bearing when the unit is withdrawn from the shaft, it will damage the shaft. Therefore the screw should be turned back fully.

2) Adapter system units:

To remove an adapter system bearing unit from the shaft, raise the tab of the washer, turn the nut two or three turns back, and apply a metal block to the nut and tap it with a hammer. Do this all round the nut, until the sleeve can be moved (Fig. 11.18).

If the nut is turned back too far and the screws are only slightly engaged, tapping to remove it will eventually ruin the screws.

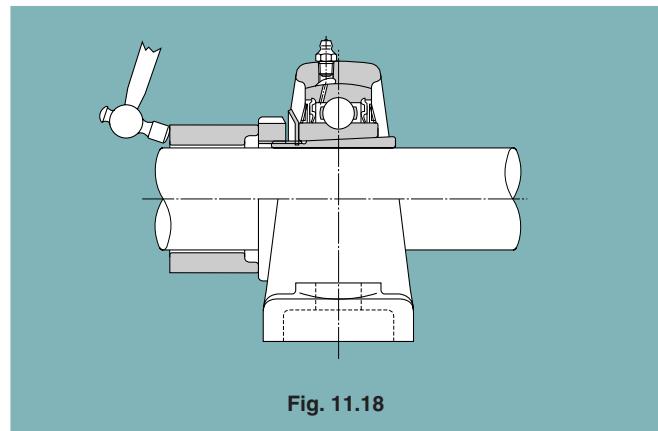


Fig. 11.18

11.6 Replacement of the bearing

If the bearing in the NTN bearing unit needs to be replaced, this can be carried out simply with a plummer block. There is no need to replace the housing, as it is reusable.


The bearing is changed using the following procedure: First, the set screw should be tightened as much as possible. Otherwise, there is a danger that it may catch in the housing when the bearing is tilted.

Next, insert the handle of a hammer or similar tool into the bore of the bearing and twist. Tilt the bearing through a full 90°, and pull it in the direction of the notch on the housing to remove it. To install a new bearing in the housing, follow the same procedure in reverse.

Dimension Table

Set screw type (1)

Page

Pillow blocks	Pillow blocks cast housing		UCP2 UCP3 UCPX	56 62 68
	Pillow blocks cast housing low center height		UCPL2 ASPL2	72 104
	Pillow blocks (Steel series)		UCPG2 UCPG3	76 78
	Pillow blocks (Stainless series)		F-UCPM2	80
	Pillow blocks (Plastic housing series)		F-UCPR2	82
	Thick pillow blocks cast housing		UCIP2 UCIP3	84 86
	Thick pillow blocks (Steel series)		UCIPG2, 3	90
	Pillow blocks cast housing high center height		UCHP2	92
	Narrow pillow blocks cast housing		UCUP2	96
	Light pillow blocks cast housing		ASPB2	100
	Pillow blocks ductile cast housing (Ductile series)		UCPE2	102
	Pillow blocks pressed steel housing		ASPP2 ASRPP2	108 110
Flanged units	Square flanged units cast housing		UCF2 UCF3 UCFX	112 118 124
	Square flanged units (Steel series)		UCFG2 UCFG3	130 132
	Square flanged units cast housing w/ spigot joint		UCFS3	134
	Square flanged units w/ spigot joint (Steel series)		UCFSG3	140
	Round flanged units cast housing w/ spigot joint		UCFC2 UCFCX	142 148
	Round flanged units w/ spigot joint (Steel series)		UCFCG2	154
	Rhombus flanged units cast housing		UCFL2 UCFL3 UCFLX	156 162 168
	Rhombus flanged units (Steel series)		UCFLG2 UCFLG3	170 172
	Rhombus flanged units (Stainless series)		F-UCFM2	174
	Rhombus flanged units (Plastic housing series)		F-UCFLR2	176
	Modified rhombus flanged units cast housing		UCFA2	178
	Modified flanged units cast housing		UCFH2	182
	Light rhombus flanged units cast housing		ASFB2 ASFD2	186 188

Set screw type (2)

Page

Flanged units	Rhombus flanged units ductile cast housing (Ductile series)		UCFE2	190
	Round flanged units pressed steel housing		ASPF2 ASRPF2	192 194
	Rhombus flanged units pressed steel housing		ASPFL2	196
Hanger units	Hanger units cast housing		UCHB2	198
Take-up units	Take-up units cast housing		UCT2 UCT3 UCTX	202 208 214
	Take-up units (Steel series)		UCTG2 UCTG3	218 220
Cartridge units	Cartridge units cast housing		UCC2 UCC3 UCCX	222 224 227
Stretcher units®	Mini stretcher units®		ASPT2	229
	Take-up stretcher units®		UCT2	394
	Type L stretcher units®		UCL2	396
	Type M stretcher units®		UCM2 UCM3	397 398

Eccentric locking collar type (1)

Page

Pillow blocks	Pillow blocks cast housing		UELPL2 UELPL3	230 234
	Pillow blocks cast housing low center height		UELPL2 AELPL2 JELPL2	240 248 252
	Pillow blocks cast housing high center height		UELHP2	244
	Narrow pillow blocks cast housing		UELUP2	246
	Light pillow blocks cast housing		AELPB2	256
	Pillow blocks pressed steel housing		AELPP2 AELRPP2	258 260
Flanged units	Square flanged units cast housing		UELFU2 UELF2 UELF3	262 266 270
	Square flanged units cast housing w/ spigot joint		UELFS3	276
	Round flanged units cast housing w/ spigot joint		UELFC2	282
	Rhombus flanged units cast housing		UELFLU2 UELFL2 UELFL3	286 290 294
	Light rhombus flanged units cast housing		AELFB2 AELFD2 JELFD2	300 302 303

Eccentric locking collar type (2)

Page








Flanged units	Round flanged units pressed steel housing		AELPF2 JELPF2 AELRPF2	304 306 308
	Rhombus flanged units pressed steel housing		AELPFL2 JELPFL2	310 312
Take-up units	Take-up units cast housing		UELT2 UELT3	314 318
Cartridge units	Cartridge units cast housing		UELC2 UELC3	324 326
Stretcher units®	Mini stretcher units®		AELPT2 JELPT2	330 331

Adapter type

Page

Pillow blocks	Pillow blocks cast housing		UKP2 UKP3 UKPX	332 336 340
Flanged units	Square flanged units cast housing		UKF2 UKF3 UKFX	344 348 352
	Square flanged units cast housing w/ spigot joint		UKFS3	356
	Round flanged units cast housing w/ spigot joint		UKFC2 UKFCX	360 364
	Rhombus flanged units cast housing		UKFL2 UKFL3 UKFLX	368 372 376
Take-up units	Take-up units cast housing		UKT2 UKT3 UKTX	378 382 386
Cartridge units	Cartridge units cast housing		UKC2 UKC3 UKCX	390 391 393


Ball bearings**Page**

Set screw type		UC2 UC3 UCX F-UC2	400 406 412 416
		AS2	418
		AR2	422
		UCS2 UCS3	460 464
		ASS2	468
Eccentric locking collar type		UEL2 UEL3	426 430
		AEL2	436
		JEL2	440
		REL2	444
		UELS2 UELS3	472 476
		AELS2	480
		JELS2	484
Adapter type		UK2 UK3 UKX	448 452 456
Tight fit type		CS2 CS3	488 489
Farm implement bearings		AS (Square bore)	490
		AC (Round bore)	498
		AH (Hex-bore)	504

sale@technobearing.ru
Pillow blocks cast housing
Set screw type

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

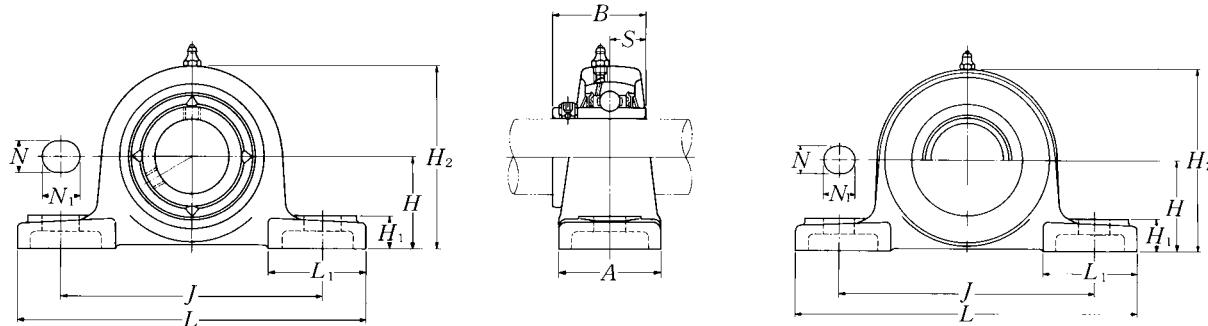**Pressed steel dust cover type**Open end: **S-UCP...D1**Closed end: **SM-UCP...D1**


Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions												Bolt size mm inch	Bearing number
		H	L	J	A	N	N ₁	H ₁	H ₂	L ₁	B	S			
12 1/2	UCP201D1	30.2	127	95	38	13	16	14	62	42	31	12.7	M10	UC201D1	
	UCP201-008D1	1 ³ / ₁₆	5	3 ³ / ₄	1 ¹ / ₂	1/2	5/8	9/16	2 ⁷ / ₁₆	1 ²¹ / ₃₂	1.2205	0.500	3/8	UC201-008D1	
15 9/16 5/8	UCP202D1	30.2	127	95	38	13	16	14	62	42	31	12.7	M10	UC202D1	
	UCP202-009D1	1 ³ / ₁₆	5	3 ³ / ₄	1 ¹ / ₂	1/2	5/8	9/16	2 ⁷ / ₁₆	1 ²¹ / ₃₂	1.2205	0.500	3/8	UC202-009D1	
	UCP202-010D1													UC202-010D1	
17 11/16	UCP203D1	30.2	127	95	38	13	16	14	62	42	31	12.7	M10	UC203D1	
	UCP203-011D1	1 ³ / ₁₆	5	3 ³ / ₄	1 ¹ / ₂	1/2	5/8	9/16	2 ⁷ / ₁₆	1 ²¹ / ₃₂	1.2205	0.500	3/8	UC203-011D1	
20 3/4	UCP204D1	33.3	127	95	38	13	16	14	65	42	31	12.7	M10	UC204D1	
	UCP204-012D1	1 ⁵ / ₁₆	5	3 ³ / ₄	1 ¹ / ₂	1/2	5/8	9/16	2 ⁹ / ₁₆	1 ²¹ / ₃₂	1.2205	0.500	3/8	UC204-012D1	
25 13/16 7/8 15/16 1	UCP205D1	36.5	140	105	38	13	16	15	71	42	34.1	14.3	M10	UC205D1	
	UCP205-013D1													UC205-013D1	
	UCP205-014D1													UC205-014D1	
	UCP205-015D1													UC205-015D1	
	UCP205-100D1													UC205-100D1	
30 1 1/16 1 1/8 1 3/16 1 1/4	UCP206D1	42.9	165	121	48	17	20	17	83	54	38.1	15.9	M14	UC206D1	
	UCP206-101D1													UC206-101D1	
	UCP206-102D1													UC206-102D1	
	UCP206-103D1													UC206-103D1	
	UCP206-104D1													UC206-104D1	
35 1 1/4 1 5/16 1 3/8 1 7/16	UCP207D1	47.6	167	127	48	17	20	18	93	54	42.9	17.5	M14	UC207D1	
	UCP207-104D1													UC207-104D1	
	UCP207-105D1													UC207-105D1	
	UCP207-106D1													UC207-106D1	
	UCP207-107D1													UC207-107D1	
40 1 1/2 1 9/16	UCP208D1	49.2	184	137	54	17	20	18	98	52	49.2	19	M14	UC208D1	
	UCP208-108D1													UC208-108D1	
	UCP208-109D1													UC208-109D1	
45 1 5/8 1 11/16 1 3/4	UCP209D1	54	190	146	54	17	20	20	106	60	49.2	19	M14	UC209D1	
	UCP209-110D1													UC209-110D1	
	UCP209-111D1													UC209-111D1	
	UCP209-112D1													UC209-112D1	

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

sale@technobearing.ru 36 for size of grease fitting.

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

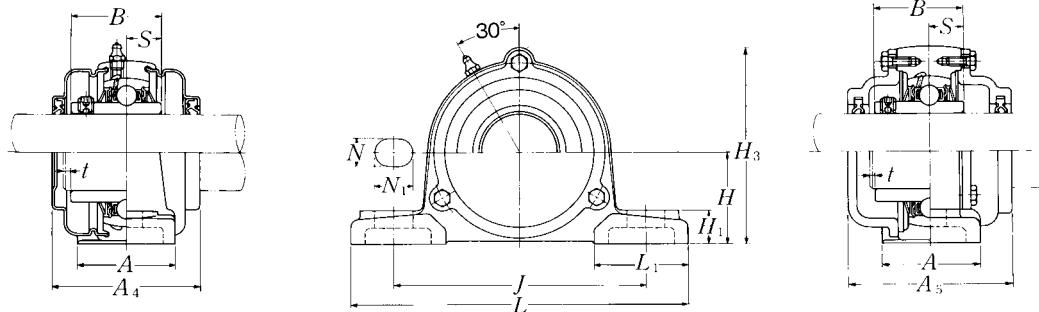


Cast dust cover type
Open end: **C-UCP…D1**
Closed end: **CM-UCP…D1**

Housing ¹⁾ number	Unit number ¹⁾ pressed steel dust cover type	Unit number ¹⁾ cast dust cover type	Nominal dimensions				Mass of unit		
			t max.	mm A ₄	inch H ₃	A ₅	kg UCP	kg S(SM)	lb C(CM)
P203D1	S(SM)-UCP201D1	C(CM)-UCP201D1	2	51	67	62	0.7	0.7	1.0
P203D1	S(SM)-UCP201-008D1	C(CM)-UCP201-008D1	5/64	2	2 5/8	2 7/16	1.5	1.5	2.2
P203D1	S(SM)-UCP202D1	C(CM)-UCP202D1	2	51	67	62	0.7	0.7	1.0
P203D1	S(SM)-UCP202-009D1	C(CM)-UCP202-009D1	5/64	2	2 5/8	2 7/16	1.5	1.5	2.2
P203D1	S(SM)-UCP202-010D1	C(CM)-UCP202-010D1							
P203D1	S(SM)-UCP203D1	C(CM)-UCP203D1	2	51	67	62	0.7	0.7	1.0
P203D1	S(SM)-UCP203-011D1	C(CM)-UCP203-011D1	5/64	2	2 5/8	2 7/16	1.5	1.5	2.2
P204D1	S(SM)-UCP204D1	C(CM)-UCP204D1	2	51	70	62	0.7	0.7	0.9
P204D1	S(SM)-UCP204-012D1	C(CM)-UCP204-012D1	5/64	2	2 3/4	2 7/16	1.5	1.5	2.0
P205D1	S(SM)-UCP205D1	C(CM)-UCP205D1	2	57	76	70	0.8	0.9	1.1
P205D1	S(SM)-UCP205-013D1	C(CM)-UCP205-013D1							
P205D1	S(SM)-UCP205-014D1	C(CM)-UCP205-014D1	5/64	2 1/4	3	2 3/4	1.8	2.0	2.4
P205D1	S(SM)-UCP205-015D1	C(CM)-UCP205-015D1							
P205D1	S(SM)-UCP205-100D1	C(CM)-UCP205-100D1							
P206D1	S(SM)-UCP206D1	C(CM)-UCP206D1	2	62	88	75	1.4	1.4	1.7
P206D1	S(SM)-UCP206-101D1	C(CM)-UCP206-101D1							
P206D1	S(SM)-UCP206-102D1	C(CM)-UCP206-102D1	5/64	2 7/16	3 15/32	2 15/16	3.1	3.1	3.8
P206D1	S(SM)-UCP206-103D1	C(CM)-UCP206-103D1							
P206D1	S(SM)-UCP206-104D1	C(CM)-UCP206-104D1							
P207D1	S(SM)-UCP207D1	C(CM)-UCP207D1	3	72	99	80	1.6	1.7	2.0
P207D1	S(SM)-UCP207-104D1	C(CM)-UCP207-104D1							
P207D1	S(SM)-UCP207-105D1	C(CM)-UCP207-105D1	1/8	2 27/32	3 29/32	3 5/32	3.5	3.7	4.4
P207D1	S(SM)-UCP207-106D1	C(CM)-UCP207-106D1							
P207D1	S(SM)-UCP207-107D1	C(CM)-UCP207-107D1							
P208D1	S(SM)-UCP208D1	C(CM)-UCP208D1	3	82	105	90	1.9	2.1	2.7
P208D1	S(SM)-UCP208-108D1	C(CM)-UCP208-108D1	1/8	3 7/32	4 1/8	3 17/32	4.2	4.6	6.0
P208D1	S(SM)-UCP208-109D1	C(CM)-UCP208-109D1							
P209D1	S(SM)-UCP209D1	C(CM)-UCP209D1	3	82	113	95	2.2	2.4	3.1
P209D1	S(SM)-UCP209-110D1	C(CM)-UCP209-110D1							
P209D1	S(SM)-UCP209-111D1	C(CM)-UCP209-111D1	1/8	3 7/32	4 7/16	3 3/4	4.9	5.3	6.8
P209D1	S(SM)-UCP209-112D1	C(CM)-UCP209-112D1							

sale@technobearing.ru
Pillow blocks cast housing
Set screw type

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

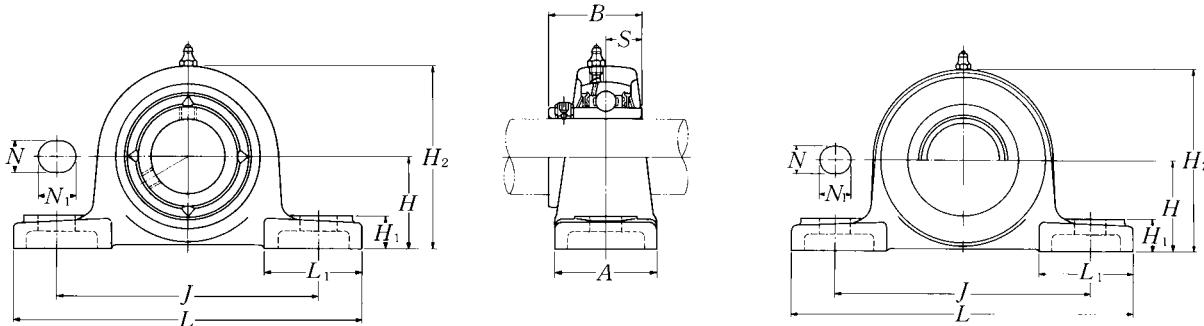

Pressed steel dust cover type


Open end: S-UCP...D1

Closed end: SM-UCP...D1

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions												Bolt size mm inch	Bearing number
		H	L	J	A	N	N ₁	H ₁	H ₂	L ₁	B	S			
50 1 ¹³ / ₁₆ 1 ⁷ / ₈ 1 ¹⁵ / ₁₆ 2	UCP210D1	57.2	206	159	60	20	23	21	114	65	51.6	19	M16	UC210D1	
	UCP210-113D1													UC210-113D1	
	UCP210-114D1	2 ¹ / ₄	8 ¹ / ₈	6 ¹ / ₄	2 ³ / ₈	25 ⁵ / ₃₂	29 ¹ / ₃₂	13 ¹ / ₁₆	4 ¹ / ₂	2 ⁹ / ₁₆	2.0315	0.748	5 ⁵ / ₈	UC210-114D1	
	UCP210-115D1													UC210-115D1	
	UCP210-200D1													UC210-200D1	
55 2 2 ¹ / ₁₆ 2 ¹ / ₈ 2 ³ / ₁₆	UCP211D1	63.5	219	171	60	20	23	23	126	65	55.6	22.2	M16	UC211D1	
	UCP211-200D1													UC211-200D1	
	UCP211-201D1	2 ¹ / ₂	8 ⁵ / ₈	6 ²³ / ₃₂	2 ³ / ₈	25 ⁵ / ₃₂	29 ¹ / ₃₂	29 ¹ / ₃₂	4 ³¹ / ₃₂	2 ⁹ / ₁₆	2.1890	0.874	5 ⁵ / ₈	UC211-201D1	
	UCP211-202D1													UC211-202D1	
	UCP211-203D1													UC211-203D1	
60 2 ¹ / ₄ 2 ⁵ / ₁₆ 2 ³ / ₈ 2 ⁷ / ₁₆	UCP212D1	69.8	241	184	70	20	23	25	138	70	65.1	25.4	M16	UC212D1	
	UCP212-204D1													UC212-204D1	
	UCP212-205D1	2 ³ / ₄	9 ¹ / ₂	7 ¹ / ₄	2 ³ / ₄	25 ⁵ / ₃₂	29 ¹ / ₃₂	31 ¹ / ₃₂	5 ⁷ / ₁₆	2 ³ / ₄	2.5630	1.000	5 ⁵ / ₈	UC212-205D1	
	UCP212-206D1													UC212-206D1	
	UCP212-207D1													UC212-207D1	
65 2 ¹ / ₂ 2 ⁹ / ₁₆	UCP213D1	76.2	265	203	70	25	28	27	151	77	65.1	25.4	M20	UC213D1	
	UCP213-208D1	3	10 ⁷ / ₁₆	8	2 ³ / ₄	31 ¹ / ₃₂	1 ³ / ₃₂	1 ¹ / ₁₆	5 ¹⁵ / ₁₆	3 ¹ / ₃₂	2.5630	1.000	3/4	UC213-208D1	
	UCP213-209D1													UC213-209D1	
70 2 ⁵ / ₈ 2 ¹¹ / ₁₆ 2 ³ / ₄	UCP214D1	79.4	266	210	72	25	28	27	157	77	74.6	30.2	M20	UC214D1	
	UCP214-210D1													UC214-210D1	
	UCP214-211D1	3 ¹ / ₈	10 ¹⁵ / ₃₂	8 ⁹ / ₃₂	2 ²⁷ / ₃₂	31 ¹ / ₃₂	1 ³ / ₃₂	1 ¹ / ₁₆	6 ³ / ₁₆	3 ¹ / ₃₂	2.9370	1.189	3/4	UC214-211D1	
	UCP214-212D1													UC214-212D1	
75 2 ¹³ / ₁₆ 2 ⁷ / ₈ 2 ¹⁵ / ₁₆ 3	UCP215D1	82.6	275	217	74	25	28	28	163	80	77.8	33.3	M20	UC215D1	
	UCP215-213D1													UC215-213D1	
	UCP215-214D1	3 ¹ / ₄	10 ¹³ / ₁₆	8 ¹⁷ / ₃₂	2 ²⁹ / ₃₂	31 ¹ / ₃₂	1 ³ / ₃₂	1 ³ / ₃₂	6 ¹³ / ₃₂	3 ⁵ / ₃₂	3.0630	1.311	3/4	UC215-214D1	
	UCP215-215D1													UC215-215D1	
	UCP215-300D1													UC215-300D1	
80 3 ¹ / ₁₆ 3 ¹ / ₈ 3 ³ / ₁₆	UCP216D1	88.9	292	232	78	25	28	30	175	85	82.6	33.3	M20	UC216D1	
	UCP216-301D1													UC216-301D1	
	UCP216-302D1	3 ¹ / ₂	11 ¹ / ₂	9 ¹ / ₈	3 ¹ / ₁₆	31 ¹ / ₃₂	1 ³ / ₃₂	1 ³ / ₁₆	6 ⁷ / ₈	3 ¹¹ / ₃₂	3.2520	1.311	3/4	UC216-302D1	
	UCP216-303D1													UC216-303D1	

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

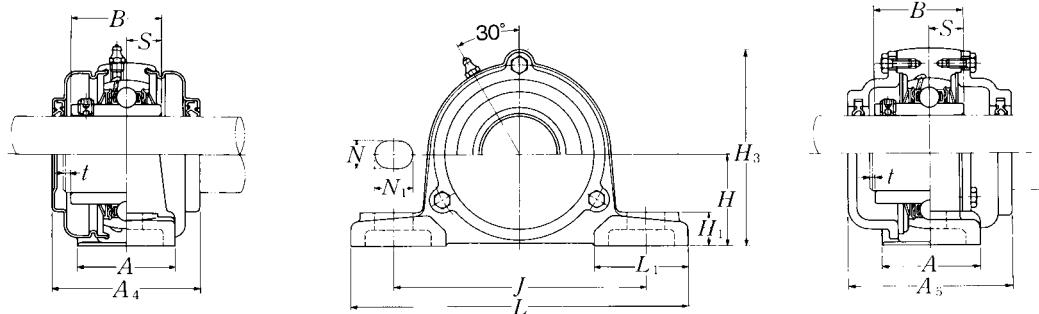


Cast dust cover type
Open end: **C-UCP…D1**
Closed end: **CM-UCP…D1**

Housing ¹⁾ number	Unit number ¹⁾ pressed steel dust cover type	Unit number ¹⁾ cast dust cover type	Nominal dimensions				Mass of unit		
			t max.	mm A ₄	inch H ₃	A ₅	kg UCP	kg S(SM)	lb C(CM)
P210D1	S(SM)-UCP210D1	C(CM)-UCP210D1	3	87	119	100	2.7	2.8	3.6
P210D1	S(SM)-UCP210-113D1	C(CM)-UCP210-113D1							
P210D1	S(SM)-UCP210-114D1	C(CM)-UCP210-114D1	$\frac{1}{8}$	$3\frac{7}{16}$	$4\frac{11}{16}$	$3\frac{15}{16}$	6.0	6.2	7.9
P210D1	S(SM)-UCP210-115D1	C(CM)-UCP210-115D1							
P210D1	S(SM)-UCP210-200D1	C(CM)-UCP210-200D1							
P211D1	S(SM)-UCP211D1	C(CM)-UCP211D1	4	92	130	100	3.5	3.5	4.4
P211D1	S(SM)-UCP211-200D1	C(CM)-UCP211-200D1							
P211D1	S(SM)-UCP211-201D1	C(CM)-UCP211-201D1	$\frac{5}{32}$	$3\frac{5}{8}$	$5\frac{1}{8}$	$3\frac{15}{16}$	7.7	7.7	9.7
P211D1	S(SM)-UCP211-202D1	C(CM)-UCP211-202D1							
P211D1	S(SM)-UCP211-203D1	C(CM)-UCP211-203D1							
P212D1	S(SM)-UCP212D1	C(CM)-UCP212D1	4	102	143	115	4.7	5.0	6.0
P212D1	S(SM)-UCP212-204D1	C(CM)-UCP212-204D1							
P212D1	S(SM)-UCP212-205D1	C(CM)-UCP212-205D1	$\frac{5}{32}$	$4\frac{1}{32}$	$5\frac{5}{8}$	$4\frac{17}{32}$	10	11	13
P212D1	S(SM)-UCP212-206D1	C(CM)-UCP212-206D1							
P212D1	S(SM)-UCP212-207D1	C(CM)-UCP212-207D1							
P213D1	S(SM)-UCP213D1	C(CM)-UCP213D1	4	107	155	120	5.6	5.8	7.2
P213D1	S(SM)-UCP213-208D1	C(CM)-UCP211-208D1	$\frac{5}{32}$	$4\frac{7}{32}$	$6\frac{3}{32}$	$4\frac{23}{32}$	12	13	16
P213D1	S(SM)-UCP213-209D1	C(CM)-UCP213-209D1							
P214D1	—	C(CM)-UCP214D1	4	—	162	135	6.5	—	8.3
P214D1	—	C(CM)-UCP214-210D1							
P214D1	—	C(CM)-UCP214-211D1	$\frac{5}{32}$	—	$6\frac{3}{8}$	$5\frac{5}{16}$	14	—	18
P214D1	—	C(CM)-UCP214-212D1							
P215D1	—	C(CM)-UCP215D1	4	—	168	135	7.2	—	9.3
P215D1	—	C(CM)-UCP215-213D1							
P215D1	—	C(CM)-UCP215-214D1	$\frac{5}{32}$	—	$6\frac{5}{8}$	$5\frac{5}{16}$	16	—	21
P215D1	—	C(CM)-UCP215-215D1							
P215D1	—	C(CM)-UCP215-300D1							
P216D1	—	C(CM)-UCP216D1	4	—	181	145	8.7	—	11
P216D1	—	C(CM)-UCP216-301D1							
P216D1	—	C(CM)-UCP216-302D1	$\frac{5}{32}$	—	$7\frac{1}{8}$	$5\frac{23}{32}$	19	—	24
P216D1	—	C(CM)-UCP216-303D1							

sale@technobearing.ru
Pillow blocks cast housing
Set screw type

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

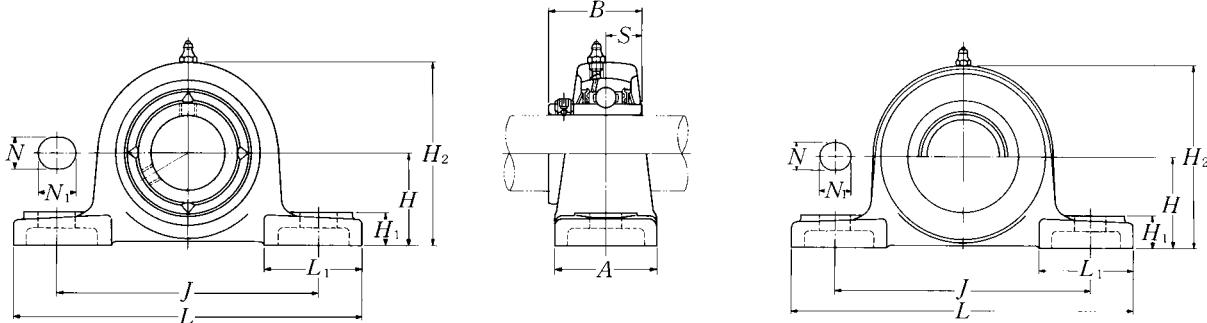

Pressed steel dust cover type


Open end: S-UCP...D1

Closed end: SM-UCP...D1

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions												Bolt size mm inch	Bearing number
		H	L	J	A	N	N ₁	H ₁	H ₂	L ₁	B	S			
85 $3\frac{1}{4}$ $3\frac{5}{16}$ $3\frac{7}{16}$	UCP217D1	95.2	310	247	83	25	28	32	187	85	85.7	34.1	M20	UC217D1	
	UCP217-304D1													UC217-304D1	
	UCP217-305D1	$3\frac{3}{4}$	$12\frac{7}{32}$	$9\frac{23}{32}$	$3\frac{9}{32}$	$3\frac{1}{32}$	$1\frac{3}{32}$	$1\frac{1}{4}$	$7\frac{3}{8}$	$3\frac{11}{32}$	3.3740	1.343	$\frac{3}{4}$	UC217-305D1	
	UCP217-307D1													UC217-307D1	
90 $3\frac{1}{2}$	UCP218D1	101.6	327	262	88	27	30	33	200	90	96	39.7	M22	UC218D1	
	UCP218-308D1	4	$12\frac{7}{8}$	$10\frac{5}{16}$	$3\frac{15}{32}$	$1\frac{1}{16}$	$1\frac{3}{16}$	$1\frac{5}{16}$	$7\frac{7}{8}$	$3\frac{17}{32}$	3.7795	1.563	$\frac{7}{8}$	UC218-308D1	

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

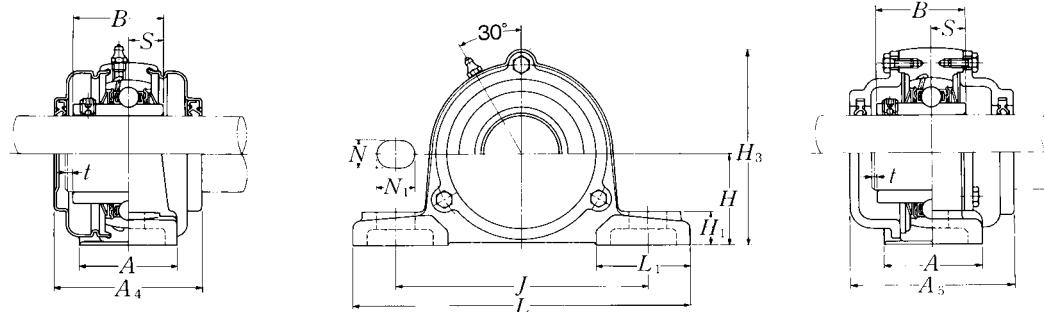
**Cast dust cover type**Open end: **C-UCP...D1**Closed end: **CM-UCP...D1**

Housing ¹⁾ number	Unit number ¹⁾ pressed steel dust cover type	Unit number ¹⁾ cast dust cover type	Nominal dimensions				Mass of unit		
			t max.	mm A ₄	inch H ₃	A ₅	kg UCP	lb S(SM)	lb C(CM)
P217D1	—	C(CM)-UCP217D1	5	—	191	155	11	—	13
P217D1	—	C(CM)-UCP217-304D1	$\frac{13}{64}$	—	$7\frac{17}{32}$	$6\frac{3}{32}$	24	—	29
P217D1	—	C(CM)-UCP217-305D1	$\frac{13}{64}$	—	$7\frac{17}{32}$	$6\frac{3}{32}$	24	—	29
P217D1	—	C(CM)-UCP217-307D1	$\frac{13}{64}$	—	$7\frac{17}{32}$	$6\frac{3}{32}$	24	—	29
P218D1	—	C(CM)-UCP218D1	5	—	204	165	13	—	16
P218D1	—	C(CM) UCP218-308D1	$\frac{13}{64}$	—	$8\frac{1}{32}$	$6\frac{1}{2}$	29	—	35

sale@technobearing.ru
Pillow blocks cast housing
Set screw type


www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

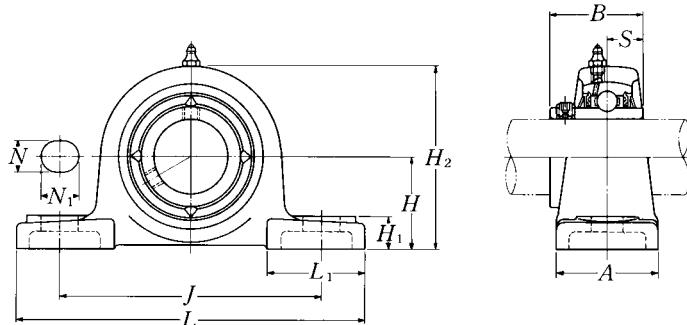

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions											Bolt size mm inch	Bearing number
		H	L	J	A	N	N ₁	H ₁	H ₂	L ₁	B	S		
25 $1\frac{3}{16}$	UCP305D1	45	175	132	45	17	20	15	85	54	38	15	M14	UC305D1
$\frac{7}{8}$	UCP305-013D1	$1\frac{49}{64}$	$6\frac{7}{8}$	$5\frac{3}{16}$	$1\frac{25}{32}$	$2\frac{1}{32}$	$2\frac{5}{32}$	$1\frac{9}{32}$	$3\frac{11}{32}$	$2\frac{1}{8}$	1.4961	0.591	$\frac{1}{2}$	UC305-013D1
$1\frac{15}{16}$	UCP305-014D1													UC305-014D1
$1\frac{1}{16}$	UCP305-015D1													UC305-015D1
1	UCP305-100D1													UC305-100D1
30 $1\frac{1}{16}$	UCP306D1	50	180	140	50	17	20	18	95	54	43	17	M14	UC306D1
$1\frac{1}{8}$	UCP306-101D1	$1\frac{31}{32}$	$7\frac{3}{32}$	$5\frac{1}{2}$	$1\frac{31}{32}$	$2\frac{1}{32}$	$2\frac{5}{32}$	$2\frac{3}{32}$	$3\frac{3}{4}$	$2\frac{1}{8}$	1.6929	0.669	$\frac{1}{2}$	UC306-101D1
$1\frac{3}{16}$	UCP306-102D1													UC306-102D1
	UCP306-103D1													UC306-103D1
35 $1\frac{1}{4}$	UCP307D1	56	210	160	56	17	25	20	106	60	48	19	M14	UC307D1
$1\frac{5}{16}$	UCP307-104D1	$2\frac{13}{64}$	$8\frac{9}{32}$	$6\frac{5}{16}$	$2\frac{7}{32}$	$2\frac{1}{32}$	$3\frac{1}{32}$	$2\frac{5}{32}$	$4\frac{3}{16}$	$2\frac{3}{8}$	1.8898	0.748	$\frac{1}{2}$	UC307-104D1
$1\frac{3}{8}$	UCP307-105D1													UC307-105D1
$1\frac{7}{16}$	UCP307-106D1													UC307-106D1
	UCP307-107D1													UC307-107D1
40 $1\frac{1}{2}$	UCP308D1	60	220	170	60	17	27	22	116	60	52	19	M14	UC308D1
$1\frac{9}{16}$	UCP308-108D1	$2\frac{23}{64}$	$8\frac{21}{32}$	$6\frac{11}{16}$	$2\frac{3}{8}$	$2\frac{1}{32}$	$1\frac{1}{16}$	$\frac{7}{8}$	$4\frac{9}{16}$	$2\frac{3}{8}$	2.0472	0.748	$\frac{1}{2}$	UC308-108D1
	UCP308-109D1													UC308-109D1
45 $1\frac{5}{8}$	UCP309D1	67	245	190	67	20	30	24	129	65	57	22	M16	UC309D1
$1\frac{11}{16}$	UCP309-110D1	$2\frac{41}{64}$	$9\frac{21}{32}$	$7\frac{15}{32}$	$2\frac{5}{8}$	$2\frac{5}{32}$	$1\frac{3}{16}$	$1\frac{5}{16}$	$5\frac{3}{32}$	$2\frac{9}{16}$	2.2441	0.866	$\frac{5}{8}$	UC309-110D1
$1\frac{3}{4}$	UCP309-111D1													UC309-111D1
	UCP309-112D1													UC309-112D1
50 $1\frac{13}{16}$	UCP310D1	75	275	212	75	20	35	27	143	75	61	22	M16	UC310D1
$1\frac{7}{8}$	UCP310-113D1	$2\frac{61}{64}$	$10\frac{13}{16}$	$8\frac{11}{32}$	$2\frac{15}{16}$	$2\frac{5}{32}$	$1\frac{3}{8}$	$1\frac{1}{16}$	$5\frac{5}{8}$	$2\frac{15}{16}$	2.4016	0.866	$\frac{5}{8}$	UC310-113D1
$1\frac{15}{16}$	UCP310-114D1													UC310-114D1
	UCP310-115D1													UC310-115D1
55 2	UCP311D1	80	310	236	80	20	38	30	154	85	66	25	M16	UC311D1
$2\frac{1}{16}$	UCP311-200D1	$3\frac{5}{32}$	$12\frac{7}{32}$	$9\frac{9}{32}$	$3\frac{5}{32}$	$2\frac{5}{32}$	$1\frac{1}{2}$	$1\frac{3}{16}$	$6\frac{1}{16}$	$3\frac{11}{32}$	2.5984	0.984	$\frac{5}{8}$	UC311-200D1
$2\frac{1}{8}$	UCP311-201D1													UC311-201D1
$2\frac{3}{16}$	UCP311-202D1													UC311-202D1
	UCP311-203D1													UC311-203D1

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".
Note: Please refer to page 36 for size of grease fitting.

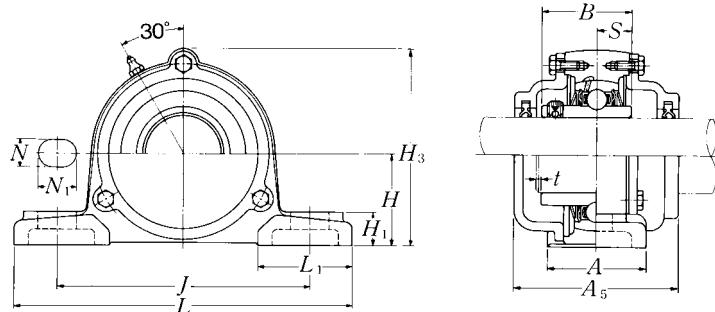
**Cast dust cover type**Open end: **C-UCP…D1**Closed end: **CM-UCP…D1**

Housing ¹⁾ number	Unit number ¹⁾ cast dust cover type	Nominal dimensions			Mass of unit	
		mm max. <i>t</i>	inch <i>H</i> ₃	inch <i>A</i> ₅	kg UCP	lb C(CM)
P305D1	C(CM)-UCP305D1	2	91	80	1.4	1.8
P305D1	C(CM)-UCP305-013D1					
P305D1	C(CM)-UCP305-014D1	5/64	3 ¹⁹ / ₃₂	3 ⁵ / ₃₂	3.1	4.0
P305D1	C(CM)-UCP305-015D1					
P305D1	C(CM)-UCP305-100D1					
P306D1	C(CM)-UCP306D1	2	105	85	1.8	2.5
P306D1	C(CM)-UCP306-101D1					
P306D1	C(CM)-UCP306-102D1	5/64	4 ¹ / ₈	3 ¹¹ / ₃₂	4.0	5.5
P306D1	C(CM)-UCP306-103D1					
P307D1	C(CM)-UCP307D1	3	115	95	2.5	3.2
P307D1	C(CM)-UCP307-104D1					
P307D1	C(CM)-UCP307-105D1	1/8	4 ¹⁷ / ₃₂	3 ³ / ₄	5.5	7.1
P307D1	C(CM)-UCP307-106D1					
P307D1	C(CM)-UCP307-107D1					
P308D1	C(CM)-UCP308D1	3	125	105	3.1	4.0
P308D1	C(CM)-UCP308-108D1	1/8	4 ²⁹ / ₃₂	4 ¹ / ₈	6.8	8.8
P308D1	C(CM)-UCP308-109D1					
P309D1	C(CM)-UCP309D1	3	140	110	4.1	5.4
P309D1	C(CM)-UCP309-110D1					
P309D1	C(CM)-UCP309-111D1	1/8	5 ¹ / ₂	4 ¹¹ / ₃₂	9.0	12
P309D1	C(CM)-UCP309-112D1					
P310D1	C(CM)-UCP310D1	3	156	120	5.6	7.0
P310D1	C(CM)-UCP310-113D1					
P310D1	C(CM)-UCP310-114D1	1/8	6 ⁵ / ₃₂	4 ²³ / ₃₂	12	15
P310D1	C(CM)-UCP310-115D1					
P311D1	C(CM)-UCP311D1	4	166	125	7.3	8.8
P311D1	C(CM)-UCP311-200D1					
P311D1	C(CM)-UCP311-201D1	5/32	6 ¹⁷ / ₃₂	4 ²⁹ / ₃₂	16	19
P311D1	C(CM)-UCP311-202D1					
P311D1	C(CM)-UCP311-203D1					

sale@technobearing.ru
Pillow blocks cast housing
Set screw type

www.technobearing.ru


8 (800) 700-72-07 (бесплатно)

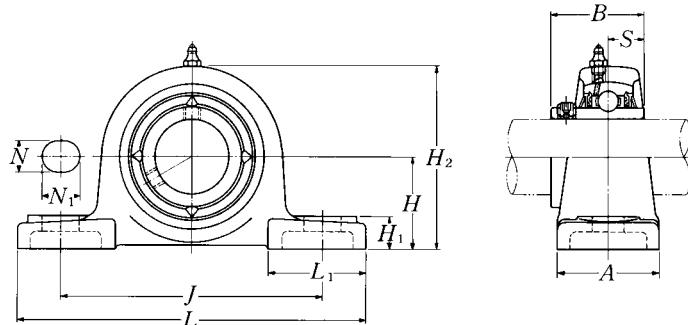


Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions												Bolt size mm inch	Bearing number
		H	L	J	A	N	N ₁	H ₁	H ₂	L ₁	B	S			
60 $2\frac{1}{4}$ $2\frac{5}{16}$ $2\frac{3}{8}$ $2\frac{7}{16}$	UCP312D1	85	330	250	85	25	38	32	165	95	71	26	M20	UC312D1	
	UCP312-204D1	$3\frac{11}{32}$	13	$9\frac{27}{32}$	$3\frac{11}{32}$	$3\frac{1}{32}$	$1\frac{1}{2}$	$1\frac{1}{4}$	$6\frac{1}{2}$	$3\frac{3}{4}$	2.7953	1.024	$\frac{3}{4}$	UC312-204D1	
	UCP312-205D1													UC312-205D1	
	UCP312-206D1													UC312-206D1	
	UCP312-207D1													UC312-207D1	
65 $2\frac{1}{2}$ $2\frac{9}{16}$	UCP313D1	90	340	260	90	25	38	33	176	105	75	30	M20	UC313D1	
	UCP313-208D1	$3\frac{35}{64}$	$13\frac{3}{8}$	$10\frac{1}{4}$	$3\frac{17}{32}$	$3\frac{1}{32}$	$1\frac{1}{2}$	$1\frac{5}{16}$	$6\frac{15}{16}$	$4\frac{1}{8}$	2.9528	1.181	$\frac{3}{4}$	UC313-208D1	
	UCP313-209D1													UC313-209D1	
70 $2\frac{5}{8}$ $2\frac{11}{16}$ $2\frac{3}{4}$	UCP314D1	95	360	280	90	27	40	35	187	105	78	33	M22	UC314D1	
	UCP314-210D1													UC314-210D1	
	UCP314-211D1	$3\frac{47}{64}$	$14\frac{3}{16}$	$11\frac{1}{32}$	$3\frac{17}{32}$	$1\frac{1}{16}$	$1\frac{9}{16}$	$1\frac{3}{8}$	$7\frac{3}{8}$	$4\frac{1}{8}$	3.0709	1.299	$\frac{7}{8}$	UC314-211D1	
	UCP314-212D1													UC314-212D1	
75 $2\frac{13}{16}$ $2\frac{7}{8}$ $2\frac{15}{16}$ 3	UCP315D1	100	380	290	100	27	40	35	198	110	82	32	M22	UC315D1	
	UCP315-213D1													UC315-213D1	
	UCP315-214D1	$3\frac{15}{16}$	$14\frac{31}{32}$	$11\frac{13}{32}$	$3\frac{15}{16}$	$1\frac{1}{16}$	$1\frac{9}{16}$	$1\frac{3}{8}$	$7\frac{25}{32}$	$4\frac{11}{32}$	3.2283	1.260	$\frac{7}{8}$	UC315-214D1	
	UCP315-215D1													UC315-215D1	
	UCP315-300D1													UC315-300D1	
80 $3\frac{1}{16}$ $3\frac{1}{8}$ $3\frac{3}{16}$	UCP316D1	106	400	300	110	27	40	40	210	110	86	34	M22	UC316D1	
	UCP316-301D1													UC316-301D1	
	UCP316-302D1	$4\frac{11}{64}$	$15\frac{3}{4}$	$11\frac{13}{16}$	$4\frac{11}{32}$	$1\frac{1}{16}$	$1\frac{9}{16}$	$1\frac{9}{16}$	$8\frac{9}{32}$	$4\frac{11}{32}$	3.3858	1.339	$\frac{7}{8}$	UC316-302D1	
	UCP316-303D1													UC316-303D1	
85 $3\frac{1}{4}$ $3\frac{5}{16}$ $3\frac{7}{16}$	UCP317D1	112	420	320	110	33	45	40	220	120	96	40	M27	UC317D1	
	UCP317-304D1													UC317-304D1	
	UCP317-305D1	$4\frac{13}{32}$	$16\frac{17}{32}$	$12\frac{19}{32}$	$4\frac{11}{32}$	$1\frac{5}{16}$	$1\frac{25}{32}$	$1\frac{9}{16}$	$8\frac{21}{32}$	$4\frac{23}{32}$	3.7795	1.575	1	UC317-305D1	
	UCP317-307D1													UC317-307D1	
90 $3\frac{7}{16}$ $3\frac{1}{2}$	UCP318D1	118	430	330	110	33	45	45	235	120	96	40	M27	UC318D1	
	UCP318-307D1	$4\frac{41}{64}$	$16\frac{15}{16}$	13	$4\frac{11}{32}$	$1\frac{5}{16}$	$1\frac{25}{32}$	$1\frac{25}{32}$	$9\frac{1}{4}$	$4\frac{23}{32}$	3.7795	1.575	1	UC318-307D1	
	UCP318-308D1													UC318-308D1	

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

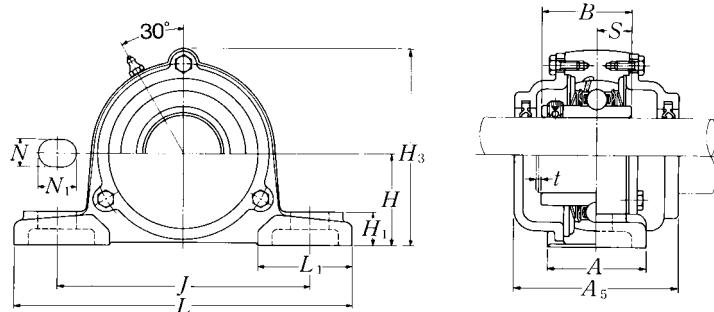**Cast dust cover type**Open end: **C-UCP…D1**Closed end: **CM-UCP…D1**


Housing 1) number	Unit number 1) cast dust cover type	Nominal dimensions			Mass of unit	
		t max.	mm H ₃	inch A ₅	kg UCP	lb C(CM)
P312D1	C(CM)-UCP312D1	4	179	135	9.4	11
P312D1	C(CM)-UCP312-204D1					
P312D1	C(CM)-UCP312-205D1	5/32	7 1/16	5 5/16	21	24
P312D1	C(CM)-UCP312-206D1					
P312D1	C(CM)-UCP312-207D1					
P313D1	C(CM)-UCP313D1	4	190	140	10	12
P313D1	C(CM)-UCP313-208D1	5/32	7 15/32	5 1/2	22	26
P313D1	C(CM)-UCP313-209D1					
P314D1	C(CM)-UCP314D1	4	200	140	12	14
P314D1	C(CM)-UCP314-210D1					
P314D1	C(CM)-UCP314-211D1	5/32	7 7/8	5 1/2	26	31
P314D1	C(CM)-UCP314-212D1					
P315D1	C(CM)-UCP315D1	4	210	150	14	17
P315D1	C(CM)-UCP315-213D1					
P315D1	C(CM)-UCP315-214D1	5/32	8 9/32	5 29/32	31	37
P315D1	C(CM)-UCP315-215D1					
P315D1	C(CM)-UCP315-300D1					
P316D1	C(CM)-UCP316D1	4	221	155	17	21
P316D1	C(CM)-UCP316-301D1					
P316D1	C(CM)-UCP316-302D1	5/32	8 11/16	6 3/32	37	46
P316D1	C(CM)-UCP316-303D1					
P317D1	C(CM)-UCP317D1	5	235	170	19	24
P317D1	C(CM)-UCP317-304D1					
P317D1	C(CM)-UCP317-305D1	13/64	9 1/4	6 11/16	42	53
P317D1	C(CM)-UCP317-307D1					
P318D1	C(CM)-UCP318D1	5	246	170	22	27
P318D1	C(CM)-UCP318-307D1	13/64	9 11/16	6 11/16	49	60
P318D1	C(CM)-UCP318-308D1					

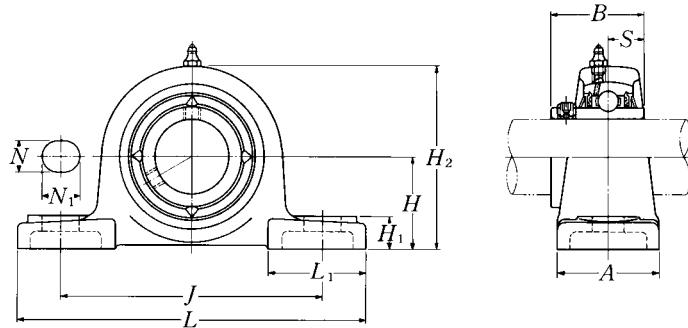

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions												Bolt size mm inch	Bearing number
		H	L	J	A	N	N ₁	H ₁	H ₂	L ₁	B	S			
95 $3\frac{5}{8}$	UCP319D1	125	470	360	120	36	50	45	250	125	103	41	M30	UC319D1	
$3\frac{11}{16}$	UCP319-310D1	$4\frac{59}{64}$	$18\frac{1}{2}$	$14\frac{3}{16}$	$4\frac{23}{32}$	$1\frac{13}{32}$	$1\frac{31}{32}$	$1\frac{25}{32}$	$9\frac{27}{32}$	$4\frac{29}{32}$	4.0551	1.614	$1\frac{1}{8}$	UC319-310D1	
$3\frac{3}{4}$	UCP319-311D1													UC319-311D1	
	UCP319-312D1													UC319-312D1	
100 $3\frac{13}{16}$	UCP320D1	140	490	380	120	36	50	50	275	130	108	42	M30	UC320D1	
$3\frac{7}{8}$	UCP320-313D1	$5\frac{33}{64}$	$19\frac{9}{32}$	$14\frac{31}{32}$	$4\frac{23}{32}$	$1\frac{13}{32}$	$1\frac{31}{32}$	$1\frac{31}{32}$	$10\frac{13}{16}$	$5\frac{1}{8}$	4.2520	1.654	$1\frac{1}{8}$	UC320-313D1	
$3\frac{15}{16}$	UCP320-314D1													UC320-314D1	
4	UCP320-315D1													UC320-315D1	
	UCP320-400D1													UC320-400D1	
105	UCP321D1	140	490	380	120	36	50	50	280	130	112	44	M30	UC321D1	
110	UCP322D1	150	520	400	140	40	55	55	300	135	117	46	M33	UC322D1	
120	UCP324D1	160	570	450	140	40	55	65	320	140	126	51	M33	UC324D1	
130	UCP326D1	180	600	480	140	40	55	75	355	140	135	54	M33	UC326D1	
140	UCP328D1	200	620	500	140	40	55	75	390	140	145	59	M33	UC328D1	

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

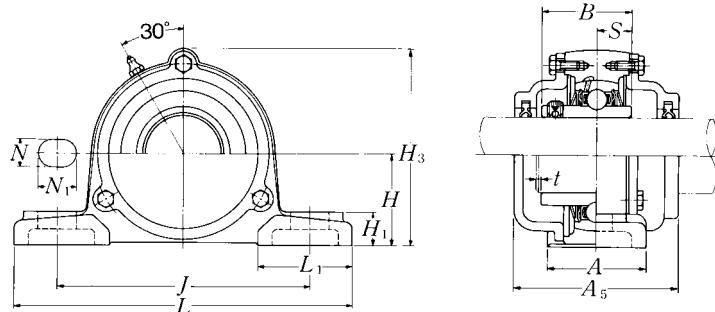
**Cast dust cover type**Open end: **C-UCP...D1**Closed end: **CM-UCP...D1**

Housing ¹⁾ number	Unit number ¹⁾ cast dust cover type	Nominal dimensions			Mass of unit	
		t max.	mm H ₃	inch A ₅	kg UCP	lb C(CM)
P319D1	C(CM)-UCP319D1	5	258	180	26	32
P319D1	C(CM)-UCP319-310D1	13/64	10 ⁵ / ₃₂	7 ³ / ₃₂	57	71
P319D1	C(CM)-UCP319-311D1					
P319D1	C(CM)-UCP319-312D1					
P320D1	C(CM)-UCP320D1	5	283	190	33	39
P320D1	C(CM)-UCP320-313D1	13/64	11 ⁵ / ₃₂	7 ¹⁵ / ₃₂	73	86
P320D1	C(CM)-UCP320-314D1					
P320D1	C(CM)-UCP320-315D1					
P320D1	C(CM)-UCP320-400D1					
P321D1	C(CM)-UCP321D1	5	290	195	35	42
P322D1	C(CM)-UCP322D1	5	313	200	43	52
P324D1	C(CM)-UCP324D1	5	335	215	50	67
P326D1	C(CM)-UCP326D1	6	375	225	69	83
P328D1	C(CM)-UCP328D1	6	407	235	84	99

sale@technobearing.ru
Pillow blocks cast housing
Set screw type

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

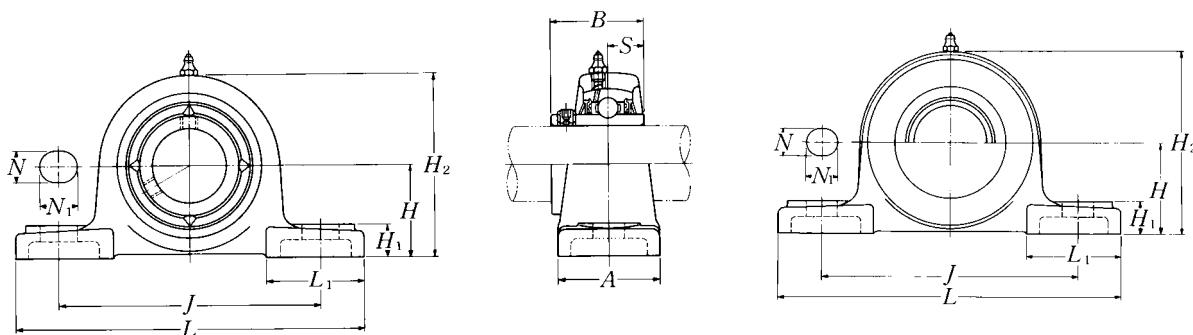**Pressed steel dust cover type**Open end: **S-UCPX...D1**Closed end: **SM-UCPX...D1**


Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions												Bolt size mm inch	Bearing number
		H	L	J	A	N	N ₁	H ₁	H ₂	L ₁	B	S			
25 $1\frac{3}{16}$ $\frac{7}{8}$ $1\frac{15}{16}$ 1	UCPX05D1	44.4	159	119	51	17	20	18	85	50	38.1	15.9	M14	UCX05D1	
	UCPX05-013D1													UCX05-013D1	
	UCPX05-014D1													UCX05-014D1	
	UCPX05-015D1													UCX05-015D1	
	UCPX05-100D1													UCX05-100D1	
30 $1\frac{1}{16}$ $1\frac{1}{8}$ $1\frac{3}{16}$ $1\frac{1}{4}$	UCPX06D1	47.6	175	127	57	17	20	20	93	54	42.9	17.5	M14	UCX06D1	
	UCPX06-101D1													UCX06-101D1	
	UCPX06-102D1													UCX06-102D1	
	UCPX06-103D1													UCX06-103D1	
	UCPX06-104D1													UC207-104D1	
35 $1\frac{5}{16}$ $1\frac{3}{8}$ $1\frac{7}{16}$	UCPX07D1	54	203	144	57	17	20	21	105	60	49.2	19	M14	UCX07D1	
	UCPX07-105D1													UCX07-105D1	
	UCPX07-106D1													UCX07-106D1	
	UCPX07-107D1													UCX07-107D1	
40 $1\frac{1}{2}$ $1\frac{9}{16}$	UCPX08D1	58.7	222	156	67	20	23	26	111	65	49.2	19	M16	UCX08D1	
	UCPX08-108D1													UCX08-108D1	
	UCPX08-109D1													UCX08-109D1	
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$ $1\frac{13}{16}$	UCPX09D1	58.7	222	156	67	20	23	26	116	65	51.6	19	M16	UCX09D1	
	UCPX09-110D1													UCX09-110D1	
	UCPX09-111D1													UCX09-111D1	
	UCPX09-112D1													UCX09-112D1	
	UCPX09-113D1													UC210-113D1	
50 $1\frac{7}{8}$ $1\frac{15}{16}$ 2	UCPX10D1	63.5	241	171	73	20	23	27	126	70	55.6	22.2	M16	UCX10D1	
	UCPX10-114D1													UCX10-114D1	
	UCPX10-115D1													UCX10-115D1	
	UCPX10-200D1													UC211-200D1	
55 $2\frac{1}{16}$ $2\frac{1}{8}$ $2\frac{3}{16}$ $2\frac{1}{4}$ $2\frac{5}{16}$	UCPX11D1	69.8	260	184	79	25	28	30	137	75	65.1	25.4	M20	UCX11D1	
	UCPX11-201D1													UCX11-201D1	
	UCPX11-202D1													UCX11-202D1	
	UCPX11-203D1													UCX11-203D1	
	UCPX11-204D1													UC212-204D1	
	UCPX11-205D1													UC212-205D1	

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".


sale@technobearing.ru 36 for size of grease fitting.

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

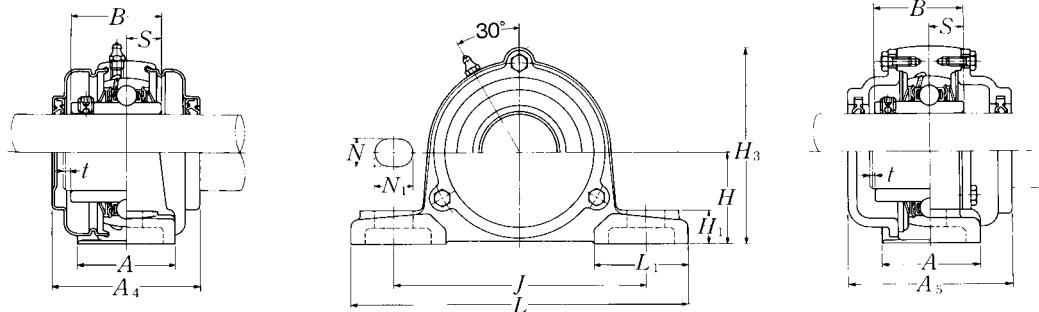**Cast dust cover type**Open end: **C-UCPX...D1**Closed end: **CM-UCPX...D1**

Housing ¹⁾ number	Unit number ¹⁾ pressed steel dust cover type	Unit number ¹⁾ cast dust cover type	Nominal dimensions				Mass of unit		
			t max.	mm A ₄	inch H ₃	A ₅	kg UCPX	lb S(SM)	lb C(CM)
PX05D1	S(SM)-UCPX05D1	C(CM)-UCPX05D1	2	62	89	75	1.4	1.5	1.8
PX05D1	S(SM)-UCPX05-013D1	C(CM)-UCPX05-013D1							
PX05D1	S(SM)-UCPX05-014D1	C(CM)-UCPX05-014D1	$\frac{5}{64}$	$2\frac{7}{16}$	$3\frac{1}{2}$	$2\frac{15}{16}$	3.1	3.3	4.0
PX05D1	S(SM)-UCPX05-015D1	C(CM)-UCPX05-015D1							
PX05D1	S(SM)-UCPX05-100D1	C(CM)-UCPX05-100D1							
PX06D1	S(SM)-UCPX06D1	C(CM)-UCPX06D1	2	72	99	80	1.9	2.0	2.4
PX06D1	S(SM)-UCPX06-101D1	C(CM)-UCPX06-101D1							
PX06D1	S(SM)-UCPX06-102D1	C(CM)-UCPX06-102D1	$\frac{5}{64}$	$2\frac{27}{32}$	$3\frac{29}{32}$	$3\frac{5}{32}$	4.2	4.4	5.3
PX06D1	S(SM)-UCPX06-103D1	C(CM)-UCPX06-103D1							
PX06D1	S(SM)-UCPX06-104D1	C(CM)-UCPX06-104D1							
PX07D1	S(SM)-UCPX07D1	C(CM)-UCPX07D1	3	82	110	90	2.4	2.6	3.3
PX07D1	S(SM)-UCPX07-105D1	C(CM)-UCPX07-105D1							
PX07D1	S(SM)-UCPX07-106D1	C(CM)-UCPX07-106D1	$\frac{1}{8}$	$3\frac{7}{32}$	$4\frac{11}{32}$	$3\frac{17}{32}$	5.3	5.7	7.3
PX07D1	S(SM)-UCPX07-107D1	C(CM)-UCPX07-107D1							
PX08D1	S(SM)-UCPX08D1	C(CM)-UCPX08D1	3	82	118	95	2.9	3.1	3.8
PX08D1	S(SM)-UCPX08-108D1	C(CM)-UCPX08-108D1							
PX08D1	S(SM)-UCPX08-109D1	C(CM)-UCPX08-109D1	$\frac{1}{8}$	$3\frac{7}{32}$	$4\frac{41}{64}$	$3\frac{3}{4}$	6.4	6.8	8.4
PX09D1	S(SM)-UCPX09D1	C(CM)-UCPX09D1	3	87	120	100	3.2	3.5	4.2
PX09D1	S(SM)-UCPX09-110D1	C(CM)-UCPX09-110D1							
PX09D1	S(SM)-UCPX09-111D1	C(CM)-UCPX09-111D1	$\frac{1}{8}$	$3\frac{7}{16}$	$4\frac{23}{32}$	$3\frac{15}{16}$	7.1	7.7	9.3
PX09D1	S(SM)-UCPX09-112D1	C(CM)-UCPX09-112D1							
PX09D1	S(SM)-UCPX09-113D1	C(CM)-UCPX09-113D1							
PX10D1	S(SM)-UCPX10D1	C(CM)-UCPX10D1	3	92	130	100	4.1	4.5	5.4
PX10D1	S(SM)-UCPX10-114D1	C(CM)-UCPX10-114D1							
PX10D1	S(SM)-UCPX10-115D1	C(CM)-UCPX10-115D1	$\frac{1}{8}$	$3\frac{5}{8}$	$5\frac{1}{8}$	$3\frac{15}{16}$	9.0	9.9	12
PX10D1	S(SM)-UCPX10-200D1	C(CM)-UCPX10-200D1							
PX11D1	S(SM)-UCPX11D1	C(CM)-UCPX11D1	4	102	144	115	5.4	5.8	6.9
PX11D1	S(SM)-UCPX11-201D1	C(CM)-UCPX11-201D1							
PX11D1	S(SM)-UCPX11-202D1	C(CM)-UCPX11-202D1	$\frac{5}{32}$	$4\frac{1}{32}$	$5\frac{21}{32}$	$4\frac{17}{32}$	12	13	15
PX11D1	S(SM)-UCPX11-203D1	C(CM)-UCPX11-203D1							
PX11D1	S(SM)-UCPX11-204D1	C(CM)-UCPX11-204D1							
PX11D1	S(SM)-UCPX11-205D1	C(CM)-UCPX11-205D1							

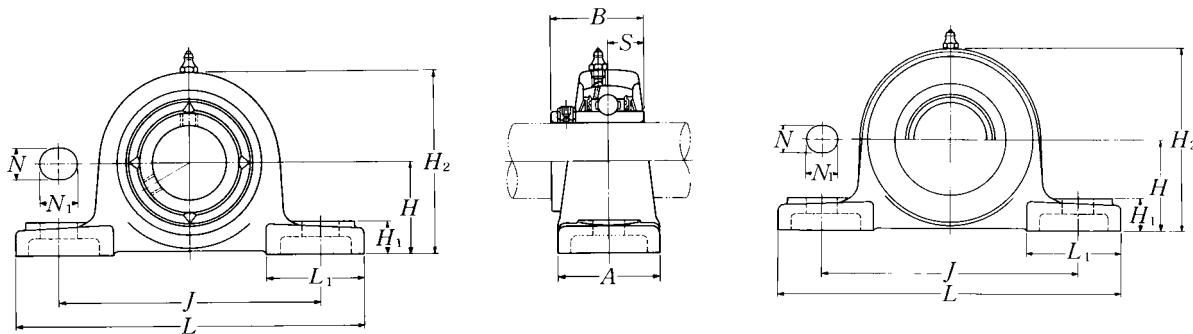

Pressed steel dust cover type

Open end: S-UCPX...D1

Closed end: SM-UCPX...D1


Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions												Bolt size mm inch	Bearing number
		H	L	J	A	N	N ₁	H ₁	H ₂	L ₁	B	S			
60 $2\frac{3}{8}$ $2\frac{7}{16}$	UCPX12D1	76.2	286	203	83	25	28	33	151	80	65.1	25.4	M20	UCX12D1	
	UCPX12-206D1	3	11 $\frac{1}{4}$	8	3 $\frac{9}{32}$	31 $\frac{1}{32}$	1 $\frac{3}{32}$	1 $\frac{5}{16}$	5 $\frac{15}{16}$	3 $\frac{5}{32}$	2.5630	1.000	$\frac{3}{4}$	UCX12-206D1	
	UCPX12-207D1													UCX12-207D1	
65 $2\frac{1}{2}$ $2\frac{7}{16}$	UCPX13D1	76.2	286	203	83	25	28	33	154	80	74.6	30.2	M20	UCX13D1	
	UCPX13-208D1	3	11 $\frac{1}{4}$	8	3 $\frac{9}{32}$	31 $\frac{1}{32}$	1 $\frac{3}{32}$	1 $\frac{5}{16}$	6 $\frac{1}{16}$	3 $\frac{5}{32}$	2.9370	1.189	$\frac{3}{4}$	UCX13-208D1	
	UCPX13-209D1													UCX13-209D1	
70 $2\frac{5}{8}$ $2\frac{11}{16}$ $2\frac{3}{4}$	UCPX14D1	88.9	330	229	89	27	30	35	170	95	77.8	33.3	M22	UCX14D1	
	UCPX14-210D1	3 $\frac{1}{2}$	13	9 $\frac{1}{32}$	3 $\frac{1}{2}$	1 $\frac{1}{16}$	1 $\frac{3}{16}$	1 $\frac{3}{8}$	6 $\frac{11}{16}$	3 $\frac{3}{4}$	3.0630	1.311	$\frac{7}{8}$	UCX14-210D1	
	UCPX14-211D1													UCX14-211D1	
	UCPX14-212D1													UCX14-212D1	
75 $2\frac{13}{16}$ $2\frac{7}{8}$ $2\frac{15}{16}$ 3	UCPX15D1	88.9	330	229	89	27	30	35	175	95	82.6	33.3	M22	UCX15D1	
	UCPX15-213D1	3 $\frac{1}{2}$	13	9 $\frac{1}{32}$	3 $\frac{1}{2}$	1 $\frac{1}{16}$	1 $\frac{3}{16}$	1 $\frac{3}{8}$	6 $\frac{7}{8}$	3 $\frac{3}{4}$	3.2520	1.311	$\frac{7}{8}$	UCX15-213D1	
	UCPX15-214D1													UCX15-214D1	
	UCPX15-215D1													UCX15-215D1	
	UCPX15-300D1													UCX15-300D1	
80 $3\frac{1}{16}$ $3\frac{3}{8}$ $3\frac{3}{16}$ $3\frac{1}{4}$	UCPX16D1	101.6	381	283	102	27	30	40	194	110	85.7	34.1	M22	UCX16D1	
	UCPX16-301D1	4	15	11 $\frac{5}{32}$	4 $\frac{1}{32}$	1 $\frac{1}{16}$	1 $\frac{3}{16}$	1 $\frac{9}{16}$	7 $\frac{5}{8}$	4 $\frac{11}{32}$	3.3740	1.343	$\frac{7}{8}$	UCX16-301D1	
	UCPX16-302D1													UCX16-302D1	
	UCPX16-303D1													UCX16-303D1	
	UCPX16-304D1													UC217-304D1	
85 $3\frac{5}{16}$ $3\frac{7}{16}$	UCPX17D1	101.6	381	283	102	27	30	40	200	110	96	39.7	M22	UCX17D1	
	UCPX17-305D1	4	15	11 $\frac{5}{32}$	4 $\frac{1}{32}$	1 $\frac{1}{16}$	1 $\frac{3}{16}$	1 $\frac{9}{16}$	7 $\frac{7}{8}$	4 $\frac{11}{32}$	3.7795	1.563	$\frac{7}{8}$	UCX17-305D1	
	UCPX17-307D1													UCX17-307D1	
90 $3\frac{7}{16}$ $3\frac{1}{2}$	UCPX18D1	101.6	381	283	111	27	30	40	206	110	104	42.9	M22	UCX18D1	
	UCPX18-307D1	4	15	11 $\frac{5}{32}$	4 $\frac{3}{8}$	1 $\frac{1}{16}$	1 $\frac{3}{16}$	1 $\frac{9}{16}$	8 $\frac{1}{8}$	4 $\frac{11}{32}$	4.0945	1.689	$\frac{7}{8}$	UCX18-307D1	
	UCPX18-308D1													UCX18-308D1	
100 $3\frac{13}{16}$ $3\frac{7}{8}$ $3\frac{15}{16}$ 4	UCPX20D1	127	432	337	121	33	36	45	244	125	117.5	49.2	M27	UCX20D1	
	UCPX20-313D1	5	17	13 $\frac{9}{32}$	4 $\frac{3}{4}$	1 $\frac{5}{16}$	1 $\frac{13}{32}$	1 $\frac{25}{32}$	9 $\frac{19}{32}$	4 $\frac{29}{32}$	4.6260	1.937	1	UCX20-313D1	
	UCPX20-314D1													UCX20-314D1	
	UCPX20-315D1													UCX20-315D1	
	UCPX20-400D1													UCX20-400D1	

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

sale@technobearing.ru 36 for size of grease fitting.


www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

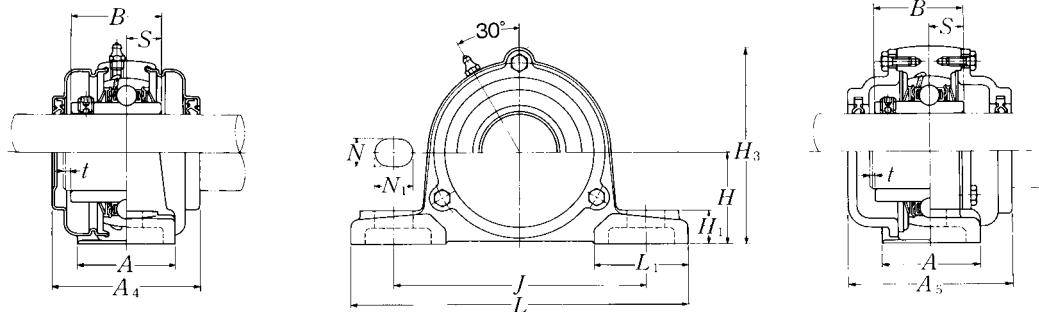

Cast dust cover type
Open end: **C-UCPX...D1**
Closed end: **CM-UCPX...D1**

Housing ¹⁾ number	Unit number ¹⁾ pressed steel dust cover type	Unit number ¹⁾ cast dust cover type	Nominal dimensions				Mass of unit		
			t max.	mm A ₄	inch H ₃	A ₅	kg UCPX	lb S(SM)	lb C(CM)
PX12D1	S(SM)-UCPX12D1	C(CM)-UCPX12D1	4	107	155	120	6.8	7.3	8.6
PX12D1	S(SM)-UCPX12-206D1	C(CM)-UCPX12-206D1	$\frac{5}{32}$	$4\frac{7}{32}$	$6\frac{3}{32}$	$4\frac{23}{32}$	15	16	19
PX12D1	S(SM)-UCPX12-207D1	C(CM)-UCPX12-207D1							
PX13D1	—	C(CM)-UCPX13D1	4	—	159	135	7.2	—	9.4
PX13D1	—	C(CM)-UCPX13-208D1	$\frac{5}{32}$	—	$6\frac{1}{4}$	$5\frac{5}{16}$	16	—	21
PX13D1	—	C(CM)-UCPX13-209D1							
PX14D1	—	C(CM)-UCPX14D1	4	—	175	135	9.3	—	12
PX14D1	—	C(CM)-UCPX14-210D1	$\frac{5}{32}$	—	$6\frac{7}{8}$	$5\frac{5}{16}$	21	—	26
PX14D1	—	C(CM)-UCPX14-211D1							
PX14D1	—	C(CM)-UCPX14-212D1							
PX15D1	—	C(CM)-UCPX15D1	4	—	181	145	10	—	13
PX15D1	—	C(CM)-UCPX15-213D1	$\frac{5}{32}$	—	$7\frac{1}{8}$	$5\frac{23}{32}$	22	—	29
PX15D1	—	C(CM)-UCPX15-214D1							
PX15D1	—	C(CM)-UCPX15-215D1							
PX15D1	—	C(CM)-UCPX15-300D1							
PX16D1	—	C(CM)-UCPX16D1	4	—	198	155	14	—	17
PX16D1	—	C(CM)-UCPX16-301D1	$\frac{5}{32}$	—	$7\frac{25}{32}$	$6\frac{3}{32}$	31	—	37
PX16D1	—	C(CM)-UCPX16-302D1							
PX16D1	—	C(CM)-UCPX16-303D1							
PX16D1	—	C(CM)-UCPX16-304D1							
PX17D1	—	C(CM)-UCPX17D1	5	—	204	165	15	—	19
PX17D1	—	C(CM)-UCPX17-305D1	$\frac{13}{64}$	—	$8\frac{1}{32}$	$6\frac{1}{2}$	33	—	42
PX17D1	—	C(CM)-UCPX17-307D1							
PX18D1	—	C(CM)-UCPX18D1	5	—	208	180	16	—	21
PX18D1	—	C(CM)-UCPX18-307D1	$\frac{13}{64}$	—	$8\frac{3}{16}$	$7\frac{3}{32}$	35	—	46
PX18D1	—	C(CM)-UCPX18-308D1							
PX20D1	—	C(CM)-UCPX20D1	5	—	244	195	25	—	29
PX20D1	—	C(CM)-UCPX20-313D1	$\frac{13}{64}$	—	$9\frac{39}{64}$	$7\frac{11}{16}$	55	—	64
PX20D1	—	C(CM)-UCPX20-314D1							
PX20D1	—	C(CM)-UCPX20-315D1							
PX20D1	—	C(CM)-UCPX20-400D1							

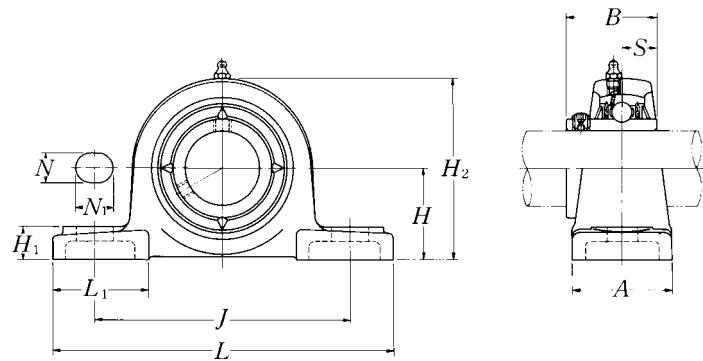

Shaft dia. mm inch	Unit number ^{1) 2) 3)}	Nominal dimensions											Bolt size mm inch	Bearing number
		H	L	J	A	N	N ₁	H ₁	H ₂	L ₁	B	S		
20 $\frac{3}{4}$	UCPL204D1	31.75	127	95	38	13	16	14	64	42	31	12.7	M10	UC204D1
	UCPL204-012D1	1 $\frac{1}{4}$	5	3 $\frac{3}{4}$	1 $\frac{1}{2}$	1 $\frac{1}{2}$	$\frac{5}{8}$	$\frac{9}{16}$	2 $\frac{17}{32}$	1 $\frac{21}{32}$	1.2205	0.500	$\frac{3}{8}$	UC204-012D1
$\frac{25}{13\frac{1}{16}}$ $\frac{7}{8}$ $\frac{15}{16}$ $1\frac{1}{16}$	UCPL205D1	33.34	140	105	38	13	16	15	68	42	34.1	14.3	M10	UC205D1
	UCPL205-013D1													UC205-013D1
	UCPL205-014D1													UC205-014D1
	UCPL205-015D1													UC205-015D1
	UCPL205-100D1													UC205-100D1
$30\frac{1}{16}$ $1\frac{1}{8}$ $1\frac{3}{16}$ $1\frac{1}{4}$	UCPL206D1	39.69	165	121	48	17	20	17	80	54	38.1	15.9	M14	UC206D1
	UCPL206-101D1													UC206-101D1
	UCPL206-102D1													UC206-102D1
	UCPL206-103D1													UC206-103D1
	UCPL206-104D1													UC206-104D1
$35\frac{1}{4}$ $1\frac{5}{16}$ $1\frac{3}{8}$ $1\frac{7}{16}$	UCPL207D1	46.04	167	127	48	17	20	18	91	54	42.9	17.5	M14	UC207D1
	UCPL207-104D1													UC207-104D1
	UCPL207-105D1													UC207-105D1
	UCPL207-106D1													UC207-106D1
	UCPL207-107D1													UC207-107D1
$45\frac{1}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UCPL209D1	52.39	190	146	54	17	20	20	104	60	49.2	19	M14	UC209D1
	UCPL209-110D1													UC209-110D1
	UCPL209-111D1													UC209-111D1
	UCPL209-112D1													UC209-112D1
$50\frac{1}{16}$ $1\frac{7}{8}$ $1\frac{15}{16}$ 2	UCPL210D1	55.56	206	159	60	20	23	21	112	65	51.6	19	M16	UC210D1
	UCPL210-113D1													UC210-113D1
	UCPL210-114D1													UC210-114D1
	UCPL210-115D1													UC210-115D1
	UCPL210-200D1													UC210-200D1


Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

2) UCPL204 and UCPL205 has solid bases.

3) UCPL208 has the same dimension as UCP208 shown in page 56.

Note: Please refer to page 36 for size of grease fitting.

Housing number	Mass of unit
	kg lb
PL204D1	0.7
PL204D1	1.5
PL205D1	0.8
PL205D1	
PL205D1	1.8
PL205D1	
PL205D1	
PL206D1	1.3
PL206D1	
PL206D1	2.9
PL206D1	
PL206D1	
PL207D1	1.6
PL207D1	
PL207D1	3.5
PL207D1	
PL207D1	
PL209D1	2.2
PL209D1	
PL209D1	4.9
PL209D1	
PL210D1	2.8
PL210D1	
PL210D1	6.2
PL210D1	

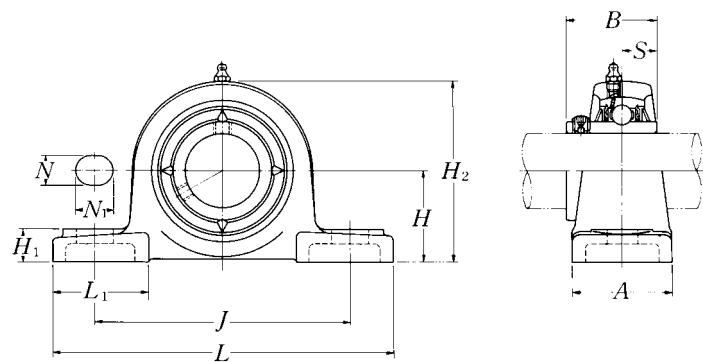

Shaft dia. mm inch	Unit number ^{1) 2) 3)}	Nominal dimensions												Bolt size mm inch	Bearing number
		H	L	J	A	N	N1	H1	H2	L1	B	S			
55 2	UCPL211D1	61.91	219	171	60	20	23	23	124	65	55.6	22.2	M16	UC211D1	
2 1/16	UCPL211-200D1													UC211-200D1	
2 1/8	UCPL211-201D1	2 7/16	8 5/8	6 23/32	2 3/8	25/32	29/32	29/32	4 7/8	2 9/16	2.1890	0.874	5/8	UC211-201D1	
2 3/16	UCPL211-202D1													UC211-202D1	
	UCPL211-203D1													UC211-203D1	
60 2 1/4	UCPL212D1	68.26	241	184	70	20	23	25	136	70	65.1	25.4	M16	UC212D1	
2 5/16	UCPL212-204D1													UC212-204D1	
2 3/8	UCPL212-205D1	2 11/16	9 1/2	7 1/4	2 3/4	25/32	29/32	31/32	5 11/32	2 3/4	2.5630	1.000	5/8	UC212-205D1	
2 7/16	UCPL212-206D1													UC212-206D1	
	UCPL212-207D1													UC212-207D1	


Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

2) UCPL204 and UCPL205 has solid bases.

3) UCPL208 has the same dimension as UCP208 shown in page 56.

Note: Please refer to page 36 for size of grease fitting.

Housing number ¹⁾	Mass of unit
	kg lb
PL211D1	3.4
PL211D1	
PL211D1	7.5
PL211D1	
PL211D1	
PL212D1	4.7
PL212D1	
PL212D1	10
PL212D1	
PL212D1	

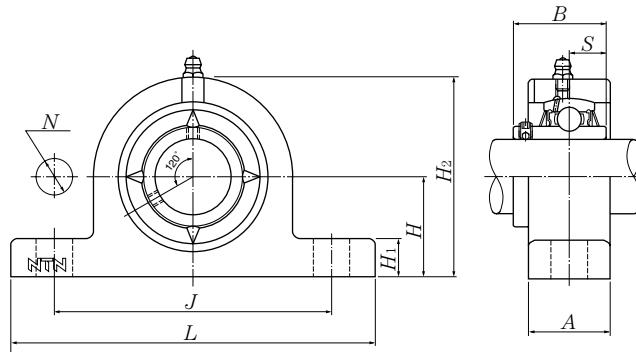


Shaft dia. mm	Unit number ¹⁾	Nominal dimensions									Bolt size mm	Bearing number
		H	L	J	A	N	H ₁	H ₂	B	S		
12	UCPG201D1	30.2	127	95	25	12	14	62	31	12.7	M10	UC201D1
15	UCPG202D1	30.2	127	95	25	12	14	62	31	12.7	M10	UC202D1
17	UCPG203D1	30.2	127	95	25	12	14	62	31	12.7	M10	UC203D1
20	UCPG204D1	33.3	127	95	25	12	14	65	31	12.7	M10	UC204D1
25	UCPG205D1	36.5	140	105	30	12	15	71	34.1	14.3	M10	UC205D1
30	UCPG206D1	42.9	165	121	35	17	17	83	38.1	15.9	M14	UC206D1
35	UCPG207D1	47.6	167	127	35	17	18	93	42.9	17.5	M14	UC207D1
40	UCPG208D1	49.2	184	137	40	17	18	98	49.2	19	M14	UC208D1
45	UCPG209D1	54	190	146	40	17	20	106	49.2	19	M14	UC209D1
50	UCPG210D1	57.2	206	159	45	19	21	114	51.6	19	M16	UC210D1
55	UCPG211D1	63.5	219	171	45	19	23	126	55.6	22.2	M16	UC211D1
60	UCPG212D1	69.8	241	184	50	19	25	138	65.1	25.4	M16	UC212D1
65	UCPG213D1	76.2	265	203	50	24	27	151	65.1	25.4	M20	UC213D1
70	UCPG214D1	79.4	266	210	55	24	27	157	74.6	30.2	M20	UC214D1
75	UCPG215D1	82.6	275	217	55	24	28	163	77.8	33.3	M20	UC215D1
80	UCPG216D1	88.9	292	232	60	24	30	175	82.6	33.3	M20	UC216D1
85	UCPG217D1	95.2	310	247	60	24	32	187	85.7	34.1	M20	UC217D1
90	UCPG218D1	101.6	327	262	65	26	33	200	96	39.7	M22	UC218D1

Remark: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

Housing number	Mass of unit kg
PG203D1	0.7
PG203D1	0.7
PG203D1	0.7
PG204D1	0.7
PG205D1	1.0
PG206D1	1.5
PG207D1	1.7
PG208D1	2.2
PG209D1	2.4
PG210D1	3.2
PG211D1	3.9
PG212D1	5.3
PG213D1	6.5
PG214D1	7.4
PG215D1	8.1
PG216D1	9.8
PG217D1	11
PG218D1	14

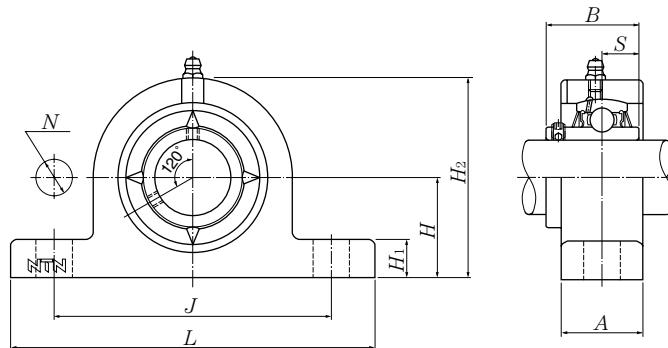


Shaft dia. mm	Unit number ¹⁾	Nominal dimensions mm									Bolt size mm	Bearing number
		H	L	J	A	N	H1	H2	B	S		
25	UCPG305D1	45	175	132	35	17	15	85	38	15	M14	UC305D1
30	UCPG306D1	50	180	140	35	17	18	95	43	17	M14	UC306D1
35	UCPG307D1	56	210	160	40	17	20	106	48	19	M14	UC307D1
40	UCPG308D1	60	220	170	45	17	22	116	52	19	M14	UC308D1
45	UCPG309D1	67	245	190	50	19	24	129	57	22	M16	UC309D1
50	UCPG310D1	75	275	212	55	19	27	143	61	22	M16	UC310D1
55	UCPG311D1	80	310	236	60	19	30	154	66	25	M16	UC311D1
60	UCPG312D1	85	330	250	65	24	32	165	71	26	M20	UC312D1
65	UCPG313D1	90	340	260	65	24	33	176	75	30	M20	UC313D1
70	UCPG314D1	95	360	280	65	26	35	187	78	33	M22	UC314D1
75	UCPG315D1	100	380	290	75	26	35	198	82	32	M22	UC315D1
80	UCPG316D1	106	400	300	80	26	40	210	86	34	M22	UC316D1
85	UCPG317D1	112	420	320	80	32	40	220	96	40	M27	UC317D1
90	UCPG318D1	118	430	330	80	32	45	235	96	40	M27	UC318D1
95	UCPG319D1	125	470	360	90	35	45	250	103	41	M30	UC319D1
100	UCPG320D1	140	490	380	90	35	50	275	108	42	M30	UC320D1
105	UCPG321D1	140	490	380	90	35	50	280	112	44	M30	UC321D1
110	UCPG322D1	150	520	400	100	38	55	300	117	46	M33	UC322D1
120	UCPG324D1	160	570	450	100	38	65	320	126	51	M33	UC324D1
130	UCPG326D1	180	600	480	110	38	75	355	135	54	M33	UC326D1
140	UCPG328D1	200	620	500	110	38	75	390	145	59	M33	UC328D1

Remark: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

Housing number	Mass of unit kg
PG305D1	1.6
PG306D1	2.0
PG307D1	2.8
PG308D1	3.6
PG309D1	5.0
PG310D1	6.9
PG311D1	8.8
PG312D1	11
PG313D1	12
PG314D1	14
PG315D1	18
PG316D1	21
PG317D1	23
PG318D1	26
PG319D1	33
PG320D1	40
PG321D1	41
PG322D1	52
PG324D1	64
PG326D1	76
PG328D1	98

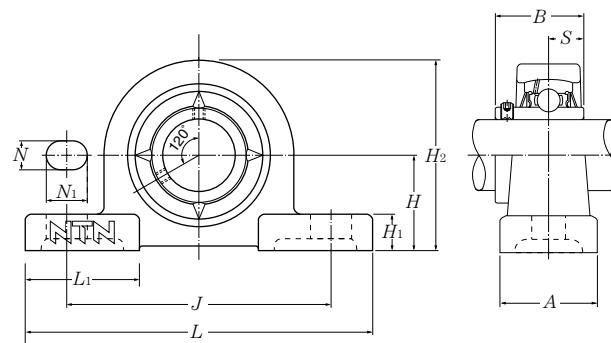


Shaft dia. mm	Unit number	Nominal dimensions mm												Bolt size mm
		H	L	J	A	N	N ₁	H ₁	H ₂	L ₁	B	S		
20	F-UCPM204/LP03	33.3	120	95	30	12	14	11	64	42	31	12.7	M10	
25	F-UCPM205/LP03	36.5	130	105	30	12	14	12	70	42	34.1	14.3	M10	
30	F-UCPM206/LP03	42.9	155	121	36	17	20	13	82	54	38.1	15.9	M14	
35	F-UCPM207/LP03	47.6	161	127	38	17	20	14	92	54	42.9	17.5	M14	
40	F-UCPM208/LP03	49.2	171	137	40	17	20	14	98	52	49.2	19	M14	
45	F-UCPM209/LP03	54	180	146	40	17	20	14	105	60	49.2	19	M14	
50	F-UCPM210/LP03	57.2	195	159	45	19	22	16	114	65	51.6	19	M16	

Remark: 1) This series uses solid grease in the bearings as standard. A stainless steel bearing unit packed with a food grade grease or heat resistance grease is also available.

2) The basic dynamic load rating C_r of the bearing is different from a bearing made with standard bearing steel.

Bearing number mm	Basic load ratings dynamic static kN		Housing number mm	Mass of unit kg
	C_r	C_{or}		
F-UC204D1/LP03	9.9	6.65	PM204	0.6
F-UC205D1/LP03	10.8	7.85	PM205	0.7
F-UC206D1/LP03	15.0	11.3	PM206	1.1
F-UC207D1/LP03	19.7	15.3	PM207	1.3
F-UC208D1/LP03	22.4	17.8	PM208	1.7
F-UC209D1/LP03	25.2	20.4	PM209	1.8
F-UC210D1/LP03	27.0	23.2	PM210	2.4

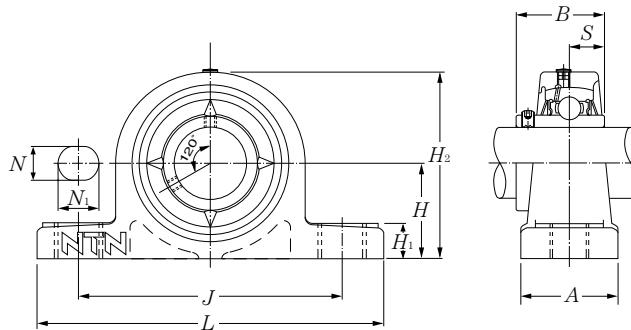
Pillow blocks (Plastic housing series)
Set screw type


Shaft dia. mm	Unit number	Nominal dimensions mm										Bolt size mm
		H	L	J	A	N	N ₁	H ₁	H ₂	B	S	
20	F-UCPR204/LP03	33.3	127	95	38	11*	14*	14.2	65	31	12.7	M10
25	F-UCPR205/LP03	36.5	140	105	38	11*	14*	14.5	71	34.1	14.3	M10
30	F-UCPR206/LP03	42.9	162	119*	46	14*	18*	17.8	83	38.1	15.9	M12*
35	F-UCPR207/LP03	47.6	167	127	48	14*	18*	18	94	42.9	17.5	M12*
40	F-UCPR208/LP03	49.2	184	137	54	14*	18*	19.5	98	49.2	19	M12*

Remark: 1) This series uses solid grease in the bearings as standard. Ball bearings packed with a food grade grease are also available.


2) Some dimensions are different from those for a cast iron housings (JIS product). (Main parts are shown with " * ")

3) The basic dynamic load rating C_r of the bearing is different from a bearing made with standard bearing steel.

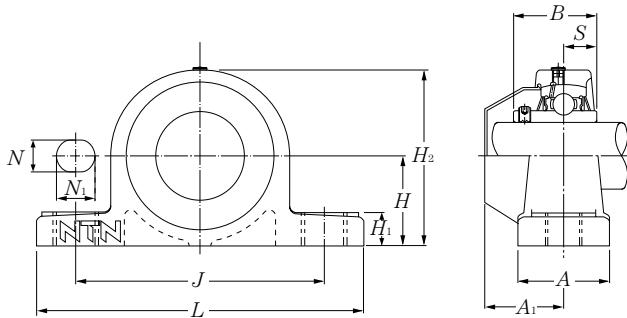

Resin dust cover type

Bearing number	Basic load ratings		Housing number mm	Unit number resin dust cover type	Nominal dimension mm A1	Mass of unit kg	
	dynamic Cr	static Cor				F-UCPR	F-RM-UCPR
F-UC204D1/LP03	9.9	6.65	PR204	F-RM-UCPR204/LP03	33	0.3	0.3
F-UC205D1/LP03	10.8	7.85	PR205	F-RM-UCPR205/LP03	34	0.3	0.3
F-UC206D1/LP03	15.0	11.3	PR206	F-RM-UCPR206/LP03	41	0.5	0.5
F-UC207D1/LP03	19.7	15.3	PR207	F-RM-UCPR207/LP03	43	0.7	0.7
F-UC208D1/LP03	22.4	17.8	PR208	F-RM-UCPR208/LP03	49	1.0	1.0

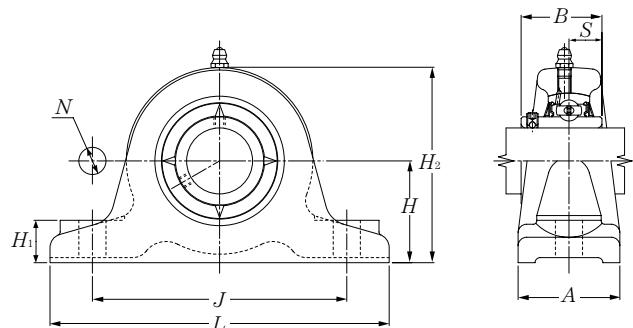
**Thick pillow blocks cast housing
Set screw type**


Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions									Bolt size mm inch	Bearing number
		H	L	J	A	N	H ₁	H ₂	B	S		
40 $1\frac{1}{2}$ $1\frac{9}{16}$	UCIP208D1	60	200	150	60	19	25	115	49.2	19	M16	UC208D1
	UCIP208-108D1	$2\frac{23}{64}$	$7\frac{7}{8}$	$5\frac{29}{32}$	$2\frac{3}{8}$	$\frac{3}{4}$	$3\frac{1}{32}$	$4\frac{17}{32}$	1.9370	0.748	$\frac{5}{8}$	UC208-108D1
	UCIP208-109D1											UC208-109D1
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UCIP209D1	70	210	160	60	19	25	128	49.2	19	M16	UC209D1
	UCIP209-110D1	$2\frac{3}{4}$	$8\frac{9}{32}$	$6\frac{19}{64}$	$2\frac{3}{8}$	$\frac{3}{4}$	$3\frac{1}{32}$	$5\frac{1}{32}$	1.9370	0.748	$\frac{5}{8}$	UC209-110D1
	UCIP209-111D1											UC209-111D1
	UCIP209-112D1											UC209-112D1
50 $1\frac{13}{16}$ $1\frac{7}{8}$ $1\frac{15}{16}$ 2	UCIP210D1	70	220	170	60	19	28	132	51.6	19	M16	UC210D1
	UCIP210-113D1	$2\frac{3}{4}$	$8\frac{2}{32}$	$6\frac{11}{16}$	$2\frac{3}{8}$	$\frac{3}{4}$	$1\frac{3}{32}$	$5\frac{3}{16}$	2.0315	0.748	$\frac{5}{8}$	UC210-113D1
	UCIP210-114D1											UC210-114D1
	UCIP210-115D1											UC210-115D1
	UCIP210-200D1											UC210-200D1
55 2 $2\frac{1}{16}$ $2\frac{1}{8}$ $2\frac{3}{16}$	UCIP211D1	80	230	180	60	19	28	148	55.6	22.2	M16	UC211D1
	UCIP211-200D1	$3\frac{5}{32}$	$9\frac{1}{16}$	$7\frac{3}{32}$	$2\frac{3}{8}$	$\frac{3}{4}$	$1\frac{3}{32}$	$5\frac{13}{16}$	2.1890	0.874	$\frac{5}{8}$	UC211-200D1
	UCIP211-201D1											UC211-201D1
	UCIP211-202D1											UC211-202D1
	UCIP211-203D1											UC211-203D1
60 $2\frac{1}{4}$ $2\frac{5}{16}$ $2\frac{3}{8}$ $2\frac{7}{16}$	UCIP212D1	80	260	200	70	22	30	155	65.1	25.4	M20	UC212D1
	UCIP212-204D1	$3\frac{5}{32}$	$10\frac{1}{4}$	$7\frac{7}{8}$	$2\frac{3}{4}$	$\frac{55}{64}$	$1\frac{3}{16}$	$6\frac{3}{32}$	2.5630	1.000	$\frac{3}{4}$	UC212-204D1
	UCIP212-205D1											UC212-205D1
	UCIP212-206D1											UC212-206D1
	UCIP212-207D1											UC212-207D1
65 $2\frac{1}{2}$ $2\frac{9}{16}$	UCIP213D1	90	280	220	70	22	30	172	65.1	25.4	M20	UC213D1
	UCIP213-208D1	$3\frac{35}{64}$	$11\frac{1}{32}$	$8\frac{21}{32}$	$2\frac{3}{4}$	$\frac{55}{64}$	$1\frac{3}{16}$	$6\frac{25}{32}$	2.5630	1.000	$\frac{3}{4}$	UC213-208D1
	UCIP213-209D1											UC213-209D1

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

Housing number	Mass of unit
	kg lb
IP208D1	4.8
IP208D1	11
IP209D1	5.5
IP209D1	12
IP210D1	6.1
IP210D1	13
IP211D1	7.3
IP211D1	16
IP212D1	9.7
IP212D1	21
IP213D1	12
IP213D1	26

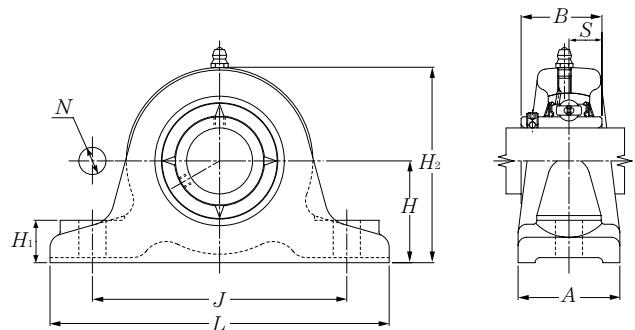
Thick pillow blocks cast housing
Set screw type


Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions									Bolt size mm inch	Bearing number
		H	L	J	A	N	H ₁	H ₂	B	S		
65 $2\frac{1}{2}$ $2\frac{9}{16}$	UCIP313D1	110	310	250	70	22	30	208	75	30	M20	UC313D1
	UCIP313-208D1	$4\frac{21}{64}$	$12\frac{7}{32}$	$9\frac{27}{32}$	$2\frac{3}{4}$	$\frac{55}{64}$	$\frac{3}{16}$	$8\frac{3}{16}$	2.9528	1.181	$\frac{3}{4}$	UC313-208D1
	UCIP313-209D1											UC313-209D1
70 $2\frac{5}{8}$ $2\frac{11}{16}$ $2\frac{3}{4}$	UCIP314D1	110	330	270	75	25	35	215	78	33	M22	UC314D1
	UCIP314-210D1	$4\frac{21}{64}$	13	$10\frac{5}{8}$	$2\frac{15}{16}$	$\frac{63}{64}$	$1\frac{3}{8}$	$8\frac{15}{32}$	3.0709	1.299	$\frac{7}{8}$	UC314-210D1
	UCIP314-211D1											UC314-211D1
	UCIP314-212D1											UC314-212D1
75 $2\frac{13}{16}$ $2\frac{7}{8}$ $2\frac{15}{16}$ 3	UCIP315D1	120	340	280	75	25	35	230	82	32	M22	UC315D1
	UCIP315-213D1	$4\frac{23}{32}$	$13\frac{3}{8}$	$11\frac{1}{32}$	$2\frac{15}{16}$	$\frac{63}{64}$	$1\frac{3}{8}$	$9\frac{1}{16}$	3.2283	1.260	$\frac{7}{8}$	UC315-213D1
	UCIP315-214D1											UC315-214D1
	UCIP315-215D1											UC315-215D1
	UCIP315-300D1											UC315-300D1
80 $3\frac{1}{16}$ $3\frac{1}{8}$ $3\frac{3}{16}$	UCIP316D1	120	350	290	85	25	40	235	86	34	M22	UC316D1
	UCIP316-301D1	$4\frac{23}{32}$	$13\frac{25}{32}$	$11\frac{27}{64}$	$3\frac{11}{32}$	$\frac{63}{64}$	$1\frac{9}{16}$	$9\frac{1}{4}$	3.3858	1.339	$\frac{7}{8}$	UC316-301D1
	UCIP316-302D1											UC316-302D1
	UCIP316-303D1											UC316-303D1
85 $3\frac{1}{4}$ $3\frac{5}{16}$ $3\frac{7}{16}$	UCIP317D1	130	370	310	85	25	40	255	96	40	M22	UC317D1
	UCIP317-304D1	$5\frac{1}{8}$	$14\frac{9}{16}$	$12\frac{13}{64}$	$3\frac{11}{32}$	$\frac{63}{64}$	$1\frac{9}{16}$	$10\frac{1}{32}$	3.7795	1.575	$\frac{7}{8}$	UC317-304D1
	UCIP317-305D1											UC317-305D1
	UCIP317-307D1											UC317-307D1
90 $3\frac{7}{16}$ $3\frac{1}{2}$	UCIP318D1	130	400	330	85	30	45	260	96	40	M27	UC318D1
	UCIP318-307D1	$5\frac{1}{8}$	$15\frac{3}{4}$	$12\frac{63}{64}$	$3\frac{11}{32}$	$1\frac{3}{16}$	$1\frac{25}{32}$	$10\frac{1}{4}$	3.7795	1.575	1	UC318-307D1
	UCIP318-308D1											UC318-308D1
95 $3\frac{5}{8}$ $3\frac{11}{16}$ $3\frac{3}{4}$	UCIP319D1	150	410	340	85	30	45	285	103	41	M27	UC319D1
	UCIP319-310D1	$5\frac{29}{32}$	$16\frac{5}{32}$	$13\frac{25}{64}$	$3\frac{11}{32}$	$1\frac{3}{16}$	$1\frac{25}{32}$	$11\frac{1}{32}$	4.0551	1.614	1	UC319-310D1
	UCIP319-311D1											UC319-311D1
	UCIP319-312D1											UC319-312D1

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

Housing number	Mass of unit
	kg lb
IP313D1	17
IP313D1	37
IP314D1	20
IP314D1	44
IP315D1	23
IP315D1	51
IP316D1	27
IP316D1	60
IP317D1	32
IP317D1	71
IP318D1	34
IP318D1	75
IP319D1	39
IP319D1	86

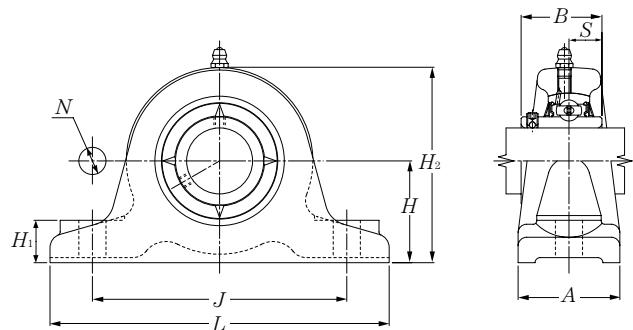
**Thick pillow blocks cast housing
Set screw type**


Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions									Bolt size mm inch	Bearing number
		H	L	J	A	N	H ₁	H ₂	B	S		
100 $3\frac{13}{16}$	UCIP320D1	150	430	360	85	30	45	295	108	42	M27	UC320D1
$3\frac{7}{8}$	UCIP320-313D1											UC320-313D1
$3\frac{15}{16}$	UCIP320-314D1	$5\frac{29}{32}$	$16\frac{15}{16}$	$14\frac{3}{16}$	$3\frac{11}{32}$	$1\frac{3}{16}$	$1\frac{25}{32}$	$11\frac{5}{8}$	4.2520	1.654	1	UC320-314D1
$3\frac{15}{16}$	UCIP320-315D1											UC320-315D1
4	UCIP320-400D1											UC320-400D1
110	UCIP322D1	170	490	410	100	33	50	335	117	46	M30	UC322D1
120	UCIP324D1	170	510	430	100	33	50	345	126	51	M30	UC324D1
130	UCIP326D1	200	550	470	110	33	50	390	135	54	M30	UC326D1
140	UCIP328D1	200	590	500	110	36	55	400	145	59	M33	UC328D1

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

Housing number ¹⁾	Mass of unit
	kg lb
IP320D1	43
IP320D1	95
IP322D1	64
IP324D1	70
IP326D1	96
IP328D1	104

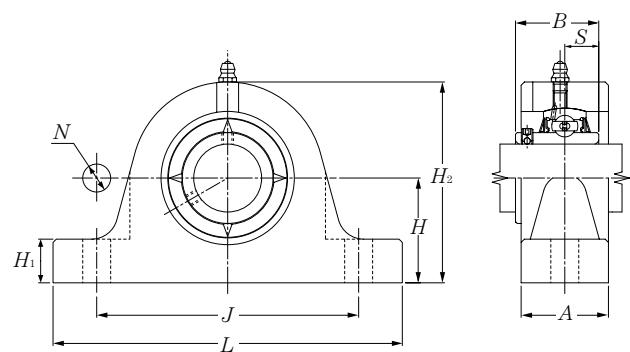Thick pillow blocks (Steel series)**Set screw type****UCIPG2**

Shaft dia. mm	Unit number ¹⁾	Nominal dimensions mm									Bolt size mm	Bearing number
		H	L	J	A	N	H ₁	H ₂	B	S		
40	UCIPG208D1	60	200	150	60	19	25	115	49.2	19	M16	UC208D1
45	UCIPG209D1	70	210	160	60	19	25	128	49.2	19	M16	UC209D1
50	UCIPG210D1	70	220	170	60	19	28	132	51.6	19	M16	UC210D1
55	UCIPG211D1	80	230	180	60	19	28	148	55.6	22.2	M16	UC211D1
60	UCIPG212D1	80	260	200	70	22	30	155	65.1	25.4	M20	UC212D1
65	UCIPG213D1	90	280	220	70	22	30	172	65.1	25.4	M20	UC213D1

UCIPG3


Shaft dia. mm	Unit number ¹⁾	Nominal dimensions mm									Bolt size mm	Bearing number
		H	L	J	A	N	H ₁	H ₂	B	S		
65	UCIPG313D1	110	310	250	70	22	30	208	75	30	M20	UC313D1
70	UCIPG314D1	110	330	270	75	25	35	215	78	33	M22	UC314D1
75	UCIPG315D1	120	340	280	75	25	35	230	82	32	M22	UC315D1
80	UCIPG316D1	120	350	290	85	25	40	235	86	34	M22	UC316D1
85	UCIPG317D1	130	370	310	85	25	40	255	96	40	M22	UC317D1
90	UCIPG318D1	130	400	330	85	30	45	260	96	40	M27	UC318D1
95	UCIPG319D1	150	410	340	85	30	45	285	103	41	M27	UC319D1
100	UCIPG320D1	150	430	360	85	30	45	295	108	42	M27	UC320D1
110	UCIPG322D1	170	490	410	100	33	50	335	117	46	M30	UC322D1
120	UCIPG324D1	170	510	430	100	33	50	345	126	51	M30	UC324D1
130	UCIPG326D1	200	550	470	110	33	50	390	135	54	M30	UC326D1
140	UCIPG328D1	200	590	500	110	36	55	400	145	59	M33	UC328D1

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

Housing ¹⁾ number	Mass of unit kg
IPG208D1	4.8
IPG209D1	5.5
IPG210D1	6.1
IPG211D1	7.3
IPG212D1	9.7
IPG213D1	12

Housing ¹⁾ number	Mass of unit kg
IPG313D1	17
IPG314D1	20
IPG315D1	23
IPG316D1	27
IPG317D1	32
IPG318D1	34
IPG319D1	39
IPG320D1	43
IPG322D1	64
IPG324D1	70
IPG326D1	96
IPG328D1	104

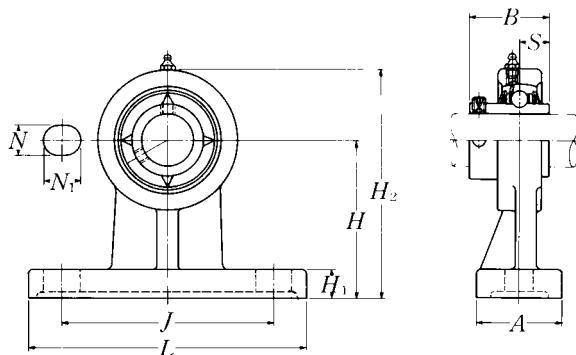


Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions										Bolt size mm inch	Bearing number
		H	L	J	A	N	N ₁	H ₁	H ₂	B	S		
12 1/2	UCHP201D1	70	127	95	40	13	19	13	101	31	12.7	M10	UC201D1
	UCHP201-008D1	2 3/4	5	3 3/4	1 9/16	1/2	3/4	1/2	3 31/32	1.2205	0.500	3/8	UC201-008D1
15 9/16 5/8	UCHP202D1	70	127	95	40	13	19	13	101	31	12.7	M10	UC202D1
	UCHP202-009D1	2 3/4	5	3 3/4	1 9/16	1/2	3/4	1/2	3 31/32	1.2205	0.500	3/8	UC202-009D1
	UCHP202-010D1												UC202-010D1
17 11/16	UCHP203D1	70	127	95	40	13	19	13	101	31	12.7	M10	UC203D1
	UCHP203-011D1	2 3/4	5	3 3/4	1 9/16	1/2	3/4	1/2	3 31/32	1.2205	0.500	3/8	UC203-011D1
20 3/4	UCHP204D1	70	127	95	40	13	19	13	101	31	12.7	M10	UC204D1
	UCHP204-012D1	2 3/4	5	3 3/4	1 9/16	1/2	3/4	1/2	3 31/32	1.2205	0.500	3/8	UC204-012D1
25 13/16 7/8 15/16 1	UCHP205D1	80	142	105	50	13	19	13	114	34.1	14.3	M10	UC205D1
	UCHP205-013D1												UC205-013D1
	UCHP205-014D1												UC205-014D1
	UCHP205-015D1												UC205-015D1
	UCHP205-100D1												UC205-100D1
30 1 1/16 1 1/8 1 3/16 1 1/4	UCHP206D1	90	165	120	50	17	21	16	130	38.1	15.9	M14	UC206D1
	UCHP206-101D1												UC206-101D1
	UCHP206-102D1												UC206-102D1
	UCHP206-103D1												UC206-103D1
	UCHP206-104D1												UC206-104D1
35 1 1/4 1 5/16 1 3/8 1 7/16	UCHP207D1	95	166	127	60	17	21	18	140	42.9	17.5	M14	UC207D1
	UCHP207-104D1												UC207-104D1
	UCHP207-105D1												UC207-105D1
	UCHP207-106D1												UC207-106D1
	UCHP207-107D1												UC207-107D1
40 1 1/2 1 9/16	UCHP208D1	100	184	136	70	17	21	20	150	49.2	19	M14	UC208D1
	UCHP208-108D1												UC208-108D1
	UCHP208-109D1												UC208-109D1

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

Housing number	Mass of unit
	kg lb
HP204D1	0.9
HP204D1	2.0
HP204D1	0.9
HP204D1	2.0
HP204D1	
HP204D1	0.9
HP204D1	2.0
HP204D1	0.9
HP204D1	2.0
HP205D1	1.2
HP205D1	
HP205D1	2.7
HP205D1	
HP205D1	
HP206D1	1.8
HP206D1	
HP206D1	4.0
HP206D1	
HP206D1	
HP207D1	2.3
HP207D1	
HP207D1	5.1
HP207D1	
HP207D1	
HP208D1	3.2
HP208D1	7.1
HP208D1	

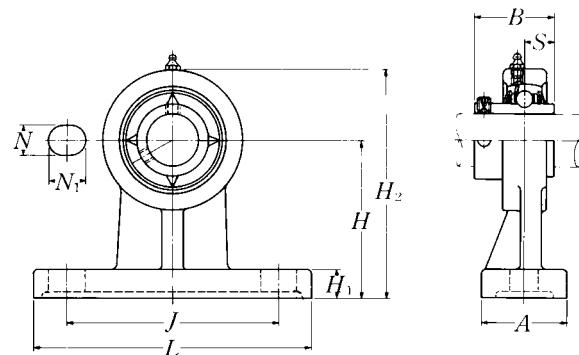


Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions										Bolt size mm inch	Bearing number		
		mm					inch								
		H	L	J	A	N	N ₁	H ₁	H ₂	B	S				
45 1 5/8 1 11/16 1 3/4	UCHP209D1	105	190	146	70	17	22	20	158	49.2	19	M14	UC209D1		
	UCHP209-110D1												UC209-110D1		
	UCHP209-111D1	4 9/64	7 15/32	5 3/4	2 3/4	21/32	7/8	25/32	6 7/32	1.9370	0.748	1/2	UC209-111D1		
	UCHP209-112D1												UC209-112D1		
50 1 13/16 1 7/8 1 15/16 2	UCHP210D1	110	206	159	70	20	22	22	165	51.6	19	M16	UC210D1		
	UCHP210-113D1												UC210-113D1		
	UCHP210-114D1	4 21/64	8 1/8	6 1/4	2 3/4	25/32	7/8	7/8	6 1/2	2.0315	0.748	5/8	UC210-114D1		
	UCHP210-115D1												UC210-115D1		
	UCHP210-200D1												UC210-200D1		

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

Housing number ¹⁾	Mass of unit
	kg lb
HP209D1	3.5
HP209D1	
HP209D1	7.7
HP209D1	
HP210D1	3.9
HP210D1	
HP210D1	8.6
HP210D1	
HP210D1	

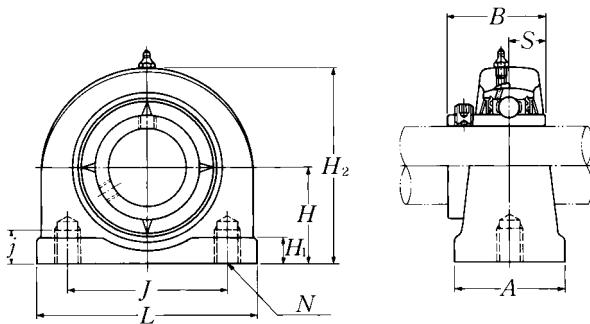Narrow pillow blocks cast housing
Set screw type


Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions											Bearing number	
		mm						inch						
		H	L	J	A	j	H ₁	H ₂	B	S	N			
12 $\frac{1}{2}$	UCUP201D1 UCUP201-008D1	30.2 $1\frac{3}{16}$	76 3	52 $2\frac{1}{16}$	38 $1\frac{1}{2}$	13 $\frac{1}{2}$	11 $\frac{7}{16}$	62 $2\frac{7}{16}$	31 1.2205	12.7 0.500	M10 × 1.5	UC201D1 UC201-008D1		
15 $\frac{9}{16}$ $\frac{5}{8}$	UCUP202D1 UCUP202-009D1 UCUP202-010D1	30.2 $1\frac{3}{16}$	76 3	52 $2\frac{1}{16}$	38 $1\frac{1}{2}$	13 $\frac{1}{2}$	11 $\frac{7}{16}$	62 $2\frac{7}{16}$	31 1.2205	12.7 0.500	M10 × 1.5	UC202D1 UC202-009D1 UC202-010D1		
17 $\frac{11}{16}$	UCUP203D1 UCUP203-011D1	30.2 $1\frac{3}{16}$	76 3	52 $2\frac{1}{16}$	38 $1\frac{1}{2}$	13 $\frac{1}{2}$	11 $\frac{7}{16}$	62 $2\frac{7}{16}$	31 1.2205	12.7 0.500	M10 × 1.5	UC203D1 UC203-011D1		
20 $\frac{3}{4}$	UCUP204D1 UCUP204-012D1	30.2 $1\frac{3}{16}$	76 3	52 $2\frac{1}{16}$	38 $1\frac{1}{2}$	13 $\frac{1}{2}$	11 $\frac{7}{16}$	62 $2\frac{7}{16}$	31 1.2205	12.7 0.500	M10 × 1.5	UC204D1 UC204-012D1		
25 $\frac{13}{16}$ $\frac{7}{8}$ $\frac{15}{16}$ 1	UCUP205D1 UCUP205-013D1 UCUP205-014D1 UCUP205-015D1 UCUP205-100D1	36.5 $1\frac{7}{16}$	84 $3\frac{5}{16}$	56 $2\frac{7}{32}$	38 $1\frac{1}{2}$	15 $\frac{19}{32}$	12 $\frac{15}{32}$	72 $2\frac{27}{32}$	34.1 1.3425	14.3 0.563	M10 × 1.5	UC205D1 UC205-013D1 UC205-014D1 UC205-015D1 UC205-100D1		
30 $1\frac{1}{16}$ $1\frac{1}{8}$ $1\frac{3}{16}$ $1\frac{1}{4}$	UCUP206D1 UCUP206-101D1 UCUP206-102D1 UCUP206-103D1 UCUP206-104D1	42.9 $1\frac{11}{16}$	94 $3\frac{11}{16}$	66 $2\frac{19}{32}$	48 $1\frac{7}{8}$	18 $\frac{23}{32}$	12 $\frac{15}{32}$	84 $3\frac{5}{16}$	38.1 1.5000	15.9 0.629	M14 × 2	UC206D1 UC206-101D1 UC206-102D1 UC206-103D1 UC206-104D1		
35 $1\frac{1}{4}$ $1\frac{5}{16}$ $1\frac{3}{8}$ $1\frac{7}{16}$	UCUP207D1 UCUP207-104D1 UCUP207-105D1 UCUP207-106D1 UCUP207-107D1	47.6 $4\frac{11}{32}$	110 $3\frac{5}{32}$	80 $1\frac{7}{8}$	48 $\frac{25}{32}$	20 $\frac{1}{2}$	13 $\frac{3}{4}$	95 1.6890	42.9 1.6890	17.5 0.689	M14 × 2	UC207D1 UC207-104D1 UC207-105D1 UC207-106D1 UC207-107D1		
40 $1\frac{1}{2}$ $1\frac{9}{16}$	UCUP208D1 UCUP208-108D1 UCUP208-109D1	49.2 $1\frac{15}{16}$	116 $4\frac{9}{16}$	84 $3\frac{5}{16}$	54 $2\frac{1}{8}$	20 $\frac{25}{32}$	13 $\frac{1}{2}$	100 $3\frac{15}{16}$	49.2 1.9370	19 0.748	M14 × 2	UC208D1 UC208-108D1 UC208-109D1		
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UCUP209D1 UCUP209-110D1 UCUP209-111D1 UCUP209-112D1	54.2 $2\frac{9}{64}$	120 $4\frac{23}{32}$	90 $3\frac{17}{32}$	54 $2\frac{1}{8}$	25 $\frac{31}{32}$	13 $\frac{1}{2}$	108 $4\frac{1}{4}$	49.2 1.9370	19 0.748	M14 × 2	UC209D1 UC209-110D1 UC209-111D1 UC209-112D1		


Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

sale@technobearing.ru 36 for size of grease fitting.

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

Housing number	Mass of unit
	kg lb
UP204D1	0.6
UP204D1	1.3
UP204D1	0.6
UP204D1	1.3
UP204D1	1.3
UP204D1	0.6
UP204D1	1.3
UP204D1	0.6
UP204D1	1.3
UP205D1	0.7
UP205D1	
UP205D1	1.5
UP205D1	
UP205D1	
UP206D1	1.1
UP206D1	
UP206D1	2.4
UP206D1	
UP206D1	
UP207D1	1.6
UP207D1	
UP207D1	3.5
UP207D1	
UP207D1	
UP208D1	1.8
UP208D1	4.0
UP208D1	
UP209D1	2.1
UP209D1	
UP209D1	4.6
UP209D1	

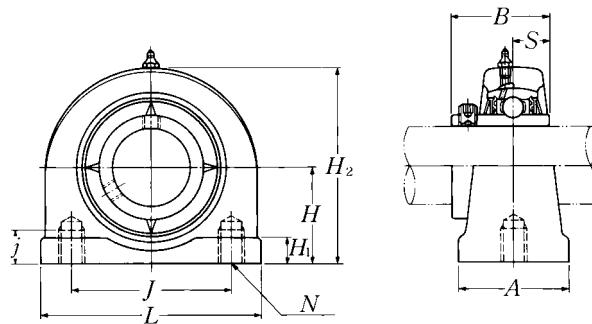
Narrow pillow blocks cast housing
Set screw type


Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions											Bearing number	
		mm						inch						
		H	L	J	A	j	H ₁	H ₂	B	S	N			
50 $1\frac{13}{16}$	UCUP210D1	57.2	130	94	60	25	14	116	51.6	19	M16 × 2	UC210D1		
$1\frac{7}{8}$	UCUP210-113D1											UC210-113D1		
$1\frac{15}{16}$	UCUP210-114D1											UC210-114D1		
$2\frac{1}{16}$	UCUP210-115D1	2 $\frac{1}{4}$	5 $\frac{1}{8}$	3 $\frac{11}{16}$	2 $\frac{3}{8}$	$\frac{31}{32}$	$\frac{9}{16}$	4 $\frac{9}{16}$	2.0315	0.748		UC210-115D1		
2	UCUP210-200D1											UC210-200D1		

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.


Housing number ¹⁾	Mass of unit
	kg lb
UP210D1	2.6
UP210D1	
UP210D1	5.7
UP210D1	
UP210D1	

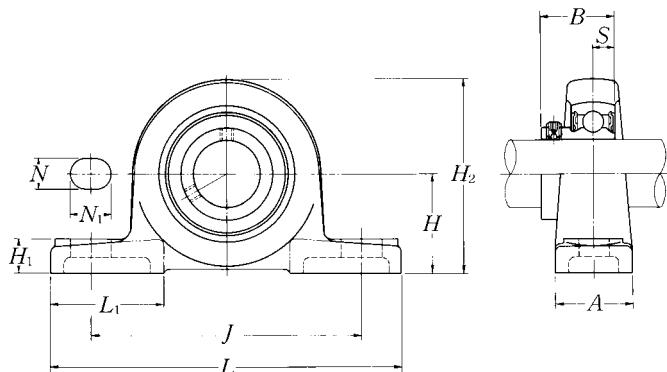

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions												Bolt size mm inch	Bearing number ¹⁾
		mm						inch							
		H	L	J	A	N	N ₁	H ₁	H ₂	L ₁	B	S			
12 1/2	ASPB201	30.2	114	87	25	11	16	12	57	38	22	6	M8	AS201	
	ASPB201-008	1 ³ / ₁₆	4 ¹ / ₂	3 ⁷ / ₁₆	3 ¹ / ₃₂	7 ¹ / ₁₆	5 ⁸ / ₈	15 ¹ / ₃₂	2 ¹ / ₄	1 ¹ / ₂	0.8661	0.236	5 ¹ / ₁₆	AS201-008	
15 9/ ₁₆ 5/ ₈	ASPB202	30.2	114	87	25	11	16	12	57	38	22	6	M8	AS202	
	ASPB202-009	1 ³ / ₁₆	4 ¹ / ₂	3 ⁷ / ₁₆	3 ¹ / ₃₂	7 ¹ / ₁₆	5 ⁸ / ₈	15 ¹ / ₃₂	2 ¹ / ₄	1 ¹ / ₂	0.8661	0.236	5 ¹ / ₁₆	AS202-009	
	ASPB202-010													AS202-010	
17 11/ ₁₆	ASPB203	30.2	114	87	25	11	16	12	57	38	22	6	M8	AS203	
	ASPB203-011	1 ³ / ₁₆	4 ¹ / ₂	3 ⁷ / ₁₆	3 ¹ / ₃₂	7 ¹ / ₁₆	5 ⁸ / ₈	15 ¹ / ₃₂	2 ¹ / ₄	1 ¹ / ₂	0.8661	0.236	5 ¹ / ₁₆	AS203-011	
20 3/ ₄	ASPB204	33.3	125	97	27	11	16	13	65	40	25	7	M8	AS204	
	ASPB204-012	1 ⁵ / ₁₆	4 ²⁹ / ₃₂	3 ¹³ / ₁₆	1 ¹ / ₁₆	7 ¹ / ₁₆	5 ⁸ / ₈	1 ¹ / ₂	2 ⁹ / ₁₆	1 ⁹ / ₁₆	0.9843	0.276	5 ¹ / ₁₆	AS204-012	
25 13/ ₁₆ 7/ ₈ 15/ ₁₆ 1	ASPB205	36.5	130	100	29	11	16	13	71	42	27	7.5	M8	AS205	
	ASPB205-013	1 ⁷ / ₁₆	5 ¹ / ₈	3 ¹⁵ / ₁₆	1 ⁵ / ₃₂	7 ¹ / ₁₆	5 ⁸ / ₈	1 ¹ / ₂	2 ²⁵ / ₃₂	1 ²¹ / ₃₂	1.0630	0.295	5 ¹ / ₁₆	AS205-013	
	ASPB205-014													AS205-014	
	ASPB205-015													AS205-015	
	ASPB205-100													AS205-100	
30 1 ¹ / ₁₆ 1 ¹ / ₈ 1 ³ / ₁₆ 1 ¹ / ₄	ASPB206	42.9	156	120	33	14	21	14	83	52	29	8	M12	AS206	
	ASPB206-101	1 ¹¹ / ₁₆	6 ⁵ / ₃₂	4 ²³ / ₃₂	1 ⁵ / ₁₆	9 ¹ / ₁₆	13 ¹ / ₁₆	9 ¹ / ₁₆	3 ⁹ / ₃₂	2 ¹ / ₁₆	1.1417	0.315	1/2	AS206-101	
	ASPB206-102													AS206-102	
	ASPB206-103													AS206-103	
	ASPB206-104													AS206-104	
35 1 ¹ / ₄ 1 ⁵ / ₁₆ 1 ³ / ₈ 1 ⁷ / ₁₆	ASPB207	47.6	165	127	35	14	21	16	93	52	34	8.5	M12	AS207	
	ASPB207-104	1 ⁷ / ₈	6 ¹ / ₂	5	1 ³ / ₈	9 ¹ / ₁₆	13 ¹ / ₁₆	9 ¹ / ₁₆	3 ²¹ / ₃₂	2 ¹ / ₁₆	1.3386	0.335	1/2	AS207-104	
	ASPB207-105													AS207-105	
	ASPB207-106													AS207-106	
	ASPB207-107													AS207-107	
40 1 ¹ / ₂ 1 ⁹ / ₁₆	ASPB208	50.8	184	140	37	14	22	18	102	52	38	9	M12	AS208	
	ASPB208-108	2	7 ¹ / ₄	5 ¹ / ₂	1 ¹⁵ / ₃₂	9 ¹ / ₁₆	7 ¹ / ₈	2 ³ / ₃₂	4 ¹ / ₃₂	2 ¹ / ₁₆	1.4961	0.354	1/2	AS208-108	
	ASPB208-109													AS208-109	

Remarks: 1) If relubricatable type is needed, please order with suffix "D1".

Housing ¹⁾ number	Mass of unit
	kg lb
PB201	0.4
PB201	0.9
PB201	0.4
PB201	0.9
PB201	0.4
PB201	0.9
PB204	0.5
PB204	1.1
PB205	0.6
PB205	1.3
PB206	1.0
PB206	2.2
PB207	1.2
PB207	2.7
PB208	1.7
PB208	3.8

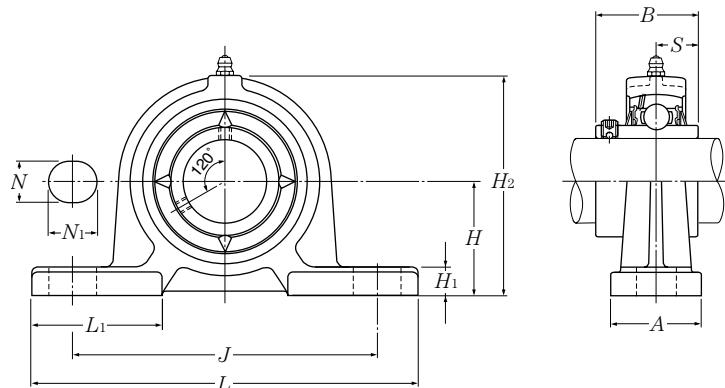


Shaft dia. mm	Unit number ¹⁾	Nominal dimensions mm												Bolt size mm	Bearing number
		H	L	J	A	N	N ₁	H ₁	H ₂	L ₁	B	S			
12	UCPE201D1	30.2	120	95	30	12	14	9	61	42	31	12.7	M10	UC201D1	
15	UCPE202D1	30.2	120	95	30	12	14	9	61	42	31	12.7	M10	UC202D1	
17	UCPE203D1	30.2	120	95	30	12	14	9	61	42	31	12.7	M10	UC203D1	
20	UCPE204D1	33.3	120	95	30	12	14	9	64	42	31	12.7	M10	UC204D1	
25	UCPE205D1	36.5	130	105	30	12	14	10	70	42	34.1	14.3	M10	UC205D1	
30	UCPE206D1	42.9	155	121	36	17	20	11	82	54	38.1	15.9	M14	UC206D1	
35	UCPE207D1	47.6	161	127	38	17	20	12	92	54	42.9	17.5	M14	UC207D1	
40	UCPE208D1	49.2	171	137	40	17	20	12	98	52	49.2	19	M14	UC208D1	
45	UCPE209D1	54	180	146	40	17	20	13	105	60	49.2	19	M14	UC209D1	
50	UCPE210D1	57.2	195	159	45	19	22	14	114	65	51.6	19	M16	UC210D1	
55	UCPE211D1	63.5	207	171	45	19	22	15	125	65	55.6	22.2	M16	UC211D1	
60	UCPE212D1	69.8	220	184	55	19	22	17	137	70	65.1	25.4	M16	UC212D1	

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

Housing number ¹⁾	Mass of unit kg
PE203D1	0.5
PE203D1	0.5
PE203D1	0.5
PE204D1	0.4
PE205D1	0.5
PE206D1	0.8
PE207D1	1.1
PE208D1	1.3
PE209D1	1.5
PE210D1	1.8
PE211D1	2.4
PE212D1	3.3

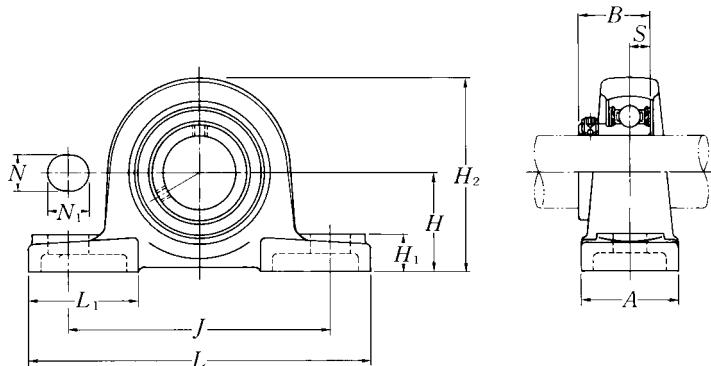


Shaft dia. mm inch	Unit number ^{1) 2) 3)}	Nominal dimensions											Bolt size mm inch	Bearing number ²⁾
		mm		inch										
		H	L	J	A	N	N ₁	H ₁	H ₂	L ₁	B	S		
12 1/2	ASPL201	26.99	121	89	35	11	14	13	54	40	22	6	M10	AS201
	ASPL201-008	1 1/16	4 3/4	3 1/2	1 3/8	7/16	9/16	1/2	2 1/8	1 9/16	0.8661	0.236	3/8	AS201-008
15 9/16 5/8	ASPL202	26.99	121	89	35	11	14	13	54	40	22	6	M10	AS202
	ASPL202-009	1 1/16	4 3/4	3 1/2	1 3/8	7/16	9/16	1/2	2 1/8	1 9/16	0.8661	0.236	3/8	AS202-009
	ASPL202-010													AS202-010
17 11/16	ASPL203	26.99	121	89	35	11	14	13	54	40	22	6	M10	AS203
	ASPL203-011	1 1/16	4 3/4	3 1/2	1 3/8	7/16	9/16	1/2	2 1/8	1 9/16	0.8661	0.236	3/8	AS203-011
20 3/4	ASPL204	31.75	127	95	38	13	16	14	64	42	25	7	M10	AS204
	ASPL204-012	1 1/4	5	3 3/4	1 1/2	1/2	5/8	9/16	2 17/32	1 21/32	0.9843	0.276	3/8	AS204-012
25 13/16 7/8 15/16 1	ASPL205	33.34	140	105	38	13	16	15	68	42	27	7.5	M10	AS205
	ASPL205-013	1 5/16	5 1/2	4 1/8	1 1/2	1/2	5/8	19/32	2 11/16	1 21/32	1.0630	0.295	3/8	AS205-013
	ASPL205-014													AS205-014
	ASPL205-015													AS205-015
	ASPL205-100													AS205-100
30 1 1/16 1 1/8 1 3/16 1 1/4	ASPL206	39.69	165	121	48	17	20	17	80	54	29	8	M14	AS206
	ASPL206-101	1 9/16	6 1/2	4 3/4	1 7/8	21/32	25/32	21/32	3 5/32	2 1/8	1.1417	0.315	1/2	AS206-101
	ASPL206-102													AS206-102
	ASPL206-103													AS206-103
	ASPL206-104													AS206-104
35 1 1/4 1 5/16 1 3/8 1 7/16	ASPL207	46.04	167	127	48	17	20	18	91	54	34	8.5	M14	AS207
	ASPL207-104	1 13/16	6 9/16	5	1 7/8	21/32	25/32	23/32	3 19/32	2 1/8	1.3386	0.335	1/2	AS207-104
	ASPL207-105													AS207-105
	ASPL207-106													AS207-106
	ASPL207-107													AS207-107
40 1 1/2 1 9/16	ASP208	49.2	184	137	54	17	20	18	98	52	38	9	M14	AS208
	ASP208-108	1 15/16	7 1/4	5 13/32	2 1/8	21/32	25/32	23/32	3 27/32	2 1/16	1.4961	0.354	1/2	AS208-108
	ASP208-109													AS208-109

Remarks: 1) ASPL201 to ASPL205 has solid bases.

2) If relubricatable type is needed, please order with suffix "D1".

3) ASPL208 has the same dimension as ASP208.

Housing number	Mass of unit
	kg lb
PL201	0.5
PL201	1.1
PL201	0.5
PL201	1.1
PL201	
PL201	0.5
PL201	1.1
PL204	0.7
PL204	1.5
PL205	0.8
PL205	
PL205	1.8
PL205	
PL205	
PL206	1.2
PL206	
PL206	2.6
PL206	
PL206	
PL207	1.5
PL207	
PL207	3.3
PL207	
PL207	
P208	1.8
P208	4.0
P208	

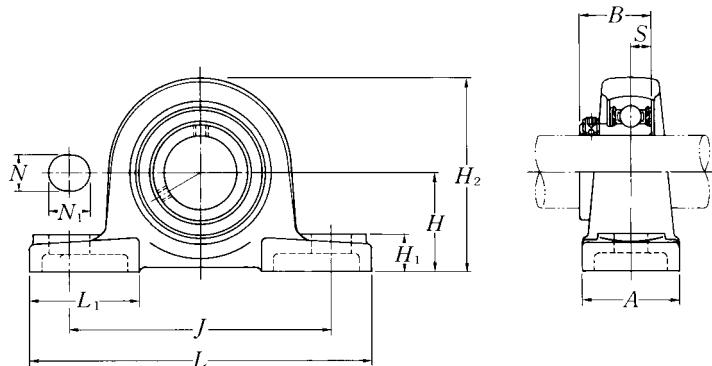


Shaft dia. mm inch	Unit number ^{1) 2) 3)}	Nominal dimensions											Bolt size mm inch	Bearing number ²⁾			
		H	L	J	A	N	N ₁	H ₁	H ₂	L ₁	B	S					
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	ASPL209	52.39	190	146	54	17	20	20	104	60	40	9.5	M14	AS209			
	ASPL209-110													AS209-110			
	ASPL209-111													AS209-111			
	ASPL209-112					$2\frac{1}{16}$	$7\frac{15}{32}$	$5\frac{3}{4}$	$2\frac{1}{8}$	$2\frac{1}{32}$	$2\frac{25}{32}$	$2\frac{25}{32}$	$4\frac{3}{32}$	$2\frac{3}{8}$	1.5748	0.374	$\frac{1}{2}$
50 $1\frac{13}{16}$ $1\frac{7}{8}$ $1\frac{15}{16}$ 2	ASPL210	55.56	206	159	60	20	23	21	112	65	42	10	M16	AS210			
	ASPL210-113													AS210-113			
	ASPL210-114													AS210-114			
	ASPL210-115													AS210-115			
	ASPL210-200					$2\frac{3}{16}$	$8\frac{1}{8}$	$6\frac{1}{4}$	$2\frac{3}{8}$	$2\frac{25}{32}$	$2\frac{29}{32}$	$1\frac{13}{16}$	$4\frac{13}{32}$	$2\frac{9}{16}$	1.6535	0.394	$\frac{5}{8}$

Remarks: 1) ASPL201 to ASPL205 has solid bases.

2) If relubricatable type is needed, please order with suffix "D1".

3) ASPL208 has the same dimension as ASP208.

Housing ²⁾ number	Mass of unit
	kg lb
PL209	2.0
PL209	
PL209	4.4
PL209	
PL210	2.6
PL210	
PL210	5.7
PL210	
PL210	

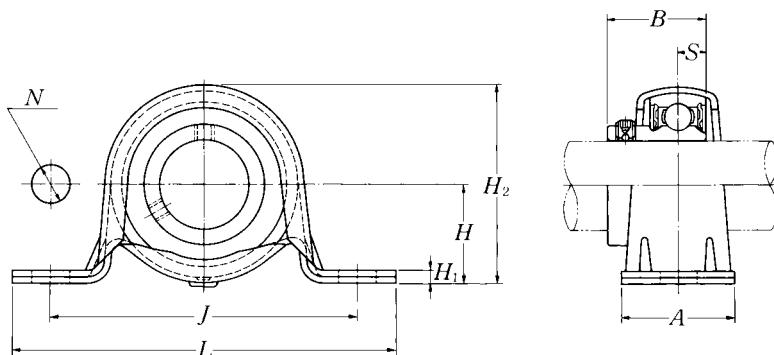


Shaft dia. mm inch	Unit number	Nominal dimensions									Bolt size mm inch	Bearing number	Housing number	Mass of unit kg lb			
		mm				inch											
		H	L	J	A	N	H1	H2	B	S							
12 1/2	ASPP201	22.2	86	68	25	9.5	3.2	43.8	22	6	M 8	AS201	PP203	0.2			
	ASPP201-008	7/8	3 3/8	2 11/16	31/32	3/8	0.126	1 23/32	0.8661	0.236	5/16	AS201-008	PP203	0.4			
15 9/16 5/8	ASPP202	22.2	86	68	25	9.5	3.2	43.8	22	6	M 8	AS202	PP203	0.2			
	ASPP202-009	7/8	3 3/8	2 11/16	31/32	3/8	0.126	1 23/32	0.8661	0.236	5/16	AS202-009	PP203	0.4			
	ASPP202-010											AS202-010	PP203				
17 11/16	ASPP203	22.2	86	68	25	9.5	3.2	43.8	22	6	M 8	AS203	PP203	0.1			
	ASPP203-011	7/8	3 3/8	2 11/16	31/32	3/8	0.126	1 23/32	0.8661	0.236	5/16	AS203-011	PP203	0.2			
20 3/4	ASPP204	25.4	98	76	32	9.5	3.2	50.5	25	7	M 8	AS204	PP204	0.2			
	ASPP204-012	1	3 27/32	3	1 1/4	3/8	0.126	2	0.9843	0.276	5/16	AS204-012	PP204	0.4			
25 13/16 7/8 15/16 1	ASPP205	28.6	108	86	32	11.5	4	56.6	27	7.5	M10	AS205	PP205	0.3			
	ASPP205-013											AS205-013	PP205				
	ASPP205-014	1 1/8	4 1/4	3 3/8	1 1/4	29/64	0.157	2 7/32	1.0630	0.295	3/8	AS205-014	PP205	0.7			
	ASPP205-015											AS205-015	PP205				
	ASPP205-100											AS205-100	PP205				
30 1 1/16 1 1/8 1 3/16 1 1/4	ASPP206	33.3	117	95	38	11.5	4	66.3	29	8	M10	AS206	PP206	0.4			
	ASPP206-101											AS206-101	PP206				
	ASPP206-102	1 5/16	4 19/32	3 3/4	1 1/2	29/64	0.157	2 5/8	1.1417	0.315	3/8	AS206-102	PP206	0.9			
	ASPP206-103											AS206-103	PP206				
	ASPP206-104											AS206-104	PP206				
35 1 1/4 1 5/16 1 3/8 1 7/16	ASPP207	39.7	129	106	42	11.5	4.6	78	34	8.5	M10	AS207	PP207	0.6			
	ASPP207-104											AS207-104	PP207				
	ASPP207-105	1 9/16	5 3/32	4 3/16	1 21/32	29/64	0.181	3 1/16	1.3386	0.335	3/8	AS207-105	PP207	1.3			
	ASPP207-106											AS207-106	PP207				
	ASPP207-107											AS207-107	PP207				

Remarks: 1) The permissible load only applies in applications where the load is stable and the speed is 2400 min⁻¹ or less.

The mounting surface should be flat.

Max. load ¹⁾ recommended	
N	lbf
radial	axial
2 000	800
440	160
2 000	800
440	160
2 000	800
440	160
2 500	1 000
550	200
3 500	1 400
770	280
4 000	1 600
880	320
4 500	1 800
990	360

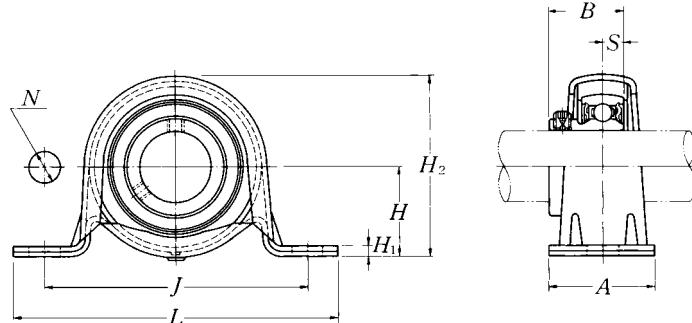

Shaft dia. mm inch	Unit number	Nominal dimensions										Bolt size mm inch	Bearing number
		H	L	J	A	N	H ₁	H ₂	B	S			
12 1/2	ASRPP201 ASRPP201-008	25.4 1	98 3 ²⁷ / ₃₂	76 3	32 1 ¹ / ₄	9.5 3/8	3.2 0.126	50.5 2	22 0.8661	6 0.236	M 8 5/16	AS201 AS201-008	
15 9/16 5/8	ASRPP202 ASRPP202-009 ASRPP202-010	25.4 1	98 3 ²⁷ / ₃₂	76 3	32 1 ¹ / ₄	9.5 3/8	3.2 0.126	50.5 2	22 0.8661	6 0.236	M 8 5/16	AS202 AS202-009 AS202-010	
17 11/16	ASRPP203 ASRPP203-011	25.4 1	98 3 ²⁷ / ₃₂	76 3	32 1 ¹ / ₄	9.5 3/8	3.2 0.126	50.5 2	22 0.8661	6 0.236	M 8 5/16	AS203 AS203-011	
20 3/4	ASRPP204 ASRPP204-012	28.6 1 ¹ / ₈	108 4 ¹ / ₄	86 3 ³ / ₈	32 1 ¹ / ₄	11.5 29/ ₆₄	4 0.157	56.6 2 ⁷ / ₃₂	25 0.9843	7 0.276	M10 3/8	AS204 AS204-012	
25 13/16 7/8 15/16 1	ASRPP205 ASRPP205-013 ASRPP205-014 ASRPP205-015 ASRPP205-100	33.3 1 ⁵ / ₁₆	117 4 ¹⁹ / ₃₂	95 3 ³ / ₄	38 1 ¹ / ₂	11.5 29/ ₆₄	4 0.157	66.3 2 ⁵ / ₈	27 1.0630	7.5 0.295	M10 3/8	AS205 AS205-013 AS205-014 AS205-015 AS205-100	
30 1 ¹ / ₁₆ 1 ¹ / ₈ 1 ³ / ₁₆ 1 ¹ / ₄	ASRPP206 ASRPP206-101 ASRPP206-102 ASRPP206-103 ASRPP206-104	39.7 1 ⁹ / ₁₆	129 5 ³ / ₃₂	106 4 ³ / ₁₆	42 1 ²¹ / ₃₂	11.5 29/ ₆₄	4.6 0.181	78 3 ¹ / ₁₆	29 1.1417	8 0.315	M10 3/8	AS206 AS206-101 AS206-102 AS206-103 AS206-104	

Remarks: 1) The permissible load only applies in applications where the load is stable and the speed is 2400 min⁻¹ or less.
The mounting surface should be flat.

2) When an anti-vibration rubber ring is used, the self alignment capability will be reduced.


Housing number		Mass of unit kg lb	Max. load ¹⁾ recommended	
rubber ring	steel		N	lbf
			radial	axial
R201	PP204	0.2	1 000	200
R201	PP204	0.4	220	40
R201	PP204	0.2	1 000	200
R201	PP204	0.4	220	40
R201	PP204	0.2	1 000	200
R201	PP204	0.4	220	40
R204	PP205	0.3	1 150	200
R204	PP205	0.7	250	40
R205	PP206	0.4	1 300	200
R205	PP206			
R205	PP206			
R205	PP206	0.9	280	40
R205	PP206			
R206	PP207	0.5	1 500	200
R206	PP207			
R206	PP207			
R206	PP207	1.1	330	40
R206	PP207			

sale@technobearing.ru

**Square flanged units cast housing
Set screw type**

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

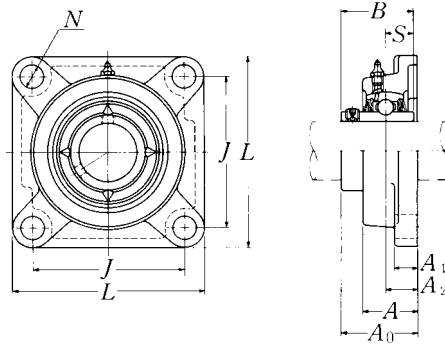





Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions									Bolt size mm inch	Bearing number
		L	J	A ₂	A ₁	A	N	A ₀	B	S		
12 1/2	UCF201D1 UCF201-008D1	86 3 3/8	64 2 33/64	15 19/32	11 7/16	25.5 1	12 15/32	33.3 1 5/16	31 1.2205	12.7 0.500	M10 3/8	UC201D1 UC201-008D1
15 9/16 5/8	UCF202D1 UCF202-009D1 UCF202-010D1	86 3 3/8	64 2 33/64	15 19/32	11 7/16	25.5 1	12 15/32	33.3 1 5/16	31 1.2205	12.7 0.500	M10 3/8	UC202D1 UC202-009D1 UC202-010D1
17 11/16	UCF203D1 UCF203-011D1	86 3 3/8	64 2 33/64	15 19/32	11 7/16	25.5 1	12 15/32	33.3 1 5/16	31 1.2205	12.7 0.500	M10 3/8	UC203D1 UC203-011D1
20 3/4	UCF204D1 UCF204-012D1	86 3 3/8	64 2 33/64	15 19/32	11 7/16	25.5 1	12 15/32	33.3 1 5/16	31 1.2205	12.7 0.500	M10 3/8	UC204D1 UC204-012D1
25 13/16 7/8 15/16 1	UCF205D1 UCF205-013D1 UCF205-014D1 UCF205-015D1 UCF205-100D1	95 3 3/4	70 2 3/4	16 5/8	13 1/2	27 1 1/16	12 15/32	35.8 1 13/32	34.1 1.3425	14.3 0.563	M10 3/8	UC205D1 UC205-013D1 UC205-014D1 UC205-015D1 UC205-100D1
30 1 1/16 1 1/8 1 3/16 1 1/4	UCF206D1 UCF206-101D1 UCF206-102D1 UCF206-103D1 UCF206-104D1	108 4 1/4	83 3 17/64	18 45/64	13 1/2	31 1 7/32	12 15/32	40.2 1 37/64	38.1 1.5000	15.9 0.626	M10 3/8	UC206D1 UC206-101D1 UC206-102D1 UC206-103D1 UC206-104D1
35 1 1/4 1 5/16 1 3/8 1 7/16	UCF207D1 UCF207-104D1 UCF207-105D1 UCF207-106D1 UCF207-107D1	117 4 19/32	92 3 5/8	19 3/4	15 19/32	34 1 11/32	14 35/64	44.4 1 3/4	42.9 1.6890	17.5 0.689	M12 7/16	UC207D1 UC207-104D1 UC207-105D1 UC207-106D1 UC207-107D1
40 1 1/2 1 9/16	UCF208D1 UCF208-108D1 UCF208-109D1	130 5 1/8	102 4 1/64	21 53/64	15 19/32	36 1 13/32	16 5/8	51.2 2 1/64	49.2 1.9370	19 0.748	M14 1/2	UC208D1 UC208-108D1 UC208-109D1
45 1 5/8 1 11/16 1 3/4	UCF209D1 UCF209-110D1 UCF209-111D1 UCF209-112D1	137 5 13/32	105 4 9/64	22 55/64	16 5/8	38 1 1/2	16 5/8	52.2 2 1/16	49.2 1.9370	19 0.748	M14 1/2	UC209D1 UC209-110D1 UC209-111D1 UC209-112D1

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

sale@technobearing.ru 36 for size of grease fitting.

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

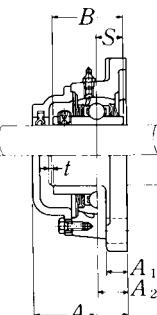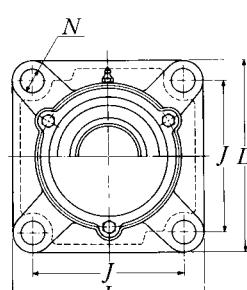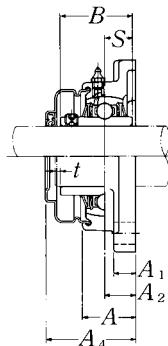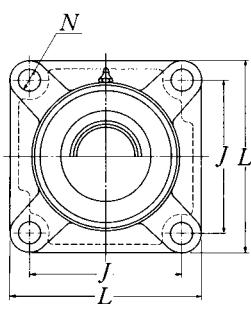**Pressed steel dust cover type**Open end: **S-UCF…D1**Closed end: **SM-UCF…D1****Cast dust cover type**Open end: **C-UCF…D1**Closed end: **CM-UCF…D1**


Housing ¹⁾ number	Unit number ¹⁾ pressed steel dust cover type	Unit number ¹⁾ cast dust cover type	Nominal dimensions			Mass of unit		
			t max.	A ₄	A ₅	kg	lb	
F204D1	S(SM)-UCF201D1	C(CM)-UCF201D1	2	40.5	46	0.6	0.6	0.8
F204D1	S(SM)-UCF201-008D1	C(CM)-UCF201-008D1	5/64	1 19/32	1 13/16	1.3	1.3	1.8
F204D1	S(SM)-UCF202D1	C(CM)-UCF202D1	2	40.5	46	0.6	0.6	0.8
F204D1	S(SM)-UCF202-009D1	C(CM)-UCF202-009D1	5/64	1 19/32	1 13/16	1.3	1.3	1.8
F204D1	S(SM)-UCF202-010D1	C(CM)-UCF202-010D1						
F204D1	S(SM)-UCF203D1	C(CM)-UCF203D1	2	40.5	46	0.6	0.6	0.8
F204D1	S(SM)-UCF203-011D1	C(CM)-UCF203-011D1	5/64	1 19/32	1 13/16	1.3	1.3	1.8
F204D1	S(SM)-UCF204D1	C(CM)-UCF204D1	2	40.5	46	0.6	0.6	0.7
F204D1	S(SM)-UCF204-012D1	C(CM)-UCF204-012D1	5/64	1 19/32	1 13/16	1.3	1.3	1.8
F205D1	S(SM)-UCF205D1	C(CM)-UCF205D1	2	44.5	51	0.8	0.8	0.9
F205D1	S(SM)-UCF205-013D1	C(CM)-UCF205-013D1						
F205D1	S(SM)-UCF205-014D1	C(CM)-UCF205-014D1						
F205D1	S(SM)-UCF205-015D1	C(CM)-UCF205-015D1						
F205D1	S(SM)-UCF205-100D1	C(CM)-UCF205-100D1						
F206D1	S(SM)-UCF206D1	C(CM)-UCF206D1	2	49	56	1.1	1.1	1.3
F206D1	S(SM)-UCF206-101D1	C(CM)-UCF206-101D1						
F206D1	S(SM)-UCF206-102D1	C(CM)-UCF206-102D1						
F206D1	S(SM)-UCF206-103D1	C(CM)-UCF206-103D1						
F206D1	S(SM)-UCF206-104D1	C(CM)-UCF206-104D1						
F207D1	S(SM)-UCF207D1	C(CM)-UCF207D1	3	55	59	1.5	1.5	1.8
F207D1	S(SM)-UCF207-104D1	C(CM)-UCF207-104D1						
F207D1	S(SM)-UCF207-105D1	C(CM)-UCF207-105D1						
F207D1	S(SM)-UCF207-106D1	C(CM)-UCF207-106D1						
F207D1	S(SM)-UCF207-107D1	C(CM)-UCF207-107D1						
F208D1	S(SM)-UCF208D1	C(CM)-UCF208D1	3	62	66	1.7	1.8	2.2
F208D1	S(SM)-UCF208-108D1	C(CM)-UCF208-108D1	1/8	2 7/16	2 19/32	3.8	4.0	4.9
F208D1	S(SM)-UCF208-109D1	C(CM)-UCF208-109D1						
F209D1	S(SM)-UCF209D1	C(CM)-UCF209D1	3	63	70	2.1	2.2	2.6
F209D1	S(SM)-UCF209-110D1	C(CM)-UCF209-110D1						
F209D1	S(SM)-UCF209-111D1	C(CM)-UCF209-111D1						
F209D1	S(SM)-UCF209-112D1	C(CM)-UCF209-112D1						

sale@technobearing.ru

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)





Square flanged units cast housing
Set screw type

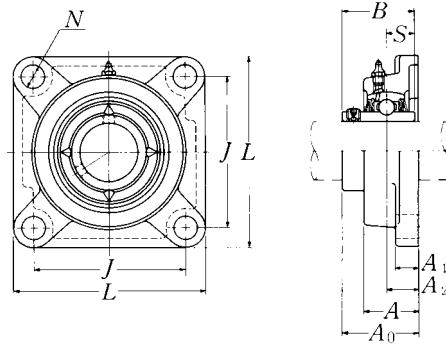

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions									Bolt size mm inch	Bearing number
		L	J	A ₂	A ₁	A	N	A ₀	B	S		
50 $1\frac{13}{16}$	UCF210D1	143	111	22	16	40	16	54.6	51.6	19	M14	UC210D1
$1\frac{7}{8}$	UCF210-113D1											UC210-113D1
$1\frac{15}{16}$	UCF210-114D1											UC210-114D1
$1\frac{15}{16}$	UCF210-115D1											UC210-115D1
2	UCF210-200D1											UC210-200D1
55 2	UCF211D1	162	130	25	18	43	19	58.4	55.6	22.2	M16	UC211D1
$2\frac{1}{16}$	UCF211-200D1											UC211-200D1
$2\frac{1}{8}$	UCF211-201D1											UC211-201D1
$2\frac{3}{16}$	UCF211-202D1											UC211-202D1
$2\frac{3}{16}$	UCF211-203D1											UC211-203D1
60 $2\frac{1}{4}$	UCF212D1	175	143	29	18	48	19	68.7	65.1	25.4	M16	UC212D1
$2\frac{5}{16}$	UCF212-204D1											UC212-204D1
$2\frac{3}{8}$	UCF212-205D1											UC212-205D1
$2\frac{7}{16}$	UCF212-206D1											UC212-206D1
$2\frac{7}{16}$	UCF212-207D1											UC212-207D1
65 $2\frac{1}{2}$	UCF213D1	187	149	30	22	50	19	69.7	65.1	25.4	M16	UC213D1
$2\frac{9}{16}$	UCF213-208D1											UC213-208D1
$2\frac{9}{16}$	UCF213-209D1											UC213-209D1
70 $2\frac{5}{8}$	UCF214D1	193	152	31	22	54	19	75.4	74.6	30.2	M16	UC214D1
$2\frac{11}{16}$	UCF214-210D1											UC214-210D1
$2\frac{3}{4}$	UCF214-211D1											UC214-211D1
$2\frac{3}{4}$	UCF214-212D1											UC214-212D1
75 $2\frac{13}{16}$	UCF215D1	200	159	34	22	56	19	78.5	77.8	33.3	M16	UC215D1
$2\frac{7}{8}$	UCF215-213D1											UC215-213D1
$2\frac{15}{16}$	UCF215-214D1											UC215-214D1
3	UCF215-215D1											UC215-215D1
	UCF215-300D1											UC215-300D1
80 $3\frac{1}{16}$	UCF216D1	208	165	34	22	58	23	83.3	82.6	33.3	M20	UC216D1
$3\frac{1}{8}$	UCF216-301D1											UC216-301D1
$3\frac{3}{16}$	UCF216-302D1											UC216-302D1
$3\frac{3}{16}$	UCF216-303D1											UC216-303D1


Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

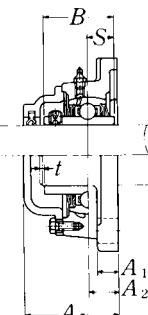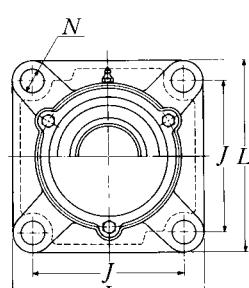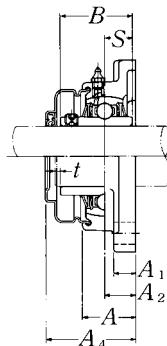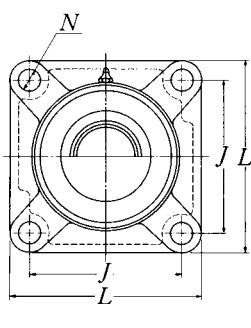**Pressed steel dust cover type**Open end: **S-UCF···D1**Closed end: **SM-UCF···D1****Cast dust cover type**Open end: **C-UCF···D1**Closed end: **CM-UCF···D1**

Housing ¹⁾ number	Unit number ¹⁾ pressed steel dust cover type	Unit number ¹⁾ cast dust cover type	Nominal dimensions			Mass of unit		
			t max.	A ₄	A ₅	kg	lb	
						UCF	S(SM)	C(CM)
F210D1	S(SM)-UCF210D1	C(CM)-UCF210D1	3	65.5	72	2.5	2.5	3.0
F210D1	S(SM)-UCF210-113D1	C(CM)-UCF210-113D1	1/8	2 ¹⁹ / ₃₂	2 ²⁷ / ₃₂	5.5	5.5	6.6
F210D1	S(SM)-UCF210-114D1	C(CM)-UCF210-114D1						
F210D1	S(SM)-UCF210-115D1	C(CM)-UCF210-115D1						
F210D1	S(SM)-UCF210-200D1	C(CM)-UCF210-200D1						
F211D1	S(SM)-UCF211D1	C(CM)-UCF211D1	4	71	75	3.3	3.4	4.0
F211D1	S(SM)-UCF211-200D1	C(CM)-UCF211-200D1	5/32	2 ²⁵ / ₃₂	2 ¹⁵ / ₁₆	7.3	7.5	8.8
F211D1	S(SM)-UCF211-201D1	C(CM)-UCF211-201D1						
F211D1	S(SM)-UCF211-202D1	C(CM)-UCF211-202D1						
F211D1	S(SM)-UCF211-203D1	C(CM)-UCF211-203D1						
F212D1	S(SM)-UCF212D1	C(CM)-UCF212D1	4	80	86	3.9	4.1	4.8
F212D1	S(SM)-UCF212-204D1	C(CM)-UCF212-204D1	5/32	3 ²⁵ / ₃₂	3 ³ / ₈	8.6	9.0	11
F212D1	S(SM)-UCF212-205D1	C(CM)-UCF212-205D1						
F212D1	S(SM)-UCF212-206D1	C(CM)-UCF212-206D1						
F212D1	S(SM)-UCF212-207D1	C(CM)-UCF212-207D1						
F213D1	S(SM)-UCF213D1	C(CM)-UCF213D1	4	83.5	90	5.5	5.6	6.4
F213D1	S(SM)-UCF213-208D1	C(CM)-UCF213-208D1	5/32	3 ⁹ / ₃₂	3 ¹⁷ / ₃₂	12	12	14
F213D1	S(SM)-UCF213-209D1	C(CM)-UCF213-209D1						
F214D1	—	C(CM)-UCF214D1	4	—	98	6.3	—	7.4
F214D1	—	C(CM)-UCF214-210D1	5/32	—	3 ²⁷ / ₃₂	14	—	16
F214D1	—	C(CM)-UCF214-211D1						
F214D1	—	C(CM)-UCF214-212D1						
F215D1	—	C(CM)-UCF215D1	4	—	102	6.6	—	7.9
F215D1	—	C(CM)-UCF215-213D1	5/32	—	4 ¹ / ₃₂	15	—	17
F215D1	—	C(CM)-UCF215-214D1						
F215D1	—	C(CM)-UCF215-215D1						
F215D1	—	C(CM)-UCF215-300D1						
F216D1	—	C(CM)-UCF216D1	4	—	106	7.9	—	9.3
F216D1	—	C(CM)-UCF216-301D1	5/32	—	4 ³ / ₁₆	17	—	21
F216D1	—	C(CM)-UCF216-302D1						
F216D1	—	C(CM)-UCF216-303D1						





Square flanged units cast housing
Set screw type

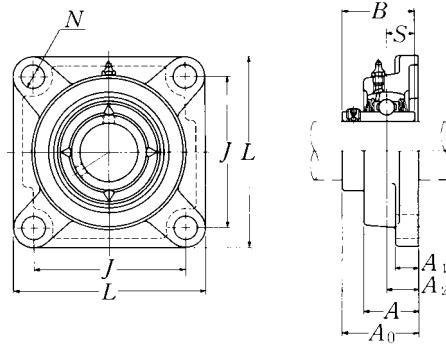


Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions									Bolt size mm inch	Bearing number
		L	J	A ₂	A ₁	A	N	A ₀	B	S		
85 3 1/4 3 5/16 3 7/16	UCF217D1	220	175	36	24	63	23	87.6	85.7	34.1	M20	UC217D1
	UCF217-304D1											UC217-304D1
	UCF217-305D1	8 ²¹ / ₃₂	6 ⁵⁷ / ₆₄	1 ²⁷ / ₆₄	1 ¹⁵ / ₁₆	2 ¹⁵ / ₃₂	2 ²⁹ / ₃₂	3 ²⁹ / ₆₄	3.3740	1.343	3/4	UC217-305D1
	UCF217-307D1											UC217-307D1
90 3 1/2	UCF218D1	235	187	40	24	68	23	96.3	96	39.7	M20	UC218D1
	UCF218-308D1	9 ¹ / ₄	7 ²³ / ₆₄	1 ³⁷ / ₆₄	1 ¹⁵ / ₁₆	2 ¹¹ / ₁₆	2 ²⁹ / ₃₂	3 ⁵¹ / ₆₄	3.7795	1.563	3/4	UC218-308D1

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

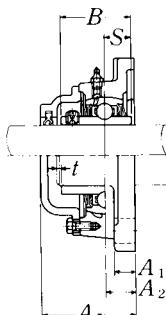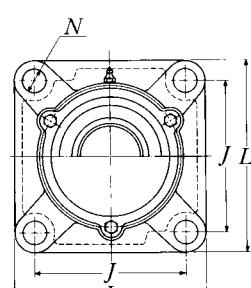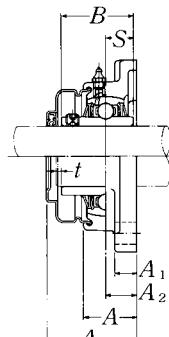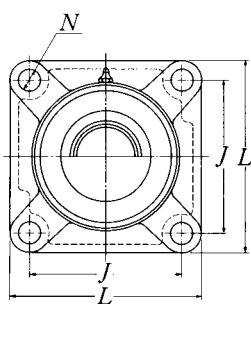**Pressed steel dust cover type**Open end: **S-UCF···D1**Closed end: **SM-UCF···D1****Cast dust cover type**Open end: **C-UCF···D1**Closed end: **CM-UCF···D1**


Housing ¹⁾ number	Unit number ¹⁾ pressed steel dust cover type	Unit number ¹⁾ cast dust cover type	Nominal dimensions			Mass of unit		
			t max.	mm A ₄	inch A ₅	kg UCF	kg S(SM)	lb C(CM)
F217D1	—	C(CM)-UCF217D1	5	—	114	9.8	—	12
F217D1	—	C(CM)-UCF217-304D1	13/64	—	4½	22	—	26
F217D1	—	C(CM)-UCF217-305D1						
F217D1	—	C(CM)-UCF217-307D1						
F218D1	—	C(CM)-UCF218D1	5	—	122	12	—	13
F218D1	—	C(CM)-UCF218-308D1	13/64	—	4 ¹³ / ₁₆	26	—	29

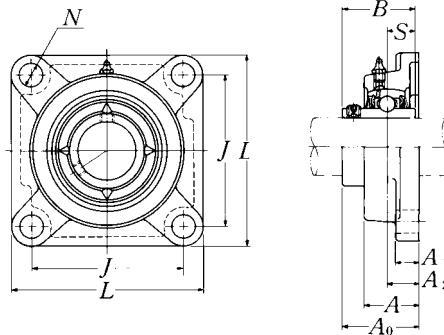


Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions									Bolt size mm inch	Bearing number
		L	J	A ₂	A ₁	A	N	A ₀	B	S		
25 $1\frac{3}{16}$ $\frac{7}{8}$ $1\frac{15}{16}$ 1	UCF305D1	110	80	16	13	29	16	39	38	15	M14	UC305D1
	UCF305-013D1											UC305-013D1
	UCF305-014D1											UC305-014D1
	UCF305-015D1											UC305-015D1
	UCF305-100D1											UC305-100D1
30 $1\frac{1}{16}$ $1\frac{1}{8}$ $1\frac{3}{16}$	UCF306D1	125	95	18	15	32	16	44	43	17	M14	UC306D1
	UCF306-101D1											UC306-101D1
	UCF306-102D1											UC306-102D1
	UCF306-103D1											UC306-103D1
35 $1\frac{1}{4}$ $1\frac{5}{16}$ $1\frac{3}{8}$ $1\frac{7}{16}$	UCF307D1	135	100	20	16	36	19	49	48	19	M16	UC307D1
	UCF307-104D1											UC307-104D1
	UCF307-105D1											UC307-105D1
	UCF307-106D1											UC307-106D1
	UCF307-107D1											UC307-107D1
40 $1\frac{1}{2}$ $1\frac{9}{16}$	UCF308D1	150	112	23	17	40	19	56	52	19	M16	UC308D1
	UCF308-108D1											UC308-108D1
	UCF308-109D1											UC308-109D1
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UCF309D1	160	125	25	18	44	19	60	57	22	M16	UC309D1
	UCF309-110D1											UC309-110D1
	UCF309-111D1											UC309-111D1
	UCF309-112D1											UC309-112D1
50 $1\frac{13}{16}$ $1\frac{7}{8}$ $1\frac{15}{16}$	UCF310D1	175	132	28	19	48	23	67	61	22	M20	UC310D1
	UCF310-113D1											UC310-113D1
	UCF310-114D1											UC310-114D1
	UCF310-115D1											UC310-115D1
55 2 $2\frac{1}{16}$ $2\frac{1}{8}$ $2\frac{3}{16}$	UCF311D1	185	140	30	20	52	23	71	66	25	M20	UC311D1
	UCF311-200D1											UC311-200D1
	UCF311-201D1											UC311-201D1
	UCF311-202D1											UC311-202D1
	UCF311-203D1											UC311-203D1

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

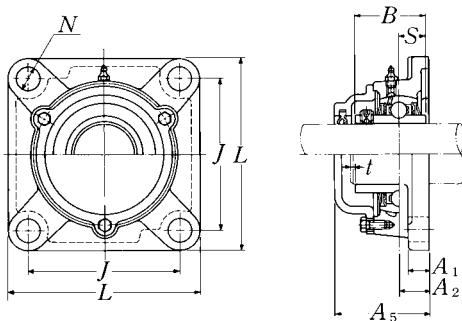**Cast dust cover type**Open end: **C-UCF…D1**Closed end: **CM-UCF…D1**


Housing ¹⁾ number	Unit number ¹⁾ cast dust cover type	Nominal dimensions		Mass of unit	
		mm <i>t</i> max.	inch <i>A₅</i>	kg UCF	lb C(CM)
F305D1	C(CM)-UCF305D1	2	56	1.1	1.4
F305D1	C(CM)-UCF305-013D1				
F305D1	C(CM)-UCF305-014D1	$\frac{5}{64}$	$2\frac{7}{32}$	2.4	3.1
F305D1	C(CM)-UCF305-015D1				
F305D1	C(CM)-UCF305-100D1				
F306D1	C(CM)-UCF306D1	2	60	1.6	2.1
F306D1	C(CM)-UCF306-101D1				
F306D1	C(CM)-UCF306-102D1	$\frac{5}{64}$	$2\frac{3}{8}$	3.5	4.6
F306D1	C(CM)-UCF306-103D1				
F307D1	C(CM)-UCF307D1	3	68	2.1	2.6
F307D1	C(CM)-UCF307-104D1				
F307D1	C(CM)-UCF307-105D1	$\frac{1}{8}$	$2\frac{11}{16}$	4.6	5.7
F307D1	C(CM)-UCF307-106D1				
F307D1	C(CM)-UCF307-107D1				
F308D1	C(CM)-UCF308D1	3	76	2.7	3.4
F308D1	C(CM)-UCF308-108D1	$\frac{1}{8}$	3	6.0	7.5
F308D1	C(CM)-UCF308-109D1				
F309D1	C(CM)-UCF309D1	3	80	3.4	4.3
F309D1	C(CM)-UCF309-110D1				
F309D1	C(CM)-UCF309-111D1	$\frac{1}{8}$	$3\frac{5}{32}$	7.5	9.5
F309D1	C(CM)-UCF309-112D1				
F310D1	C(CM)-UCF310D1	3	88	4.5	5.8
F310D1	C(CM)-UCF310-113D1				
F310D1	C(CM)-UCF310-114D1	$\frac{1}{8}$	$3\frac{15}{32}$	9.9	13
F310D1	C(CM)-UCF310-115D1				
F311D1	C(CM)-UCF311D1	4	92	5.3	6.7
F311D1	C(CM)-UCF311-200D1				
F311D1	C(CM)-UCF311-201D1	$\frac{5}{32}$	$3\frac{5}{8}$	12	15
F311D1	C(CM)-UCF311-202D1				
F311D1	C(CM)-UCF311-203D1				

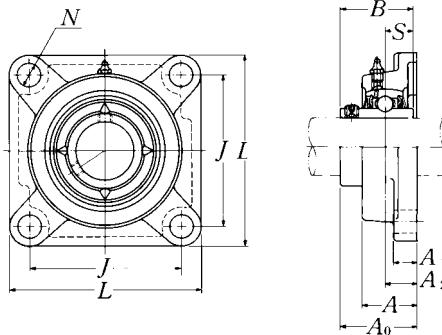

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions									Bolt size mm inch	Bearing number
		L	J	A ₂	A ₁	A	N	A ₀	B	S		
60 $2\frac{1}{4}$ $2\frac{5}{16}$ $2\frac{3}{8}$ $2\frac{7}{16}$	UCF312D1	195	150	33	22	56	23	78	71	26	M20	UC312D1
	UCF312-204D1	$7\frac{11}{16}$	$5\frac{29}{32}$	$1\frac{19}{64}$	$\frac{7}{8}$	$2\frac{7}{32}$	$2\frac{29}{32}$	$3\frac{5}{64}$	2.7953	1.024	$\frac{3}{4}$	UC312-205D1
	UCF312-205D1											UC312-206D1
	UCF312-206D1											UC312-207D1
	UCF312-207D1											
65 $2\frac{1}{2}$ $2\frac{9}{16}$	UCF313D1	208	166	33	22	58	23	78	75	30	M20	UC313D1
	UCF313-208D1	$8\frac{3}{16}$	$6\frac{17}{32}$	$1\frac{19}{64}$	$\frac{7}{8}$	$2\frac{9}{32}$	$2\frac{29}{32}$	$3\frac{5}{64}$	2.9528	1.181	$\frac{3}{4}$	UC313-208D1
	UCF313-209D1											UC313-209D1
70 $2\frac{5}{8}$ $2\frac{11}{16}$ $2\frac{3}{4}$	UCF314D1	226	178	36	25	61	25	81	78	33	M22	UC314D1
	UCF314-210D1	$8\frac{29}{32}$	$6\frac{1}{64}$	$1\frac{27}{64}$	$3\frac{1}{32}$	$2\frac{13}{32}$	$6\frac{3}{64}$	$3\frac{3}{16}$	3.0709	1.299	$\frac{7}{8}$	UC314-210D1
	UCF314-211D1											UC314-211D1
	UCF314-212D1											UC314-212D1
75 $2\frac{13}{16}$ $2\frac{7}{8}$ $2\frac{15}{16}$ 3	UCF315D1	236	184	39	25	66	25	89	82	32	M22	UC315D1
	UCF315-213D1	$9\frac{9}{32}$	$7\frac{1}{4}$	$1\frac{17}{32}$	$3\frac{1}{32}$	$2\frac{19}{32}$	$6\frac{3}{64}$	$3\frac{1}{2}$	3.2283	1.260	$\frac{7}{8}$	UC315-213D1
	UCF315-214D1											UC315-214D1
	UCF315-215D1											UC315-215D1
	UCF315-300D1											UC315-300D1
80 $3\frac{1}{16}$ $3\frac{1}{8}$ $3\frac{3}{16}$	UCF316D1	250	196	38	27	68	31	90	86	34	M27	UC316D1
	UCF316-301D1	$9\frac{27}{32}$	$7\frac{23}{32}$	$1\frac{1}{2}$	$1\frac{1}{16}$	$2\frac{11}{16}$	$1\frac{7}{32}$	$3\frac{35}{64}$	3.3858	1.339	1	UC316-301D1
	UCF316-302D1											UC316-302D1
	UCF316-303D1											UC316-303D1
85 $3\frac{1}{4}$ $3\frac{5}{16}$ $3\frac{7}{16}$	UCF317D1	260	204	44	27	74	31	100	96	40	M27	UC317D1
	UCF317-304D1	$10\frac{1}{4}$	$8\frac{1}{32}$	$1\frac{47}{64}$	$1\frac{1}{16}$	$2\frac{29}{32}$	$1\frac{7}{32}$	$3\frac{15}{16}$	3.7795	1.575	1	UC317-304D1
	UCF317-305D1											UC317-305D1
	UCF317-307D1											UC317-307D1
90 $3\frac{7}{16}$ $3\frac{1}{2}$	UCF318D1	280	216	44	30	76	35	100	96	40	M30	UC318D1
	UCF318-307D1	$11\frac{1}{32}$	$8\frac{1}{2}$	$1\frac{47}{64}$	$1\frac{3}{16}$	3	$1\frac{3}{8}$	$3\frac{15}{16}$	3.7795	1.575	$1\frac{1}{8}$	UC318-307D1
	UCF318-308D1											UC318-308D1


Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

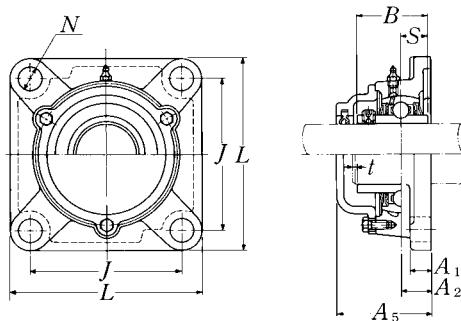**Cast dust cover type**Open end: **C-UCF…D1**Closed end: **CM-UCF…D1**

Housing ¹⁾ number	Unit number ¹⁾ cast dust cover type	Nominal dimensions		Mass of unit	
		mm t max.	inch A_5	kg UCF	lb C(CM)
F312D1	C(CM)-UCF312D1	4	100	6.3	7.8
F312D1	C(CM)-UCF312-204D1				
F312D1	C(CM)-UCF312-205D1	$\frac{5}{32}$	$3\frac{15}{16}$	14	17
F312D1	C(CM)-UCF312-206D1				
F312D1	C(CM)-UCF312-207D1				
F313D1	C(CM)-UCF313D1	4	103	8.0	9.7
F313D1	C(CM)-UCF313-208D1	$\frac{5}{32}$	$4\frac{1}{16}$	18	21
F313D1	C(CM)-UCF313-209D1				
F314D1	C(CM)-UCF314D1	4	106	9.4	11
F314D1	C(CM)-UCF314-210D1				
F314D1	C(CM)-UCF314-211D1	$\frac{5}{32}$	$4\frac{3}{16}$	21	24
F314D1	C(CM)-UCF314-212D1				
F315D1	C(CM)-UCF315D1	4	114	11	13
F315D1	C(CM)-UCF315-213D1				
F315D1	C(CM)-UCF315-214D1	$\frac{5}{32}$	$4\frac{1}{2}$	24	29
F315D1	C(CM)-UCF315-215D1				
F315D1	C(CM)-UCF315-300D1				
F316D1	C(CM)-UCF316D1	4	116	14	16
F316D1	C(CM)-UCF316-301D1				
F316D1	C(CM)-UCF316-302D1	$\frac{5}{32}$	$4\frac{9}{16}$	31	35
F316D1	C(CM)-UCF316-303D1				
F317D1	C(CM)-UCF317D1	5	129	15	19
F317D1	C(CM)-UCF317-304D1				
F317D1	C(CM)-UCF317-305D1	$\frac{13}{64}$	$5\frac{3}{32}$	33	42
F317D1	C(CM)-UCF317-307D1				
F318D1	C(CM)-UCF318D1	5	129	19	23
F318D1	C(CM)-UCF318-307D1				
F318D1	C(CM)-UCF318-308D1	$\frac{13}{64}$	$5\frac{3}{32}$	42	51


Square flanged units cast housing
Set screw type

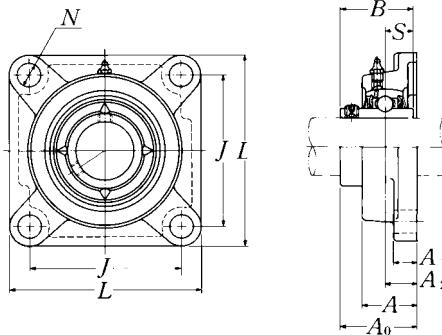

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions									Bolt size mm inch	Bearing number
		L	J	A ₂	A ₁	A	N	A ₀	B	S		
95 3 ⁵ / ₈	UCF319D1	290	228	59	30	94	35	121	103	41	M30	UC319D1
3 ¹¹ / ₁₆	UCF319-310D1											UC319-310D1
3 ³ / ₄	UCF319-311D1	11 ¹³ / ₃₂	8 ³¹ / ₃₂	2 ²¹ / ₆₄	1 ³ / ₁₆	3 ¹¹ / ₁₆	1 ³ / ₈	4 ⁴⁹ / ₆₄	4.0551	1.614	1 ¹ / ₈	UC319-311D1
100 3 ¹³ / ₁₆	UCF320D1	310	242	59	32	94	38	125	108	42	M33	UC320D1
3 ⁷ / ₈	UCF320-313D1											UC320-313D1
3 ¹⁵ / ₁₆	UCF320-314D1	12 ⁷ / ₃₂	9 ¹⁷ / ₃₂	2 ²¹ / ₆₄	1 ¹ / ₄	3 ¹¹ / ₁₆	1 ¹ / ₂	4 ⁵⁹ / ₆₄	4.2520	1.654	1 ¹ / ₄	UC320-314D1
4	UCF320-315D1											UC320-315D1
	UCF320-400D1											UC320-400D1
105	UCF321D1	310	242	59	32	94	38	127	112	44	M33	UC321D1
110	UCF322D1	340	266	60	35	96	41	131	117	46	M36	UC322D1
120	UCF324D1	370	290	65	40	110	41	140	126	51	M36	UC324D1
130	UCF326D1	410	320	65	45	115	41	146	135	54	M36	UC326D1
140	UCF328D1	450	350	75	55	125	41	161	145	59	M36	UC328D1


Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

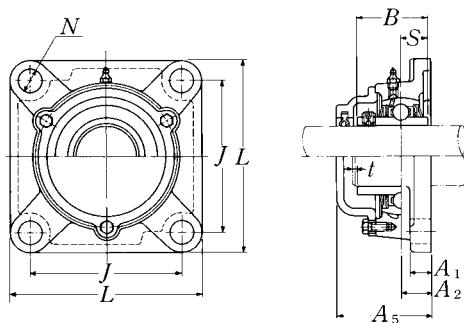**Cast dust cover type**Open end: **C-UCF…D1**Closed end: **CM-UCF…D1**

Housing ¹⁾ number	Unit number ¹⁾ cast dust cover type	Nominal dimensions		Mass of unit	
		mm max.	inch A ₅	kg UCF	lb C(CM)
F319D1	C(CM)-UCF319D1	5	149	22	25
F319D1	C(CM)-UCF319-310D1				
F319D1	C(CM)-UCF319-311D1	13/64	5 7/8	49	55
F319D1	C(CM)-UCF319-312D1				
F320D1	C(CM)-UCF320D1	5	154	27	32
F320D1	C(CM)-UCF320-313D1				
F320D1	C(CM)-UCF320-314D1	13/64	6 1/16	60	71
F320D1	C(CM)-UCF320-315D1				
F320D1	C(CM)-UCF320-400D1				
F321D1	C(CM)-UCF321D1	5	156	26	32
F322D1	C(CM)-UCF322D1	5	160	34	40
F324D1	C(CM)-UCF324D1	5	172	48	56
F326D1	C(CM)-UCF326D1	6	178	63	73
F328D1	C(CM)-UCF328D1	6	192	90	100





Square flanged units cast housing
Set screw type

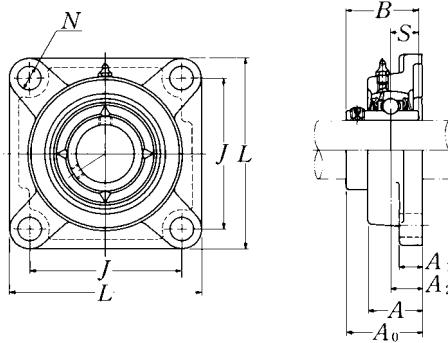


Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions									Bolt size mm inch	Bearing number
		L	J	A ₂	A ₁	A	N	A ₀	B	S		
25 13/16 7/8 15/16 1	UCFX05D1	108	83	18	13	30	12	40.2	38.1	15.9	M10	UCX05D1
	UCFX05-013D1	4 1/4	3 17/64	45/64	1/2	1 3/16	15/32	1 37/64	1.5000	0.626	3/8	UCX05-013D1
	UCFX05-014D1											UCX05-014D1
	UCFX05-015D1											UCX05-015D1
	UCFX05-100D1											UCX05-100D1
30 1 1/16 1 1/8 1 3/16 1 1/4	UCFX06D1	117	92	19	14	34	16	44.4	42.9	17.5	M14	UCX06D1
	UCFX06-101D1	4 19/32	3 5/8	3/4	9/16	1 11/32	5/8	1 3/4	1.6890	0.689	1/2	UCX06-101D1
	UCFX06-102D1											UCX06-102D1
	UCFX06-103D1											UCX06-103D1
	UCFX06-104D1											UC207-104D1
35 1 5/16 1 3/8 1 7/16	UCFX07D1	130	102	21	14	38	16	51.2	49.2	19	M14	UCX07D1
	UCFX07-105D1	5 1/8	4 1/64	53/64	9/16	1 1/2	5/8	2 1/64	1.9370	0.748	1/2	UCX07-105D1
	UCFX07-106D1											UCX07-106D1
	UCFX07-107D1											UCX07-107D1
40 1 1/2 1 9/16	UCFX08D1	137	105	22	14	40	19	52.2	49.2	19	M16	UCX08D1
	UCFX08-108D1	5 13/32	4 9/64	55/64	9/16	1 9/16	3/4	2 1/16	1.9370	0.748	5/8	UCX08-108D1
	UCFX08-109D1											UCX08-109D1
45 1 5/8 1 11/16 1 3/4 1 13/16	UCFX09D1	143	111	23	14	40	19	55.6	51.6	19	M16	UCX09D1
	UCFX09-110D1	5 5/8	4 3/8	29/32	9/16	1 9/16	3/4	2 3/16	2.0315	0.748	5/8	UCX09-110D1
	UCFX09-111D1											UCX09-111D1
	UCFX09-112D1											UCX09-112D1
	UCFX09-113D1											UC210-113D1
50 1 7/8 1 15/16 2	UCFX10D1	162	130	26	20	44	19	59.4	55.6	22.2	M16	UCX10D1
	UCFX10-114D1	6 3/8	5 1/8	1 1/32	25/32	1 23/32	3/4	2 11/32	2.1890	0.874	5/8	UCX10-114D1
	UCFX10-115D1											UCX10-115D1
	UCFX10-200D1											UC211-200D1

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

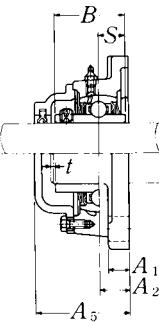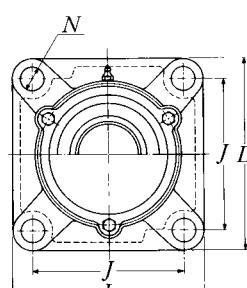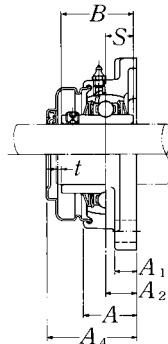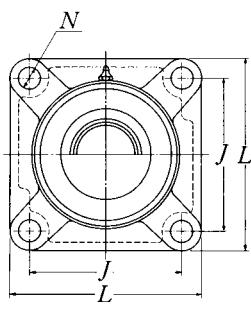**Pressed steel dust cover type**Open end: **S-UCFX…D1**Closed end: **SM-UCFX…D1****Cast dust cover type**Open end: **C-UCFX…D1**Closed end: **CM-UCFX…D1**





Housing ¹⁾ number	Unit number ¹⁾ pressed steel dust cover type	Unit number ¹⁾ cast dust cover type	Nominal dimensions			Mass of unit		
			t max.	A ₄	A ₅	kg	lb	
						UCFX	S(SM)	C(CM)
FX05D1	S(SM)-UCFX05D1	C(CM)-UCFX05D1	2	49	56	1.1	1.2	1.3
FX05D1	S(SM)-UCFX05-013D1	C(CM)-UCFX05-013D1	$\frac{5}{64}$	$1\frac{15}{16}$	$2\frac{7}{32}$	2.4	2.7	2.9
FX05D1	S(SM)-UCFX05-014D1	C(CM)-UCFX05-014D1						
FX05D1	S(SM)-UCFX05-015D1	C(CM)-UCFX05-015D1						
FX05D1	S(SM)-UCFX05-100D1	C(CM)-UCFX05-100D1						
FX06D1	S(SM)-UCFX06D1	C(CM)-UCFX06D1	2	55	59	1.7	1.8	1.9
FX06D1	S(SM)-UCFX06-101D1	C(CM)-UCFX06-101D1	$\frac{5}{64}$	$2\frac{5}{32}$	$2\frac{5}{16}$	3.8	4.0	4.2
FX06D1	S(SM)-UCFX06-102D1	C(CM)-UCFX06-102D1						
FX06D1	S(SM)-UCFX06-103D1	C(CM)-UCFX06-103D1						
FX06D1	S(SM)-UCFX06-104D1	C(CM)-UCFX06-104D1						
FX07D1	S(SM)-UCFX07D1	C(CM)-UCFX07D1	3	62	66	2.1	2.2	2.5
FX07D1	S(SM)-UCFX07-105D1	C(CM)-UCFX07-105D1	$\frac{1}{8}$	$2\frac{7}{16}$	$2\frac{19}{32}$	4.6	4.9	5.5
FX07D1	S(SM)-UCFX07-106D1	C(CM)-UCFX07-106D1						
FX07D1	S(SM)-UCFX07-107D1	C(CM)-UCFX07-107D1						
FX08D1	S(SM)-UCFX08D1	C(CM)-UCFX08D1	3	63	70	2.3	2.4	2.7
FX08D1	S(SM)-UCFX08-108D1	C(CM)-UCFX08-108D1	$\frac{1}{8}$	$2\frac{15}{32}$	$2\frac{3}{4}$	5.1	5.3	6.0
FX08D1	S(SM)-UCFX08-109D1	C(CM)-UCFX08-109D1						
FX09D1	S(SM)-UCFX09D1	C(CM)-UCFX09D1	3	65.5	73	2.5	2.6	3.0
FX09D1	S(SM)-UCFX09-110D1	C(CM)-UCFX09-110D1	$\frac{1}{8}$	$2\frac{19}{32}$	$2\frac{7}{8}$	5.5	5.7	6.6
FX09D1	S(SM)-UCFX09-111D1	C(CM)-UCFX09-111D1						
FX09D1	S(SM)-UCFX09-112D1	C(CM)-UCFX09-112D1						
FX09D1	S(SM)-UCFX09-113D1	C(CM)-UCFX09-113D1						
FX10D1	S(SM)-UCFX10D1	C(CM)-UCFX10D1	3	71	76	3.8	3.9	4.3
FX10D1	S(SM)-UCFX10-114D1	C(CM)-UCFX10-114D1	$\frac{1}{8}$	$2\frac{25}{32}$	3	8.4	8.6	9.5
FX10D1	S(SM)-UCFX10-115D1	C(CM)-UCFX10-115D1						
FX10D1	S(SM)-UCFX10-200D1	C(CM)-UCFX10-200D1						

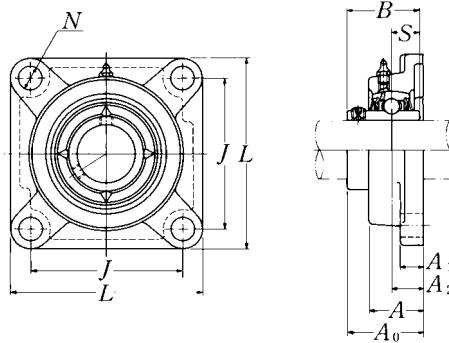

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions									Bolt size mm inch	Bearing number
		L	J	A ₂	A ₁	A	N	A ₀	B	S		
55 $2\frac{1}{16}$ $2\frac{1}{8}$ $2\frac{3}{16}$ $2\frac{1}{4}$ $2\frac{5}{16}$	UCFX11D1	175	143	29	20	49	19	68.7	65.1	25.4	M16	UCX11D1
	UCFX11-201D1											UCX11-201D1
	UCFX11-202D1											UCX11-202D1
	UCFX11-203D1	6 $\frac{7}{8}$	5 $\frac{5}{8}$	1 $\frac{1}{64}$	2 $\frac{5}{32}$	1 $\frac{15}{16}$	$\frac{3}{4}$	2 $\frac{45}{64}$	2.5630	1.000	$\frac{5}{8}$	UCX11-203D1
	UCFX11-204D1											UC212-204D1
	UCFX11-205D1											UC212-205D1
60 $2\frac{3}{8}$ $2\frac{7}{16}$	UCFX12D1	187	149	34	21	59	19	73.7	65.1	25.4	M16	UCX12D1
	UCFX12-206D1	7 $\frac{3}{8}$	5 $\frac{55}{64}$	1 $\frac{11}{32}$	1 $\frac{3}{16}$	2 $\frac{5}{16}$	$\frac{3}{4}$	2 $\frac{29}{32}$	2.5630	1.000	$\frac{5}{8}$	UCX12-206D1
	UCFX12-207D1											UCX12-207D1
65 $2\frac{1}{2}$ $2\frac{9}{16}$	UCFX13D1	187	149	34	21	59	19	78.4	74.6	30.2	M16	UCX13D1
	UCFX13-208D1	7 $\frac{3}{8}$	5 $\frac{55}{64}$	1 $\frac{11}{32}$	1 $\frac{3}{16}$	2 $\frac{5}{16}$	$\frac{3}{4}$	3 $\frac{3}{32}$	2.9370	1.189	$\frac{5}{8}$	UCX13-208D1
	UCFX13-209D1											UCX13-209D1
70 $2\frac{5}{8}$ $2\frac{11}{16}$ $2\frac{3}{4}$	UCFX14D1	197	152	37	24	60	23	81.5	77.8	33.3	M20	UCX14D1
	UCFX14-210D1	7 $\frac{3}{4}$	5 $\frac{63}{64}$	1 $\frac{29}{64}$	1 $\frac{5}{16}$	2 $\frac{3}{8}$	2 $\frac{29}{32}$	3 $\frac{13}{64}$	3.0630	1.311	$\frac{3}{4}$	UCX14-210D1
	UCFX14-211D1											UCX14-211D1
	UCFX14-212D1											UCX14-212D1
75 $2\frac{13}{16}$ $2\frac{7}{8}$ $2\frac{15}{16}$ 3	UCFX15D1	197	152	40	24	68	23	89.3	82.6	33.3	M20	UCX15D1
	UCFX15-213D1											UCX15-213D1
	UCFX15-214D1	7 $\frac{3}{4}$	5 $\frac{63}{64}$	1 $\frac{37}{64}$	1 $\frac{5}{16}$	2 $\frac{11}{16}$	2 $\frac{29}{32}$	3 $\frac{33}{64}$	3.2520	1.311	$\frac{3}{4}$	UCX15-214D1
	UCFX15-215D1											UCX15-215D1
	UCFX15-300D1											UCX15-300D1
80 $3\frac{3}{16}$ $3\frac{1}{8}$ $3\frac{3}{16}$ $3\frac{1}{4}$	UCFX16D1	214	171	40	24	70	23	91.6	85.7	34.1	M20	UCX16D1
	UCFX16-301D1	8 $\frac{7}{16}$	6 $\frac{47}{64}$	1 $\frac{37}{64}$	1 $\frac{5}{16}$	2 $\frac{3}{4}$	2 $\frac{29}{32}$	3 $\frac{39}{64}$	3.3740	1.343	$\frac{3}{4}$	UCX16-301D1
	UCFX16-302D1											UCX16-302D1
	UCFX16-303D1											UCX16-303D1
	UCFX16-304D1											UC217-304D1
85 $3\frac{5}{16}$ $3\frac{7}{16}$	UCFX17D1	214	171	40	24	70	23	96.3	96	39.7	M20	UCX17D1
	UCFX17-305D1	8 $\frac{7}{16}$	6 $\frac{47}{64}$	1 $\frac{37}{64}$	1 $\frac{5}{16}$	2 $\frac{3}{4}$	2 $\frac{29}{32}$	3 $\frac{51}{64}$	3.7795	1.563	$\frac{3}{4}$	UCX17-305D1
	UCFX17-307D1											UCX17-307D1

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

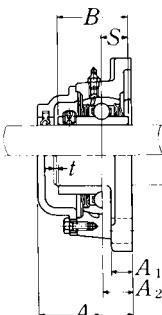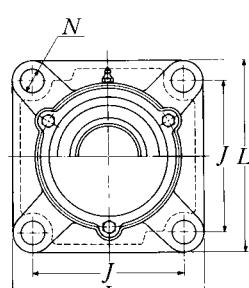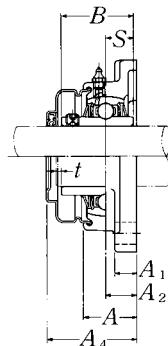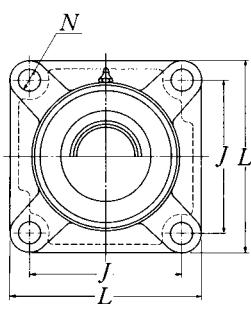**Pressed steel dust cover type**Open end: **S-UCFX…D1**Closed end: **SM-UCFX…D1****Cast dust cover type**Open end: **C-UCFX…D1**Closed end: **CM-UCFX…D1**


Housing ¹⁾ number	Unit number ¹⁾ pressed steel dust cover type	Unit number ¹⁾ cast dust cover type	Nominal dimensions			Mass of unit		
			t max.	A ₄	A ₅	kg	lb	
						UCFX	S(SM)	C(CM)
FX11D1	S(SM)-UCFX11D1	C(CM)-UCFX11D1	4	80	86	4.8	5.0	5.5
FX11D1	S(SM)-UCFX11-201D1	C(CM)-UCFX11-201D1						
FX11D1	S(SM)-UCFX11-202D1	C(CM)-UCFX11-202D1						
FX11D1	S(SM)-UCFX11-203D1	C(CM)-UCFX11-203D1	5/32	3 ²⁵ / ₃₂	3 ³ / ₈	11	11	12
FX11D1	S(SM)-UCFX11-204D1	C(CM)-UCFX11-204D1						
FX11D1	S(SM)-UCFX11-205D1	C(CM)-UCFX11-205D1						
FX12D1	S(SM)-UCFX12D1	C(CM)-UCFX12D1	4	83.5	94	6.4	6.6	7.3
FX12D1	S(SM)-UCFX12-206D1	C(CM)-UCFX12-206D1	5/32	3 ⁹ / ₃₂	3 ¹¹ / ₁₆	14	15	16
FX12D1	S(SM)-UCFX12-207D1	C(CM)-UCFX12-207D1						
FX13D1	—	C(CM)-UCFX13D1	4	—	101	6.7	—	7.8
FX13D1	—	C(CM)-UCFX13-208D1	5/32	—	3 ³¹ / ₃₂	15	—	17
FX13D1	—	C(CM)-UCFX13-209D1						
FX14D1	—	C(CM)-UCFX14D1	4	—	105	7.1	—	8.3
FX14D1	—	C(CM)-UCFX14-210D1	5/32	—	4 ¹ / ₈	16	—	18
FX14D1	—	C(CM)-UCFX14-211D1						
FX14D1	—	C(CM)-UCFX14-212D1						
FX15D1	—	C(CM)-UCFX15D1	4	—	112	8.6	—	9.9
FX15D1	—	C(CM)-UCFX15-213D1	5/32	—	4 ¹³ / ₃₂	19	—	22
FX15D1	—	C(CM)-UCFX15-214D1						
FX15D1	—	C(CM)-UCFX15-215D1						
FX15D1	—	C(CM)-UCFX15-300D1						
FX16D1	—	C(CM)-UCFX16D1	4	—	118	11	—	12
FX16D1	—	C(CM)-UCFX16-301D1	5/32	—	4 ²¹ / ₃₂	24	—	26
FX16D1	—	C(CM)-UCFX16-302D1						
FX16D1	—	C(CM)-UCFX16-303D1						
FX16D1	—	C(CM)-UCFX16-304D1						
FX17D1	—	C(CM)-UCFX17D1	5	—	122	12	—	14
FX17D1	—	C(CM)-UCFX17-305D1	13/64	—	4 ¹³ / ₁₆	26	—	31
FX17D1	—	C(CM)-UCFX17-307D1						

sale@technobearing.ru

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)


Square flanged units cast housing
Set screw type

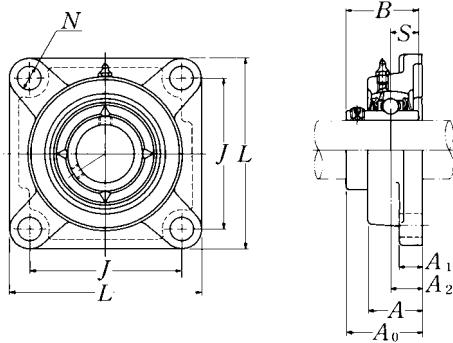

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions									Bolt size mm inch	Bearing number
		L	J	A ₂	A ₁	A	N	A ₀	B	S		
90 3 ⁷ / ₁₆ 3 ¹ / ₂	UCFX18D1 UCFX18-307D1 UCFX18-308D1	214 8 ⁷ / ₁₆	171 6 ⁴⁷ / ₆₄	45 1 ⁴⁹ / ₆₄	24 1 ¹⁵ / ₁₆	76 3	23 29 ²⁹ / ₃₂	106.1 4 ¹¹ / ₆₄	104 4.0945	42.9 1.689	M20 3/4	UCX18D1 UCX18-307D1 UCX18-308D1
100 3 ¹³ / ₁₆ 3 ⁷ / ₈ 3 ¹⁵ / ₁₆ 4	UCFX20D1 UCFX20-313D1 UCFX20-314D1 UCFX20-315D1 UCFX20-400D1	268 10 ⁹ / ₁₆	211 8 ⁵ / ₁₆	59 2 ²¹ / ₆₄	31 1 ⁷ / ₃₂	97 3 ¹³ / ₁₆	31 1 ⁷ / ₃₂	127.3 5 ¹ / ₆₄	117.5 4.6260	49.2 1.937	M27 1	UCX20D1 UCX20-313D1 UCX20-314D1 UCX20-315D1 UCX20-400D1

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

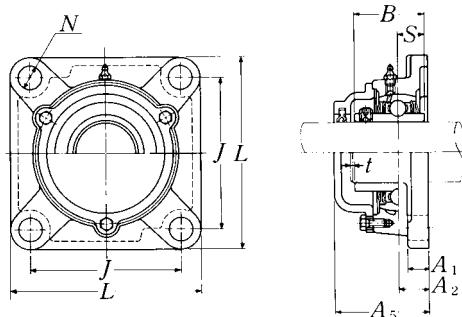
**Cast dust cover type**Open end: **C-UCFX…D1**Closed end: **CM-UCFX…D1**

Housing ¹⁾ number	Unit number ¹⁾ cast dust cover type	Nominal dimensions		Mass of unit	
		mm max. <i>t</i>	inch <i>A</i> ₅	kg UCFX	lb C(CM)
FX18D1	C(CM)-UCFX18D1	5	135	13	15
FX18D1	C(CM)-UCFX18-307D1	13/64	5 5/16	29	33
FX18D1	C(CM)-UCFX18-308D1				
FX20D1	C(CM)-UCFX20D1	5	146.5	21	23
FX20D1	C(CM)-UCFX20-313D1				
FX20D1	C(CM)-UCFX20-314D1	13/64	5 49/64	46	51
FX20D1	C(CM)-UCFX20-315D1				
FX20D1	C(CM)-UCFX20-400D1				

sale@technobearing.ru

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

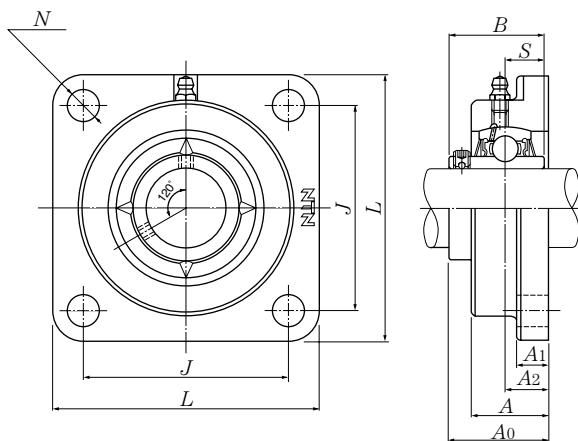
Square flanged units (Steel series)**Set screw type**

Shaft dia. mm	Unit number ¹⁾	Nominal dimensions mm									Bolt size mm	Bearing number
		L	J	A ₂	A ₁	A	N	A ₀	B	S		
12	UCFG201D1	86	64	15	11	25.5	12	33.3	31	12.7	M10	UC201D1
15	UCFG202D1	86	64	15	11	25.5	12	33.3	31	12.7	M10	UC202D1
17	UCFG203D1	86	64	15	11	25.5	12	33.3	31	12.7	M10	UC203D1
20	UCFG204D1	86	64	15	11	25.5	12	33.3	31	12.7	M10	UC204D1
25	UCFG205D1	95	70	16	13	27	12	35.7	34	14.3	M10	UC205D1
30	UCFG206D1	108	83	18	13	31	12	40.2	38.1	15.9	M10	UC206D1
35	UCFG207D1	117	92	19	15	34	14	44.4	42.9	17.5	M12	UC207D1
40	UCFG208D1	130	102	21	15	36	16	51.2	49.2	19	M14	UC208D1
45	UCFG209D1	137	105	22	16	38	16	52.2	49.2	19	M14	UC209D1
50	UCFG210D1	143	111	22	16	40	16	54.6	51.6	19	M14	UC210D1
55	UCFG211D1	162	130	25	18	43	19	58.4	55.6	22.2	M16	UC211D1
60	UCFG212D1	175	143	29	18	48	19	68.7	65.1	25.4	M16	UC212D1
65	UCFG213D1	187	149	30	22	50	19	69.7	65.1	25.4	M16	UC213D1
70	UCFG214D1	193	152	31	22	54	19	75.4	74.6	30.2	M16	UC214D1
75	UCFG215D1	200	159	34	22	56	19	78.5	77.8	33.3	M16	UC215D1
80	UCFG216D1	208	165	34	22	58	23	83.3	82.6	33.3	M20	UC216D1
85	UCFG217D1	220	175	36	24	63	23	87.6	85.7	34.1	M20	UC217D1
90	UCFG218D1	235	187	40	24	68	23	96.3	96	39.7	M20	UC218D1

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

Housing number	Mass of unit kg
FG204D1	0.8
FG205D1	1.0
FG206D1	1.5
FG207D1	2.0
FG208D1	2.4
FG209D1	2.8
FG210D1	3.2
FG211D1	4.6
FG212D1	5.7
FG213D1	7.4
FG214D1	8.1
FG215D1	9.0
FG216D1	10
FG217D1	12
FG218D1	15

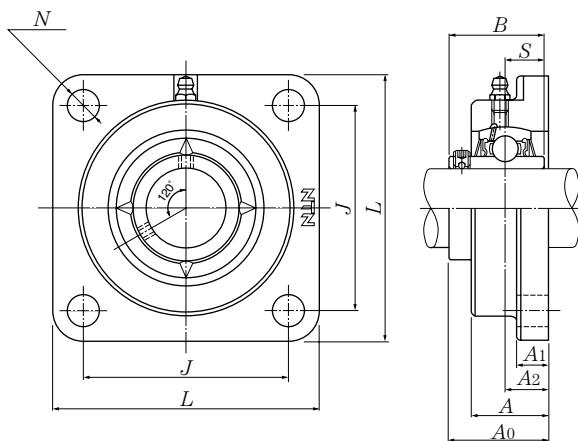Square flanged units (Steel series)**Set screw type**

Shaft dia. mm	Unit number ¹⁾	Nominal dimensions mm									Bolt size mm	Bearing number
		L	J	A ₂	A ₁	A	N	A ₀	B	S		
25	UCFG305D1	110	80	16	13	29	16	39	38	15	M14	UC305D1
30	UCFG306D1	125	95	18	15	32	16	44	43	17	M14	UC306D1
35	UCFG307D1	135	100	20	16	36	19	49	48	19	M16	UC307D1
40	UCFG308D1	150	112	23	17	40	19	56	52	19	M16	UC308D1
45	UCFG309D1	160	125	25	18	44	19	60	57	22	M16	UC309D1
50	UCFG310D1	175	132	28	19	48	23	67	61	22	M20	UC310D1
55	UCFG311D1	185	140	30	20	52	23	71	66	25	M20	UC311D1
60	UCFG312D1	195	150	33	22	56	23	78	71	26	M20	UC312D1
65	UCFG313D1	208	166	33	22	58	23	78	75	30	M20	UC313D1
70	UCFG314D1	226	178	36	25	61	25	81	78	33	M22	UC314D1
75	UCFG315D1	236	184	39	25	66	25	89	82	32	M22	UC315D1
80	UCFG316D1	250	196	38	27	68	31	90	86	34	M27	UC316D1
85	UCFG317D1	260	204	44	27	74	31	100	96	40	M27	UC317D1
90	UCFG318D1	280	216	44	30	76	35	100	96	40	M30	UC318D1
95	UCFG319D1	290	228	59	30	94	35	121	103	41	M30	UC319D1
100	UCFG320D1	310	242	59	32	94	38	125	108	42	M33	UC320D1
105	UCFG321D1	310	242	59	32	94	38	127	112	44	M33	UC321D1
110	UCFG322D1	340	266	60	35	96	41	131	117	46	M36	UC322D1
120	UCFG324D1	370	290	65	40	110	41	140	126	51	M36	UC324D1
130	UCFG326D1	410	320	65	45	115	41	146	135	54	M36	UC326D1
140	UCFG328D1	450	350	75	55	125	41	161	145	59	M36	UC328D1

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".



Note: Please refer to page 36 for size of grease fitting.

Housing number ¹⁾	Mass of unit kg
FG305D1	1.6
FG306D1	2.0
FG307D1	2.8
FG308D1	3.6
FG309D1	5.0
FG310D1	6.9
FG311D1	8.8
FG312D1	11
FG313D1	12
FG314D1	14
FG315D1	18
FG316D1	21
FG317D1	23
FG318D1	26
FG319D1	33
FG320D1	40
FG321D1	41
FG322D1	52
FG324D1	64
FG326D1	76
FG328D1	98

sale@technobearing.ru

www.technobearing.ru


8 (800) 700-72-07 (бесплатно)

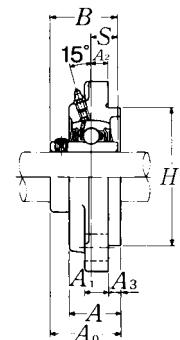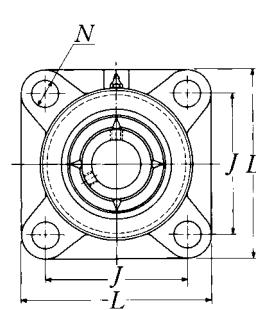Square flanged units cast housing w/ spigot joint**Set screw type**

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions											Bolt size mm inch
		L	J	A ₂	N	A ₃	A ₁	A	H ₃	A ₀	B	S	
25 $1\frac{13}{16}$ $\frac{7}{8}$ $1\frac{15}{16}$ 1	UCFS305D1	110	80	9	16	7	13	29	80	39	38	15	M14
	UCFS305-013D1	$4\frac{11}{32}$	$3\frac{5}{32}$	$2\frac{3}{64}$	$\frac{5}{8}$	$\frac{9}{32}$	$\frac{1}{2}$	$1\frac{1}{64}$	3.1496	$1\frac{17}{32}$	1.4961	0.591	$\frac{1}{2}$
	UCFS305-014D1												
	UCFS305-015D1												
	UCFS305-100D1												
30 $1\frac{1}{16}$ $1\frac{1}{8}$ $1\frac{3}{16}$	UCFS306D1	125	95	10	16	8	15	32	90	44	43	17	M14
	UCFS306-101D1	$4\frac{29}{32}$	$3\frac{47}{64}$	$2\frac{5}{64}$	$\frac{5}{8}$	$\frac{5}{16}$	$1\frac{19}{32}$	$1\frac{17}{64}$	3.5433	$1\frac{47}{64}$	1.6929	0.669	$\frac{1}{2}$
	UCFS306-102D1												
	UCFS306-103D1												
35 $1\frac{1}{4}$ $1\frac{5}{16}$ $1\frac{3}{8}$ $1\frac{7}{16}$	UCFS307D1	135	100	11	19	9	16	36	100	49	48	19	M16
	UCFS307-104D1	$5\frac{5}{16}$	$3\frac{15}{16}$	$\frac{7}{16}$	$\frac{3}{4}$	$2\frac{3}{64}$	$\frac{5}{8}$	$1\frac{13}{32}$	3.9370	$1\frac{59}{64}$	1.8898	0.748	$\frac{5}{8}$
	UCFS307-105D1												
	UCFS307-106D1												
	UCFS307-107D1												
40 $1\frac{1}{2}$ $1\frac{9}{16}$	UCFS308D1	150	112	13	19	10	17	40	115	56	52	19	M16
	UCFS308-108D1	$5\frac{29}{32}$	$4\frac{13}{32}$	$3\frac{33}{64}$	$\frac{3}{4}$	$2\frac{5}{64}$	$2\frac{1}{32}$	$1\frac{9}{16}$	4.5276	$2\frac{13}{64}$	2.0472	0.748	$\frac{5}{8}$
	UCFS308-109D1												
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UCFS309D1	160	125	14	19	11	18	44	125	60	57	22	M16
	UCFS309-110D1	$6\frac{5}{16}$	$4\frac{59}{64}$	$3\frac{35}{64}$	$\frac{3}{4}$	$\frac{7}{16}$	$2\frac{3}{32}$	$1\frac{47}{64}$	4.9213	$2\frac{23}{64}$	2.2441	0.866	$\frac{5}{8}$
	UCFS309-111D1												
	UCFS309-112D1												
50 $1\frac{13}{16}$ $1\frac{7}{8}$ $1\frac{15}{16}$	UCFS310D1	175	132	16	23	12	19	48	140	67	61	22	M20
	UCFS310-113D1	$6\frac{7}{8}$	$5\frac{13}{64}$	$\frac{5}{8}$	$2\frac{9}{32}$	$1\frac{15}{32}$	$\frac{3}{4}$	$1\frac{57}{64}$	5.5118	$2\frac{41}{64}$	2.4016	0.866	$\frac{3}{4}$
	UCFS310-114D1												
	UCFS310-115D1												
55 2 $2\frac{1}{16}$ $2\frac{1}{8}$ $2\frac{3}{16}$	UCFS311D1	185	140	17	23	13	20	52	150	71	66	25	M20
	UCFS311-200D1	$7\frac{9}{32}$	$5\frac{33}{64}$	$4\frac{43}{64}$	$2\frac{29}{32}$	$3\frac{33}{64}$	$2\frac{25}{32}$	$2\frac{3}{64}$	5.9055	$2\frac{51}{64}$	2.5984	0.984	$\frac{3}{4}$
	UCFS311-201D1												
	UCFS311-202D1												
	UCFS311-203D1												

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

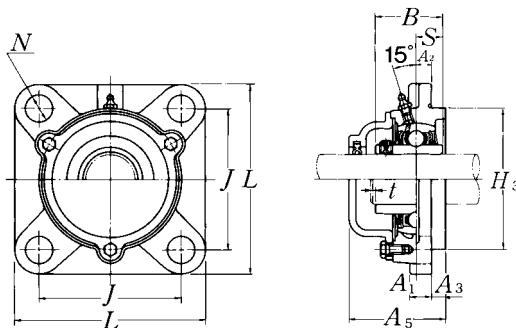
**Cast dust cover type**Open end: **C-UCFS…D1**Closed end: **CM-UCFS…D1**

Bearing number	Housing ¹⁾ number	Unit number ¹⁾ cast dust cover type	Nominal dimensions		Mass of unit	
			mm <i>t</i> max.	inch <i>A</i> ₅	kg UCFS	lb C(CM)
UC305D1	FS305D1	C(CM)-UCFS305D1	2	56	1.2	1.4
UC305-013D1	FS305D1	C(CM)-UCFS305-013D1				
UC305-014D1	FS305D1	C(CM)-UCFS305-014D1				
UC305-015D1	FS305D1	C(CM)-UCFS305-015D1				
UC305-100D1	FS305D1	C(CM)-UCFS305-100D1				
UC306D1	FS306D1	C(CM)-UCFS306D1	2	60	1.8	2.2
UC306-101D1	FS306D1	C(CM)-UCFS306-101D1				
UC306-102D1	FS306D1	C(CM)-UCFS306-102D1				
UC306-103D1	FS306D1	C(CM)-UCFS306-103D1				
UC307D1	FS307D1	C(CM)-UCFS307D1	3	67	2.3	2.8
UC307-104D1	FS307D1	C(CM)-UCFS307-104D1				
UC307-105D1	FS307D1	C(CM)-UCFS307-105D1				
UC307-106D1	FS307D1	C(CM)-UCFS307-106D1				
UC307-107D1	FS307D1	C(CM)-UCFS307-107D1				
UC308D1	FS308D1	C(CM)-UCFS308D1	3	76	3.1	3.6
UC308-108D1	FS308D1	C(CM)-UCFS308-108D1				
UC308-109D1	FS308D1	C(CM)-UCFS308-109D1				
UC309D1	FS309D1	C(CM)-UCFS309D1	3	80	3.8	4.7
UC309-110D1	FS309D1	C(CM)-UCFS309-110D1				
UC309-111D1	FS309D1	C(CM)-UCFS309-111D1				
UC309-112D1	FS309D1	C(CM)-UCFS309-112D1				
UC310D1	FS310D1	C(CM)-UCFS310D1	3	88	5.0	6.2
UC310-113D1	FS310D1	C(CM)-UCFS310-113D1				
UC310-114D1	FS310D1	C(CM)-UCFS310-114D1				
UC310-115D1	FS310D1	C(CM)-UCFS310-115D1				
UC311D1	FS311D1	C(CM)-UCFS311D1	4	93	5.9	7.2
UC311-200D1	FS311D1	C(CM)-UCFS311-200D1				
UC311-201D1	FS311D1	C(CM)-UCFS311-201D1				
UC311-202D1	FS311D1	C(CM)-UCFS311-202D1				
UC311-203D1	FS311D1	C(CM)-UCFS311-203D1				

sale@technobearing.ru

www.technobearing.ru


8 (800) 700-72-07 (бесплатно)

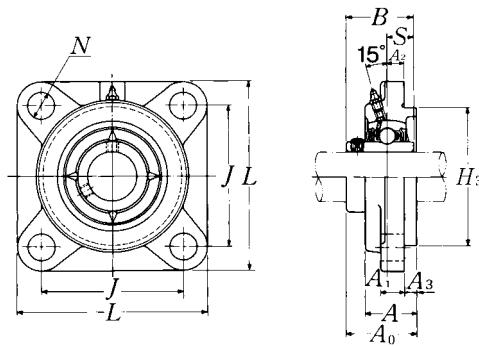Square flanged units cast housing w/ spigot joint**Set screw type**


Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions											Bolt size mm inch
		L	J	A ₂	N	A ₃	A ₁	A	H ₃	A ₀	B	S	
60 $2\frac{1}{4}$ $2\frac{5}{16}$ $2\frac{3}{8}$ $2\frac{7}{16}$	UCFS312D1	195	150	19	23	14	22	56	160	78	71	26	M20
	UCFS312-204D1	$7\frac{11}{16}$	$5\frac{29}{32}$	$\frac{3}{4}$	$\frac{29}{32}$	$\frac{35}{64}$	$\frac{7}{8}$	$2\frac{13}{64}$	6.2992	$3\frac{5}{64}$	2.7953	1.024	$\frac{3}{4}$
	UCFS312-205D1												
	UCFS312-206D1												
	UCFS312-207D1												
65 $2\frac{1}{2}$ $2\frac{9}{16}$	UCFS313D1	208	166	15	23	18	22	58	175	78	75	30	M20
	UCFS313-208D1	$8\frac{3}{16}$	$6\frac{17}{32}$	$1\frac{9}{32}$	$2\frac{9}{32}$	$\frac{45}{64}$	$\frac{7}{8}$	$2\frac{9}{32}$	6.8898	$3\frac{5}{64}$	2.9528	1.181	$\frac{3}{4}$
	UCFS313-209D1												
70 $2\frac{5}{8}$ $2\frac{11}{16}$ $2\frac{3}{4}$	UCFS314D1	226	178	18	25	18	25	61	185	81	78	33	M22
	UCFS314-210D1	$8\frac{29}{32}$	$7\frac{1}{64}$	$\frac{45}{64}$	$\frac{63}{64}$	$\frac{45}{64}$	$3\frac{1}{32}$	$2\frac{13}{32}$	7.2835	$3\frac{3}{16}$	3.0709	1.299	$\frac{7}{8}$
	UCFS314-211D1												
	UCFS314-212D1												
75 $2\frac{13}{16}$ $2\frac{7}{8}$ $2\frac{15}{16}$ 3	UCFS315D1	236	184	21	25	18	25	66	200	89	82	32	M22
	UCFS315-213D1	$9\frac{9}{32}$	$7\frac{1}{4}$	$\frac{53}{64}$	$\frac{63}{64}$	$\frac{45}{64}$	$3\frac{1}{32}$	$2\frac{19}{32}$	7.8740	$3\frac{1}{2}$	3.2283	1.260	$\frac{7}{8}$
	UCFS315-214D1												
	UCFS315-215D1												
	UCFS315-300D1												
80 $3\frac{1}{16}$ $3\frac{1}{8}$ $3\frac{3}{16}$	UCFS316D1	250	196	18	31	20	27	68	210	90	86	34	M27
	UCFS316-301D1	$9\frac{27}{32}$	$7\frac{23}{32}$	$\frac{45}{64}$	$1\frac{7}{32}$	$\frac{25}{32}$	$1\frac{1}{16}$	$2\frac{43}{64}$	8.2677	$3\frac{35}{64}$	3.3858	1.339	1
	UCFS316-302D1												
	UCFS316-303D1												
85 $3\frac{1}{4}$ $3\frac{5}{16}$ $3\frac{7}{16}$	UCFS317D1	260	204	24	31	20	27	74	220	100	96	40	M27
	UCFS317-304D1	$10\frac{1}{4}$	$8\frac{1}{32}$	$\frac{15}{16}$	$1\frac{7}{32}$	$\frac{25}{32}$	$1\frac{1}{16}$	$2\frac{29}{32}$	8.6614	$3\frac{15}{16}$	3.7795	1.575	1
	UCFS317-305D1												
	UCFS317-307D1												
90 $3\frac{7}{16}$ $3\frac{1}{2}$	UCFS318D1	280	216	24	35	20	30	76	240	100	96	40	M30
	UCFS318-307D1	$11\frac{1}{32}$	$8\frac{1}{2}$	$\frac{15}{16}$	$1\frac{3}{8}$	$\frac{25}{32}$	$1\frac{3}{16}$	$2\frac{63}{64}$	9.4488	$3\frac{15}{16}$	3.7795	1.575	$1\frac{1}{8}$
	UCFS318-308D1												

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

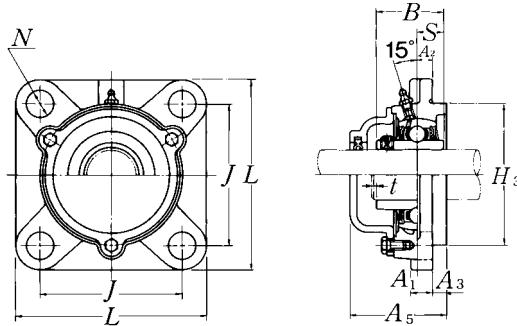**Cast dust cover type**Open end: **C-UCFS…D1**Closed end: **CM-UCFS…D1**


Bearing number	Housing ¹⁾ number	Unit number ¹⁾ cast dust cover type	Nominal dimensions		Mass of unit	
			mm <i>t</i> max.	inch <i>A</i> ₅	kg UCFS	lb C(CM)
UC312D1	FS312D1	C(CM)-UCFS312D1	4	100	7.0	8.4
UC312-204D1	FS312D1	C(CM)-UCFS312-204D1				
UC312-205D1	FS312D1	C(CM)-UCFS312-205D1				
UC312-206D1	FS312D1	C(CM)-UCFS312-206D1				
UC312-207D1	FS312D1	C(CM)-UCFS312-207D1				
UC313D1	FS313D1	C(CM)-UCFS313D1	4	103	8.6	10
UC313-208D1	FS313D1	C(CM)-UCFS313-208D1	$\frac{5}{32}$	$4\frac{1}{16}$	19	22
UC313-209D1	FS313D1	C(CM)-UCFS313-209D1				
UC314D1	FS314D1	C(CM)-UCFS314D1	4	106	10	12
UC314-210D1	FS314D1	C(CM)-UCFS314-210D1				
UC314-211D1	FS314D1	C(CM)-UCFS314-211D1				
UC314-212D1	FS314D1	C(CM)-UCFS314-212D1				
UC315D1	FS315D1	C(CM)-UCFS315D1	4	114	12	14
UC315-213D1	FS315D1	C(CM)-UCFS315-213D1				
UC315-214D1	FS315D1	C(CM)-UCFS315-214D1				
UC315-215D1	FS315D1	C(CM)-UCFS315-215D1				
UC315-300D1	FS315D1	C(CM)-UCFS315-300D1				
UC316D1	FS316D1	C(CM)-UCFS316D1	4	116	14	17
UC316-301D1	FS316D1	C(CM)-UCFS316-301D1				
UC316-302D1	FS316D1	C(CM)-UCFS316-302D1	$\frac{5}{32}$	$4\frac{9}{16}$	31	37
UC316-303D1	FS316D1	C(CM)-UCFS316-303D1				
UC317D1	FS317D1	C(CM)-UCFS317D1	5	129	17	20
UC317-304D1	FS317D1	C(CM)-UCFS317-304D1				
UC317-305D1	FS317D1	C(CM)-UCFS317-305D1				
UC317-307D1	FS317D1	C(CM)-UCFS317-307D1				
UC318D1	FS318D1	C(CM)-UCFS318D1	5	129	20	24
UC318-307D1	FS318D1	C(CM)-UCFS318-307D1	$\frac{13}{64}$	$5\frac{5}{64}$	44	53
UC318-308D1	FS318D1	C(CM)-UCFS318-308D1				

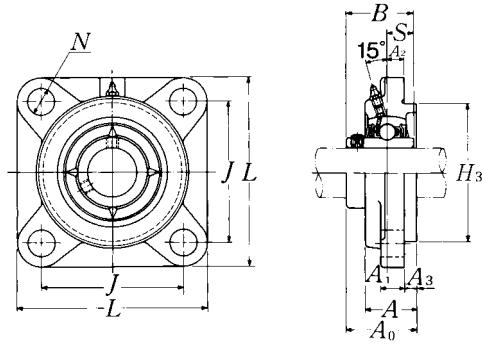



Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions											Bolt size mm inch
		L	J	A ₂	N	A ₃	A ₁	A	H ₃	A ₀	B	S	
95 $3\frac{5}{8}$	UCFS319D1	290	228	39	35	20	30	94	250	121	103	41	M30
$3\frac{11}{16}$	UCFS319-310D1	$11\frac{13}{32}$	$8\frac{31}{32}$	$1\frac{17}{32}$	$1\frac{3}{8}$	$\frac{25}{32}$	$1\frac{3}{16}$	$3\frac{45}{64}$	9.8425	$4\frac{49}{64}$	4.0551	1.614	$1\frac{1}{8}$
$3\frac{3}{4}$	UCFS319-311D1												
	UCFS319-312D1												
100 $3\frac{13}{16}$	UCFS320D1	310	242	39	38	20	32	94	260	125	108	42	M33
$3\frac{7}{8}$	UCFS320-313D1	$12\frac{7}{32}$	$9\frac{17}{32}$	$1\frac{17}{32}$	$1\frac{1}{2}$	$\frac{25}{32}$	$1\frac{1}{4}$	$3\frac{45}{64}$	10.2362	$4\frac{59}{64}$	4.2520	1.654	$1\frac{1}{4}$
$3\frac{15}{16}$	UCFS320-314D1												
4	UCFS320-315D1												
	UCFS320-400D1												
105	UCFS321D1	310	242	39	38	20	32	94	260	127	112	44	M33
110	UCFS322D1	340	266	35	41	25	35	96	300	131	117	46	M36
120	UCFS324D1	370	290	35	41	30	40	110	330	140	126	51	M36
130	UCFS326D1	410	320	35	41	30	45	115	360	146	135	54	M36
140	UCFS328D1	450	350	45	41	30	55	125	400	161	145	59	M36

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

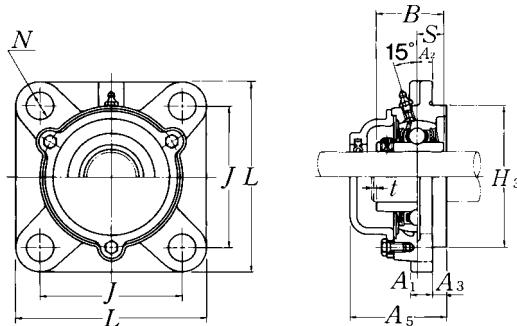**Cast dust cover type**Open end: **C-UCFS…D1**Closed end: **CM-UCFS…D1**

Bearing number	Housing ¹⁾ number	Unit number ¹⁾ cast dust cover type	Nominal dimensions		Mass of unit	
			mm <i>t</i> max.	inch <i>A</i> ₅	kg UCFS	lb C(CM)
UC319D1	FS319D1	C(CM)-UCFS319D1	5	149	24	28
UC319-310D1	FS319D1	C(CM)-UCFS319-310D1				
UC319-311D1	FS319D1	C(CM)-UCFS319-311D1	$1\frac{13}{64}$	$5\frac{55}{64}$	53	62
UC319-312D1	FS319D1	C(CM)-UCFS319-312D1				
UC320D1	FS320D1	C(CM)-UCFS320D1	5	154	29	34
UC320-313D1	FS320D1	C(CM)-UCFS320-313D1				
UC320-314D1	FS320D1	C(CM)-UCFS320-314D1	$1\frac{13}{64}$	$6\frac{1}{16}$	64	75
UC320-315D1	FS320D1	C(CM)-UCFS320-315D1				
UC320-400D1	FS320D1	C(CM)-UCFS320-400D1				
UC321D1	FS321D1	C(CM)-UCFS321D1	5	156	28	33
UC322D1	FS322D1	C(CM)-UCFS322D1	5	160	38	45
UC324D1	FS324D1	C(CM)-UCFS324D1	5	172	52	59
UC326D1	FS326D1	C(CM)-UCFS326D1	6	178	69	77
UC328D1	FS328D1	C(CM)-UCFS328D1	6	192	98	109

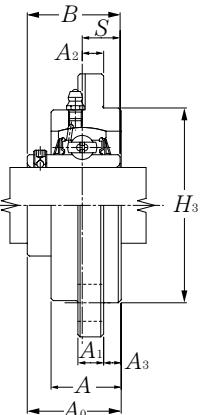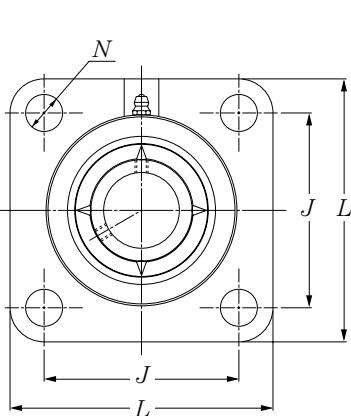Square flanged units w/ spigot joint (Steel series)**Set screw type**

Shaft dia. mm	Unit number ¹⁾	Nominal dimensions mm											Bolt size mm	Bearing number
		L	J	A ₂	N	A ₃	A ₁	A	H ₃	A ₀	B	S		
25	UCFSG305D1	110	80	9	16	7	13	29	80	39	38	15	M14	UC305D1
30	UCFSG306D1	125	95	10	16	8	15	32	90	44	43	17	M14	UC306D1
35	UCFSG307D1	135	100	11	19	9	16	36	100	49	48	19	M16	UC307D1
40	UCFSG308D1	150	112	13	19	10	17	40	115	56	52	19	M16	UC308D1
45	UCFSG309D1	160	125	14	19	11	18	44	125	60	57	22	M16	UC309D1
50	UCFSG310D1	175	132	16	23	12	19	48	140	67	61	22	M20	UC310D1
55	UCFSG311D1	185	140	17	23	13	20	52	150	71	66	25	M20	UC311D1
60	UCFSG312D1	195	150	19	23	14	22	56	160	78	71	26	M20	UC312D1
65	UCFSG313D1	208	166	15	23	18	22	58	175	78	75	30	M20	UC313D1
70	UCFSG314D1	226	178	18	25	18	25	61	185	81	78	33	M22	UC314D1
75	UCFSG315D1	236	184	21	25	18	25	66	200	89	82	32	M22	UC315D1
80	UCFSG316D1	250	196	18	31	20	27	68	210	90	86	34	M27	UC316D1
85	UCFSG317D1	260	204	24	31	20	27	74	220	100	96	40	M27	UC317D1
90	UCFSG318D1	280	216	24	35	20	30	76	240	100	96	40	M30	UC318D1
95	UCFSG319D1	290	228	39	35	20	30	94	250	121	103	41	M30	UC319D1
100	UCFSG320D1	310	242	39	38	20	32	94	260	125	108	42	M33	UC320D1
105	UCFSG321D1	310	242	39	38	20	32	94	260	127	112	44	M33	UC321D1
110	UCFSG322D1	340	266	35	41	25	35	96	300	131	117	46	M36	UC322D1
120	UCFSG324D1	370	290	35	41	30	40	110	330	140	126	51	M36	UC324D1
130	UCFSG326D1	410	320	35	41	30	45	115	360	146	135	54	M36	UC326D1
140	UCFSG328D1	450	350	45	41	30	55	125	400	161	145	59	M36	UC328D1

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.


Housing number	Mass of unit kg
FSG305D1	1.9
FSG306D1	2.1
FSG307D1	2.6
FSG308D1	3.6
FSG309D1	4.5
FSG310D1	5.8
FSG311D1	6.9
FSG312D1	8.3
FSG313D1	10
FSG314D1	13
FSG315D1	15
FSG316D1	17
FSG317D1	20
FSG318D1	24
FSG319D1	29
FSG320D1	35
FSG321D1	33
FSG322D1	45
FSG324D1	61
FSG326D1	80
FSG328D1	113

sale@technobearing.ru

www.technobearing.ru

Round flanged units cast housing w/ spigot joint**Set screw type**

8 (800) 700-72-07 (бесплатно)

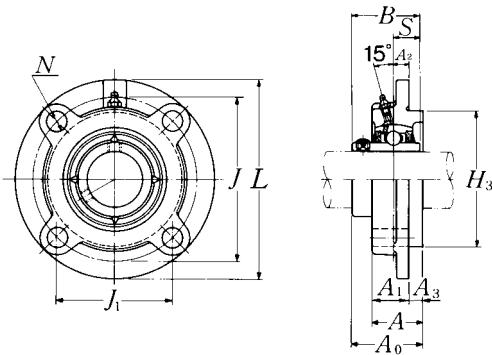


Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions												Bolt size mm inch	
		L	J	(J ₁)	A ₂	N	A ₃	A ₁	A _{1c}	A	H ₃	A ₀	B	S	
12 1/2	UCFC201D1 UCFC201-008D1	100 3 ¹⁵ / ₁₆	78 3 ⁵ / ₆₄	55.2 2 ¹¹ / ₆₄	10 25/ ₆₄	12 15/ ₃₂	5 13/ ₆₄	20.5 13/ ₁₆	20.5 13/ ₁₆	25.5 1	62 2.4409	33.3 1 ¹⁵ / ₁₆	31 1.2205	12.7 0.500	M10 3/8
15 9/ ₁₆ 5/ ₈	UCFC202D1 UCFC202-009D1 UCFC202-010D1	100 3 ¹⁵ / ₁₆	78 3 ⁵ / ₆₄	55.2 2 ¹¹ / ₆₄	10 25/ ₆₄	12 15/ ₃₂	5 13/ ₆₄	20.5 13/ ₁₆	20.5 13/ ₁₆	25.5 1	62 2.4409	33.3 1 ⁵ / ₁₆	31 1.2205	12.7 0.500	M10 3/8
17 11/ ₁₆	UCFC203D1 UCFC203-011D1	100 3 ¹⁵ / ₁₆	78 3 ⁵ / ₆₄	55.2 2 ¹¹ / ₆₄	10 25/ ₆₄	12 15/ ₃₂	5 13/ ₆₄	20.5 13/ ₁₆	20.5 13/ ₁₆	25.5 1	62 2.4409	33.3 1 ⁵ / ₁₆	31 1.2205	12.7 0.500	M10 3/8
20 3/ ₄	UCFC204D1 UCFC204-012D1	100 3 ¹⁵ / ₁₆	78 3 ⁵ / ₆₄	55.2 2 ¹¹ / ₆₄	10 25/ ₆₄	12 15/ ₃₂	5 13/ ₆₄	20.5 13/ ₁₆	20.5 13/ ₁₆	25.5 1	62 2.4409	33.3 1 ⁵ / ₁₆	31 1.2205	12.7 0.500	M10 3/8
25 13/ ₁₆ 7/ ₈ 15/ ₁₆ 1	UCFC205D1 UCFC205-013D1 UCFC205-014D1 UCFC205-015D1 UCFC205-100D1	115 4 ¹⁷ / ₃₂	90 3 ³⁵ / ₆₄	63.6 2 ¹ / ₂	10 25/ ₆₄	12 15/ ₃₂	6 15/ ₆₄	21 13/ ₁₆	22 7/8	27 1 ¹ / ₁₆	70 2.7559	35.8 1 ¹³ / ₃₂	34.1 1.3425	14.3 0.563	M10 3/8
30 1 ¹ / ₁₆ 1 ¹ / ₈ 1 ³ / ₁₆ 1 ¹ / ₄	UCFC206D1 UCFC206-101D1 UCFC206-102D1 UCFC206-103D1 UCFC206-104D1	125 4 ²⁹ / ₃₂	100 3 ¹⁵ / ₁₆	70.7 2 ²⁵ / ₃₂	10 25/ ₆₄	12 15/ ₃₂	8 5/ ₁₆	23 29/ ₃₂	24.5 31/ ₃₂	31 1 ⁷ / ₃₂	80 3.1496	40.2 1 ³⁷ / ₆₄	38.1 1.5000	15.9 0.629	M10 3/8
35 1 ¹ / ₄ 1 ⁵ / ₁₆ 1 ³ / ₈ 1 ⁷ / ₁₆	UCFC207D1 UCFC207-104D1 UCFC207-105D1 UCFC207-106D1 UCFC207-107D1	135 5 ⁵ / ₁₆	110 4 ²¹ / ₆₄	77.8 3 ¹ / ₁₆	11 7/ ₁₆	14 35/ ₆₄	8 5/ ₁₆	26 1 ¹ / ₃₂	26 1 ¹ / ₃₂	34 1 ¹¹ / ₃₂	90 3.5433	44.4 1 ³ / ₄	42.9 1.6890	17.5 0.689	7/16
40 1 ¹ / ₂ 1 ⁹ / ₁₆	UCFC208D1 UCFC208-108D1 UCFC208-109D1	145 5 ²³ / ₃₂	120 4 ²³ / ₃₂	84.9 3 ¹¹ / ₃₂	11 7/ ₁₆	14 35/ ₆₄	10 25/ ₆₄	26 1 ¹ / ₃₂	27.5 1 ⁵ / ₆₄	36 1 ²⁷ / ₆₄	100 3.9370	51.2 2 ¹ / ₆₄	49.2 1.9370	19 0.748	7/16
45 1 ⁵ / ₈ 1 ¹¹ / ₁₆ 1 ³ / ₄	UCFC209D1 UCFC209-110D1 UCFC209-111D1 UCFC209-112D1	160 6 ⁵ / ₁₆	132 5 ¹³ / ₆₄	93.3 3 ⁴³ / ₆₄	10 25/ ₆₄	16 5/ ₈	12 15/ ₃₂	26 1 ¹ / ₃₂	28 1 ⁷ / ₆₄	38 1 ¹ / ₆₄	105 4.1339	52.2 2 ³ / ₆₄	49.2 1.9370	19 0.748	1/2

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

sale@technobearing.ru 36 for size of grease fitting.

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

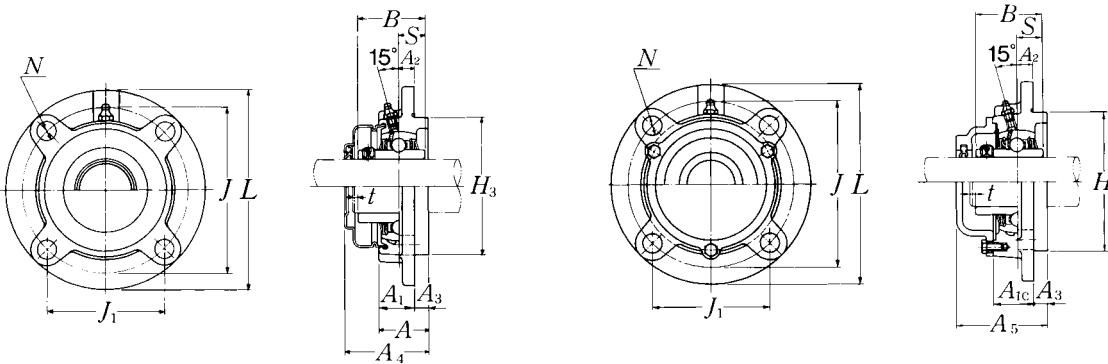

Pressed steel dust cover type

Open end: S-UCFC···D1


Closed end: SM-UCFC···D1

Cast dust cover type

Open end: C-UCFC···D1


Closed end: CM-UCFC···D1

Bearing number	Housing number	Unit number pressed ¹⁾ steel dust cover type	Unit number ¹⁾ cast dust cover type	Nominal dimensions			Mass of unit		
				mm max.	t A ₄	inch A ₅	kg UCFC	kg S(SM)	lb C(CM)
UC201D1	FC204D1	S(SM)-UCFC201D1	C(CM)-UCFC201D1	2 $\frac{5}{64}$	40.5 $1\frac{19}{32}$	46 $1\frac{13}{16}$	0.8	0.8	0.9
UC201-008D1	FC204D1	S(SM)-UCFC201-008D1	S(SM)-UCFC201-008D1				1.8	1.8	2.0
UC202D1	FC204D1	S(SM)-UCFC202D1	C(CM)-UCFC202D1	2 $\frac{5}{64}$	40.5 $1\frac{19}{32}$	46 $1\frac{13}{16}$	0.8	0.8	0.9
UC202-009D1	FC204D1	S(SM)-UCFC202-009D1	C(CM)-UCFC202-009D1				1.8	1.8	2.0
UC202-010D1	FC204D1	S(SM)-UCFC202-010D1	C(CM)-UCFC202-010D1						
UC203D1	FC204D1	S(SM)-UCFC203D1	C(CM)-UCFC203D1	2 $\frac{5}{64}$	40.5 $1\frac{19}{32}$	46 $1\frac{13}{16}$	0.8	0.8	0.9
UC203-011D1	FC204D1	S(SM)-UCFC203-011D1	C(CM)-UCFC203-011D1				1.8	1.8	2.0
UC204D1	FC204D1	S(SM)-UCFC204D1	C(CM)-UCFC204D1	2 $\frac{5}{64}$	40.5 $1\frac{19}{32}$	46 $1\frac{13}{16}$	0.7	0.7	0.9
UC204-012D1	FC204D1	S(SM)-UCFC204-012D1	C(CM)-UCFC204-012D1				1.5	1.5	2.0
UC205D1	FC205D1	S(SM)-UCFC205D1	C(CM)-UCFC205D1	2 $\frac{5}{64}$	44.5 $1\frac{3}{4}$	51 2	1.0	1.0	1.2
UC205-013D1	FC205D1	S(SM)-UCFC205-013D1	C(CM)-UCFC205-013D1						
UC205-014D1	FC205D1	S(SM)-UCFC205-014D1	C(CM)-UCFC205-014D1						
UC205-015D1	FC205D1	S(SM)-UCFC205-015D1	C(CM)-UCFC205-015D1						
UC205-100D1	FC205D1	S(SM)-UCFC205-100D1	C(CM)-UCFC205-100D1						
UC206D1	FC206D1	S(SM)-UCFC206D1	C(CM)-UCFC206D1	2 $\frac{5}{64}$	49 $1\frac{59}{64}$	56 $2\frac{13}{64}$	1.3	1.4	1.6
UC206-101D1	FC206D1	S(SM)-UCFC206-101D1	C(CM)-UCFC206-101D1						
UC206-102D1	FC206D1	S(SM)-UCFC206-102D1	C(CM)-UCFC206-102D1						
UC206-103D1	FC206D1	S(SM)-UCFC206-103D1	C(CM)-UCFC206-103D1						
UC206-104D1	FC206D1	S(SM)-UCFC206-104D1	C(CM)-UCFC206-104D1						
UC207D1	FC207D1	S(SM)-UCFC207D1	C(CM)-UCFC207D1	3 $\frac{1}{8}$	55 $2\frac{11}{64}$	59 $2\frac{21}{64}$	1.6	1.7	1.9
UC207-104D1	FC207D1	S(SM)-UCFC207-104D1	C(CM)-UCFC207-104D1						
UC207-105D1	FC207D1	S(SM)-UCFC207-105D1	C(CM)-UCFC207-105D1						
UC207-106D1	FC207D1	S(SM)-UCFC207-106D1	C(CM)-UCFC207-106D1						
UC207-107D1	FC207D1	S(SM)-UCFC207-107D1	C(CM)-UCFC207-107D1						
UC208D1	FC208D1	S(SM)-UCFC208D1	C(CM)-UCFC208D1	3 $\frac{1}{8}$	62 $2\frac{7}{16}$	66 $2\frac{19}{32}$	2.0	2.1	2.4
UC208-108D1	FC208D1	S(SM)-UCFC208-108D1	C(CM)-UCFC208-108D1				4.4	4.6	5.3
UC208-109D1	FC208D1	S(SM)-UCFC208-109D1	C(CM)-UCFC208-109D1						
UC209D1	FC209D1	S(SM)-UCFC209D1	C(CM)-UCFC209D1	3 $\frac{1}{8}$	63 $2\frac{31}{64}$	70 $2\frac{3}{4}$	2.7	2.7	3.2
UC209-110D1	FC209D1	S(SM)-UCFC209-110D1	C(CM)-UCFC209-110D1						
UC209-111D1	FC209D1	S(SM)-UCFC209-111D1	C(CM)-UCFC209-111D1						
UC209-112D1	FC209D1	S(SM)-UCFC209-112D1	C(CM)-UCFC209-112D1						

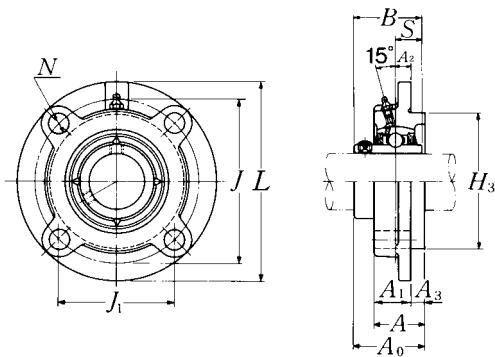


Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

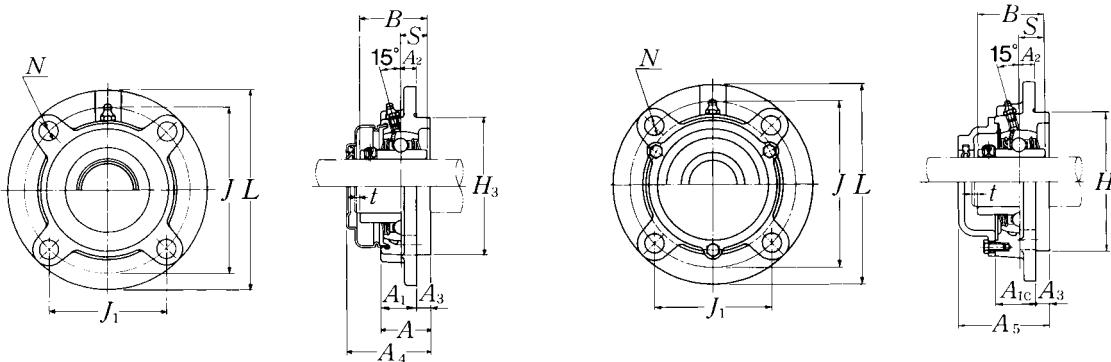**Pressed steel dust cover type**Open end: **S-UCFC···D1**Closed end: **SM-UCFC···D1****Cast dust cover type**Open end: **C-UCFC···D1**Closed end: **CM-UCFC···D1**


Bearing number	Housing number	Unit number pressed ¹⁾ steel dust cover type	Unit number ¹⁾ cast dust cover type	Nominal dimensions			Mass of unit		
				mm max.	t A ₄	inch A ₅	kg UCFC	kg S(SM)	lb C(CM)
UC210D1	FC210D1	S(SM)-UCFC210D1	C(CM)-UCFC210D1	3	65.5	72	3.0	3.1	3.6
UC210-113D1	FC210D1	S(SM)-UCFC210-113D1	C(CM)-UCFC210-113D1						
UC210-114D1	FC210D1	S(SM)-UCFC210-114D1	C(CM)-UCFC210-114D1						
UC210-115D1	FC210D1	S(SM)-UCFC210-115D1	C(CM)-UCFC210-115D1						
UC210-200D1	FC210D1	S(SM)-UCFC210-200D1	C(CM)-UCFC210-200D1						
UC211D1	FC211D1	S(SM)-UCFC211D1	C(CM)-UCFC211D1	4	71	75	4.1	4.2	4.8
UC211-200D1	FC211D1	S(SM)-UCFC211-200D1	C(CM)-UCFC211-200D1						
UC211-201D1	FC211D1	S(SM)-UCFC211-201D1	C(CM)-UCFC211-201D1						
UC211-202D1	FC211D1	S(SM)-UCFC211-202D1	C(CM)-UCFC211-202D1						
UC211-203D1	FC211D1	S(SM)-UCFC211-203D1	C(CM)-UCFC211-203D1						
UC212D1	FC212D1	S(SM)-UCFC212D1	C(CM)-UCFC212D1	4	80	86	4.9	5.1	5.9
UC212-204D1	FC212D1	S(SM)-UCFC212-204D1	C(CM)-UCFC212-204D1						
UC212-205D1	FC212D1	S(SM)-UCFC212-205D1	C(CM)-UCFC212-205D1						
UC212-206D1	FC212D1	S(SM)-UCFC212-206D1	C(CM)-UCFC212-206D1						
UC212-207D1	FC212D1	S(SM)-UCFC212-207D1	C(CM)-UCFC212-207D1						
UC213D1	FC213D1	S(SM)-UCFC213D1	C(CM)-UCFC213D1	4	83.5	89.5	5.8	6.0	6.8
UC213-208D1	FC213D1	S(SM)-UCFC213-208D1	C(CM)-UCFC213-208D1						
UC213-209D1	FC213D1	S(SM)-UCFC213-209D1	C(CM)-UCFC213-209D1						
UC214D1	FC214D1	—	C(CM)-UCFC214D1	4	—	98	7.0	—	8.0
UC214-210D1	FC214D1		C(CM)-UCFC214-210D1						
UC214-211D1	FC214D1	—	C(CM)-UCFC214-211D1						
UC214-212D1	FC214D1		C(CM)-UCFC214-212D1						
UC215D1	FC215D1	—	C(CM)-UCFC215D1	4	—	102	7.4	—	8.8
UC215-213D1	FC215D1		C(CM)-UCFC215-213D1						
UC215-214D1	FC215D1	—	C(CM)-UCFC215-214D1						
UC215-215D1	FC215D1		C(CM)-UCFC215-215D1						
UC215-300D1	FC215D1		C(CM)-UCFC215-300D1						
UC216D1	FC216D1	—	C(CM)-UCFC216D1	4	—	106	9.1	—	10
UC216-301D1	FC216D1		C(CM)-UCFC216-301D1						
UC216-302D1	FC216D1	—	C(CM)-UCFC216-302D1						
UC216-303D1	FC216D1		C(CM)-UCFC216-303D1						

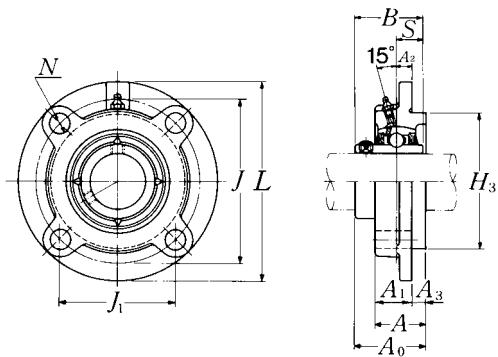

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions												Bolt size mm inch	
		L	J	(J ₁)	A ₂	N	A ₃	A ₁	A _{1C}	A	H ₃	A ₀	B	S	
85 $3\frac{1}{4}$ $3\frac{5}{16}$ $3\frac{7}{16}$	UCFC217D1	250	208	147.1	18	23	18	45	45.5	63	180	87.6	85.7	34.1	M20
	UCFC217-304D1														
	UCFC217-305D1	9 $\frac{27}{32}$	8 $\frac{3}{16}$	5 $\frac{51}{64}$	45 $\frac{1}{64}$	29 $\frac{1}{32}$	45 $\frac{1}{64}$	1 $\frac{25}{32}$	1 $\frac{51}{64}$	2 $\frac{31}{64}$	7.0866	3 $\frac{29}{64}$	3.3740	1.343	$\frac{3}{4}$
	UCFC217-307D1														
90 $3\frac{1}{2}$	UCFC218D1	265	220	155.6	22	23	18	50	50	68	190	96.3	96	39.7	M20
	UCFC218-308D1	10 $\frac{7}{16}$	8 $\frac{21}{32}$	6 $\frac{1}{8}$	55 $\frac{1}{64}$	29 $\frac{1}{32}$	45 $\frac{1}{64}$	1 $\frac{31}{32}$	1 $\frac{31}{32}$	2 $\frac{43}{64}$	7.4803	3 $\frac{51}{64}$	3.7795	1.563	$\frac{3}{4}$

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

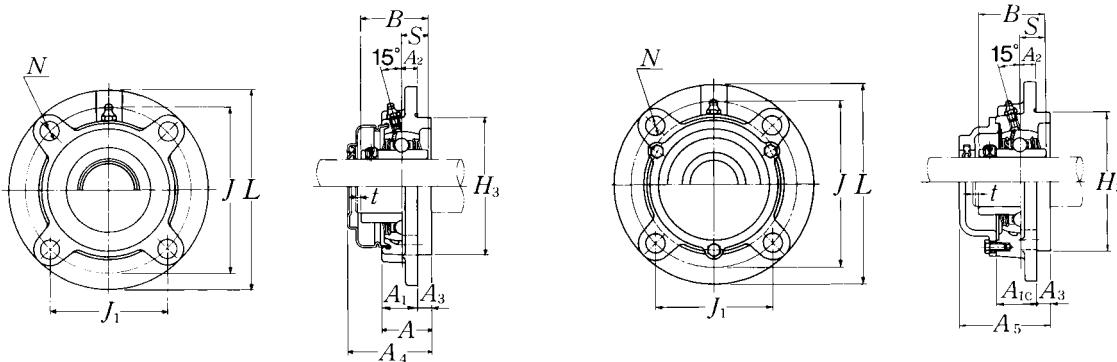**Pressed steel dust cover type**Open end: **S-UCFC···D1**Closed end: **SM-UCFC···D1****Cast dust cover type**Open end: **C-UCFC···D1**Closed end: **CM-UCFC···D1**


Bearing number	Housing number	Unit number pressed ¹⁾ steel dust cover type	Unit number ¹⁾ cast dust cover type	Nominal dimensions		Mass of unit		
				mm max. <i>t</i>	inch <i>A</i> ₄ <i>A</i> ₅	kg UCFC	kg S(SM)	lb C(CM)
UC217D1	FC217D1	—	C(CM)-UCFC217D1	5	—	114	11	—
UC217-304D1	FC217D1	—	C(CM)-UCFC217-304D1	$1\frac{13}{64}$	—	$4\frac{31}{64}$	24	—
UC217-305D1	FC217D1	—	C(CM)-UCFC217-305D1	$1\frac{13}{64}$	—	$4\frac{31}{64}$	26	—
UC217-307D1	FC217D1	—	C(CM)-UCFC217-307D1	$1\frac{13}{64}$	—	$4\frac{51}{64}$	29	—
UC218D1	FC218D1	—	C(CM)-UCFC218D1	5	—	122	13	—
UC218-308D1	FC218D1	—	C(CM)-UCFC218-308D1	$1\frac{13}{64}$	—	$4\frac{51}{64}$	29	33

sale@technobearing.ru

www.technobearing.ru

Round flanged units cast housing w/ spigot joint**Set screw type**

8 (800) 700-72-07 (бесплатно)

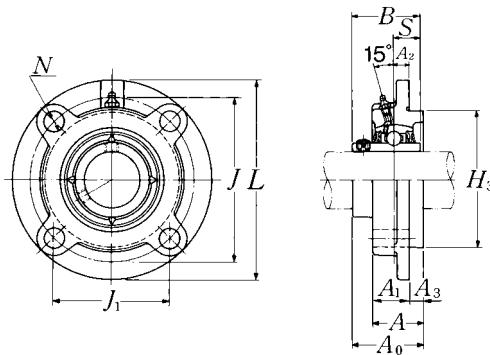

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions												Bolt size mm inch
		L	J	(J ₁)	A ₂	N	A ₃	A ₁	A	H ₃	A ₀	B	S	
25 $1\frac{3}{16}$ $\frac{7}{8}$ $1\frac{15}{16}$ 1	UCFCX05D1	111	92	65.1	10	9.5	6	24	30	76	38.2	38.1	15.9	M 8
	UCFCX05-013D1	$4\frac{3}{8}$	$3\frac{5}{8}$	$2\frac{9}{16}$	$2\frac{5}{64}$	$\frac{3}{8}$	$\frac{1}{4}$	$1\frac{5}{16}$	$1\frac{3}{16}$	2.9921	$1\frac{1}{2}$	1.5000	0.626	$\frac{5}{16}$
	UCFCX05-014D1													
	UCFCX05-015D1													
	UCFCX05-100D1													
30 $1\frac{1}{16}$ $1\frac{1}{8}$ $1\frac{3}{16}$ $1\frac{1}{4}$	UCFCX06D1	127	105	74.2	8	12	9.5	22.5	32	85	42.9	42.9	17.5	M10
	UCFCX06-101D1	5	$4\frac{9}{64}$	$2\frac{59}{64}$	$\frac{5}{16}$	$\frac{15}{32}$	$\frac{3}{8}$	$\frac{7}{8}$	$1\frac{27}{64}$	3.3465	$1\frac{11}{16}$	1.6890	0.689	$\frac{3}{8}$
	UCFCX06-102D1													
	UCFCX06-103D1													
	UCFCX06-104D1													
35 $1\frac{5}{16}$ $1\frac{3}{8}$ $1\frac{7}{16}$	UCFCX07D1	133	111	78.5	9	12	11	26	37	92	50.2	49.2	19	M10
	UCFCX07-105D1	$5\frac{1}{4}$	$4\frac{3}{8}$	$3\frac{3}{32}$	$2\frac{3}{64}$	$\frac{15}{32}$	$\frac{7}{16}$	$1\frac{1}{32}$	$1\frac{29}{64}$	3.6220	$1\frac{31}{32}$	1.9370	0.748	$\frac{3}{8}$
	UCFCX07-106D1													
	UCFCX07-107D1													
40 $1\frac{1}{2}$ $1\frac{9}{16}$	UCFCX08D1	133	111	78.5	9	12	11	26	37	92	50.2	49.2	19	M10
	UCFCX08-108D1	$5\frac{1}{4}$	$4\frac{3}{8}$	$3\frac{3}{32}$	$2\frac{3}{64}$	$\frac{15}{32}$	$\frac{7}{16}$	$1\frac{1}{32}$	$1\frac{29}{64}$	3.6220	$1\frac{31}{32}$	1.9370	0.748	$\frac{3}{8}$
	UCFCX08-109D1													
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$ $1\frac{13}{16}$	UCFCX09D1	155	130	91.9	8	14	12	25	37	108	52.6	51.6	19	M12
	UCFCX09-110D1	$6\frac{3}{32}$	$5\frac{1}{8}$	$3\frac{5}{8}$	$\frac{5}{16}$	$\frac{35}{64}$	$\frac{15}{32}$	$\frac{31}{32}$	$1\frac{29}{64}$	4.2520	$2\frac{5}{64}$	2.0315	0.748	$\frac{7}{16}$
	UCFCX09-111D1													
	UCFCX09-112D1													
	UCFCX09-113D1													
50 $1\frac{7}{8}$ $1\frac{15}{16}$ 2	UCFCX10D1	162	136	96.2	7	14	16	25	41	118	56.4	55.6	22.2	M12
	UCFCX10-114D1	$6\frac{3}{8}$	$5\frac{23}{64}$	$3\frac{25}{32}$	$\frac{9}{32}$	$\frac{35}{64}$	$\frac{5}{8}$	$\frac{31}{32}$	$1\frac{39}{64}$	4.6457	$2\frac{7}{32}$	2.1890	0.874	$\frac{7}{16}$
	UCFCX10-115D1													
	UCFCX10-200D1													

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.


Bearing number	Housing number ¹⁾	Mass of unit kg lb
UCX05D1	FCX05D1	1.2
UCX05-013D1	FCX05D1	
UCX05-014D1	FCX05D1	
UCX05-015D1	FCX05D1	2.7
UCX05-100D1	FCX05D1	
UCX06D1	FCX06D1	1.7
UCX06-101D1	FCX06D1	
UCX06-102D1	FCX06D1	
UCX06-103D1	FCX06D1	3.8
UC207-104D1	FCX06D1	
UCX07D1	FCX07D1	1.9
UCX07-105D1	FCX07D1	
UCX07-106D1	FCX07D1	4.2
UCX07-107D1	FCX07D1	
UCX08D1	FCX08D1	2.0
UCX08-108D1	FCX08D1	
UCX08-109D1	FCX08D1	4.4
UCX09D1	FCX09D1	2.6
UCX09-110D1	FCX09D1	
UCX09-111D1	FCX09D1	
UCX09-112D1	FCX09D1	5.7
UC210-113D1	FCX09D1	
UCX10D1	FCX10D1	3.1
UCX10-114D1	FCX10D1	
UCX10-115D1	FCX10D1	6.8
UC211-200D1	FCX10D1	

sale@technobearing.ru

www.technobearing.ru

Round flanged units cast housing w/ spigot joint**Set screw type**

8 (800) 700-72-07 (бесплатно)

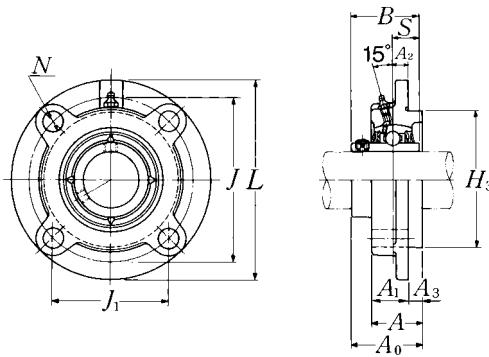

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions												Bolt size mm inch
		L	J	(J ₁)	A ₂	N	A ₃	A ₁	A	H ₃	A ₀	B	S	
55 $2\frac{1}{16}$	UCFCX11D1	180	152	107.5	4	16	22	26	48	127	65.7	65.1	25.4	M14
$2\frac{1}{8}$	UCFCX11-201D1	$7\frac{3}{32}$	$5\frac{63}{64}$	$4\frac{15}{64}$	$\frac{5}{32}$	$\frac{5}{8}$	$\frac{55}{64}$	$1\frac{1}{32}$	$1\frac{57}{64}$	5.0000	$2\frac{19}{32}$	2.5630	1.000	$\frac{1}{2}$
$2\frac{3}{16}$	UCFCX11-202D1													
$2\frac{1}{4}$	UCFCX11-203D1													
$2\frac{5}{16}$	UCFCX11-204D1													
	UCFCX11-205D1													
60 $2\frac{3}{8}$	UCFCX12D1	194	165	116.7	11	16	20	33	53	140	70.7	65.1	25.4	M14
$2\frac{7}{16}$	UCFCX12-206D1	$7\frac{5}{8}$	$6\frac{1}{2}$	$4\frac{19}{32}$	$\frac{7}{16}$	$\frac{5}{8}$	$\frac{25}{32}$	$1\frac{5}{16}$	$2\frac{5}{64}$	5.5118	$2\frac{25}{32}$	2.5630	1.000	$\frac{1}{2}$
	UCFCX12-207D1													
65 $2\frac{1}{2}$	UCFCX13D1	194	165	116.7	11	16	20	33	53	140	75.4	74.6	30.2	M14
$2\frac{9}{16}$	UCFCX13-208D1	$7\frac{5}{8}$	$6\frac{1}{2}$	$4\frac{19}{32}$	$\frac{7}{16}$	$\frac{5}{8}$	$\frac{25}{32}$	$1\frac{5}{16}$	$2\frac{5}{64}$	5.5118	$2\frac{31}{32}$	2.9370	1.189	$\frac{1}{2}$
	UCFCX13-209D1													
70 $2\frac{5}{8}$	UCFCX14D1	222	190	134.4	14	19	20	36	56	164	78.5	77.8	33.3	M16
$2\frac{11}{16}$	UCFCX14-210D1	$8\frac{3}{4}$	$7\frac{31}{64}$	$5\frac{9}{32}$	$\frac{35}{64}$	$\frac{3}{4}$	$\frac{25}{32}$	$1\frac{13}{32}$	$2\frac{13}{64}$	6.4567	$3\frac{3}{32}$	3.0630	1.311	$\frac{5}{8}$
$2\frac{3}{4}$	UCFCX14-211D1													
	UCFCX14-212D1													
75 $2\frac{13}{16}$	UCFCX15D1	222	190	134.4	12	19	22	35	57	164	83.3	82.6	33.3	M16
$2\frac{7}{8}$	UCFCX15-213D1	$8\frac{3}{4}$	$7\frac{31}{64}$	$5\frac{9}{32}$	$\frac{15}{32}$	$\frac{3}{4}$	$\frac{55}{64}$	$1\frac{3}{8}$	$2\frac{1}{4}$	6.4567	$3\frac{9}{32}$	3.2520	1.311	$\frac{5}{8}$
$2\frac{15}{16}$	UCFCX15-214D1													
3	UCFCX15-215D1													
	UCFCX15-300D1													
80 $3\frac{1}{16}$	UCFCX16D1	260	219	154.9	10	23	25	36	61	186	86.6	85.7	34.1	M20
$3\frac{1}{8}$	UCFCX16-301D1	$10\frac{1}{4}$	$8\frac{5}{8}$	$6\frac{3}{32}$	$\frac{25}{64}$	$\frac{29}{32}$	$\frac{63}{64}$	$1\frac{13}{32}$	$2\frac{13}{32}$	7.3228	$3\frac{13}{32}$	3.3740	1.343	$\frac{3}{4}$
$3\frac{3}{16}$	UCFCX16-302D1													
$3\frac{1}{4}$	UCFCX16-303D1													
	UCFCX16-304D1													
85 $3\frac{5}{16}$	UCFCX17D1	260	219	154.9	10	23	25	36	61	186	91.3	96	39.7	M20
$3\frac{7}{16}$	UCFCX17-305D1	$10\frac{1}{4}$	$8\frac{5}{8}$	$6\frac{3}{32}$	$\frac{25}{64}$	$\frac{29}{32}$	$\frac{63}{64}$	$1\frac{13}{32}$	$2\frac{13}{32}$	7.3228	$3\frac{19}{32}$	3.7795	1.563	$\frac{3}{4}$
	UCFCX17-307D1													

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".


Note: Please refer to page 36 for size of grease fitting.

Bearing number	Housing number ¹⁾	Mass of unit kg lb
UCX11D1	FCX11D1	4.2
UCX11-201D1	FCX11D1	
UCX11-202D1	FCX11D1	
UCX11-203D1	FCX11D1	9.3
UC212-204D1	FCX11D1	
UC212-205D1	FCX11D1	
UCX12D1	FCX12D1	5.5
UCX12-206D1	FCX12D1	12
UCX12-207D1	FCX12D1	
UCX13D1	FCX13D1	5.7
UCX13-208D1	FCX13D1	13
UCX13-209D1	FCX13D1	
UCX14D1	FCX14D1	7.3
UCX14-210D1	FCX14D1	
UCX14-211D1	FCX14D1	16
UCX14-212D1	FCX14D1	
UCX15D1	FCX15D1	8.0
UCX15-213D1	FCX15D1	
UCX15-214D1	FCX15D1	18
UCX15-215D1	FCX15D1	
UCX15-300D1	FCX15D1	
UCX16D1	FCX16D1	12
UCX16-301D1	FCX16D1	
UCX16-302D1	FCX16D1	26
UCX16-303D1	FCX16D1	
UC217-304D1	FCX16D1	
UCX17D1	FCX17D1	12
UCX17-305D1	FCX17D1	26
UCX17-307D1	FCX17D1	

sale@technobearing.ru

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

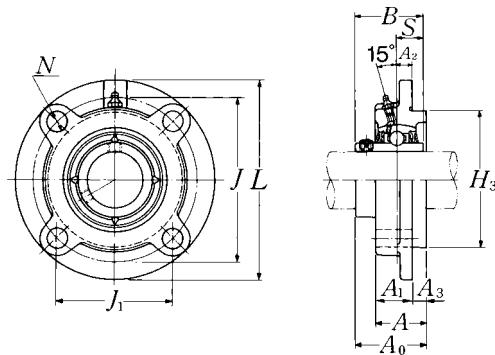
Round flanged units cast housing w/ spigot joint**Set screw type**

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions												Bolt size mm inch
		mm						inch						
90 $3\frac{7}{16}$ $3\frac{1}{2}$	UCFCX18D1	260	219	154.9	12	23	28	43	71	186	101.1	104	42.9	M20
	UCFCX18-307D1	10 $\frac{1}{4}$	8 $\frac{5}{8}$	6 $\frac{3}{32}$	1 $\frac{15}{32}$	2 $\frac{29}{32}$	1 $\frac{7}{64}$	1 $\frac{11}{16}$	2 $\frac{51}{64}$	7.3228	3 $\frac{63}{64}$	4.0945	1.689	$\frac{3}{4}$
	UCFCX18-308D1													
100 $3\frac{13}{16}$ $3\frac{7}{8}$ $3\frac{15}{16}$ 4	UCFCX20D1	276	238	168.3	22	23	28	66	94	206	118.3	117.5	49.2	M20
	UCFCX20-313D1	10 $\frac{7}{8}$	9 $\frac{3}{8}$	6 $\frac{5}{8}$	5 $\frac{55}{64}$	2 $\frac{29}{32}$	1 $\frac{7}{64}$	2 $\frac{19}{32}$	3 $\frac{45}{64}$	8.1102	4 $\frac{21}{32}$	4.6260	1.937	$\frac{3}{4}$
	UCFCX20-314D1													
	UCFCX20-315D1													
	UCFCX20-400D1													

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

Bearing number	Housing number ¹⁾	Mass of unit kg lb
UCX18D1	FCX18D1	12
UCX18-307D1	FCX18D1	26
UCX18-308D1	FCX18D1	
UCX20D1	FCX20D1	18
UCX20-313D1	FCX20D1	
UCX20-314D1	FCX20D1	
UCX20-315D1	FCX20D1	40
UCX20-400D1	FCX20D1	

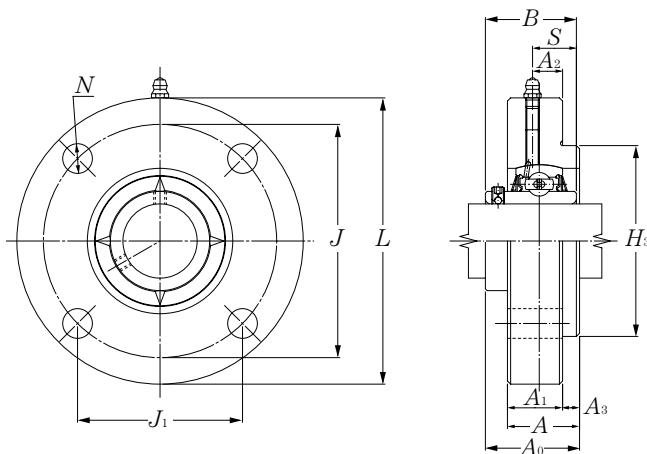Round flanged units w/ spigot joint (Steel series)**Set screw type**

Shaft dia. mm	Unit number ¹⁾	Nominal dimensions mm												Bolt size mm
		L	J	(J ₁)	A ₂	N	A ₃	A ₁	A	H ₃	A ₀	B	S	
12	UCFCG201D1	100	78	55.2	10	12	5	20.5	25.5	62	33.3	31	12.7	M10
15	UCFCG202D1	100	78	55.2	10	12	5	20.5	25.5	62	33.3	31	12.7	M10
17	UCFCG203D1	100	78	55.2	10	12	5	20.5	25.5	62	33.3	31	12.7	M10
20	UCFCG204D1	100	78	55.2	10	12	5	20.5	25.5	62	33.3	31	12.7	M10
25	UCFCG205D1	115	90	63.6	10	12	6	21	27	70	35.8	34.1	14.3	M10
30	UCFCG206D1	125	100	70.7	10	12	8	23	31	80	40.2	38.1	15.9	M10
35	UCFCG207D1	135	110	77.8	11	14	8	26	34	90	44.4	42.9	17.5	M12
40	UCFCG208D1	145	120	84.9	11	14	10	26	36	100	51.2	49.2	19	M12
45	UCFCG209D1	160	132	93.3	10	16	12	26	38	105	52.2	49.2	19	M14
50	UCFCG210D1	165	138	97.6	10	16	12	28	40	110	54.6	51.6	19	M14
55	UCFCG211D1	185	150	106.1	13	19	12	31	43	125	58.4	55.6	22.2	M16
60	UCFCG212D1	195	160	113.1	17	19	12	36	48	135	68.7	65.1	25.4	M16
65	UCFCG213D1	205	170	120.2	16	19	14	36	50	145	69.7	65.1	25.4	M16
70	UCFCG214D1	215	177	125.2	17	19	14	40	54	150	75.4	74.6	30.2	M16
75	UCFCG215D1	220	184	130.1	18	19	16	40	56	160	78.5	77.8	33.3	M16
80	UCFCG216D1	240	200	141.4	18	23	16	42	58	170	83.3	82.6	33.3	M20
85	UCFCG217D1	250	208	147.1	18	23	18	45	63	180	87.6	85.7	34.1	M20
90	UCFCG218D1	265	220	155.6	22	23	18	50	68	190	96.3	96	39.7	M20

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.


Bearing number	Housing ¹⁾ number	Mass of unit kg
UC201D1	FCG204D1	1.2
UC202D1	FCG204D1	1.2
UC203D1	FCG204D1	1.1
UC204D1	FCG204D1	1.1
UC205D1	FCG205D1	1.6
UC206D1	FCG206D1	2.0
UC207D1	FCG207D1	2.6
UC208D1	FCG208D1	3.1
UC209D1	FCG209D1	3.8
UC210D1	FCG210D1	4.2
UC211D1	FCG211D1	5.8
UC212D1	FCG212D1	7.4
UC213D1	FCG213D1	8.1
UC214D1	FCG214D1	9.9
UC215D1	FCG215D1	10
UC216D1	FCG216D1	13
UC217D1	FCG217D1	15
UC218D1	FCG218D1	19

sale@technobearing.ru

Rhombus flanged units cast housing
Set screw type

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

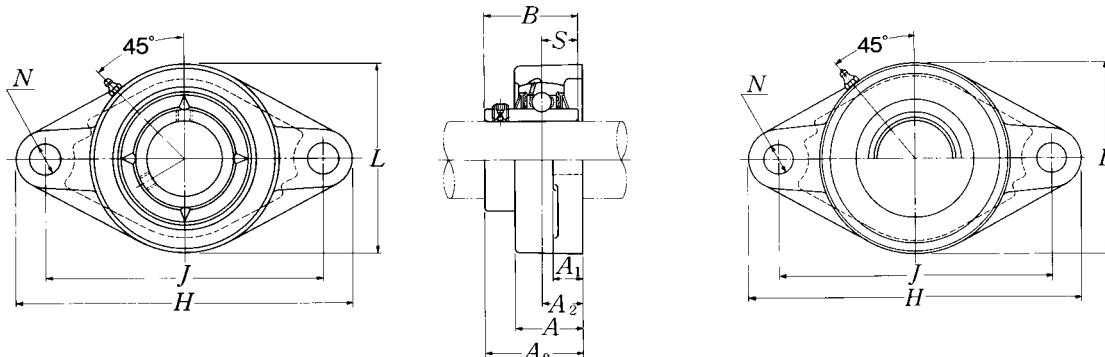**Pressed steel dust cover type**

Open end: S-UCFL...D1

Closed end: SM-UCFL...D1


Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions										Bolt size mm inch	Bearing number
		H	J	A ₂	A ₁	A	N	L	A ₀	B	S		
12 1/2	UCFL201D1 UCFL201-008D1	113 4 7/16	90 3 35/64	15 19/32	11 7/16	25.5 1	12 15/32	60 2 3/8	33.3 1 5/16	31 1.2205	12.7 0.500	M10 3/8	UC201D1 UC201-008D1
15 9/16 5/8	UCFL202D1 UCFL202-009D1 UCFL202-010D1	113 4 7/16	90 3 35/64	15 19/32	11 7/16	25.5 1	12 15/32	60 2 3/8	33.3 1 5/16	31 1.2205	12.7 0.500	M10 3/8	UC202D1 UC202-009D1 UC202-010D1
17 11/16	UCFL203D1 UCFL203-011D1	113 4 7/16	90 3 35/64	15 19/32	11 7/16	25.5 1	12 15/32	60 2 3/8	33.3 1 5/16	31 1.2205	12.7 0.500	M10 3/8	UC203D1 UC203-011D1
20 3/4	UCFL204D1 UCFL204-012D1	113 4 7/16	90 3 35/64	15 19/32	11 7/16	25.5 1	12 15/32	60 2 3/8	33.3 1 5/16	31 1.2205	12.7 0.500	M10 3/8	UC204D1 UC204-012D1
25 13/16 7/8 15/16 1	UCFL205D1 UCFL205-013D1 UCFL205-014D1 UCFL205-015D1 UCFL205-100D1	130 5 1/8	99 3 57/64	16 5/8	13 1/2	27 1 1/16	16 5/8	68 2 11/16	35.8 1 13/32	34.1 1.3425	14.3 0.563	M14 1/2	UC205D1 UC205-013D1 UC205-014D1 UC205-015D1 UC205-100D1
30 1 1/16 1 1/8 1 3/16 1 1/4	UCFL206D1 UCFL206-101D1 UCFL206-102D1 UCFL206-103D1 UCFL206-104D1	148 5 13/16	117 4 39/64	18 45/64	13 1/2	31 1 7/32	16 5/8	80 3 5/32	40.2 1 37/64	38.1 1.5000	15.9 0.626	M14 1/2	UC206D1 UC206-101D1 UC206-102D1 UC206-103D1 UC206-104D1
35 1 1/4 1 5/16 1 3/8 1 7/16	UCFL207D1 UCFL207-104D1 UCFL207-105D1 UCFL207-106D1 UCFL207-107D1	161 6 11/32	130 5 1/8	19 3/4	15 19/32	34 1 11/32	16 5/8	90 3 17/32	44.4 1 3/4	42.9 1.6890	17.5 0.689	M14 1/2	UC207D1 UC207-104D1 UC207-105D1 UC207-106D1 UC207-107D1
40 1 1/2 1 9/16	UCFL208D1 UCFL208-108D1 UCFL208-109D1	175 6 7/8	144 5 43/64	21 53/64	15 19/32	36 1 13/32	16 5/8	100 3 15/16	51.2 2 1/64	49.2 1.9370	19 0.748	M14 1/2	UC208D1 UC208-108D1 UC208-109D1
45 1 5/8 1 11/16 1 3/4	UCFL209D1 UCFL209-110D1 UCFL209-111D1 UCFL209-112D1	188 7 13/32	148 5 53/64	22 55/64	16 5/8	38 1 1/2	19 3/4	108 4 1/4	52.2 2 1/16	49.2 1.9370	19 0.748	M16 5/8	UC209D1 UC209-110D1 UC209-111D1 UC209-112D1

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

sale@technobearing.ru 36 for size of grease fitting.

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

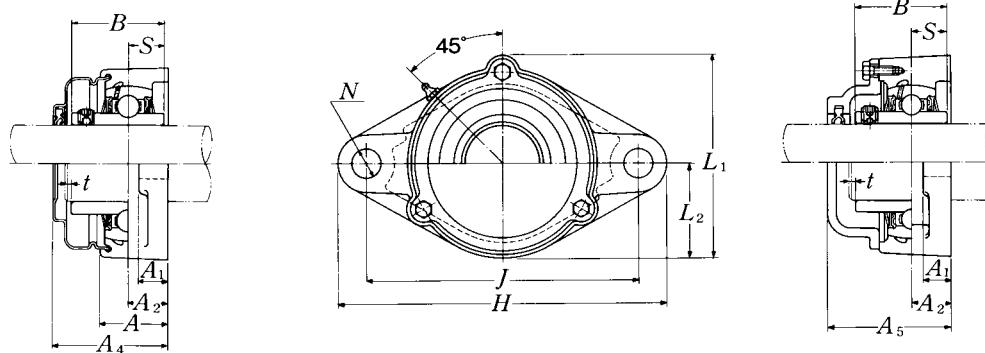**Cast dust cover type**

Open end: C-UCFL…D1


Closed end: CM-UCFL…D1

Housing ¹⁾ number	Unit number ¹⁾ pressed steel dust cover type	Unit number ¹⁾ cast dust cover type	Nominal dimensions					Mass of unit		
			t max.	A ₄	A ₅	L ₁	L ₂	kg	lb	
FL204D1	S(SM)-UCFL201D1	C(CM)-UCFL201D1	2	40.5	46	67	30	0.5	0.5	0.6
FL204D1	S(SM)-UCFL201-008D1	C(CM)-UCFL201-008D1	5/64	1 19/32	1 13/16	2 5/8	1 3/16	1.1	1.1	1.3
FL204D1	S(SM)-UCFL202D1	C(CM)-UCFL202D1	2	40.5	46	67	30	0.5	0.5	0.6
FL204D1	S(SM)-UCFL202-009D1	C(CM)-UCFL202-009D1	5/64	1 19/32	1 13/16	2 5/8	1 3/16	1.1	1.1	1.3
FL204D1	S(SM)-UCFL202-010D1	C(CM)-UCFL202-009D1								
FL204D1	S(SM)-UCFL203D1	C(CM)-UCFL203D1	2	40.5	46	67	30	0.5	0.5	0.6
FL204D1	S(SM)-UCFL203-011D1	C(CM)-UCFL203-011D1	5/64	1 19/32	1 13/32	2 5/8	1 3/16	1.1	1.1	1.3
FL204D1	S(SM)-UCFL204D1	C(CM)-UCFL204D1	2	40.5	46	67	30	0.4	0.4	0.6
FL204D1	S(SM)-UCFL204-012D1	C(CM)-UCFL204-012D1	5/64	1 19/32	1 13/16	2 5/8	1 3/16	0.9	0.9	1.3
FL205D1	S(SM)-UCFL205D1	C(CM)-UCFL205D1	2	44.5	51	74	34	0.6	0.6	0.8
FL205D1	S(SM)-UCFL205-013D1	C(CM)-UCFL205-013D1								
FL205D1	S(SM)-UCFL205-014D1	C(CM)-UCFL205-014D1								
FL205D1	S(SM)-UCFL205-015D1	C(CM)-UCFL205-015D1								
FL205D1	S(SM)-UCFL205-100D1	C(CM)-UCFL205-100D1								
FL206D1	S(SM)-UCFL206D1	C(CM)-UCFL206D1	2	49	56	85	40	0.9	0.9	1.2
FL206D1	S(SM)-UCFL206-101D1	C(CM)-UCFL206-101D1								
FL206D1	S(SM)-UCFL206-102D1	C(CM)-UCFL206-102D1								
FL206D1	S(SM)-UCFL206-103D1	C(CM)-UCFL206-103D1								
FL206D1	S(SM)-UCFL206-104D1	C(CM)-UCFL206-104D1								
FL207D1	S(SM)-UCFL207D1	C(CM)-UCFL207D1	3	55	59	97	45	1.2	1.2	1.4
FL207D1	S(SM)-UCFL207-104D1	C(CM)-UCFL207-104D1								
FL207D1	S(SM)-UCFL207-105D1	C(CM)-UCFL207-105D1								
FL207D1	S(SM)-UCFL207-106D1	C(CM)-UCFL207-106D1								
FL207D1	S(SM)-UCFL207-107D1	C(CM)-UCFL207-107D1								
FL208D1	S(SM)-UCFL208D1	C(CM)-UCFL208D1	3	62	66	106	50	1.5	1.5	1.9
FL208D1	S(SM)-UCFL208-108D1	C(CM)-UCFL208-108D1	1/8	2 7/16	2 19/32	4 3/16	1 31/32	3.3	3.3	4.2
FL208D1	S(SM)-UCFL208-109D1	C(CM)-UCFL208-109D1								
FL209D1	S(SM)-UCFL209D1	C(CM)-UCFL209D1	3	63	70	113	54	1.8	1.9	2.3
FL209D1	S(SM)-UCFL209-110D1	C(CM)-UCFL209-110D1								
FL209D1	S(SM)-UCFL209-111D1	C(CM)-UCFL209-111D1								
FL209D1	S(SM)-UCFL209-112D1	C(CM)-UCFL209-112D1	1/8	2 15/32	2 3/4	4 7/16	2 1/8	4.0	4.2	5.1

sale@technobearing.ru

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

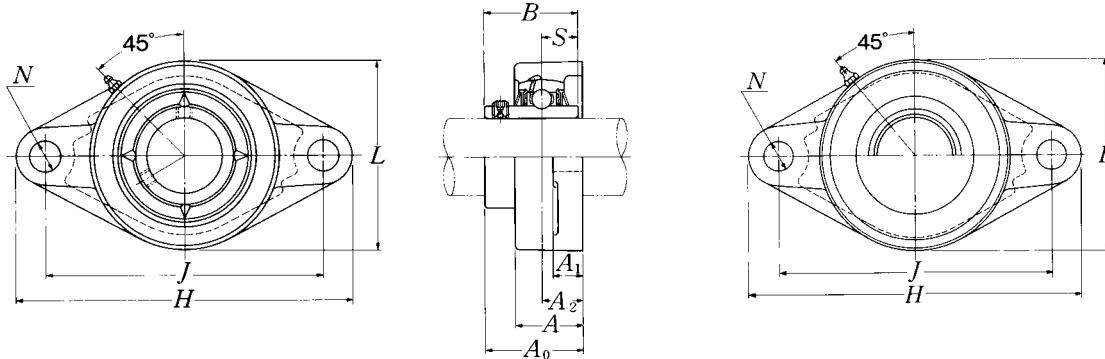Rhombus flanged units cast housing
Set screw type
**Pressed steel dust cover type**Open end: **S-UCFL…D1**Closed end: **SM-UCFL…D1**

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions										Bolt size mm inch	Bearing number
		H	J	A ₂	A ₁	A	N	L	A ₀	B	S		
50 $1\frac{13}{16}$ $1\frac{1}{8}$ $1\frac{15}{16}$ 2	UCFL210D1	197	157	22	16	40	19	115	54.6	51.6	19	M16	UC210D1
	UCFL210-113D1												UC210-113D1
	UCFL210-114D1												UC210-114D1
	UCFL210-115D1												UC210-115D1
	UCFL210-200D1												UC210-200D1
55 2 $2\frac{1}{16}$ $2\frac{1}{8}$ $2\frac{3}{16}$	UCFL211D1	224	184	25	18	43	19	130	58.4	55.6	22.2	M16	UC211D1
	UCFL211-200D1												UC211-200D1
	UCFL211-201D1												UC211-201D1
	UCFL211-202D1												UC211-202D1
	UCFL211-203D1												UC211-203D1
60 $2\frac{1}{4}$ $2\frac{5}{16}$ $2\frac{3}{8}$ $2\frac{7}{16}$	UCFL212D1	250	202	29	18	48	23	140	68.7	65.1	25.4	M20	UC212D1
	UCFL212-204D1												UC212-204D1
	UCFL212-205D1												UC212-205D1
	UCFL212-206D1												UC212-206D1
	UCFL212-207D1												UC212-207D1
65 $2\frac{1}{2}$ $2\frac{9}{16}$	UCFL213D1	258	210	30	22	50	23	155	69.7	65.1	25.4	M20	UC213D1
	UCFL213-208D1												UC213-208D1
	UCFL213-209D1												UC213-209D1
70 $2\frac{5}{8}$ $2\frac{11}{16}$ $2\frac{3}{4}$	UCFL214D1	265	216	31	22	54	23	160	75.4	74.6	30.2	M20	UC214D1
	UCFL214-210D1												UC214-210D1
	UCFL214-211D1												UC214-211D1
	UCFL214-212D1												UC214-212D1
75 $2\frac{13}{16}$ $2\frac{7}{8}$ $2\frac{15}{16}$ 3	UCFL215D1	275	225	34	22	56	23	165	78.5	77.8	33.3	M20	UC215D1
	UCFL215-213D1												UC215-213D1
	UCFL215-214D1												UC215-214D1
	UCFL215-215D1												UC215-215D1
	UCFL215-300D1												UC215-300D1
80 $3\frac{1}{16}$ $3\frac{1}{8}$ $3\frac{3}{16}$	UCFL216D1	290	233	34	22	58	25	180	83.3	82.6	33.3	M22	UC216D1
	UCFL216-301D1												UC216-301D1
	UCFL216-302D1												UC216-302D1
	UCFL216-303D1												UC216-303D1


Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

sale@technobearing.ru

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

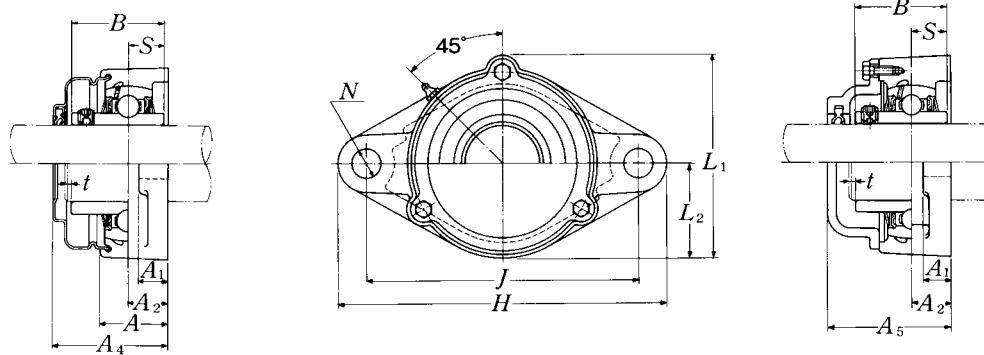**Cast dust cover type**

Open end: C-UCFL···D1

Closed end: CM-UCFL···D1


Housing ¹⁾ number	Unit number ¹⁾ pressed steel dust cover type	Unit number ¹⁾ cast dust cover type	Nominal dimensions					Mass of unit		
			t max.	A ₄	A ₅	L ₁	L ₂	kg	lb	
FL210D1	S(SM)-UCFL210D1	C(CM)-UCFL210D1	3	65.5	72	120	58	2.0	2.1	2.7
FL210D1	S(SM)-UCFL210-113D1	C(CM)-UCFL210-113D1	1/8	2 ¹⁹ / ₃₂	2 ²⁷ / ₃₂	4 ²³ / ₃₂	2 ⁹ / ₃₂	4.4	4.6	6.0
FL210D1	S(SM)-UCFL210-114D1	C(CM)-UCFL210-114D1								
FL210D1	S(SM)-UCFL210-115D1	C(CM)-UCFL210-115D1								
FL210D1	S(SM)-UCFL210-200D1	C(CM)-UCFL210-200D1								
FL211D1	S(SM)-UCFL211D1	C(CM)-UCFL211D1	4	71	75	133	65	2.9	3.0	3.4
FL211D1	S(SM)-UCFL211-200D1	C(CM)-UCFL211-200D1	5/32	2 ²⁵ / ₃₂	2 ¹⁵ / ₁₆	5 ¹ / ₄	2 ⁹ / ₁₆	6.4	6.6	7.5
FL211D1	S(SM)-UCFL211-201D1	C(CM)-UCFL211-201D1								
FL211D1	S(SM)-UCFL211-202D1	C(CM)-UCFL211-202D1								
FL211D1	S(SM)-UCFL211-203D1	C(CM)-UCFL211-203D1								
FL212D1	S(SM)-UCFL212D1	C(CM)-UCFL212D1	4	80	86	144	70	3.8	4.0	4.6
FL212D1	S(SM)-UCFL212-204D1	C(CM)-UCFL212-204D1	5/32	3 ⁵ / ₃₂	3 ³ / ₈	5 ²¹ / ₃₂	2 ³ / ₄	8.4	8.8	10
FL212D1	S(SM)-UCFL212-205D1	C(CM)-UCFL212-205D1								
FL212D1	S(SM)-UCFL212-206D1	C(CM)-UCFL212-206D1								
FL212D1	S(SM)-UCFL212-207D1	C(CM)-UCFL212-207D1								
FL213D1	S(SM)-UCFL213D1	C(CM)-UCFL213D1	4	83.5	90	157	78	4.8	4.9	5.8
FL213D1	S(SM)-UCFL213-208D1	C(CM)-UCFL213-208D1	5/32	3 ⁹ / ₃₂	3 ¹⁷ / ₃₂	6 ³ / ₁₆	3 ¹ / ₁₆	11	11	15
FL213D1	S(SM)-UCFL213-209D1	C(CM)-UCFL213-209D1								
FL214D1	—	C(CM)-UCFL214D1	4	—	98	164	80	5.4	—	7.7
FL214D1	—	C(CM)-UCFL214-210D1	5/32	—	3 ²⁷ / ₃₂	6 ¹⁵ / ₃₂	3 ⁵ / ₃₂	12	—	17
FL214D1	—	C(CM)-UCFL214-211D1								
FL214D1	—	C(CM)-UCFL214-212D1								
FL215D1	—	C(CM)-UCFL215D1	4	—	102	169	82	6.0	—	7.1
FL215D1	—	C(CM)-UCFL215-213D1	5/32	—	4 ¹ / ₃₂	6 ²¹ / ₃₂	3 ⁷ / ₃₂	13	—	16
FL215D1	—	C(CM)-UCFL215-214D1								
FL215D1	—	C(CM)-UCFL215-215D1								
FL215D1	—	C(CM)-UCFL215-300D1								
FL216D1	—	C(CM)-UCFL216D1	4	—	106	183	90	7.4	—	8.6
FL216D1	—	C(CM)-UCFL216-301D1	5/32	—	4 ³ / ₁₆	7 ⁷ / ₃₂	3 ¹⁷ / ₃₂	16	—	19
FL216D1	—	C(CM)-UCFL216-302D1								
FL216D1	—	C(CM)-UCFL216-303D1								

sale@technobearing.ru

Rhombus flanged units cast housing**Set screw type**

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

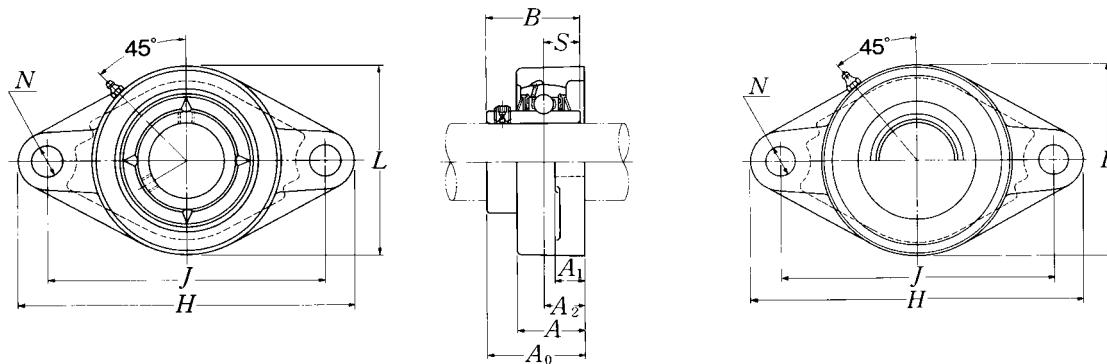**Pressed steel dust cover type**


Open end: S-UCFL···D1

Closed end: SM-UCFL···D1

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions										Bolt size mm inch	Bearing number
		H	J	A ₂	A ₁	A	N	L	A ₀	B	S		
85 $3\frac{1}{4}$ $3\frac{5}{16}$ $3\frac{7}{16}$	UCFL217D1	305	248	36	24	63	25	190	87.6	85.7	34.1	M22	UC217D1
	UCFL217-304D1												UC217-304D1
	UCFL217-305D1	12	$9\frac{49}{64}$	$1\frac{27}{64}$	$1\frac{5}{16}$	$2\frac{15}{32}$	$6\frac{3}{64}$	$7\frac{15}{32}$	$3\frac{29}{64}$	3.3740	1.343	$\frac{7}{8}$	UC217-305D1
	UCFL217-307D1												UC217-307D1
90 $3\frac{1}{2}$	UCFL218D1	320	265	40	24	68	25	205	96.3	96	39.7	M22	UC218D1
	UCFL218-308D1	$12\frac{19}{32}$	$10\frac{7}{16}$	$1\frac{37}{64}$	$1\frac{5}{16}$	$2\frac{11}{16}$	$6\frac{3}{64}$	$8\frac{1}{16}$	$3\frac{51}{64}$	3.7795	1.563	$\frac{7}{8}$	UC218-308D1

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

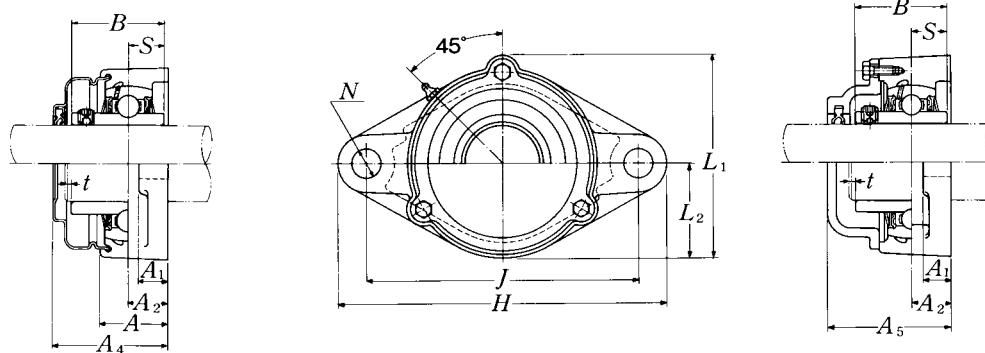**Cast dust cover type**

Open end: C-UCFL···D1

Closed end: CM-UCFL···D1


Housing ¹⁾ number	Unit number ¹⁾ pressed steel dust cover type	Unit number ¹⁾ cast dust cover type	Nominal dimensions				Mass of unit			
			t max.	A ₄	A ₅	L ₁	L ₂	kg	lb	
FL217D1	—	C(CM)-UCFL217D1	5	—	114	192	95	8.8	—	10
FL217D1	—	C(CM)-UCFL217-304D1	13/64	—	4 1/2	7 9/16	3 3/4	19	—	22
FL217D1	—	C(CM)-UCFL217-305D1	—	—	—	—	—	—	—	—
FL217D1	—	C(CM)-UCFL217-307D1	—	—	—	—	—	—	—	—
FL218D1	—	C(CM)-UCFL218D1	5	—	122	205	102	11	—	13
FL218D1	—	C(CM)-UCFL218-308D1	13/64	—	4 13/16	8 1/16	4 1/32	24	—	29

sale@technobearing.ru

Rhombus flanged units cast housing
Set screw type

www.technobearing.ru


8 (800) 700-72-07 (бесплатно)

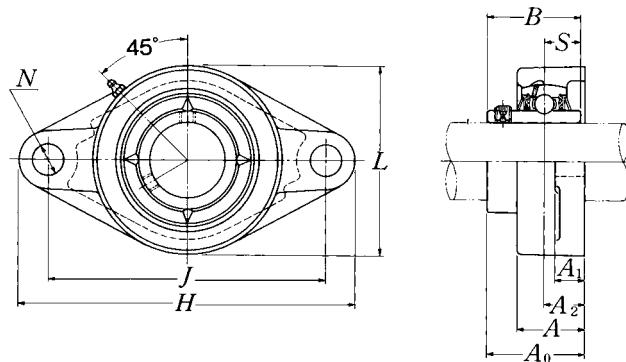


Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions										Bolt size mm inch	Bearing number
		H	J	A ₂	A ₁	A	N	L	A ₀	B	S		
25 $\frac{13}{16}$	UCFL305D1	150	113	16	13	29	19	80	39	38	15	M16	UC305D1
$\frac{7}{8}$	UCFL305-013D1	$5\frac{29}{32}$	$4\frac{7}{16}$	$\frac{5}{8}$	$\frac{1}{2}$	$1\frac{5}{32}$	$\frac{3}{4}$	$3\frac{5}{32}$	$1\frac{17}{32}$	1.4961	0.591	$\frac{5}{8}$	UC305-013D1
$\frac{15}{16}$	UCFL305-014D1												UC305-014D1
1	UCFL305-015D1												UC305-015D1
	UCFL305-100D1												UC305-100D1
30 $1\frac{1}{16}$	UCFL306D1	180	134	18	15	32	23	90	44	43	17	M20	UC306D1
$1\frac{1}{8}$	UCFL306-101D1	$7\frac{3}{32}$	$5\frac{9}{32}$	$\frac{45}{64}$	$1\frac{9}{32}$	$1\frac{1}{4}$	$2\frac{9}{32}$	$3\frac{17}{32}$	$1\frac{47}{64}$	1.6929	0.669	$\frac{3}{4}$	UC306-101D1
$1\frac{3}{16}$	UCFL306-102D1												UC306-102D1
	UCFL306-103D1												UC306-103D1
35 $1\frac{1}{4}$	UCFL307D1	185	141	20	16	36	23	100	49	48	19	M20	UC307D1
$1\frac{5}{16}$	UCFL307-104D1	$7\frac{9}{32}$	$5\frac{35}{64}$	$2\frac{5}{32}$	$\frac{5}{8}$	$1\frac{13}{32}$	$2\frac{9}{32}$	$3\frac{15}{16}$	$1\frac{59}{64}$	1.8898	0.748	$\frac{3}{4}$	UC307-104D1
$1\frac{3}{8}$	UCFL307-105D1												UC307-105D1
$1\frac{7}{16}$	UCFL307-106D1												UC307-106D1
	UCFL307-107D1												UC307-107D1
40 $1\frac{1}{2}$	UCFL308D1	200	158	23	17	40	23	112	56	52	19	M20	UC308D1
$1\frac{9}{16}$	UCFL308-108D1	$7\frac{7}{8}$	$6\frac{7}{32}$	$2\frac{9}{32}$	$2\frac{1}{32}$	$1\frac{9}{16}$	$2\frac{9}{32}$	$4\frac{13}{32}$	$2\frac{13}{64}$	2.0472	0.748	$\frac{3}{4}$	UC308-108D1
	UCFL308-109D1												UC308-109D1
45 $1\frac{5}{8}$	UCFL309D1	230	177	25	18	44	25	125	60	57	22	M22	UC309D1
$1\frac{11}{16}$	UCFL309-110D1	$9\frac{1}{16}$	$6\frac{31}{32}$	$6\frac{3}{64}$	$2\frac{3}{32}$	$1\frac{23}{32}$	$6\frac{3}{64}$	$4\frac{29}{32}$	$2\frac{23}{64}$	2.2441	0.866	$\frac{7}{8}$	UC309-110D1
$1\frac{3}{4}$	UCFL309-111D1												UC309-111D1
	UCFL309-112D1												UC309-112D1
50 $1\frac{13}{16}$	UCFL310D1	240	187	28	19	48	25	140	67	61	22	M22	UC310D1
$1\frac{7}{8}$	UCFL310-113D1	$9\frac{7}{16}$	$7\frac{23}{64}$	$1\frac{7}{64}$	$\frac{3}{4}$	$1\frac{7}{8}$	$6\frac{3}{64}$	$5\frac{1}{2}$	$2\frac{41}{64}$	2.4016	0.866	$\frac{7}{8}$	UC310-113D1
$1\frac{15}{16}$	UCFL310-114D1												UC310-114D1
	UCFL310-115D1												UC310-115D1
55 2	UCFL311D1	250	198	30	20	52	25	150	71	66	25	M22	UC311D1
$2\frac{1}{16}$	UCFL311-200D1	$9\frac{27}{32}$	$7\frac{51}{64}$	$1\frac{3}{16}$	$2\frac{5}{32}$	$2\frac{1}{16}$	$6\frac{3}{64}$	$5\frac{29}{32}$	$2\frac{51}{64}$	2.5984	0.984	$\frac{7}{8}$	UC311-200D1
$2\frac{1}{8}$	UCFL311-201D1												UC311-201D1
$2\frac{3}{16}$	UCFL311-202D1												UC311-202D1
	UCFL311-203D1												UC311-203D1

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

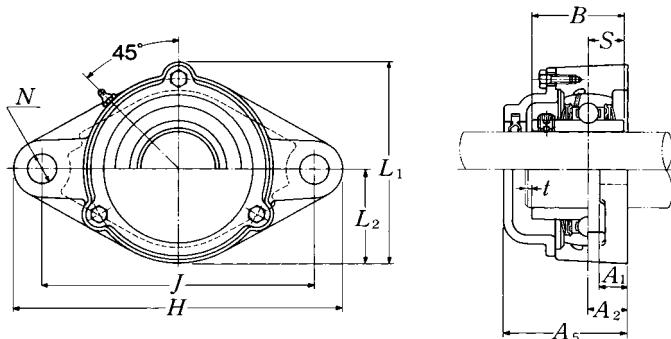**Cast dust cover type**Open end: **C-UCFL...D1**Closed end: **CM-UCFL...D1**


Housing ¹⁾ number	Unit number ¹⁾ cast dust cover type	Nominal dimensions				Mass of unit	
		t max.	A ₅	L ₁	L ₂	kg UCFL	lb C(CM)
FL305D1	C(CM)-UCFL305D1	2	56	86	40	0.9	1.2
FL305D1	C(CM)-UCFL305-013D1						
FL305D1	C(CM)-UCFL305-014D1	$\frac{5}{64}$	$2\frac{7}{32}$	$3\frac{3}{8}$	$1\frac{9}{16}$	2.0	2.7
FL305D1	C(CM)-UCFL305-015D1						
FL305D1	C(CM)-UCFL305-100D1						
FL306D1	C(CM)-UCFL306D1	2	60	101	45	1.4	1.7
FL306D1	C(CM)-UCFL306-101D1						
FL306D1	C(CM)-UCFL306-102D1	$\frac{5}{64}$	$2\frac{3}{8}$	$3\frac{31}{32}$	$1\frac{25}{32}$	3.1	3.8
FL306D1	C(CM)-UCFL306-103D1						
FL307D1	C(CM)-UCFL307D1	3	68	110	50	1.7	2.1
FL307D1	C(CM)-UCFL307-104D1						
FL307D1	C(CM)-UCFL307-105D1	$\frac{1}{8}$	$2\frac{11}{16}$	$4\frac{11}{32}$	$1\frac{31}{32}$	3.8	4.6
FL307D1	C(CM)-UCFL307-106D1						
FL307D1	C(CM)-UCFL307-107D1						
FL308D1	C(CM)-UCFL308D1	3	76	122	56	2.2	2.9
FL308D1	C(CM)-UCFL308-108D1	$\frac{1}{8}$	3	$4\frac{13}{16}$	$2\frac{7}{32}$	4.9	6.4
FL308D1	C(CM)-UCFL308-109D1						
FL309D1	C(CM)-UCFL309D1	3	80	135	62	3.0	3.8
FL309D1	C(CM)-UCFL309-110D1						
FL309D1	C(CM)-UCFL309-111D1	$\frac{1}{8}$	$3\frac{5}{32}$	$5\frac{5}{16}$	$2\frac{7}{16}$	6.6	8.4
FL309D1	C(CM)-UCFL309-112D1						
FL310D1	C(CM)-UCFL310D1	3	88	152	70	4.1	5.0
FL310D1	C(CM)-UCFL310-113D1						
FL310D1	C(CM)-UCFL310-114D1	$\frac{1}{8}$	$3\frac{15}{32}$	$5\frac{31}{32}$	$2\frac{3}{4}$	9.0	11
FL310D1	C(CM)-UCFL310-115D1						
FL311D1	C(CM)-UCFL311D1	4	92	162	75	4.6	5.9
FL311D1	C(CM)-UCFL311-200D1						
FL311D1	C(CM)-UCFL311-201D1	$\frac{5}{32}$	$3\frac{5}{8}$	$6\frac{3}{8}$	$2\frac{15}{16}$	10	13
FL311D1	C(CM)-UCFL311-202D1						
FL311D1	C(CM)-UCFL311-203D1						

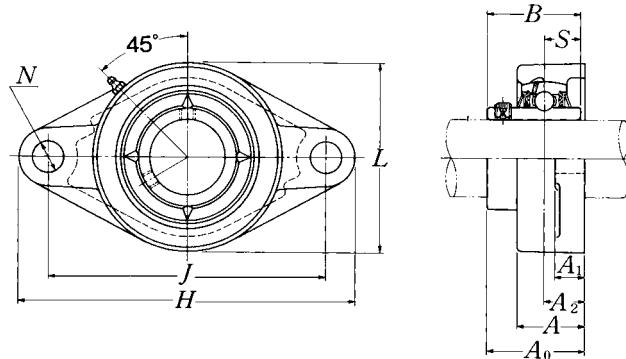Rhombus flanged units cast housing
Set screw type


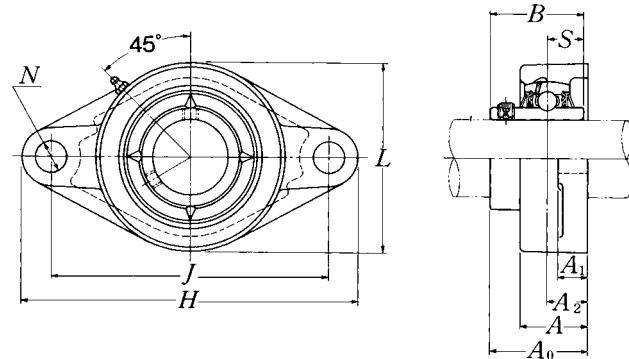
Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions										Bolt size mm inch	Bearing number
		H	J	A ₂	A ₁	A	N	L	A ₀	B	S		
60 $2\frac{1}{4}$ $2\frac{5}{16}$ $2\frac{3}{8}$ $2\frac{7}{16}$	UCFL312D1	270	212	33	22	56	31	160	78	71	26	M27	UC312D1
	UCFL312-204D1	10 $\frac{5}{8}$	8 $\frac{11}{32}$	1 $\frac{19}{64}$	$\frac{7}{8}$	2 $\frac{7}{32}$	1 $\frac{1}{32}$	6 $\frac{5}{16}$	3 $\frac{5}{64}$	2.7953	1.024	1	UC312-204D1
	UCFL312-205D1												UC312-205D1
	UCFL312-206D1												UC312-206D1
	UCFL312-207D1												UC312-207D1
65 $2\frac{1}{2}$ $2\frac{9}{16}$	UCFL313D1	295	240	33	25	58	31	175	78	75	30	M27	UC313D1
	UCFL313-208D1	11 $\frac{5}{8}$	9 $\frac{29}{64}$	1 $\frac{19}{64}$	$\frac{31}{32}$	2 $\frac{9}{32}$	1 $\frac{1}{32}$	6 $\frac{7}{8}$	3 $\frac{5}{64}$	2.9528	1.181	1	UC313-208D1
	UCFL313-209D1												UC313-209D1
70 $2\frac{5}{8}$ $2\frac{11}{16}$ $2\frac{3}{4}$	UCFL314D1	315	250	36	28	61	35	185	81	78	33	M30	UC314D1
	UCFL314-210D1	12 $\frac{13}{32}$	9 $\frac{27}{32}$	1 $\frac{27}{64}$	$1\frac{3}{32}$	2 $\frac{13}{32}$	1 $\frac{3}{8}$	7 $\frac{9}{32}$	3 $\frac{3}{16}$	3.0709	1.299	$1\frac{1}{8}$	UC314-210D1
	UCFL314-211D1												UC314-211D1
	UCFL314-212D1												UC314-212D1
75 $2\frac{13}{16}$ $2\frac{7}{8}$ $2\frac{15}{16}$ 3	UCFL315D1	320	260	39	30	66	35	195	89	82	32	M30	UC315D1
	UCFL315-213D1	12 $\frac{19}{32}$	10 $\frac{15}{64}$	1 $\frac{17}{32}$	$1\frac{3}{16}$	2 $\frac{19}{32}$	1 $\frac{3}{8}$	7 $\frac{11}{16}$	3 $\frac{1}{2}$	3.2283	1.260	$1\frac{1}{8}$	UC315-213D1
	UCFL315-214D1												UC315-214D1
	UCFL315-215D1												UC315-215D1
	UCFL315-300D1												UC315-300D1
80 $3\frac{1}{16}$ $3\frac{1}{8}$ $3\frac{3}{16}$	UCFL316D1	355	285	38	32	68	38	210	90	86	34	M33	UC316D1
	UCFL316-301D1	13 $\frac{31}{32}$	11 $\frac{7}{32}$	1 $\frac{1}{2}$	$1\frac{1}{4}$	2 $\frac{11}{16}$	1 $\frac{1}{2}$	8 $\frac{9}{32}$	3 $\frac{35}{64}$	3.3858	1.339	$1\frac{1}{4}$	UC316-301D1
	UCFL316-302D1												UC316-302D1
	UCFL316-303D1												UC316-303D1
85 $3\frac{1}{4}$ $3\frac{5}{16}$ $3\frac{7}{16}$	UCFL317D1	370	300	44	32	74	38	220	100	96	40	M33	UC317D1
	UCFL317-304D1	14 $\frac{9}{16}$	11 $\frac{13}{16}$	1 $\frac{47}{64}$	$1\frac{1}{4}$	2 $\frac{29}{32}$	1 $\frac{1}{2}$	8 $\frac{21}{32}$	3 $\frac{15}{16}$	3.7795	1.575	$1\frac{1}{4}$	UC317-304D1
	UCFL317-305D1												UC317-305D1
	UCFL317-307D1												UC317-307D1
90 $3\frac{7}{16}$ $3\frac{1}{2}$	UCFL318D1	385	315	44	36	76	38	235	100	96	40	M33	UC318D1
	UCFL318-307D1	15 $\frac{5}{32}$	12 $\frac{13}{32}$	1 $\frac{47}{64}$	$1\frac{13}{32}$	3	1 $\frac{1}{2}$	9 $\frac{1}{4}$	3 $\frac{15}{16}$	3.7795	1.575	$1\frac{1}{4}$	UC318-307D1
	UCFL318-308D1												UC318-308D1

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

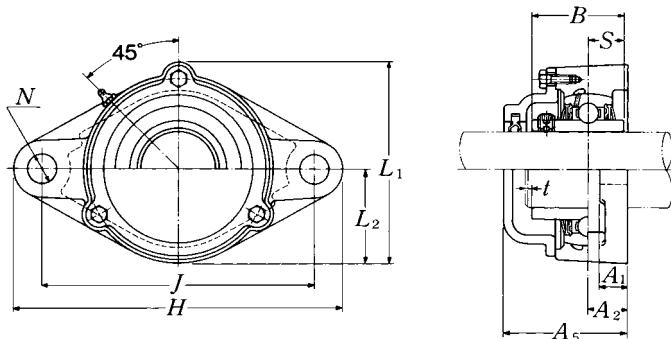**Cast dust cover type**Open end: **C-UCFL...D1**Closed end: **CM-UCFL...D1**


Housing ¹⁾ number	Unit number ¹⁾ cast dust cover type	Nominal dimensions				Mass of unit	
		t max.	A ₅	L ₁	L ₂	kg UCFL	lb C(CM)
FL312D1	C(CM)-UCFL312D1	4	100	175	80	5.7	7.7
FL312D1	C(CM)-UCFL312-204D1	$\frac{5}{32}$	$3\frac{15}{16}$	$6\frac{7}{8}$	$3\frac{5}{32}$	13	17
FL312D1	C(CM)-UCFL312-205D1						
FL312D1	C(CM)-UCFL312-206D1						
FL312D1	C(CM)-UCFL312-207D1						
FL313D1	C(CM)-UCFL313D1	4	103	189	88	7.6	9.9
FL313D1	C(CM)-UCFL313-208D1	$\frac{5}{32}$	$4\frac{1}{16}$	$7\frac{7}{16}$	$3\frac{15}{32}$	17	22
FL313D1	C(CM)-UCFL313-209D1						
FL314D1	C(CM)-UCFL314D1	4	106	198	92	8.6	11
FL314D1	C(CM)-UCFL314-210D1	$\frac{5}{32}$	$4\frac{3}{16}$	$7\frac{25}{32}$	$3\frac{5}{8}$	19	24
FL314D1	C(CM)-UCFL314-211D1						
FL314D1	C(CM)-UCFL314-212D1						
FL315D1	C(CM)-UCFL315D1	4	114	210	98	9.9	12
FL315D1	C(CM)-UCFL315-213D1	$\frac{5}{32}$	$4\frac{1}{2}$	$8\frac{9}{32}$	$3\frac{27}{32}$	22	26
FL315D1	C(CM)-UCFL315-214D1						
FL315D1	C(CM)-UCFL315-215D1						
FL315D1	C(CM)-UCFL315-300D1						
FL316D1	C(CM)-UCFL316D1	4	116	222	105	13	16
FL316D1	C(CM)-UCFL316-301D1	$\frac{5}{32}$	$4\frac{9}{16}$	$8\frac{3}{4}$	$4\frac{1}{8}$	29	35
FL316D1	C(CM)-UCFL316-302D1						
FL316D1	C(CM)-UCFL316-303D1						
FL317D1	C(CM)-UCFL317D1	5	127	234	110	15	18
FL317D1	C(CM)-UCFL317-304D1	$\frac{13}{64}$	5	$9\frac{7}{32}$	$4\frac{11}{32}$	33	40
FL317D1	C(CM)-UCFL317-305D1						
FL317D1	C(CM)-UCFL317-307D1						
FL318D1	C(CM)-UCFL318D1	5	129	247	118	17	21
FL318D1	C(CM)-UCFL318-307D1	$\frac{13}{64}$	$5\frac{3}{32}$	$9\frac{23}{32}$	$4\frac{21}{32}$	37	46
FL318D1	C(CM)-UCFL318-308D1						



Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions										Bolt size mm inch	Bearing number
		H	J	A ₂	A ₁	A	N	L	A ₀	B	S		
95 $3\frac{5}{8}$	UCFL319D1	405	330	59	40	94	41	250	121	103	41	M36	UC319D1
$3\frac{11}{16}$	UCFL319-310D1	$15\frac{15}{16}$	$12\frac{63}{64}$	$2\frac{21}{64}$	$1\frac{9}{16}$	$3\frac{11}{16}$	$1\frac{39}{64}$	$9\frac{27}{32}$	$4\frac{49}{64}$	4.0551	1.614	$1\frac{3}{8}$	UC319-310D1
$3\frac{3}{4}$	UCFL319-311D1												UC319-311D1
	UCFL319-312D1												UC319-312D1
100 $3\frac{13}{16}$	UCFL320D1	440	360	59	40	94	44	270	125	108	42	M39	UC320D1
$3\frac{7}{8}$	UCFL320-313D1	$17\frac{5}{16}$	$14\frac{11}{64}$	$2\frac{21}{64}$	$1\frac{9}{16}$	$3\frac{11}{16}$	$1\frac{47}{64}$	$10\frac{5}{8}$	$4\frac{59}{64}$	4.2520	1.654	$1\frac{1}{2}$	UC320-313D1
$3\frac{15}{16}$	UCFL320-314D1												UC320-314D1
4	UCFL320-315D1												UC320-315D1
	UCFL320-400D1												UC320-400D1
105	UCFL321D1	440	360	59	40	94	44	270	127	112	44	M39	UC321D1
110	UCFL322D1	470	390	60	42	96	44	300	131	117	46	M39	UC322D1
120	UCFL324D1	520	430	65	48	110	47	330	140	126	51	M42	UC324D1
130	UCFL326D1	550	460	65	50	115	47	360	146	135	54	M42	UC326D1
140	UCFL328D1	600	500	75	60	125	51	400	161	145	59	M45	UC328D1

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

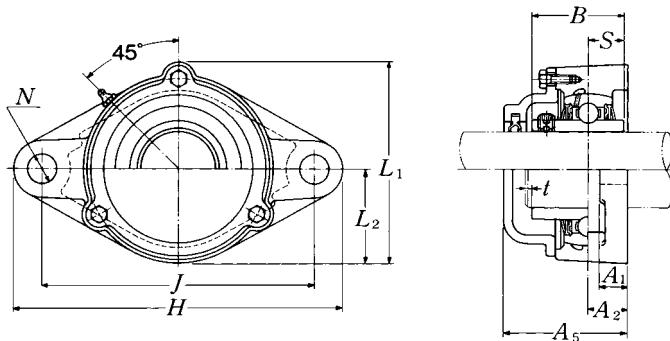
**Cast dust cover type**Open end: **C-UCFL...D1**Closed end: **CM-UCFL...D1**

Housing ¹⁾ number	Unit number ¹⁾ cast dust cover type	Nominal dimensions				Mass of unit	
		t max.	A ₅	L ₁	L ₂	kg UCFL	lb C(CM)
FL319D1	C(CM)-UCFL319D1	5	149	260	125	22	26
FL319D1	C(CM)-UCFL319-310D1	$1\frac{13}{64}$	$5\frac{7}{8}$	$10\frac{1}{4}$	$4\frac{29}{32}$	49	57
FL319D1	C(CM)-UCFL319-311D1						
FL319D1	C(CM)-UCFL319-312D1						
FL320D1	C(CM)-UCFL320D1	5	154	280	135	26	31
FL320D1	C(CM)-UCFL320-313D1	$1\frac{13}{64}$	$6\frac{1}{16}$	$11\frac{1}{32}$	$5\frac{5}{16}$	57	68
FL320D1	C(CM)-UCFL320-314D1						
FL320D1	C(CM)-UCFL320-315D1						
FL320D1	C(CM)-UCFL320-400D1						
FL321D1	C(CM)-UCFL321D1	5	156	287	135	27	32
FL322D1	C(CM)-UCFL322D1	5	160	315	150	34	39
FL324D1	C(CM)-UCFL324D1	5	172	342	165	48	52
FL326D1	C(CM)-UCFL326D1	6	178	376	180	58	64
FL328D1	C(CM)-UCFL328D1	6	192	410	200	81	90

sale@technobearing.ru

www.technobearing.ru


8 (800) 700-72-07 (бесплатно)

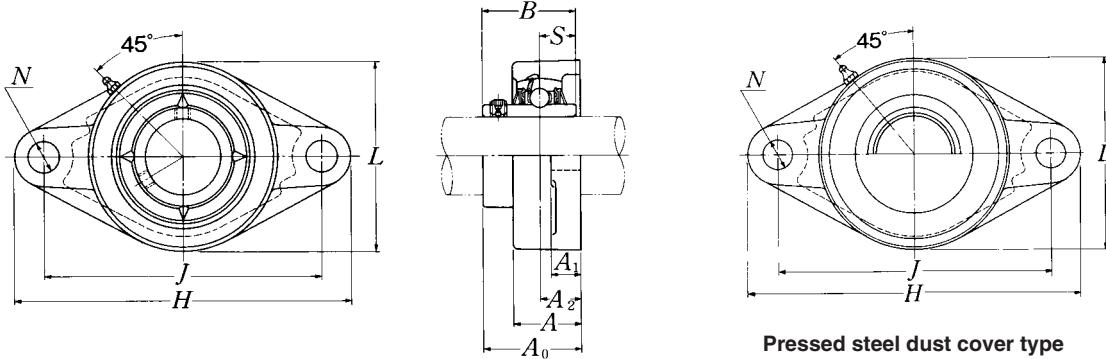Rhombus flanged units cast housing
Set screw type
**Pressed steel dust cover type**Open end: **S-UCFLX···D1**Closed end: **SM-UCFLX···D1**

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions										Bolt size mm inch	Bearing number
		H	J	A ₂	A ₁	A	N	L	A ₀	B	S		
25 $\frac{13}{16}$ $\frac{7}{8}$ $\frac{15}{16}$	UCFLX05D1	141	117	18	13	30	12	83	40.2	38.1	15.9	M10	UCX05D1
	UCFLX05-013D1												UCX05-013D1
	UCFLX05-014D1												UCX05-014D1
	UCFLX05-015D1												UCX05-015D1
1	UCFLX05-100D1												UCX05-100D1
30 $1\frac{1}{16}$ $1\frac{1}{8}$ $1\frac{3}{16}$ $1\frac{1}{4}$	UCFLX06D1	156	130	19	15	34	16	95	44.4	42.9	17.5	M14	UCX06D1
	UCFLX06-101D1												UCX06-101D1
	UCFLX06-102D1												UCX06-102D1
	UCFLX06-103D1												UCX06-103D1
	UCFLX06-104D1												UC207-104D1
35 $1\frac{5}{16}$ $1\frac{3}{8}$ $1\frac{7}{16}$	UCFLX07D1	171	144	21	16	38	16	105	51.2	49.2	19	M14	UCX07D1
	UCFLX07-105D1												UCX07-105D1
	UCFLX07-106D1												UCX07-106D1
	UCFLX07-107D1												UCX07-107D1
40 $1\frac{1}{2}$ $1\frac{9}{16}$	UCFLX08D1	179	148	22	16	40	16	111	52.2	49.2	19	M14	UCX08D1
	UCFLX08-108D1												UCX08-108D1
	UCFLX08-109D1												UCX08-109D1
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$ $1\frac{13}{16}$	UCFLX09D1	189	157	23	16	40	16	116	55.6	51.6	19	M14	UCX09D1
	UCFLX09-110D1												UCX09-110D1
	UCFLX09-111D1												UCX09-111D1
	UCFLX09-112D1												UCX09-112D1
	UCFLX09-113D1												UC210-113D1
50 $1\frac{7}{8}$ $1\frac{15}{16}$ 2	UCFLX10D1	216	184	26	18	44	19	133	59.4	55.6	22.2	M16	UCX10D1
	UCFLX10-114D1												UCX10-114D1
	UCFLX10-115D1												UCX10-115D1
	UCFLX10-200D1												UC211-200D1

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

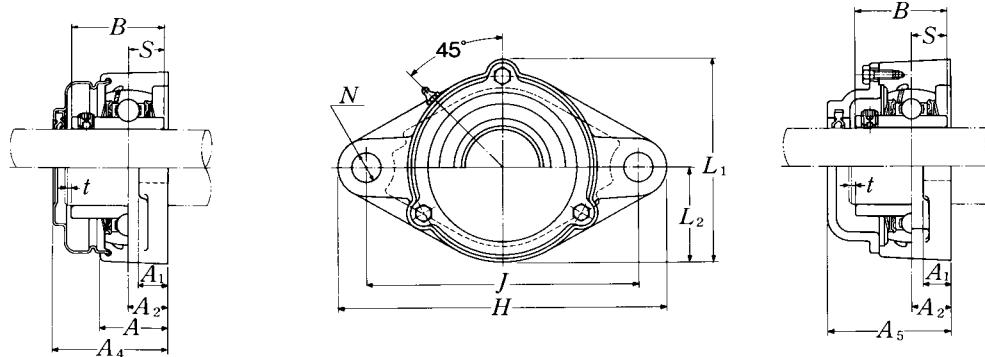


Cast dust cover type

Open end: C-UCFLX...D1

Closed end: CM-UCFLX...D1

Housing ¹⁾ number	Unit number ¹⁾ pressed steel dust cover type	Unit number ¹⁾ cast dust cover type	Nominal dimensions					Mass of unit		
			t max.	A ₄	A ₅	L ₁	L ₂	kg	lb	
								UCFLX	S(SM)	C(CM)
FLX05D1	S(SM)-UCFLX05D1	C(CM)-UCFLX05D1	2	49	56	86	41.5	1.0	1.0	1.2
FLX05D1	S(SM)-UCFLX05-013D1	C(CM)-UCFLX05-013D1	$\frac{5}{64}$	$1\frac{15}{16}$	$2\frac{7}{32}$	$3\frac{3}{8}$	$1\frac{5}{8}$	2.2	2.2	2.7
FLX05D1	S(SM)-UCFLX05-014D1	C(CM)-UCFLX05-014D1								
FLX05D1	S(SM)-UCFLX05-015D1	C(CM)-UCFLX05-015D1								
FLX05D1	S(SM)-UCFLX05-100D1	C(CM)-UCFLX05-100D1								
FLX06D1	S(SM)-UCFLX06D1	C(CM)-UCFLX06D1	2	55	59	98.5	47.5	1.5	1.6	1.8
FLX06D1	S(SM)-UCFLX06-101D1	C(CM)-UCFLX06-101D1	$\frac{5}{64}$	$2\frac{5}{32}$	$2\frac{5}{16}$	$3\frac{7}{8}$	$1\frac{7}{8}$	3.3	3.5	4.0
FLX06D1	S(SM)-UCFLX06-102D1	C(CM)-UCFLX06-102D1								
FLX06D1	S(SM)-UCFLX06-103D1	C(CM)-UCFLX06-103D1								
FLX06D1	S(SM)-UCFLX06-104D1	C(CM)-UCFLX06-104D1								
FLX07D1	S(SM)-UCFLX07D1	C(CM)-UCFLX07D1	3	62	66	108.5	52.5	1.8	1.9	2.2
FLX07D1	S(SM)-UCFLX07-105D1	C(CM)-UCFLX07-105D1	$\frac{1}{8}$	$2\frac{7}{16}$	$2\frac{19}{32}$	$4\frac{9}{32}$	$2\frac{1}{16}$	4.0	4.2	4.9
FLX07D1	S(SM)-UCFLX07-106D1	C(CM)-UCFLX07-106D1								
FLX07D1	S(SM)-UCFLX07-107D1	C(CM)-UCFLX07-107D1								
FLX08D1	S(SM)-UCFLX08D1	C(CM)-UCFLX08D1	3	63	70	114.5	55.5	2.0	2.1	2.4
FLX08D1	S(SM)-UCFLX08-108D1	C(CM)-UCFLX08-108D1	$\frac{1}{8}$	$2\frac{15}{32}$	$2\frac{3}{4}$	$4\frac{1}{2}$	$2\frac{3}{16}$	4.4	4.6	5.3
FLX08D1	S(SM)-UCFLX08-109D1	C(CM)-UCFLX08-109D1								
FLX09D1	S(SM)-UCFLX09D1	C(CM)-UCFLX09D1	3	65.5	73	119.5	58	2.2	2.3	2.7
FLX09D1	S(SM)-UCFLX09-110D1	C(CM)-UCFLX09-110D1	$\frac{1}{8}$	$2\frac{19}{32}$	$2\frac{7}{8}$	$4\frac{23}{32}$	$2\frac{9}{32}$	4.9	5.1	6.0
FLX09D1	S(SM)-UCFLX09-111D1	C(CM)-UCFLX09-111D1								
FLX09D1	S(SM)-UCFLX09-112D1	C(CM)-UCFLX09-112D1								
FLX09D1	S(SM)-UCFLX09-113D1	C(CM)-UCFLX09-113D1								
FLX10D1	S(SM)-UCFLX10D1	C(CM)-UCFLX10D1	3	71	76	133.5	66.5	3.0	3.2	3.6
FLX10D1	S(SM)-UCFLX10-114D1	C(CM)-UCFLX10-114D1	$\frac{1}{8}$	$2\frac{25}{32}$	3	$5\frac{1}{4}$	$2\frac{5}{8}$	6.6	7.1	7.9
FLX10D1	S(SM)-UCFLX10-115D1	C(CM)-UCFLX10-115D1								
FLX10D1	S(SM)-UCFLX10-200D1	C(CM)-UCFLX10-200D1								

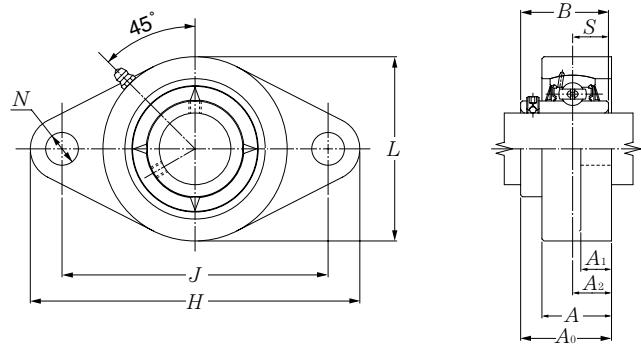


Shaft dia. mm	Unit number ¹⁾	Nominal dimensions mm											Bolt size mm	Bearing number
		H	J	A ₂	A ₁	A	N	L	A ₀	B	S			
12	UCFLG201D1	113	90	15	11	25.5	12	60	33.3	31	12.7	M10	UC201D1	
15	UCFLG202D1	113	90	15	11	25.5	12	60	33.3	31	12.7	M10	UC202D1	
17	UCFLG203D1	113	90	15	11	25.5	12	60	33.3	31	12.7	M10	UC203D1	
20	UCFLG204D1	113	90	15	11	25.5	12	60	33.3	31	12.7	M10	UC204D1	
25	UCFLG205D1	130	99	16	13	27	16	68	35.8	34.1	14.3	M14	UC205D1	
30	UCFLG206D1	148	117	18	13	31	16	80	40.2	38.1	15.9	M14	UC206D1	
35	UCFLG207D1	161	130	19	15	34	16	90	44.4	42.9	17.5	M14	UC207D1	
40	UCFLG208D1	175	144	21	15	36	16	100	51.2	49.2	19	M14	UC208D1	
45	UCFLG209D1	188	148	22	16	38	19	108	52.2	49.2	19	M16	UC209D1	
50	UCFLG210D1	197	157	22	16	40	19	115	54.6	51.6	19	M16	UC210D1	
55	UCFLG211D1	224	184	25	18	43	19	130	58.4	55.6	22.2	M16	UC211D1	
60	UCFLG212D1	250	202	29	18	48	23	140	68.7	65.1	25.4	M20	UC212D1	
65	UCFLG213D1	258	210	30	22	50	23	155	69.7	65.1	25.4	M20	UC213D1	
70	UCFLG214D1	265	216	31	22	54	23	160	75.4	74.6	30.2	M20	UC214D1	
75	UCFLG215D1	275	225	34	22	56	23	165	78.5	77.8	33.3	M20	UC215D1	
80	UCFLG216D1	290	233	34	22	58	25	180	83.3	82.6	33.3	M22	UC216D1	
85	UCFLG217D1	305	248	36	24	63	25	190	87.6	85.7	34.1	M22	UC217D1	
90	UCFLG218D1	320	265	40	24	68	25	205	96.3	96	39.7	M22	UC218D1	

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

Housing number	Mass of unit kg
FLG204D1	0.5
FLG205D1	0.7
FLG206D1	1.1
FLG207D1	1.4
FLG208D1	1.8
FLG209D1	2.4
FLG210D1	2.6
FLG211D1	3.6
FLG212D1	4.7
FLG213D1	6.0
FLG214D1	6.6
FLG215D1	7.2
FLG216D1	8.8
FLG217D1	11
FLG218D1	13

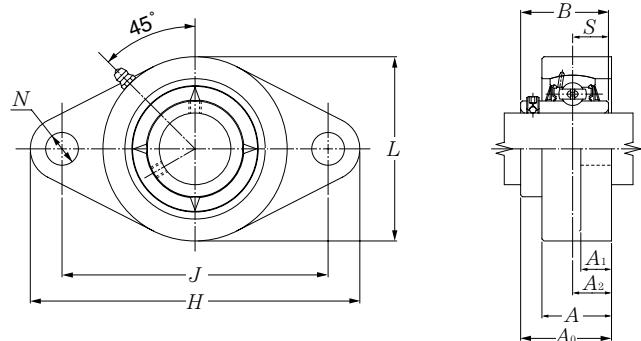
Rhombus flanged units (Steel series)
Set screw type


Shaft dia. mm	Unit number ¹⁾	Nominal dimensions mm										Bolt size mm	Bearing number
		H	J	A ₂	A ₁	A	N	L	A ₀	B	S		
25	UCFLG305D1	150	113	16	13	29	19	80	39	38	15	M16	UC305D1
30	UCFLG306D1	180	134	18	15	32	23	90	44	43	17	M20	UC306D1
35	UCFLG307D1	185	141	20	16	36	23	100	49	48	19	M20	UC307D1
40	UCFLG308D1	200	158	23	17	40	23	112	56	52	19	M20	UC308D1
45	UCFLG309D1	230	177	25	18	44	25	125	60	57	22	M22	UC309D1
50	UCFLG310D1	240	187	28	19	48	25	140	67	61	22	M22	UC310D1
55	UCFLG311D1	250	198	30	20	52	25	150	71	66	25	M22	UC311D1
60	UCFLG312D1	270	212	33	22	56	31	160	78	71	26	M27	UC312D1
65	UCFLG313D1	295	240	33	25	58	31	175	78	75	30	M27	UC313D1
70	UCFLG314D1	315	250	36	28	61	35	185	81	78	33	M30	UC314D1
75	UCFLG315D1	320	260	39	30	66	35	195	89	82	32	M30	UC315D1
80	UCFLG316D1	355	285	38	32	68	38	210	90	86	34	M33	UC316D1
85	UCFLG317D1	370	300	44	32	74	38	220	100	96	40	M33	UC317D1
90	UCFLG318D1	385	315	44	36	76	38	235	100	96	40	M33	UC318D1
95	UCFLG319D1	405	330	59	40	94	41	250	121	103	41	M36	UC319D1
100	UCFLG320D1	440	360	59	40	94	44	270	125	108	42	M39	UC320D1
105	UCFLG321D1	440	360	59	40	94	44	270	127	112	44	M39	UC321D1
110	UCFLG322D1	470	390	60	42	96	44	300	131	117	46	M39	UC322D1
120	UCFLG324D1	520	430	65	48	110	47	330	140	126	51	M42	UC324D1
130	UCFLG326D1	550	460	65	50	115	47	360	146	135	54	M42	UC326D1
140	UCFLG328D1	600	500	75	60	125	51	400	161	145	59	M45	UC328D1

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

Housing number	Mass of unit kg
FLG305D1	1.1
FLG306D1	1.6
FLG307D1	2.0
FLG308D1	2.6
FLG309D1	3.7
FLG310D1	4.8
FLG311D1	5.7
FLG312D1	6.9
FLG313D1	8.9
FLG314D1	11
FLG315D1	12
FLG316D1	15
FLG317D1	17
FLG318D1	21
FLG319D1	27
FLG320D1	32
FLG321D1	31
FLG322D1	40
FLG324D1	56
FLG326D1	69
FLG328D1	96

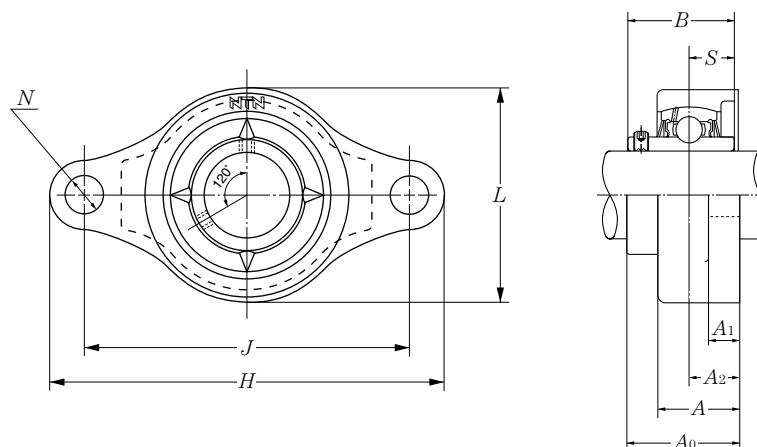
Rhombus flanged units (Stainless series)**Set screw type**

Shaft dia. mm	Unit number	Nominal dimensions mm										Bolt size mm
		H	J	A ₂	A ₁	A	N	L	A ₀	B	S	
20	F-UCFM204/LP03	112	90	15	10	25.5	12	60	33.3	31	12.7	M10
25	F-UCFM205/LP03	127	99	16	10	26.5	16	68	35.8	34.1	14.3	M14
30	F-UCFM206/LP03	145	117	18	10	30	16	80	40.2	38.1	15.9	M14
35	F-UCFM207/LP03	158	130	19	12	32	16	90	44.4	42.9	17.5	M14
40	F-UCFM208/LP03	172	144	21	12	35	16	100	51.2	49.2	19	M14
45	F-UCFM209/LP03	180	148	22	13	36	19	108	52.2	49.2	19	M16
50	F-UCFM210/LP03	189	157	22	13	37	19	115	54.6	51.6	19	M16

Remark: 1) This series uses solid grease in the bearings as standard. A stainless steel bearing unit packed with a food grade grease or heat resistance grease is also available.

2) The basic dynamic load rating C_r of the bearing is different from a bearing made with standard bearing steel.

Bearing number	Basic load ratings		Housing number	Mass of unit kg
	dynamic C_r	static C_{or}		
F-UC204D1/LP03	9.9	6.65	FM204	0.4
F-UC205D1/LP03	10.8	7.85	FM205	0.6
F-UC206D1/LP03	15.0	11.3	FM206	0.8
F-UC207D1/LP03	19.7	15.3	FM207	1.1
F-UC208D1/LP03	22.4	17.8	FM208	1.4
F-UC209D1/LP03	25.2	20.4	FM209	1.8
F-UC210D1/LP03	27.0	23.2	FM210	1.9

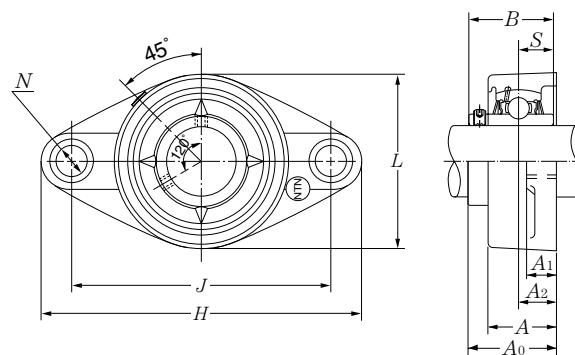


Shaft dia. mm	Unit number	Nominal dimensions										Bolt size mm
		H	J	A ₂	A ₁	A	N	L	A ₀	B	S	
20	F-UCFLR204/LP03	113	90	15.4	11.4	26.5	11*	64	33.7	31	12.7	M10
25	F-UCFLR205/LP03	130	99	17	13.5	29.1	11*	68	36.8	34.1	14.3	M10*
30	F-UCFLR206/LP03	148	117	19	13.3	30.5	11*	80	41.2	38.1	15.9	M10*
35	F-UCFLR207/LP03	163	130	18	16.1	32.8	13*	90	43.4	42.9	17.5	M12*
40	F-UCFLR208/LP03	175	144	21.5	20	37.5	14*	100	51.7	49.2	19	M12*

Remark: 1) This series uses solid grease in the bearings as standard. Ball bearings packed with a food grade grease are also available.


2) Some dimensions are different from those for a cast iron housings (JIS product). (Main parts are shown with " * ")

3) The basic dynamic load rating C_r of the bearing is different from a bearing made with standard bearing steel.

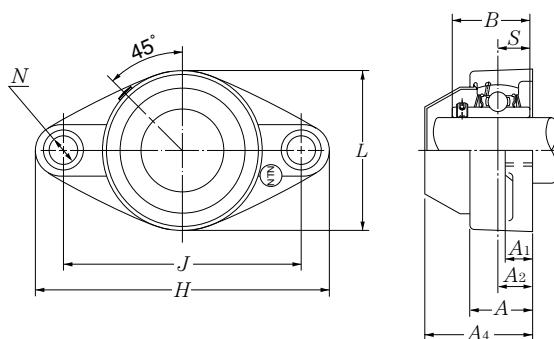

Resin dust cover type

Bearing number	Basic load ratings		Housing number	Unit number resin dust cover type	Nominal dimension mm A4	Mass of unit kg	
	dynamic C_r	static C_{or}				F-	RM-
						UCFLR	UCFLR
F-UC204D1/LP03	9.9	6.65	FLR204	F-RM-UCFLR204/LP03	47	0.3	0.3
F-UC205D1/LP03	10.8	7.85	FLR205	F-RM-UCFLR205/LP03	51	0.3	0.3
F-UC206D1/LP03	15.0	11.3	FLR206	F-RM-UCFLR206/LP03	59	0.5	0.5
F-UC207D1/LP03	19.7	15.3	FLR207	F-RM-UCFLR207/LP03	61	0.7	0.7
F-UC208D1/LP03	22.4	17.8	FLR208	F-RM-UCFLR208/LP03	71	0.9	1.0

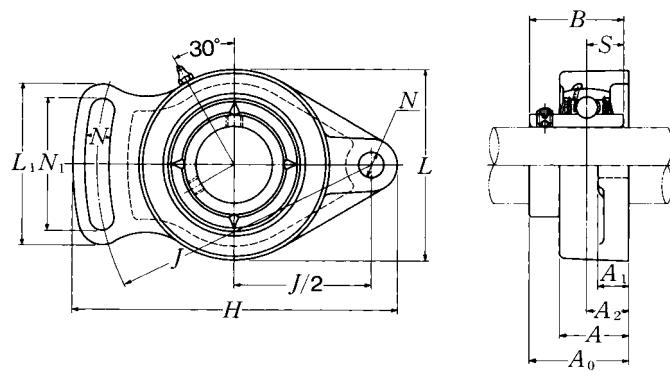
Modified rhombus flanged units cast housing**Set screw type**

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions												Bolt size mm inch
		H	J	A ₂	A ₁	A	N	N ₁	L	L ₁	A ₀	B	S	
12 1/2	UCFA201D1 UCFA201-008D1	98 3 ²⁷ / ₃₂	78 3 ¹ / ₁₆	15 19 ¹ / ₃₂	12 15 ¹ / ₃₂	25.5 1	10 25 ¹ / ₆₄	40 1 ⁹ / ₁₆	60 2 ³ / ₈	50 1 ³¹ / ₃₂	33.3 1 ⁵ / ₁₆	31 1.2205	12.7 0.500	M 8 5/ ₁₆
15 9/ ₁₆ 5/ ₈	UCFA202D1 UCFA202-009D1 UCFA202-010D1	98 3 ²⁷ / ₃₂	78 3 ¹ / ₁₆	15 19 ¹ / ₃₂	12 15 ¹ / ₃₂	25.5 1	10 25 ¹ / ₆₄	40 1 ⁹ / ₁₆	60 2 ³ / ₈	50 1 ³¹ / ₃₂	33.3 1 ⁵ / ₁₆	31 1.2205	12.7 0.500	M 8 5/ ₁₆
17 11/ ₁₆	UCFA203D1 UCFA203-011D1	98 3 ²⁷ / ₃₂	78 3 ¹ / ₁₆	15 19 ¹ / ₃₂	12 15 ¹ / ₃₂	25.5 1	10 25 ¹ / ₆₄	40 1 ⁹ / ₁₆	60 2 ³ / ₈	50 1 ³¹ / ₃₂	33.3 1 ⁵ / ₁₆	31 1.2205	12.7 0.500	M 8 5/ ₁₆
20 3/ ₄	UCFA204D1 UCFA204-012D1	98 3 ²⁷ / ₃₂	78 3 ¹ / ₁₆	15 19 ¹ / ₃₂	12 15 ¹ / ₃₂	25.5 1	10 25 ¹ / ₆₄	40 1 ⁹ / ₁₆	60 2 ³ / ₈	50 1 ³¹ / ₃₂	33.3 1 ⁵ / ₁₆	31 1.2205	12.7 0.500	M 8 5/ ₁₆
25 13/ ₁₆ 7/ ₈ 15/ ₁₆ 1	UCFA205D1 UCFA205-013D1 UCFA205-014D1 UCFA205-015D1 UCFA205-100D1	124 4 ⁷ / ₈	96 3 ²⁵ / ₃₂	15 19 ¹ / ₃₂	14 9/ ₁₆	26.5 1 ¹ / ₃₂	13 33 ¹ / ₆₄	49 1 ¹⁵ / ₁₆	70 2 ³ / ₄	64 2 ¹⁷ / ₃₂	34.8 1 ³ / ₈	34.1 1.3425	14.3 0.563	M10 3/ ₈
30 1 ¹ / ₁₆ 1 ¹ / ₈ 1 ³ / ₁₆ 1 ¹ / ₄	UCFA206D1 UCFA206-101D1 UCFA206-102D1 UCFA206-103D1 UCFA206-104D1	141 5 ⁹ / ₁₆	115 4 ¹⁷ / ₃₂	18 45 ¹ / ₆₄	14 9/ ₁₆	31 1 ⁷ / ₃₂	13 33 ¹ / ₆₄	53 2 ³ / ₃₂	80 3 ⁵ / ₃₂	68 2 ¹¹ / ₁₆	40.2 1 ³⁷ / ₆₄	38.1 1.5000	15.9 0.626	M10 3/ ₈
35 1 ¹ / ₄ 1 ⁵ / ₁₆ 1 ³ / ₈ 1 ⁷ / ₁₆	UCFA207D1 UCFA207-104D1 UCFA207-105D1 UCFA207-106D1 UCFA207-107D1	155 6 ³ / ₃₂	128 5 ¹ / ₃₂	20 25 ¹ / ₃₂	16 5/ ₈	34 1 ¹¹ / ₃₂	15 19 ¹ / ₃₂	60 2 ³ / ₈	90 3 ¹⁷ / ₃₂	75 2 ¹⁵ / ₁₆	45.4 1 ²⁵ / ₃₂	42.9 1.6890	17.5 0.689	7/ ₁₆
40 1 ¹ / ₂ 1 ⁹ / ₁₆	UCFA208D1 UCFA208-108D1 UCFA208-109D1	171 6 ²³ / ₃₂	142 5 ¹⁹ / ₃₂	22 55 ¹ / ₆₄	16 5/ ₈	36 1 ¹³ / ₃₂	15 19 ¹ / ₃₂	69 2 ²³ / ₃₂	100 3 ¹⁵ / ₁₆	84 3 ⁵ / ₁₆	52.2 2 ¹ / ₁₆	49.2 1.9370	19 0.748	7/ ₁₆

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

Bearing number	Housing number ¹⁾	Mass of unit kg lb
UC201D1	FA204D1	0.5
UC201-008D1	FA204D1	1.1
UC202D1	FA204D1	0.5
UC202-009D1	FA204D1	1.1
UC202-010D1	FA204D1	
UC203D1	FA204D1	0.5
UC203-011D1	FA204D1	1.1
UC204D1	FA204D1	0.5
UC204-012D1	FA204D1	1.1
UC205D1	FA205D1	0.7
UC205-013D1	FA205D1	
UC205-014D1	FA205D1	1.5
UC205-015D1	FA205D1	
UC205-100D1	FA205D1	
UC206D1	FA206D1	0.9
UC206-101D1	FA206D1	
UC206-102D1	FA206D1	2.0
UC206-103D1	FA206D1	
UC206-104D1	FA206D1	
UC207D1	FA207D1	1.2
UC207-104D1	FA207D1	
UC207-105D1	FA207D1	2.7
UC207-106D1	FA207D1	
UC207-107D1	FA207D1	
UC208D1	FA208D1	1.5
UC208-108D1	FA208D1	
UC208-109D1	FA208D1	3.3

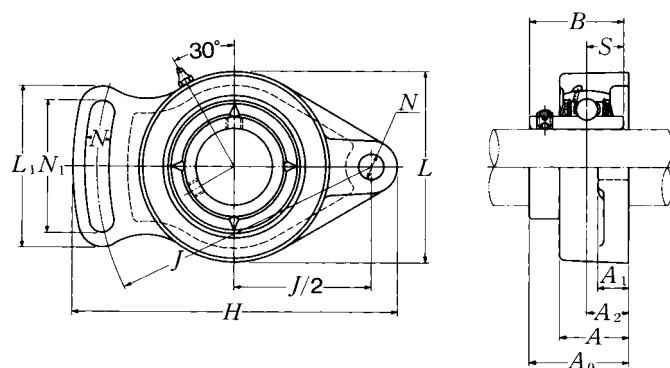
Modified rhombus flanged units cast housing**Set screw type**

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions												Bolt size mm inch
		H	J	A ₂	A ₁	A	N	N ₁	L	L ₁	A ₀	B	S	
45 $1\frac{5}{8}$	UCFA209D1	179	146	22	18	38	17	72	110	88	52.2	49.2	19	M14
$1\frac{11}{16}$	UCFA209-110D1	$7\frac{1}{16}$	$5\frac{3}{4}$	$\frac{55}{64}$	$\frac{23}{32}$	$1\frac{1}{2}$	$\frac{43}{64}$	$2\frac{27}{32}$	$4\frac{11}{32}$	$3\frac{15}{32}$	$2\frac{1}{16}$	1.9370	0.748	$\frac{1}{2}$
$1\frac{3}{4}$	UCFA209-111D1													
	UCFA209-112D1													
50 $1\frac{13}{16}$	UCFA210D1	189	155	22	18	40	17	75	115	92	54.6	51.6	19	M14
$1\frac{7}{8}$	UCFA210-113D1	$7\frac{7}{16}$	$6\frac{3}{32}$	$\frac{55}{64}$	$\frac{23}{32}$	$1\frac{9}{16}$	$\frac{43}{64}$	$2\frac{15}{16}$	$4\frac{17}{32}$	$3\frac{5}{8}$	$2\frac{5}{32}$	2.0315	0.748	$\frac{1}{2}$
$1\frac{15}{16}$	UCFA210-114D1													
2	UCFA210-115D1													
	UCFA210-200D1													
55 2	UCFA211D1	216	182	26	20	43	17	85	130	102	59.4	55.6	22.2	M14
$2\frac{1}{16}$	UCFA211-200D1	$8\frac{1}{8}$	$7\frac{5}{32}$	$1\frac{1}{32}$	$\frac{25}{32}$	$1\frac{11}{16}$	$\frac{43}{64}$	$3\frac{11}{32}$	$5\frac{1}{8}$	$4\frac{1}{32}$	$2\frac{11}{32}$	2.1890	0.874	$\frac{1}{2}$
$2\frac{1}{8}$	UCFA211-201D1													
$2\frac{3}{16}$	UCFA211-202D1													
	UCFA211-203D1													

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

Bearing number	Housing number ¹⁾	Mass of unit kg lb
UC209D1	FA209D1	1.9
UC209-110D1	FA209D1	
UC209-111D1	FA209D1	4.2
UC209-112D1	FA209D1	
UC210D1	FA210D1	2.2
UC210-113D1	FA210D1	
UC210-114D1	FA210D1	4.9
UC210-115D1	FA210D1	
UC210-200D1	FA210D1	
UC211D1	FA211D1	2.9
UC211-200D1	FA211D1	
UC211-201D1	FA211D1	6.4
UC211-202D1	FA211D1	
UC211-203D1	FA211D1	

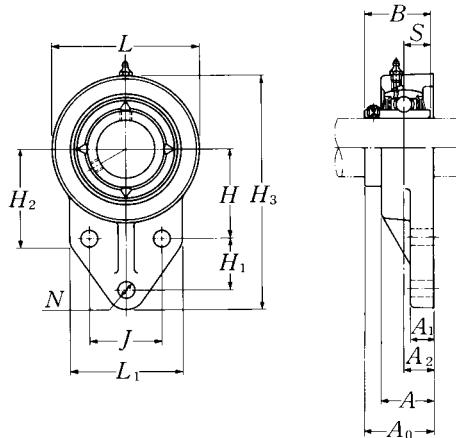**Modified flanged units cast housing
Set screw type**


Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions													
		H ₃	J	A ₂	A ₁	A	N	mm	inch	H ₁	L ₁	H ₂	L	A ₀	B
12 1/2	UCFH201D1 UCFH201-008D1	110 4 ¹¹ / ₃₂	32 1 ¹⁷ / ₆₄	15 1 ⁹ / ₃₂	13 1/2	25.5 1	10 25/ ₆₄	42 1 ²¹ / ₃₂	27 1 ¹ / ₁₆	52 2 ¹ / ₁₆	52 2 ¹ / ₁₆	62 2 ⁷ / ₁₆	33.3 1 ⁵ / ₁₆	31 1.2205	12.7 0.500
15 9/ ₁₆ 5/ ₈	UCFH202D1 UCFH202-009D1 UCFH202-010D1	110 4 ¹¹ / ₃₂	32 1 ¹⁷ / ₆₄	15 1 ⁹ / ₃₂	13 1/2	25.5 1	10 25/ ₆₄	42 1 ²¹ / ₃₂	27 1 ¹ / ₁₆	52 2 ¹ / ₁₆	52 2 ¹ / ₁₆	62 2 ⁷ / ₁₆	33.3 1 ⁵ / ₁₆	31 1.2205	12.7 0.500
17 11/ ₁₆	UCFH203D1 UCFH203-011D1	110 4 ¹¹ / ₃₂	32 1 ¹⁷ / ₆₄	15 1 ⁹ / ₃₂	13 1/2	25.5 1	10 25/ ₆₄	42 1 ²¹ / ₃₂	27 1 ¹ / ₁₆	52 2 ¹ / ₁₆	52 2 ¹ / ₁₆	62 2 ⁷ / ₁₆	33.3 1 ⁵ / ₁₆	31 1.2205	12.7 0.500
20 3/ ₄	UCFH204D1 UCFH204-012D1	110 4 ¹¹ / ₃₂	32 1 ¹⁷ / ₆₄	15 1 ⁹ / ₃₂	13 1/2	25.5 1	10 25/ ₆₄	42 1 ²¹ / ₃₂	27 1 ¹ / ₁₆	52 2 ¹ / ₁₆	52 2 ¹ / ₁₆	62 2 ⁷ / ₁₆	33.3 1 ⁵ / ₁₆	31 1.2205	12.7 0.500
25 13/ ₁₆ 7/ ₈ 15/ ₁₆ 1	UCFH205D1 UCFH205-013D1 UCFH205-014D1 UCFH205-015D1 UCFH205-100D1	116 4 ⁹ / ₁₆	34 1 ¹¹ / ₃₂	16 5/8	13 1/2	27 1 ¹ / ₁₆	10 25/ ₆₄	45 1 ⁴⁹ / ₆₄	27 1 ¹ / ₁₆	56 2 ⁷ / ₃₂	52 2 ¹¹ / ₁₆	68 1 ¹³ / ₃₂	35.8 1.3425	34.1 0.563	14.3
30 1 ¹ / ₁₆ 1 ¹ / ₈ 1 ³ / ₁₆ 1 ¹ / ₄	UCFH206D1 UCFH206-101D1 UCFH206-102D1 UCFH206-103D1 UCFH206-104D1	130 5 ¹ / ₈	40 37/ ₆₄	18 45/ ₆₄	13 1/2	31 1 ⁷ / ₃₂	10 25/ ₆₄	50 1 ³¹ / ₃₂	29 1 ⁹ / ₁₆	65 2 ⁵ / ₃₂	55 3 ¹ / ₁₆	78 1 ³⁷ / ₆₄	40.2 1.5000	38.1 0.626	15.9
35 1 ¹ / ₄ 1 ⁵ / ₁₆ 1 ³ / ₈ 1 ⁷ / ₁₆	UCFH207D1 UCFH207-104D1 UCFH207-105D1 UCFH207-106D1 UCFH207-107D1	144 5 ²¹ / ₃₂	46 1 ¹³ / ₁₆	19 3/4	15 19/ ₃₂	34 1 ¹¹ / ₃₂	10 25/ ₆₄	55 2 ¹¹ / ₆₄	32 1 ¹⁷ / ₆₄	70 2 ³ / ₄	62 2 ⁷ / ₁₆	90 3 ¹⁷ / ₃₂	44.4 1.6890	42.9 0.689	17.5
40 1 ¹ / ₂ 1 ⁹ / ₁₆	UCFH208D1 UCFH208-108D1 UCFH208-109D1	164 6 ¹⁵ / ₃₂	50 1 ³¹ / ₃₂	21 53/ ₆₄	16 5/8	36 1 ¹³ / ₃₂	12 15/ ₃₂	60 2 ²³ / ₆₄	41 1 ³⁹ / ₆₄	78 3 ¹ / ₁₆	72 2 ²⁷ / ₃₂	100 3 ¹⁵ / ₁₆	51.2 2 ¹ / ₆₄	49.2 1.9370	19 0.748
45 1 ⁵ / ₈ 1 ¹¹ / ₁₆ 1 ³ / ₄	UCFH209D1 UCFH209-110D1 UCFH209-111D1 UCFH209-112D1	174 6 ²⁷ / ₃₂	54 2 ¹ / ₈	22 55/ ₆₄	18 23/ ₃₂	38 1 ¹ / ₂	12 15/ ₃₂	65 2 ⁹ / ₁₆	43 1 ¹¹ / ₁₆	80 3 ⁵ / ₃₂	76 3	106 4 ³ / ₁₆	52.2 2 ¹ / ₁₆	49.2 1.9370	19 0.748

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

sale@technobearing.ru 36 for size of grease fitting.

www.technobearing.ru


8 (800) 700-72-07 (бесплатно)

Bolt size mm inch	Bearing number	Housing number ¹⁾	Mass of unit kg lb
M 8 5/16	UC201D1 UC201-008D1	FH204D1 FH204D1	0.6 1.3
M 8 5/16	UC202D1 UC202-009D1 UC202-010D1	FH204D1 FH204D1 FH204D1	0.6 1.3
M 8 5/16	UC203D1 UC203-011D1	FH204D1 FH204D1	0.6 1.3
M 8 5/16	UC204D1 UC204-012D1	FH204D1 FH204D1	0.6 1.3
M 8 5/16	UC205D1 UC205-013D1 UC205-014D1 UC205-015D1 UC205-100D1	FH205D1 FH205D1 FH205D1 FH205D1 FH205D1	0.7 1.5
M 8 5/16	UC206D1 UC206-101D1 UC206-102D1 UC206-103D1 UC206-104D1	FH206D1 FH206D1 FH206D1 FH206D1 FH206D1	0.9 2.0
M 8 5/16	UC207D1 UC207-104D1 UC207-105D1 UC207-106D1 UC207-107D1	FH207D1 FH207D1 FH207D1 FH207D1 FH207D1	1.3 2.9
M10 3/8	UC208D1 UC208-108D1 UC208-109D1	FH208D1 FH208D1 FH208D1	1.8 4.0
M10 3/8	UC209D1 UC209-110D1 UC209-111D1 UC209-112D1	FH209D1 FH209D1 FH209D1 FH209D1	2.1 4.6

sale@technobearing.ru

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

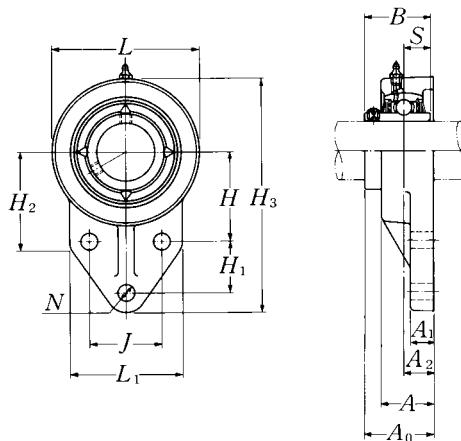
**Modified flanged units cast housing
Set screw type**


Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions														
		H ₃	J	A ₂	A ₁	A	N	H	H ₁	L ₁	H ₂	L	A ₀	B	S	
50 $1\frac{13}{16}$	UCFH210D1	184	58	22	18	40	12	68	46	86	82	112	54.6	51.6	19	
$1\frac{7}{8}$	UCFH210-113D1	$7\frac{1}{4}$	$2\frac{9}{32}$	$5\frac{5}{64}$	$2\frac{3}{32}$	$1\frac{9}{16}$	$1\frac{15}{32}$	$2\frac{43}{64}$	$1\frac{13}{16}$	$3\frac{3}{8}$	$3\frac{7}{32}$	$4\frac{13}{32}$	$2\frac{5}{32}$	2.0315	0.748	
$1\frac{15}{16}$	UCFH210-114D1															
$1\frac{15}{16}$	UCFH210-115D1															
2	UCFH210-200D1															

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

Bolt size mm inch	Bearing number	Housing number ¹⁾	Mass of unit kg lb
M10 $\frac{3}{8}$	UC210D1	FH210D1	2.4
	UC210-113D1	FH210D1	
	UC210-114D1	FH210D1	
	UC210-115D1	FH210D1	
	UC210-200D1	FH210D1	5.3

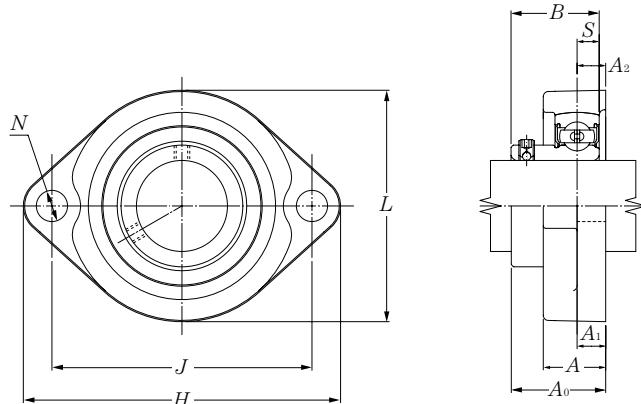Light rhombus flanged units cast housing
Set screw type


Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions										Bolt size mm inch	Bearing number ¹⁾
		H	J	A ₂	A ₁	A	N	L	A ₀	B	S		
12 1/2	ASFB201 ASFB201-008	81 3 3/16	63.5 2 1/2	9.5 3/8	9.5 3/8	18 23/32	7 9/32	56 2 7/32	25.5 1	22 0.8661	6 0.236	M6 1/4	AS201 AS201-008
15 9/16 5/8	ASFB202 ASFB202-009 ASFB202-010	81 3 3/16	63.5 2 1/2	9.5 3/8	9.5 3/8	18 23/32	7 9/32	56 2 7/32	25.5 1	22 0.8661	6 0.236	M6 1/4	AS202 AS202-009 AS202-010
17 11/16	ASFB203 ASFB203-011	81 3 3/16	63.5 2 1/2	9.5 3/8	9.5 3/8	18 23/32	7 9/32	56 2 7/32	25.5 1	22 0.8661	6 0.236	M6 1/4	AS203 AS203-011
20 3/4	ASFB204 ASFB204-012	90 3 35/64	71.5 2 13/16	11 7/16	11 7/16	20 25/32	10 25/64	61 2 13/32	29 1 9/64	25 0.9843	7 0.276	M8 5/16	AS204 AS204-012
25 13/16 7/8 15/16 1	ASFB205 ASFB205-013 ASFB205-014 ASFB205-015 ASFB205-100	95 3 3/4	76 2 63/64	11 7/16	11 7/16	20 25/32	10 25/64	64 2 17/32	30.5 1 13/64	27 1.0630	7.5 0.295	M8 5/16	AS205 AS205-013 AS205-014 AS205-015 AS205-100
30 1 1/16 1 1/8 1 3/16 1 1/4	ASFB206 ASFB206-101 ASFB206-102 ASFB206-103 ASFB206-104	113 4 7/16	90.5 3 9/16	12 15/32	12 15/32	22.5 7/8	12 15/32	76 3	33 1 19/64	29 1.1417	8 0.315	M10 3/8	AS206 AS206-101 AS206-102 AS206-103 AS206-104
35 1 1/4 1 5/16 1 3/8 1 7/16	ASFB207 ASFB207-104 ASFB207-105 ASFB207-106 ASFB207-107	122 4 51/64	100 3 15/16	11 7/16	13 1/2	24 15/16	12 15/32	89 3 1/2	36.5 1 7/16	34 1.3386	8.5 0.335	M10 3/8	AS207 AS207-104 AS207-105 AS207-106 AS207-107


Remarks: 1) If relubricatable type is needed, please order with suffix "D1".

Housing ¹⁾ number	Mass of unit
	kg lb
FB201	0.3
FB201	0.7
FB201	0.3
FB201	0.7
FB201	0.2
FB201	0.4
FB204	0.3
FB204	0.7
FB205	0.3
FB205	0.7
FB206	0.5
FB206	1.1
FB207	0.8
FB207	1.8

sale@technobearing.ru

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

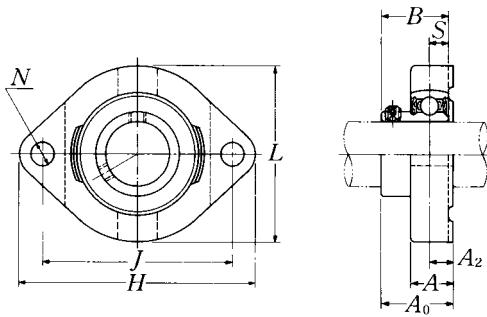
Light rhombus flanged units cast housing
Set screw type


Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions									Bolt size mm inch	Bearing number ¹⁾
		H	J	A ₂	A	N	L	A ₀	B	S		
12 $\frac{1}{2}$	ASFD201 ASFD201-008	81 $3\frac{3}{16}$	63 $2\frac{31}{64}$	8.5 $2\frac{1}{64}$	15 $1\frac{19}{32}$	7 $\frac{9}{32}$	59 $2\frac{5}{16}$	24.5 $3\frac{1}{32}$	22 0.8661	6 0.236	M6 $\frac{1}{4}$	AS201 AS201-008
15 $\frac{9}{16}$ $\frac{5}{8}$	ASFD202 ASFD202-009 ASFD202-010	81 $3\frac{3}{16}$	63 $2\frac{31}{64}$	8.5 $2\frac{1}{64}$	15 $1\frac{19}{32}$	7 $\frac{9}{32}$	59 $2\frac{5}{16}$	24.5 $3\frac{1}{32}$	22 0.8661	6 0.236	M6 $\frac{1}{4}$	AS202 AS202-009 AS202-010
17 $\frac{11}{16}$	ASFD203 ASFD203-011	81 $3\frac{3}{16}$	63 $2\frac{31}{64}$	8.5 $2\frac{1}{64}$	15 $1\frac{19}{32}$	7 $\frac{9}{32}$	59 $2\frac{5}{16}$	24.5 $3\frac{1}{32}$	22 0.8661	6 0.236	M6 $\frac{1}{4}$	AS203 AS203-011
20 $\frac{3}{4}$	ASFD204 ASFD204-012	90 $3\frac{35}{64}$	71 $2\frac{51}{64}$	9.5 $\frac{3}{8}$	17 $2\frac{1}{32}$	10 $2\frac{5}{64}$	67 $2\frac{5}{8}$	27.5 $1\frac{5}{64}$	25 0.9843	7 0.276	M8 $\frac{5}{16}$	AS204 AS204-012
25 $\frac{13}{16}$ $\frac{7}{8}$ $\frac{15}{16}$ 1	ASFD205 ASFD205-013 ASFD205-014 ASFD205-015 ASFD205-100	95 $3\frac{3}{4}$	76 $2\frac{63}{64}$	9.5 $\frac{3}{8}$	17 $2\frac{1}{32}$	10 $2\frac{5}{64}$	71 $2\frac{25}{32}$	29 $1\frac{9}{64}$	27 1.0630	7.5 0.295	M8 $\frac{5}{16}$	AS205 AS205-013 AS205-014 AS205-015 AS205-100
30 $1\frac{1}{16}$ $1\frac{1}{8}$ $1\frac{3}{16}$ $1\frac{1}{4}$	ASFD206 ASFD206-101 ASFD206-102 ASFD206-103 ASFD206-104	113 $4\frac{7}{16}$	90 $3\frac{35}{64}$	12 $1\frac{15}{32}$	21 $1\frac{13}{16}$	12 $1\frac{15}{32}$	84 $3\frac{5}{16}$	33 $1\frac{19}{64}$	29 1.1417	8 0.315	M10 $\frac{3}{8}$	AS206 AS206-101 AS206-102 AS206-103 AS206-104
35 $1\frac{1}{4}$ $1\frac{5}{16}$ $1\frac{3}{8}$ $1\frac{7}{16}$	ASFD207 ASFD207-104 ASFD207-105 ASFD207-106 ASFD207-107	125 $4\frac{29}{32}$	100 $3\frac{15}{16}$	12.5 $3\frac{1}{64}$	22 $\frac{7}{8}$	12 $1\frac{15}{32}$	94 $3\frac{11}{16}$	38 $1\frac{1}{2}$	34 1.3386	8.5 0.335	M10 $\frac{3}{8}$	AS207 AS207-104 AS207-105 AS207-106 AS207-107
40 $1\frac{1}{2}$ $1\frac{9}{16}$	ASFD208 ASFD208-108 ASFD208-109	148 $5\frac{53}{64}$	119 $4\frac{11}{16}$	14.5 $3\frac{7}{64}$	25 $3\frac{1}{32}$	13.5 $1\frac{17}{32}$	104 $4\frac{3}{32}$	43.5 $1\frac{23}{32}$	38 1.4961	9 0.354	M12 $\frac{7}{16}$	AS208 AS208-108 AS208-109

Remarks: 1) If relubricatable type is needed, please order with prefix "A-" and suffix "D1".

Example: A-ASFD201D1

Housing ¹⁾ number	Mass of unit
	kg lb
FD201	0.3
FD201	0.7
FD201	0.3
FD201	0.7
FD201	0.7
FD201	0.3
FD201	0.7
FD204	0.4
FD204	0.9
FD205	0.5
FD205	
FD205	1.1
FD205	
FD205	
FD206	0.8
FD206	
FD206	1.8
FD206	
FD206	
FD207	0.9
FD207	
FD207	2.0
FD207	
FD207	
FD208	1.3
FD208	
FD208	2.9
FD208	

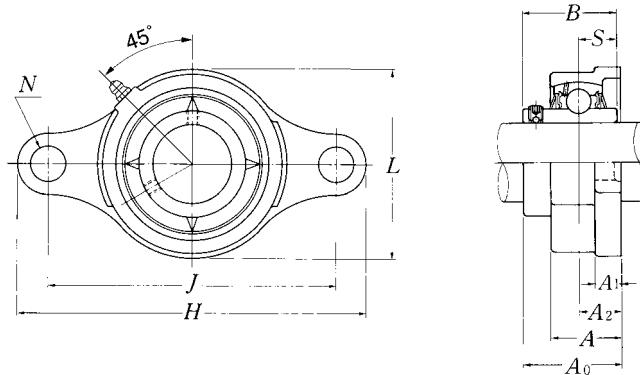


Shaft dia. mm	Unit number ¹⁾	Nominal dimensions mm										Bolt size mm	Bearing number
		H	J	A ₂	A ₁	A	N	L	A ₀	B	S		
12	UCFE201D1	112	90	15	10	25	12	57	33.3	31	12.7	M10	UC201D1
15	UCFE202D1	112	90	15	10	25	12	57	33.3	31	12.7	M10	UC202D1
17	UCFE203D1	112	90	15	10	25	12	57	33.3	31	12.7	M10	UC203D1
20	UCFE204D1	112	90	15	10	25	12	57	33.3	31	12.7	M10	UC204D1
25	UCFE205D1	127	99	16	10	26	16	62	35.8	34.1	14.3	M14	UC205D1
30	UCFE206D1	145	117	18	10	30	16	73	40.2	38.1	15.9	M14	UC206D1
35	UCFE207D1	158	130	19	12	32	16	86	44.4	42.9	17.5	M14	UC207D1
40	UCFE208D1	172	144	21	12	35	16	95	51.2	49.2	19	M14	UC208D1
45	UCFE209D1	180	148	22	13	36	19	101	52.2	49.2	19	M16	UC209D1
50	UCFE210D1	189	157	22	13	37	19	106	54.6	51.6	19	M16	UC210D1
55	UCFE211D1	216	184	25	18	41	19	118	58.4	55.6	22.2	M16	UC211D1
60	UCFE212D1	241	202	29	18	46	23	129	68.7	65.1	25.4	M20	UC212D1

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

Housing number	Mass of unit kg
FE204D1	0.4
FE205D1	0.4
FE206D1	0.6
FE207D1	0.9
FE208D1	1.2
FE209D1	1.3
FE210D1	1.5
FE211D1	2.1
FE212D1	2.8

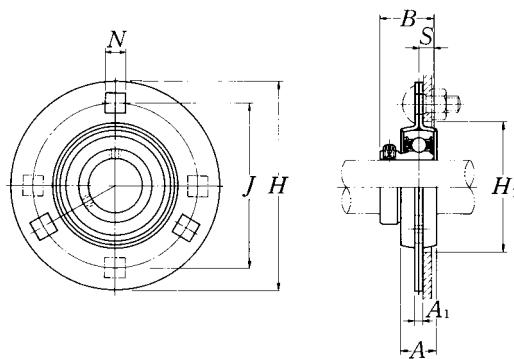
Round flanged units pressed steel housing**Set screw type**

Shaft dia. mm inch	Unit number	Nominal dimensions								Bolt size mm inch	Max. load recommended		Bearing number
		mm				inch					N radial	lbf axial	
H	J	A ₁	N ¹⁾	A	B	S	H ₁ min.						
12 1/2	ASPF201 ASPF201-008	81 3 3/16	63.5 2 1/2	4 0.157	7.1 9/32	14 9/16	22 0.8661	6 0.236	49 1 59/64	M6 1/4	2 700 600	1 350 300	AS201 AS201-008
15 9/16 5/8	ASPF202 ASPF202-009 ASPF202-010	81 3 3/16	63.5 2 1/2	4 0.157	7.1 9/32	14 9/16	22 0.8661	6 0.236	49 1 59/64	M6 1/4	2 700 600	1 350 300	AS202 AS202-009 AS202-010
17 11/16	ASPF203 ASPF203-011	81 3 3/16	63.5 2 1/2	4 0.157	7.1 9/32	14 9/16	22 0.8661	6 0.236	49 1 59/64	M6 1/4	2 700 600	1 350 300	AS203 AS203-011
20 3/4	ASPF204 ASPF204-012	90 3 35/64	71.5 2 13/16	4 0.157	9 23/64	16 5/8	25 0.9843	7 0.276	56 2 13/64	M8 5/16	3 000 660	1 500 330	AS204 AS204-012
25 13/16 7/8 15/16 1	ASPF205 ASPF205-013 ASPF205-014 ASPF205-015 ASPF205-100	95 3 3/4	76 2 63/64	4 0.157	9 23/64	18 23/32	27 1.0630	7.5 0.295	60 2 23/64	M8 5/16	4 000 880	2 000 440	AS205 AS205-013 AS205-014 AS205-015 AS205-100
30 1 1/16 1 1/8 1 3/16 1 1/4	ASPF206 ASPF206-101 ASPF206-102 ASPF206-103 ASPF206-104	113 4 7/16	90.5 3 9/16	5.2 0.205	11 7/16	18 23/32	29 1.1417	8 0.315	71 2 51/64	M10 3/8	5 000 1 100	2 500 550	AS206 AS206-101 AS206-102 AS206-103 AS206-104
35 1 1/4 1 5/16 1 3/8 1 7/16	ASPF207 ASPF207-104 ASPF207-105 ASPF207-106 ASPF207-107	122 4 13/16	100 3 15/16	5.2 0.205	11 7/16	20 25/32	34 1.3386	8.5 0.335	81 3 3/16	M10 3/8	6 000 1 300	3 000 650	AS207 AS207-104 AS207-105 AS207-106 AS207-107
40 1 1/2 1 9/16	ASPF208 ASPF208-108 ASPF208-109	148 5 13/16	119 4 11/16	6.8 0.268	13.5 1 7/32	21 13/16	38 1.4961	9 0.354	91 3 37/64	M12 1/2	7 000 1 500	3 500 750	AS208 AS208-108 AS208-109

Remarks: 1) ASPF208 has four bolt holes.

2) The permissible load only applies in applications where the load is stable and the speed is 2400 min⁻¹ or less.

Housing number	Mass of unit kg lb
PF203	0.2
PF203	0.4
PF203	0.2
PF203	0.4
PF203	0.4
PF203	0.2
PF203	0.4
PF204	0.2
PF204	0.4
PF205	0.3
PF205	
PF205	0.7
PF205	
PF205	
PF206	0.4
PF206	
PF206	0.9
PF206	
PF206	
PF207	0.6
PF207	
PF207	1.3
PF207	
PF207	
PF208	0.9
PF208	2.0
PF208	

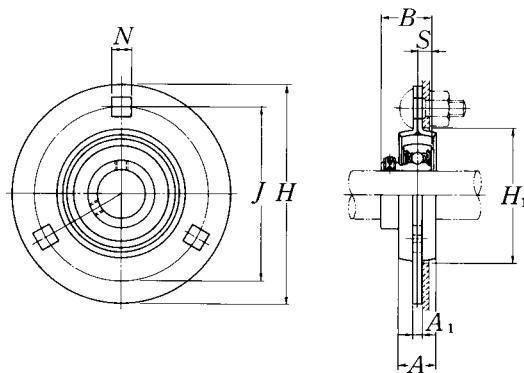


Shaft dia. mm inch	Unit number	Nominal dimensions								Bolt size mm inch	Max. load recommended		Bearing number
		mm				inch					N	radial N	axial lbf
12 1/2	ASRPF201	90	71.5	4	9	16	22	6	56	M 8	1 000	200	AS201
	ASRPF201-008	3 ¹⁷ / ₃₂	2 ¹³ / ₁₆	0.157	2 ³ / ₆₄	5/8	0.8661	0.236	2 ¹³ / ₆₄	5/16	220	40	AS201-008
15 9/16 5/8	ASRPF202	90	71.5	4	9	16	22	6	56	M 8	1 000	200	AS202
	ASRPF202-009	3 ¹⁷ / ₃₂	2 ¹³ / ₁₆	0.157	2 ³ / ₆₄	5/8	0.8661	0.236	2 ¹³ / ₆₄	5/16	220	40	AS202-009
	ASRPF202-010												AS202-010
17 11/16	ASRPF203	90	71.5	4	9	16	22	6	56	M 8	1 000	200	AS203
	ASRPF203-011	3 ¹⁷ / ₃₂	2 ¹³ / ₁₆	0.157	2 ³ / ₆₄	5/8	0.8661	0.236	2 ¹³ / ₆₄	5/16	220	40	AS203-011
20 3/4	ASRPF204	95	76	4	9	18	25	7	60	M 8	1 150	200	AS204
	ASRPF204-012	3 ³ / ₄	2 ⁶³ / ₆₄	0.157	2 ³ / ₆₄	2 ³ / ₃₂	0.9843	0.276	2 ²³ / ₆₄	5/16	250	40	AS204-012
25 13/16 7/8 15/16 1	ASRPF205	113	90.5	5.2	11	18	27	7.5	71	M10	1 300	200	AS205
	ASRPF205-013	4 ⁷ / ₁₆	3 ⁹ / ₁₆	0.205	7/16	2 ³ / ₃₂	1.0630	0.295	2 ⁵¹ / ₆₄	3/8	280	40	AS205-013
	ASRPF205-014												AS205-014
	ASRPF205-015												AS205-015
	ASRPF205-100												AS205-100
30 1 1/16 1 1/8 1 3/16 1 1/4	ASRPF206	122	100	5.2	11	20	29	8	81	M10	1 500	200	AS206
	ASRPF206-101	4 ¹³ / ₁₆	3 ¹⁵ / ₁₆	0.205	7/16	2 ⁵ / ₃₂	1.1417	0.315	3 ³ / ₁₆	3/8	330	40	AS206-101
	ASRPF206-102												AS206-102
	ASRPF206-103												AS206-103
	ASRPF206-104												AS206-104

Remarks: 1) The permissible load only applies in applications where the load is stable and the speed is 2400 min⁻¹ or less.

2) When an anti-vibration rubber ring is used, the self alignment capability will be reduced.

Housing number		Mass of unit
		kg lb
rubber ring	steel	
R201	PF204	0.2
R201	PF204	0.4
R201	PF204	0.2
R201	PF204	0.4
R201	PF204	0.2
R201	PF204	0.4
R204	PF205	0.2
R204	PF205	0.4
R205	PF206	0.3
R205	PF206	
R205	PF206	
R205	PF206	0.7
R205	PF206	
R206	PF207	0.5
R206	PF207	
R206	PF207	
R206	PF207	1.1
R206	PF207	

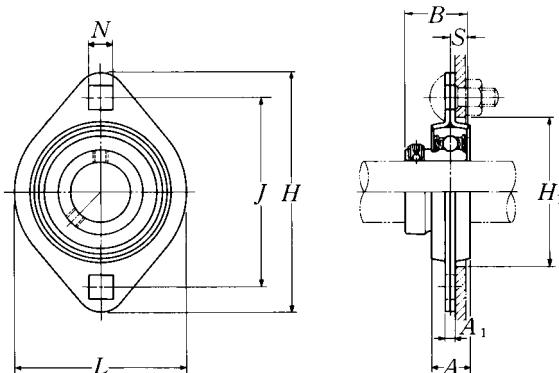

Shaft dia. mm inch	Unit number	Nominal dimensions									Bolt size mm inch	Max. load recommended		Bearing number	
		mm				inch						N radial	Ibf axial		
		H	J	A ₁	N	A	L	B	S	H ₁ min.					
12 1/2	ASPFL201	81	63.5	4	7.1	14	59	22	6	49	M 6 1/4	2 700 600	1 350 300	AS201	
	ASPFL201-008	3 3/16	2 1/2	0.157	9/32	9/16	2 5/16	0.8661	0.236	1 59/64					AS201-008
15 9/16 5/8	ASPFL202	81	63.5	4	7.1	14	59	22	6	49	M 6 1/4	2 700 600	1 350 300	AS202	
	ASPFL202-009	3 3/16	2 1/2	0.157	9/32	9/16	2 5/16	0.8661	0.236	1 59/64					AS202-009
	ASPFL202-010														AS202-010
17 11/16	ASPFL203	81	63.5	4	7.1	14	59	22	6	49	M 6 1/4	2 700 600	1 350 300	AS203	
	ASPFL203-011	3 3/16	2 1/2	0.157	9/32	9/16	2 5/16	0.8661	0.236	1 59/64					AS203-011
20 3/4	ASPFL204	90	71.5	4	9	16	67	25	7	56	M 8 5/16	3 000 660	1 500 330	AS204	
	ASPFL204-012	3 17/32	2 13/16	0.157	23/64	5/8	2 5/8	0.9843	0.276	2 13/64					AS204-012
25 13/16 7/8 15/16 1	ASPFL205	95	76	4	9	18	71	27	7.5	60	M 8 5/16	4 000 880	2 000 440	AS205	
	ASPFL205-013														AS205-013
	ASPFL205-014														AS205-014
	ASPFL205-015														AS205-015
	ASPFL205-100														AS205-100
30 1 1/16 1 1/8 1 3/16 1 1/4	ASPFL206	113	90.5	5.2	11	18	84	29	8	71	M10 3/8	5 000 1 100	2 500 550	AS206	
	ASPFL206-101														AS206-101
	ASPFL206-102														AS206-102
	ASPFL206-103														AS206-103
	ASPFL206-104														AS206-104
35 1 1/4 1 5/16 1 3/8 1 7/16	ASPFL207	122	100	5.2	11	20	94	34	8.5	81	M10 3/8	6 000 1 300	3 000 650	AS207	
	ASPFL207-104														AS207-104
	ASPFL207-105														AS207-105
	ASPFL207-106														AS207-106
	ASPFL207-107														AS207-107
40 1 1/2 1 9/16	ASPFL208	148	119	6.8	13.5	21	100	38	9	91	M12 1/2	6 000 1 300	3 000 650	AS208	
	ASPFL208-108														AS208-108
	ASPFL208-109														AS208-109


Remarks: 1) The permissible load only applies in applications where the load is stable and the speed is 2400 min⁻¹ or less.

Housing number	Mass of unit kg lb
PFL203	0.2
PFL203	0.4
PFL203	0.2
PFL203	0.4
PFL203	0.4
PFL203	0.2
PFL203	0.4
PFL204	0.2
PFL204	0.4
PFL205	0.3
PFL205	
PFL205	0.7
PFL205	
PFL205	
PFL206	0.4
PFL206	
PFL206	0.9
PFL206	
PFL206	
PFL207	0.6
PFL207	
PFL207	1.3
PFL207	
PFL207	
PFL208	0.8
PFL208	1.4
PFL208	

sale@technobearing.ru
Hanger units cast housing
Set screw type

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

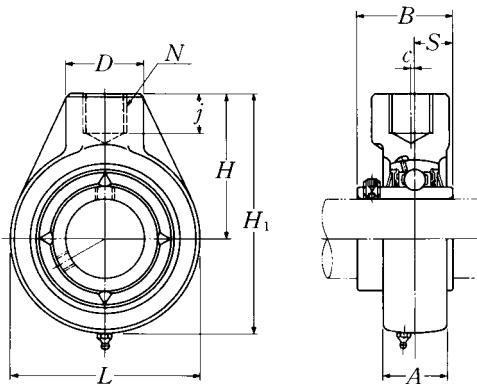

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions										Bearing number	
		mm					inch						
		L	H1	c	A	H	N	D	j	B	S		
12 $\frac{1}{2}$	UCHB201D1	64	96	0	21	64	$RP\frac{3}{4}$	40	19	31	12.7	UC201D1	
	UCHB201-008D1	$2\frac{17}{32}$	$3\frac{25}{32}$	0	$1\frac{3}{16}$	$2\frac{33}{64}$	$RP\frac{3}{4}$	$1\frac{9}{16}$	$\frac{3}{4}$	1.2205	0.500	UC201-008D1	
15 $\frac{9}{16}$ $\frac{5}{8}$	UCHB202D1	64	96	0	21	64	$RP\frac{3}{4}$	40	19	31	12.7	UC202D1	
	UCHB202-009D1	$2\frac{17}{32}$	$3\frac{25}{32}$	0	$1\frac{3}{16}$	$2\frac{33}{64}$	$RP\frac{3}{4}$	$1\frac{9}{16}$	$\frac{3}{4}$	1.2205	0.500	UC202-009D1	
	UCHB202-010D1											UC202-010D1	
17 $\frac{11}{16}$	UCHB203D1	64	96	0	21	64	$RP\frac{3}{4}$	40	19	31	12.7	UC203D1	
	UCHB203-011D1	$2\frac{17}{32}$	$3\frac{25}{32}$	0	$1\frac{3}{16}$	$2\frac{33}{64}$	$RP\frac{3}{4}$	$1\frac{9}{16}$	$\frac{3}{4}$	1.2205	0.500	UC203-011D1	
20 $\frac{3}{4}$	UCHB204D1	64	96	0	21	64	$RP\frac{3}{4}$	40	19	31	12.7	UC204D1	
	UCHB204-012D1	$2\frac{17}{32}$	$3\frac{25}{32}$	0	$1\frac{3}{16}$	$2\frac{33}{64}$	$RP\frac{3}{4}$	$1\frac{9}{16}$	$\frac{3}{4}$	1.2205	0.500	UC204-012D1	
25 $\frac{13}{16}$ $\frac{7}{8}$ $\frac{15}{16}$ 1	UCHB205D1	78	103	0	24	64	$RP\frac{3}{4}$	40	19	34.1	14.3	UC205D1	
	UCHB205-013D1	$3\frac{1}{16}$	$4\frac{1}{16}$	0	$1\frac{5}{16}$	$2\frac{33}{64}$	$RP\frac{3}{4}$	$1\frac{9}{16}$	$\frac{3}{4}$	1.3425	0.563	UC205-013D1	
	UCHB205-014D1											UC205-014D1	
	UCHB205-015D1											UC205-015D1	
	UCHB205-100D1											UC205-100D1	
30 $1\frac{1}{16}$ $1\frac{1}{8}$ $1\frac{3}{16}$ $1\frac{1}{4}$	UCHB206D1	78	103	0	28	64	$RP\frac{3}{4}$	40	19	38.1	15.9	UC206D1	
	UCHB206-101D1	$3\frac{1}{16}$	$4\frac{1}{16}$	0	$1\frac{3}{32}$	$2\frac{33}{64}$	$RP\frac{3}{4}$	$1\frac{9}{16}$	$\frac{3}{4}$	1.5000	0.626	UC206-101D1	
	UCHB206-102D1											UC206-102D1	
	UCHB206-103D1											UC206-103D1	
	UCHB206-104D1											UC206-104D1	
35 $1\frac{1}{4}$ $1\frac{5}{16}$ $1\frac{3}{8}$ $1\frac{7}{16}$	UCHB207D1	92	116	0	30	70	$RP\frac{3}{4}$	40	19	42.9	17.5	UC207D1	
	UCHB207-104D1	$3\frac{5}{8}$	$4\frac{9}{16}$	0	$1\frac{3}{16}$	$2\frac{3}{4}$	$RP\frac{3}{4}$	$1\frac{9}{16}$	$\frac{3}{4}$	1.6890	0.689	UC207-104D1	
	UCHB207-105D1											UC207-105D1	
	UCHB207-106D1											UC207-106D1	
	UCHB207-107D1											UC207-107D1	
40 $1\frac{1}{2}$ $1\frac{9}{16}$	UCHB208D1	96	121	2	33	73	$RP\frac{3}{4}$	40	19	49.2	19	UC208D1	
	UCHB208-108D1	$3\frac{25}{32}$	$4\frac{3}{4}$	$\frac{3}{32}$	$1\frac{5}{16}$	$2\frac{7}{8}$	$RP\frac{3}{4}$	$1\frac{9}{16}$	$\frac{3}{4}$	1.9370	0.748	UC208-108D1	
	UCHB208-109D1											UC208-109D1	
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UCHB209D1	108	136	5	35	82	RP1	48	21	49.2	19	UC209D1	
	UCHB209-110D1	$4\frac{1}{4}$	$5\frac{11}{32}$	$\frac{3}{16}$	$1\frac{3}{8}$	$3\frac{15}{64}$	RP1	$1\frac{7}{8}$	$\frac{13}{16}$	1.9370	0.748	UC209-110D1	
	UCHB209-111D1											UC209-111D1	
	UCHB209-112D1											UC209-112D1	

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

sale@technobearing.ru 36 for size of grease fitting.

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)


Housing number	Mass of unit
	kg lb
HB204D1	1.0
HB204D1	2.2
HB204D1	0.9
HB204D1	2.0
HB204D1	2.0
HB204D1	0.9
HB204D1	2.0
HB204D1	0.9
HB204D1	2.0
HB205D1	0.9
HB205D1	
HB205D1	2.0
HB205D1	
HB206D1	0.8
HB206D1	
HB206D1	1.8
HB206D1	
HB206D1	
HB207D1	1.2
HB207D1	
HB207D1	2.7
HB207D1	
HB207D1	
HB208D1	1.3
HB208D1	
HB208D1	2.9
HB208D1	
HB209D1	1.8
HB209D1	
HB209D1	4.0
HB209D1	

Nominal Designation of Thread	Nominal dimensions mm		
	Major Diameter of Internal Thread	Pitch Diameter	Minor Diameter of Internal Thread
Rp $\frac{3}{4}$ (PS $\frac{3}{4}$)	26.441	25.279	24.117
Rp1(PS1)	33.249	31.770	30.291
Rp $1\frac{1}{4}$ (PS $1\frac{1}{4}$)	41.910	40.431	38.952
Rp $1\frac{1}{2}$ (PS $1\frac{1}{2}$)	47.803	46.324	44.845

sale@technobearing.ru
Hanger units cast housing
Set screw type

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

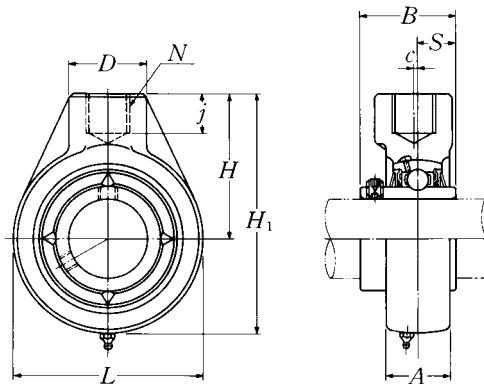

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions										Bearing number	
		mm					inch						
		L	H1	c	A	H	N	D	j	B	S		
50 $1\frac{13}{16}$ $1\frac{7}{8}$ $1\frac{15}{16}$ 2	UCHB210D1	118	142	5	37	83	RP1	48	21	51.6	19	UC210D1	
	UCHB210-113D1											UC210-113D1	
	UCHB210-114D1											UC210-114D1	
	UCHB210-115D1											UC210-115D1	
	UCHB210-200D1											UC210-200D1	
55 2 $2\frac{1}{16}$ $2\frac{1}{8}$ $2\frac{3}{16}$	UCHB211D1	126	158	7	38	95	RP1 $\frac{1}{4}$	60	25	55.6	22.2	UC211D1	
	UCHB211-200D1											UC211-200D1	
	UCHB211-201D1											UC211-201D1	
	UCHB211-202D1											UC211-202D1	
	UCHB211-203D1											UC211-203D1	
60 $2\frac{1}{4}$ $2\frac{5}{16}$ $2\frac{3}{8}$ $2\frac{7}{16}$	UCHB212D1	142	173	9	42	102	RP1 $\frac{1}{4}$	60	28	65.1	25.4	UC212D1	
	UCHB212-204D1											UC212-204D1	
	UCHB212-205D1											UC212-205D1	
	UCHB212-206D1											UC212-206D1	
	UCHB212-207D1											UC212-207D1	
65 $2\frac{1}{2}$	UCHB213D1	166	200	9.5	44	117	RP1 $\frac{1}{2}$	70	32	65.1	25.4	UC213D1	
	UCHB213-208D1	6 $\frac{17}{32}$	7 $\frac{7}{8}$	$\frac{3}{8}$	$1\frac{23}{32}$	4 $\frac{39}{64}$	RP1 $\frac{1}{2}$	2 $\frac{3}{4}$	1 $\frac{1}{4}$	2.5630	1.000	UC213-208D1	

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.


Housing number	Mass of unit
	kg lb
HB210D1	2.2
HB210D1	
HB210D1	4.9
HB210D1	
HB210D1	
HB211D1	2.8
HB211D1	
HB211D1	6.2
HB211D1	
HB211D1	
HB212D1	3.7
HB212D1	
HB212D1	8.2
HB212D1	
HB212D1	
HB213D1	5.7
HB213D1	12.6

Nominal Designation of Thread	Nominal dimensions mm		
	Major Diameter of Internal Thread	Pitch Diameter	Minor Diameter of Internal Thread
Rp ³ / ₄ (PS ³ / ₄)	26.441	25.279	24.117
Rp1 (PS1)	33.249	31.770	30.291
Rp1 ¹ / ₄ (PS1 ¹ / ₄)	41.910	40.431	38.952
Rp1 ¹ / ₂ (PS1 ¹ / ₂)	47.803	46.324	44.845

sale@technobearing.ru
Take-up units cast housing
Set screw type

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

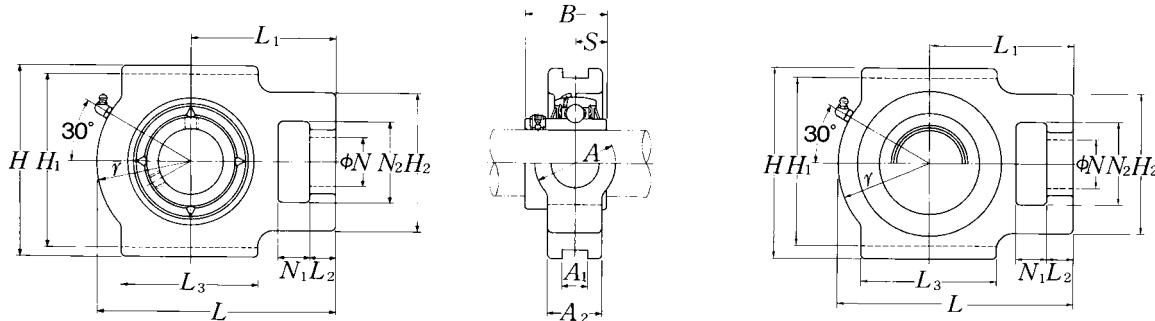
Pressed steel dust cover type

 Open end: **S-UCT…D1**

 Closed end: **SM-UCT…D1**


Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions															
		mm							inch								
		N ₁	L ₂	H ₂	N ₂	N	L ₃	A ₁	H ₁	H	L	A ₂	A	r	L ₁	B	S
12 1/2	UCT201D1	16	12	51	32	19	51	12	76	89	94	21	32	33	61	31	12.7
	UCT201-008D1	5/8	15/32	2	1 1/4	3/4	2	0.472	2 63/64	3 1/2	3 11/16	13/16	1 1/4	1 5/16	2 13/32	1.2205	0.500
15 9/16 5/8	UCT202D1	16	12	51	32	19	51	12	76	89	94	21	32	33	61	31	12.7
	UCT202-009D1	5/8	15/32	2	1 1/4	3/4	2	0.472	2 63/64	3 1/2	3 11/16	13/16	1 1/4	1 5/16	2 13/32	1.2205	0.500
17 11/16	UCT203D1	16	12	51	32	19	51	12	76	89	94	21	32	33	61	31	12.7
	UCT203-011D1	5/8	15/32	2	1 1/4	3/4	2	0.472	2 63/64	3 1/2	3 11/16	13/16	1 1/4	1 5/16	2 13/32	1.2205	0.500
20 3/4	UCT204D1	16	12	51	32	19	51	12	76	89	94	21	32	33	61	31	12.7
	UCT204-012D1	5/8	15/32	2	1 1/4	3/4	2	0.472	2 63/64	3 1/2	3 11/16	13/16	1 1/4	1 5/16	2 13/32	1.2205	0.500
25 13/16 7/8 15/16 1	UCT205D1	16	12	51	32	19	51	12	76	89	97	24	32	35	62	34.1	14.3
	UCT205-013D1	5/8	15/32	2	1 1/4	3/4	2	0.472	2 63/64	3 1/2	3 13/16	15/16	1 1/4	1 3/8	2 7/16	1.3425	0.563
	UCT205-014D1																
	UCT205-015D1																
	UCT205-100D1																
30 1 1/16 1 1/8 1 3/16 1 1/4	UCT206D1	16	12	56	37	22	57	12	89	102	113	28	37	43	70	38.1	15.9
	UCT206-101D1	5/8	15/32	2 7/32	1 15/32	7/8	2 1/4	0.472	3 1/2	4 1/32	4 7/16	1 3/32	1 15/32	1 11/16	2 3/4	1.5000	0.626
	UCT206-102D1																
	UCT206-103D1																
	UCT206-104D1																
35 1 1/4 1 5/16 1 3/8 1 7/16	UCT207D1	16	15	64	37	22	64	12	89	102	129	30	37	51	78	42.9	17.5
	UCT207-104D1	5/8	19/32	2 17/32	1 15/32	7/8	2 17/32	0.472	3 1/2	4 1/32	5 3/32	1 3/16	1 15/32	2	3 1/16	1.6890	0.689
	UCT207-105D1																
	UCT207-106D1																
	UCT207-107D1																
40 1 1/2 1 9/16	UCT208D1	19	18	83	49	29	83	16	102	114	144	33	49	56	88	49.2	19
	UCT208-108D1	3/4	23/32	3 9/32	1 15/16	1 5/32	3 3/32	0.630	4 1/64	4 1/2	5 21/32	1 5/16	1 15/16	2 7/32	3 15/32	1.9370	0.748
	UCT208-109D1																
45 1 5/8 1 11/16 1 3/4	UCT209D1	19	18	83	49	29	83	16	102	117	145	35	49	57	88	49.2	19
	UCT209-110D1	3/4	23/32	3 9/32	1 15/16	1 5/32	3 3/32	0.630	4 1/64	4 19/32	5 23/32	1 3/8	1 15/16	2 1/4	3 15/32	1.9370	0.748
	UCT209-111D1																
	UCT209-112D1																

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

sale@technobearing.ru 36 for size of grease fitting.

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

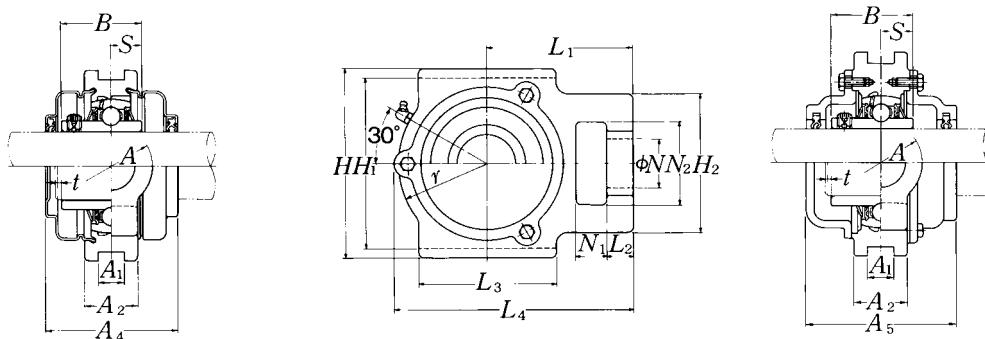

Cast dust cover type

Open end: C-UCT···D1


Closed end: CM-UCT···D1

Bearing number	Housing number	Unit number ¹⁾ pressed steel dust cover type	Unit number ¹⁾ cast dust cover type	Nominal dimensions			Mass of unit				
				t max.	A ₄	L ₄	A ₅	mm	inch	kg	lb
UC201D1	T204D1	S(SM)-UCT201D1	C(CM)-UCT201D1	2 5/64	51 2	97 3 13/16	62 2 7/16	0.6	0.8	1.1	
UC201-008D1	T204D1	S(SM)-UCT201-008D1	C(CM)-UCT201-008D1	5/64	2	3 13/16	2 7/16	1.3	1.8	2.4	
UC202D1	T204D1	S(SM)-UCT202D1	C(CM)-UCT202D1	2 5/64	51 2	97 3 13/16	62 2 7/16	0.6	0.8	1.1	
UC202-009D1	T204D1	S(SM)-UCT202-009D1	C(CM)-UCT202-009D1	5/64	2	3 13/16	2 7/16	1.3	1.8	2.4	
UC202-010D1	T204D1	S(SM)-UCT202-010D1	C(CM)-UCT202-010D1	5/64	2	3 13/16	2 7/16	1.3	1.8	2.4	
UC203D1	T204D1	S(SM)-UCT203D1	C(CM)-UCT203D1	2 5/64	51 2	97 3 13/16	62 2 7/16	0.6	0.8	1.0	
UC203-011D1	T204D1	S(SM)-UCT203-011D1	C(CM)-UCT203-011D1	5/64	2	3 13/16	2 7/16	1.3	1.8	2.2	
UC204D1	T204D1	S(SM)-UCT204D1	C(CM)-UCT204D1	2 5/64	51 2	97 3 13/16	62 2 7/16	0.6	0.8	1.0	
UC204-012D1	T204D1	S(SM)-UCT204-012D1	C(CM)-UCT204-012D1	5/64	2	3 13/16	2 7/16	1.3	1.8	2.2	
UC205D1	T205D1	S(SM)-UCT205D1	C(CM)-UCT205D1	2 5/64	57 2 1/4	100.5 3 31/32	70 2 3/4	0.8	0.9	1.1	
UC205-013D1	T205D1	S(SM)-UCT205-013D1	C(CM)-UCT205-013D1	5/64	2 1/4	3 31/32	2 3/4	1.8	2.0	2.4	
UC205-014D1	T205D1	S(SM)-UCT205-014D1	C(CM)-UCT205-014D1	5/64	2 1/4	3 31/32	2 3/4	1.8	2.0	2.4	
UC205-015D1	T205D1	S(SM)-UCT205-015D1	C(CM)-UCT205-015D1	5/64	2 1/4	3 31/32	2 3/4	1.8	2.0	2.4	
UC205-100D1	T205D1	S(SM)-UCT205-100D1	C(CM)-UCT205-100D1	5/64	2 1/4	3 31/32	2 3/4	1.8	2.0	2.4	
UC206D1	T206D1	S(SM)-UCT206D1	C(CM)-UCT206D1	2 5/64	62 2 7/16	113.5 4 15/32	75 2 15/16	1.3	1.3	1.7	
UC206-101D1	T206D1	S(SM)-UCT206-101D1	C(CM)-UCT206-101D1	5/64	62 2 7/16	113.5 4 15/32	75 2 15/16	2.9	2.9	3.8	
UC206-102D1	T206D1	S(SM)-UCT206-102D1	C(CM)-UCT206-102D1	5/64	62 2 7/16	113.5 4 15/32	75 2 15/16	2.9	2.9	3.8	
UC206-103D1	T206D1	S(SM)-UCT206-103D1	C(CM)-UCT206-103D1	5/64	62 2 7/16	113.5 4 15/32	75 2 15/16	2.9	2.9	3.8	
UC206-104D1	T206D1	S(SM)-UCT206-104D1	C(CM)-UCT206-104D1	5/64	62 2 7/16	113.5 4 15/32	75 2 15/16	2.9	2.9	3.8	
UC207D1	T207D1	S(SM)-UCT207D1	C(CM)-UCT207D1	3 1/8	72 2 27/32	129 5 3/32	80 3 5/32	1.6	1.7	2.1	
UC207-104D1	T207D1	S(SM)-UCT207-104D1	C(CM)-UCT207-104D1	1/8	72 2 27/32	129 5 3/32	80 3 5/32	3.5	3.7	4.6	
UC207-105D1	T207D1	S(SM)-UCT207-105D1	C(CM)-UCT207-105D1	1/8	72 2 27/32	129 5 3/32	80 3 5/32	3.5	3.7	4.6	
UC207-106D1	T207D1	S(SM)-UCT207-106D1	C(CM)-UCT207-106D1	1/8	72 2 27/32	129 5 3/32	80 3 5/32	3.5	3.7	4.6	
UC207-107D1	T207D1	S(SM)-UCT207-107D1	C(CM)-UCT207-107D1	1/8	72 2 27/32	129 5 3/32	80 3 5/32	3.5	3.7	4.6	
UC208D1	T208D1	S(SM)-UCT208D1	C(CM)-UCT208D1	3 1/8	82 3 7/32	144 5 21/32	90 3 17/32	2.4	2.5	3.1	
UC208-108D1	T208D1	S(SM)-UCT208-108D1	C(CM)-UCT208-108D1	1/8	82 3 7/32	144 5 21/32	90 3 17/32	5.3	5.5	6.8	
UC208-109D1	T208D1	S(SM)-UCT208-109D1	C(CM)-UCT208-109D1	1/8	82 3 7/32	144 5 21/32	90 3 17/32	5.3	5.5	6.8	
UC209D1	T209D1	S(SM)-UCT209D1	C(CM)-UCT209D1	3 1/8	82 3 7/32	145.5 5 23/32	95 3 3/4	2.4	2.5	3.3	
UC209-110D1	T209D1	S(SM)-UCT209-110D1	C(CM)-UCT209-110D1	1/8	82 3 7/32	145.5 5 23/32	95 3 3/4	5.3	5.5	7.3	
UC209-111D1	T209D1	S(SM)-UCT209-111D1	C(CM)-UCT209-111D1	1/8	82 3 7/32	145.5 5 23/32	95 3 3/4	5.3	5.5	7.3	
UC209-112D1	T209D1	S(SM)-UCT209-112D1	C(CM)-UCT209-112D1	1/8	82 3 7/32	145.5 5 23/32	95 3 3/4	5.3	5.5	7.3	

sale@technobearing.ru
Take-up units cast housing
Set screw type


www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

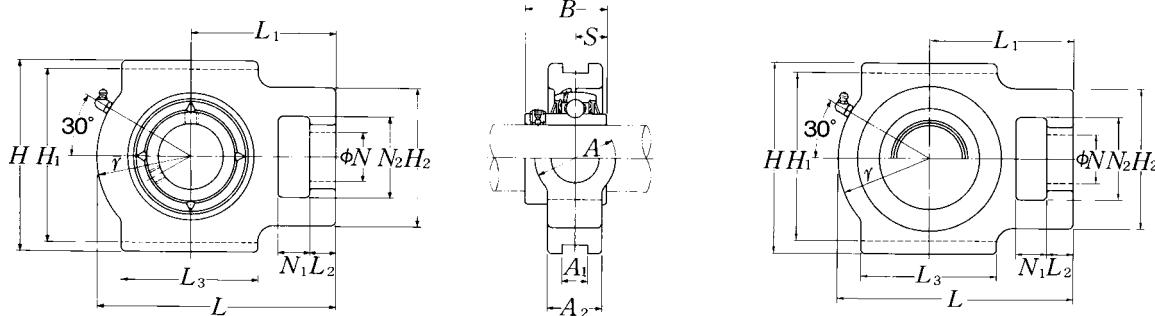**Pressed steel dust cover type**Open end: **S-UCT…D1**Closed end: **SM-UCT…D1**

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions															
		mm								inch							
		N ₁	L ₂	H ₂	N ₂	N	L ₃	A ₁	H ₁	H	L	A ₂	A	r	L ₁	B	S
50 1 ¹³ / ₁₆ 1 ⁷ / ₈ 1 ¹⁵ / ₁₆ 2	UCT210D1	19	18	83	49	29	86	16	102	117	151	37	49	59	92	51.6	19
	UCT210-113D1	¾	2 ³ / ₃₂	3 ⁹ / ₃₂	1 ¹⁵ / ₁₆	1 ⁵ / ₃₂	3 ³ / ₈	0.630	4 ¹ / ₆₄	4 ¹⁹ / ₃₂	5 ¹⁵ / ₁₆	1 ¹⁵ / ₃₂	1 ¹⁵ / ₁₆	2 ⁵ / ₁₆	3 ⁵ / ₈	2.0315	0.748
	UCT210-114D1																
	UCT210-115D1																
	UCT210-200D1																
55 2 2 ¹ / ₁₆ 2 ¹ / ₈ 2 ³ / ₁₆	UCT211D1	25	21	102	64	35	95	22	130	146	171	38	64	65	106	55.6	22.2
	UCT211-200D1	¾	1 ³ / ₁₆	4 ¹ / ₃₂	2 ¹⁷ / ₃₂	1 ³ / ₈	3 ³ / ₄	0.866	5 ¹ / ₈	5 ³ / ₄	6 ²³ / ₃₂	1 ¹ / ₂	2 ¹⁷ / ₃₂	2 ⁹ / ₁₆	4 ³ / ₁₆	2.1890	0.874
	UCT211-201D1																
	UCT211-202D1																
	UCT211-203D1																
60 2 ¹ / ₄ 2 ⁵ / ₁₆ 2 ³ / ₈ 2 ⁷ / ₁₆	UCT212D1	32	21	102	64	35	102	22	130	146	194	42	64	75	119	65.1	25.4
	UCT212-204D1	1¼	1 ³ / ₁₆	4 ¹ / ₃₂	2 ¹⁷ / ₃₂	1 ³ / ₈	4 ¹ / ₃₂	0.866	5 ¹ / ₈	5 ³ / ₄	7 ⁵ / ₈	1 ² / ₃₂	2 ¹⁷ / ₃₂	2 ¹⁵ / ₁₆	4 ¹¹ / ₁₆	2.5630	1.000
	UCT212-205D1																
	UCT212-206D1																
	UCT212-207D1																
65 2 ¹ / ₂ 2 ⁹ / ₁₆	UCT213D1	32	23	111	70	41	121	26	151	167	224	44	70	87	137	65.1	25.4
	UCT213-208D1	1¼	2 ⁹ / ₃₂	4 ³ / ₈	2 ³ / ₄	1 ⁵ / ₈	4 ³ / ₄	1.024	5 ¹⁵ / ₁₆	6 ⁹ / ₁₆	8 ¹³ / ₁₆	1 ²³ / ₃₂	2 ³ / ₄	3 ⁷ / ₁₆	5 ¹³ / ₃₂	2.5630	1.000
	UCT213-209D1																
70 2 ⁵ / ₈ 2 ¹¹ / ₁₆ 2 ³ / ₄	UCT214D1	32	23	111	70	41	121	26	151	167	224	46	70	87	137	74.6	30.2
	UCT214-210D1	1¼	2 ⁹ / ₃₂	4 ³ / ₈	2 ³ / ₄	1 ⁵ / ₈	4 ³ / ₄	1.024	5 ¹⁵ / ₁₆	6 ⁹ / ₁₆	8 ¹³ / ₁₆	1 ¹³ / ₁₆	2 ³ / ₄	3 ⁷ / ₁₆	5 ¹³ / ₃₂	2.9370	1.189
	UCT214-211D1																
	UCT214-212D1																
75 2 ¹³ / ₁₆ 2 ⁷ / ₈ 2 ¹⁵ / ₁₆ 3	UCT215D1	32	23	111	70	41	121	26	151	167	232	48	70	92	140	77.8	33.3
	UCT215-213D1	1¼	2 ⁹ / ₃₂	4 ³ / ₈	2 ³ / ₄	1 ⁵ / ₈	4 ³ / ₄	1.024	5 ¹⁵ / ₁₆	6 ⁹ / ₁₆	9 ¹ / ₈	1 ⁷ / ₈	2 ³ / ₄	3 ⁵ / ₈	5 ¹ / ₂	3.0630	1.311
	UCT215-214D1																
	UCT215-215D1																
	UCT215-300D1																
80 3 ¹ / ₁₆ 3 ¹ / ₈ 3 ³ / ₁₆	UCT216D1	32	23	111	70	41	121	26	165	184	235	51	70	95	140	82.6	33.3
	UCT216-301D1	1¼	2 ⁹ / ₃₂	4 ³ / ₈	2 ³ / ₄	1 ⁵ / ₈	4 ³ / ₄	1.024	6½	7¼	9¼	2	2 ³ / ₄	3 ³ / ₄	5½	3.2520	1.311
	UCT216-302D1																
	UCT216-303D1																

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".
Note: Please refer to page 36 for size of grease fitting.

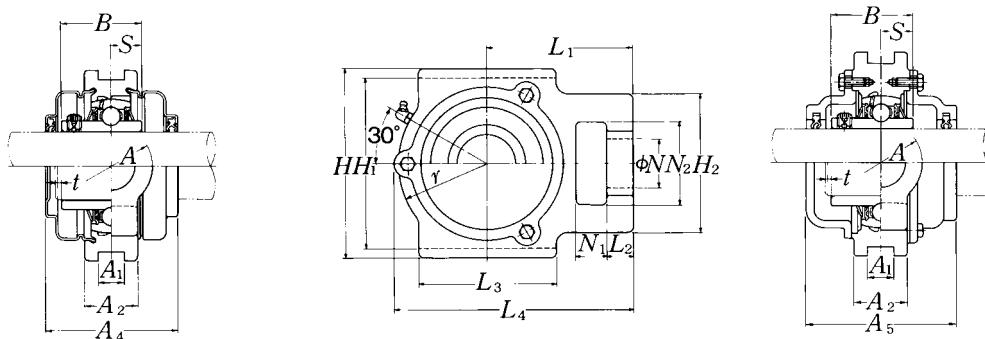

Cast dust cover type

Open end: C-UCT···D1


Closed end: CM-UCT···D1

Bearing number	Housing number	Unit number ¹⁾ pressed steel dust cover type	Unit number ¹⁾ cast dust cover type	Nominal dimensions			Mass of unit			
				t max.	A ₄	L ₄	A ₅	mm	inch	kg
UC210D1	T210D1	S(SM)-UCT210D1	C(CM)-UCT210D1	3	87	152	100	2.6	2.7	3.6
UC210-113D1	T210D1	S(SM)-UCT210-113D1	C(CM)-UCT210-113D1							
UC210-114D1	T210D1	S(SM)-UCT210-114D1	C(CM)-UCT210-114D1							
UC210-115D1	T210D1	S(SM)-UCT210-115D1	C(CM)-UCT210-115D1							
UC210-200D1	T210D1	S(SM)-UCT210-200D1	C(CM)-UCT210-200D1							
UC211D1	T211D1	S(SM)-UCT211D1	C(CM)-UCT211D1	4	92	171.5	100	3.9	4.1	5.0
UC211-200D1	T211D1	S(SM)-UCT211-200D1	C(CM)-UCT211-200D1							
UC211-201D1	T211D1	S(SM)-UCT211-201D1	C(CM)-UCT211-201D1							
UC211-202D1	T211D1	S(SM)-UCT211-202D1	C(CM)-UCT211-202D1							
UC211-203D1	T211D1	S(SM)-UCT211-203D1	C(CM)-UCT211-203D1							
UC212D1	T212D1	S(SM)-UCT212D1	C(CM)-UCT212D1	4	102	194	115	4.8	5.1	6.1
UC212-204D1	T212D1	S(SM)-UCT212-204D1	C(CM)-UCT212-204D1							
UC212-205D1	T212D1	S(SM)-UCT212-205D1	C(CM)-UCT212-205D1							
UC212-206D1	T212D1	S(SM)-UCT212-206D1	C(CM)-UCT212-206D1							
UC212-207D1	T212D1	S(SM)-UCT212-207D1	C(CM)-UCT212-207D1							
UC213D1	T213D1	S(SM)-UCT213D1	C(CM)-UCT213D1	4	107	224	120	7.0	7.3	8.4
UC213-208D1	T213D1	S(SM)-UCT213-208D1	C(CM)-UCT213-208D1							
UC213-209D1	T213D1	S(SM)-UCT213-209D1	C(CM)-UCT213-209D1							
UC214D1	T214D1	—	C(CM)-UCT214D1	4	—	224	135	7.0	—	9.1
UC214-210D1	T214D1		C(CM)-UCT214-210D1							
UC214-211D1	T214D1	—	C(CM)-UCT214-211D1							
UC214-212D1	T214D1		C(CM)-UCT214-212D1							
UC215D1	T215D1	—	C(CM)-UCT215D1	4	—	232	135	7.4	—	9.8
UC215-213D1	T215D1		C(CM)-UCT215-213D1							
UC215-214D1	T215D1	—	C(CM)-UCT215-214D1							
UC215-215D1	T215D1		C(CM)-UCT215-215D1							
UC215-300D1	T215D1		C(CM)-UCT215-300D1							
UC216D1	T216D1	—	C(CM)-UCT216D1	4	—	235	145	8.2	—	11
UC216-301D1	T216D1		C(CM)-UCT216-301D1							
UC216-302D1	T216D1	—	C(CM)-UCT216-302D1							
UC216-303D1	T216D1		C(CM)-UCT216-303D1							

sale@technobearing.ru
Take-up units cast housing
Set screw type

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

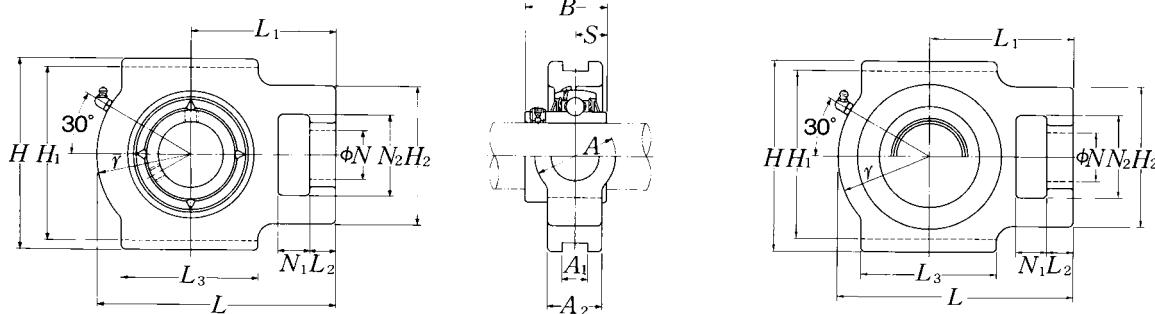

Pressed steel dust cover type


Open end: **S-UCT···D1**

Closed end: **SM-UCT···D1**

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions																
		mm								inch								
		N ₁	L ₂	H ₂	N ₂	N	L ₃	A ₁	H ₁	H	L	A ₂	A	r	L ₁	B	S	
85 <i>3</i> / ₄ <i>3</i> / ₁₆ <i>3</i> / ₁₆	UCT217D1	38	31	124	73	48	157	30	173	198	260	54	73	98	162	85.7	34.1	
	UCT217-304D1	1½	1¾ ₃₂	4¾/8	2¾/8	1⅓/8	6¾ ₁₆	1.181	6¹³/₁₆	7²⁵/₃₂	10¹/₄	2¹/₈	2¾/8	3²⁷/₃₂	6¾/₆	3.3740	1.343	
	UCT217-305D1																	
	UCT217-307D1																	

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

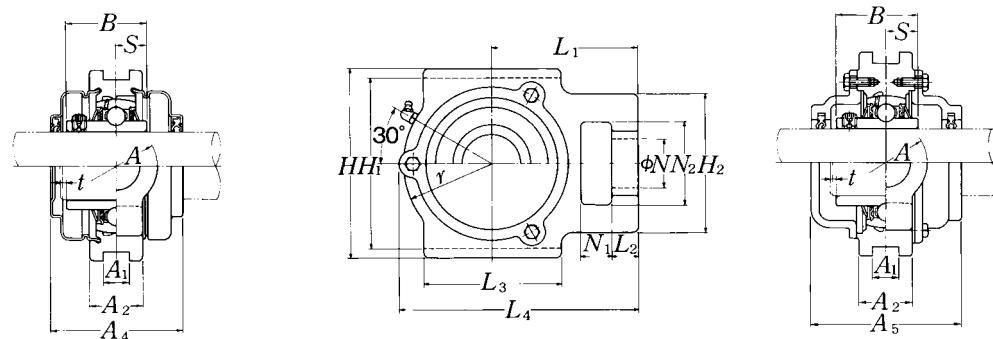


Cast dust cover type

Open end: **C-UCT**...**D1**

Closed end: CM-UCT...D1

Bearing number	Housing number	Unit number ¹⁾ pressed steel dust cover type	Unit number ¹⁾ cast dust cover type	Nominal dimensions				Mass of unit		
				t max.	A ₄	L ₄	A ₅	mm	inch	kg
UC217D1	T217D1	—	C(CM)-UCT217D1	5	—	260	155	11	—	14
UC217-304D1	T217D1	—	C(CM)-UCT217-304D1							
UC217-305D1	T217D1	—	C(CM)-UCT217-305D1	13/64	—	10 1/4	6 3/32	24	—	31
UC217-307D1	T217D1	—	C(CM)-UCT217-307D1							


sale@technobearing.ru
Take-up units cast housing
Set screw type

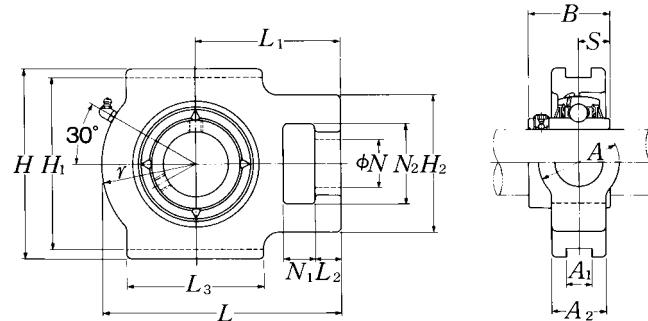

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions															
		mm								inch							
25 $\frac{13}{16}$ $\frac{7}{8}$ $\frac{15}{16}$ 1	UCT305D1	16	14	62	36	26	65	12	80	89	122	26	36	46	76	38	15
	UCT305-013D1	$\frac{5}{8}$	$\frac{9}{16}$	$2\frac{7}{16}$	$1\frac{13}{32}$	$1\frac{1}{32}$	$2\frac{9}{16}$	0.472	$3\frac{5}{32}$	$3\frac{1}{2}$	$4\frac{13}{16}$	$1\frac{1}{32}$	$1\frac{13}{32}$	$1\frac{13}{16}$	3	1.4961	0.591
	UCT305-014D1																
	UCT305-015D1																
	UCT305-100D1																
30 $1\frac{1}{16}$ $1\frac{1}{8}$ $1\frac{3}{16}$	UCT306D1	18	16	70	41	28	74	16	90	100	137	28	41	52	85	43	17
	UCT306-101D1	$2\frac{3}{32}$	$\frac{5}{8}$	$2\frac{3}{4}$	$1\frac{5}{8}$	$1\frac{3}{32}$	$2\frac{29}{32}$	0.630	$3\frac{35}{64}$	$3\frac{15}{16}$	$5\frac{13}{32}$	$1\frac{3}{32}$	$1\frac{5}{8}$	$2\frac{1}{16}$	$3\frac{11}{32}$	1.6929	0.669
	UCT306-102D1																
	UCT306-103D1																
35 $1\frac{1}{4}$ $1\frac{5}{16}$ $1\frac{3}{8}$ $1\frac{7}{16}$	UCT307D1	20	17	75	45	30	80	16	100	111	150	32	45	56	94	48	19
	UCT307-104D1	$2\frac{5}{32}$	$2\frac{1}{32}$	$2\frac{15}{16}$	$1\frac{25}{32}$	$1\frac{3}{16}$	$3\frac{5}{32}$	0.630	$3\frac{15}{16}$	$4\frac{3}{8}$	$5\frac{29}{32}$	$1\frac{1}{4}$	$1\frac{25}{32}$	$2\frac{7}{32}$	$3\frac{11}{16}$	1.8898	0.748
	UCT307-105D1																
	UCT307-106D1																
	UCT307-107D1																
40 $1\frac{1}{2}$ $1\frac{9}{16}$	UCT308D1	22	19	83	50	32	89	18	112	124	162	34	50	62	100	52	19
	UCT308-108D1	$\frac{7}{8}$	$\frac{3}{4}$	$3\frac{9}{32}$	$1\frac{31}{32}$	$1\frac{1}{4}$	$3\frac{1}{2}$	0.709	$4\frac{13}{32}$	$4\frac{7}{8}$	$6\frac{3}{8}$	$1\frac{1}{32}$	$1\frac{31}{32}$	$2\frac{7}{16}$	$3\frac{15}{16}$	2.0472	0.748
	UCT308-109D1																
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UCT309D1	24	20	90	55	34	97	18	125	138	178	38	55	68	110	57	22
	UCT309-110D1	$1\frac{5}{16}$	$2\frac{5}{32}$	$3\frac{17}{32}$	$2\frac{5}{32}$	$1\frac{11}{32}$	$3\frac{13}{16}$	0.709	$4\frac{59}{64}$	$5\frac{7}{16}$	7	$1\frac{1}{2}$	$2\frac{5}{32}$	$2\frac{11}{16}$	$4\frac{11}{32}$	2.2441	0.866
	UCT309-111D1																
	UCT309-112D1																
50 $1\frac{13}{16}$ $1\frac{7}{8}$ $1\frac{15}{16}$	UCT310D1	27	22	98	61	37	106	20	140	151	192	40	61	74	118	61	22
	UCT310-113D1	$1\frac{1}{16}$	$\frac{7}{8}$	$3\frac{27}{32}$	$2\frac{13}{32}$	$1\frac{15}{32}$	$4\frac{3}{16}$	0.787	$5\frac{33}{64}$	$5\frac{15}{16}$	$7\frac{9}{16}$	$1\frac{9}{16}$	$2\frac{13}{32}$	$2\frac{29}{32}$	$4\frac{21}{32}$	2.4016	0.866
	UCT310-114D1																
	UCT310-115D1																
55 2 $2\frac{1}{16}$ $2\frac{1}{8}$ $2\frac{3}{16}$	UCT311D1	29	23	105	66	39	115	22	150	163	207	44	66	80	127	66	25
	UCT311-200D1	$1\frac{5}{32}$	$2\frac{9}{32}$	$4\frac{1}{8}$	$2\frac{19}{32}$	$1\frac{17}{32}$	$4\frac{17}{32}$	0.866	$5\frac{29}{32}$	$6\frac{13}{32}$	$8\frac{5}{32}$	$1\frac{23}{32}$	$2\frac{19}{32}$	$3\frac{5}{32}$	5	2.5984	0.984
	UCT311-201D1																
	UCT311-202D1																
	UCT311-203D1																

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

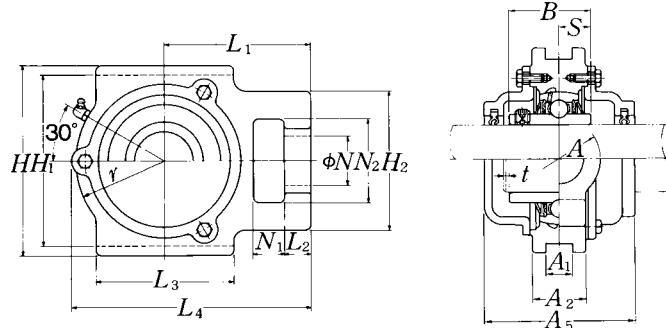
**Cast dust cover type**

Open end: C-UCT...D1

Closed end: CM-UCT...D1

Bearing number	Housing number	Unit number ¹⁾ cast dust cover type	Nominal dimensions			Mass of unit	
			t max.	L ₄	A ₅	kg UCT	lb C(CM)
UC305D1	T305D1	C(CM)-UCT305D1	2	122	80	1.4	1.7
UC305-013D1	T305D1	C(CM)-UCT305-013D1					
UC305-014D1	T305D1	C(CM)-UCT305-014D1					
UC305-015D1	T305D1	C(CM)-UCT305-015D1					
UC305-100D1	T305D1	C(CM)-UCT305-100D1					
UC306D1	T306D1	C(CM)-UCT306D1	2	139	85	1.8	2.4
UC306-101D1	T306D1	C(CM)-UCT306-101D1					
UC306-102D1	T306D1	C(CM)-UCT306-102D1					
UC306-103D1	T306D1	C(CM)-UCT306-103D1					
UC307D1	T307D1	C(CM)-UCT307D1	3	152	95	2.3	3.2
UC307-104D1	T307D1	C(CM)-UCT307-104D1					
UC307-105D1	T307D1	C(CM)-UCT307-105D1					
UC307-106D1	T307D1	C(CM)-UCT307-106D1					
UC307-107D1	T307D1	C(CM)-UCT307-107D1					
UC308D1	T308D1	C(CM)-UCT308D1	3	164	105	3.0	4.2
UC308-108D1	T308D1	C(CM)-UCT308-108D1					
UC308-109D1	T308D1	C(CM)-UCT308-109D1					
UC309D1	T309D1	C(CM)-UCT309D1	3	181	110	4.0	5.4
UC309-110D1	T309D1	C(CM)-UCT309-110D1					
UC309-111D1	T309D1	C(CM)-UCT309-111D1					
UC309-112D1	T309D1	C(CM)-UCT309-112D1					
UC310D1	T310D1	C(CM)-UCT310D1	3	197	120	5.0	7.0
UC310-113D1	T310D1	C(CM)-UCT310-113D1					
UC310-114D1	T310D1	C(CM)-UCT310-114D1					
UC310-115D1	T310D1	C(CM)-UCT310-115D1					
UC311D1	T311D1	C(CM)-UCT311D1	4	211	125	6.3	8.4
UC311-200D1	T311D1	C(CM)-UCT311-200D1					
UC311-201D1	T311D1	C(CM)-UCT311-201D1					
UC311-202D1	T311D1	C(CM)-UCT311-202D1					
UC311-203D1	T311D1	C(CM)-UCT311-203D1					


sale@technobearing.ru
Take-up units cast housing
Set screw type

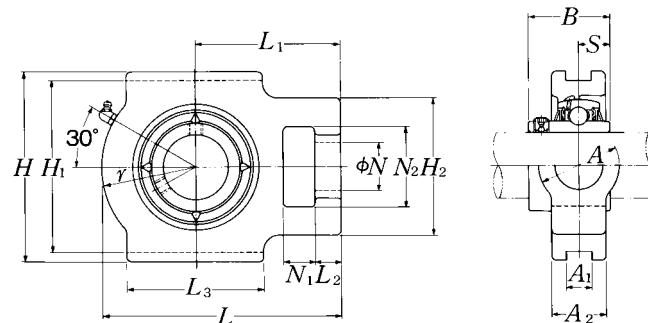

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions															
		mm								inch							
60 $2\frac{1}{4}$ $2\frac{5}{16}$ $2\frac{3}{8}$ $2\frac{7}{16}$	UCT312D1	31	25	113	71	41	123	22	160	178	220	46	71	85	135	71	26
	UCT312-204D1	$1\frac{7}{32}$	$3\frac{1}{32}$	$4\frac{7}{16}$	$2\frac{25}{32}$	$1\frac{5}{8}$	$4\frac{27}{32}$	0.866	$6\frac{19}{64}$	7	$8\frac{21}{32}$	$1\frac{13}{16}$	$2\frac{25}{32}$	$3\frac{11}{32}$	$5\frac{5}{16}$	2.7953	1.024
	UCT312-205D1	$1\frac{7}{32}$	$3\frac{1}{32}$	$4\frac{7}{16}$	$2\frac{25}{32}$	$1\frac{5}{8}$	$4\frac{27}{32}$	0.866	$6\frac{19}{64}$	7	$8\frac{21}{32}$	$1\frac{13}{16}$	$2\frac{25}{32}$	$3\frac{11}{32}$	$5\frac{5}{16}$	2.7953	1.024
	UCT312-206D1	$1\frac{7}{32}$	$3\frac{1}{32}$	$4\frac{7}{16}$	$2\frac{25}{32}$	$1\frac{5}{8}$	$4\frac{27}{32}$	0.866	$6\frac{19}{64}$	7	$8\frac{21}{32}$	$1\frac{13}{16}$	$2\frac{25}{32}$	$3\frac{11}{32}$	$5\frac{5}{16}$	2.7953	1.024
	UCT312-207D1	$1\frac{7}{32}$	$3\frac{1}{32}$	$4\frac{7}{16}$	$2\frac{25}{32}$	$1\frac{5}{8}$	$4\frac{27}{32}$	0.866	$6\frac{19}{64}$	7	$8\frac{21}{32}$	$1\frac{13}{16}$	$2\frac{25}{32}$	$3\frac{11}{32}$	$5\frac{5}{16}$	2.7953	1.024
65 $2\frac{1}{2}$ $2\frac{9}{16}$	UCT313D1	32	27	116	70	43	134	26	170	190	238	50	80	92	146	75	30
	UCT313-208D1	$1\frac{1}{4}$	$1\frac{1}{16}$	$4\frac{9}{16}$	$2\frac{3}{4}$	$1\frac{11}{16}$	$5\frac{5}{32}$	1.024	$6\frac{11}{16}$	$7\frac{15}{32}$	$9\frac{3}{8}$	$1\frac{31}{32}$	$3\frac{5}{32}$	$3\frac{5}{8}$	$5\frac{3}{4}$	2.9528	1.181
	UCT313-209D1	$1\frac{1}{4}$	$1\frac{1}{16}$	$4\frac{9}{16}$	$2\frac{3}{4}$	$1\frac{11}{16}$	$5\frac{5}{32}$	1.024	$6\frac{11}{16}$	$7\frac{15}{32}$	$9\frac{3}{8}$	$1\frac{31}{32}$	$3\frac{5}{32}$	$3\frac{5}{8}$	$5\frac{3}{4}$	2.9528	1.181
70 $2\frac{5}{8}$ $2\frac{11}{16}$ $2\frac{3}{4}$	UCT314D1	36	27	130	85	46	140	26	180	202	252	52	90	97	155	78	33
	UCT314-210D1	$1\frac{13}{32}$	$1\frac{1}{16}$	$5\frac{1}{8}$	$3\frac{11}{32}$	$1\frac{13}{16}$	$5\frac{1}{2}$	1.024	$7\frac{3}{32}$	$7\frac{15}{16}$	$9\frac{29}{32}$	$2\frac{1}{16}$	$3\frac{17}{32}$	$3\frac{13}{16}$	$6\frac{3}{32}$	3.0709	1.299
	UCT314-211D1	$1\frac{13}{32}$	$1\frac{1}{16}$	$5\frac{1}{8}$	$3\frac{11}{32}$	$1\frac{13}{16}$	$5\frac{1}{2}$	1.024	$7\frac{3}{32}$	$7\frac{15}{16}$	$9\frac{29}{32}$	$2\frac{1}{16}$	$3\frac{17}{32}$	$3\frac{13}{16}$	$6\frac{3}{32}$	3.0709	1.299
	UCT314-212D1	$1\frac{13}{32}$	$1\frac{1}{16}$	$5\frac{1}{8}$	$3\frac{11}{32}$	$1\frac{13}{16}$	$5\frac{1}{2}$	1.024	$7\frac{3}{32}$	$7\frac{15}{16}$	$9\frac{29}{32}$	$2\frac{1}{16}$	$3\frac{17}{32}$	$3\frac{13}{16}$	$6\frac{3}{32}$	3.0709	1.299
75 $2\frac{13}{16}$ $2\frac{7}{8}$ $2\frac{15}{16}$ 3	UCT315D1	36	27	132	85	46	150	26	192	216	262	55	90	102	160	82	32
	UCT315-213D1	$1\frac{13}{32}$	$1\frac{1}{16}$	$5\frac{3}{16}$	$3\frac{11}{32}$	$1\frac{13}{16}$	$5\frac{29}{32}$	1.024	$7\frac{9}{16}$	$8\frac{1}{2}$	$10\frac{5}{16}$	$2\frac{5}{32}$	$3\frac{17}{32}$	$4\frac{1}{32}$	$6\frac{5}{16}$	3.2283	1.260
	UCT315-214D1	$1\frac{13}{32}$	$1\frac{1}{16}$	$5\frac{3}{16}$	$3\frac{11}{32}$	$1\frac{13}{16}$	$5\frac{29}{32}$	1.024	$7\frac{9}{16}$	$8\frac{1}{2}$	$10\frac{5}{16}$	$2\frac{5}{32}$	$3\frac{17}{32}$	$4\frac{1}{32}$	$6\frac{5}{16}$	3.2283	1.260
	UCT315-215D1	$1\frac{13}{32}$	$1\frac{1}{16}$	$5\frac{3}{16}$	$3\frac{11}{32}$	$1\frac{13}{16}$	$5\frac{29}{32}$	1.024	$7\frac{9}{16}$	$8\frac{1}{2}$	$10\frac{5}{16}$	$2\frac{5}{32}$	$3\frac{17}{32}$	$4\frac{1}{32}$	$6\frac{5}{16}$	3.2283	1.260
	UCT315-300D1	$1\frac{13}{32}$	$1\frac{1}{16}$	$5\frac{3}{16}$	$3\frac{11}{32}$	$1\frac{13}{16}$	$5\frac{29}{32}$	1.024	$7\frac{9}{16}$	$8\frac{1}{2}$	$10\frac{5}{16}$	$2\frac{5}{32}$	$3\frac{17}{32}$	$4\frac{1}{32}$	$6\frac{5}{16}$	3.2283	1.260
80 $3\frac{1}{16}$ $3\frac{1}{8}$ $3\frac{3}{16}$	UCT316D1	42	30	150	98	53	160	30	204	230	282	60	102	108	174	86	34
	UCT316-301D1	$1\frac{21}{32}$	$1\frac{3}{16}$	$5\frac{29}{32}$	$3\frac{27}{32}$	$2\frac{3}{32}$	$6\frac{5}{16}$	1.181	$8\frac{1}{32}$	$9\frac{1}{16}$	$11\frac{3}{32}$	$2\frac{3}{8}$	$4\frac{1}{32}$	$4\frac{1}{4}$	$6\frac{27}{32}$	3.3858	1.339
	UCT316-302D1	$1\frac{21}{32}$	$1\frac{3}{16}$	$5\frac{29}{32}$	$3\frac{27}{32}$	$2\frac{3}{32}$	$6\frac{5}{16}$	1.181	$8\frac{1}{32}$	$9\frac{1}{16}$	$11\frac{3}{32}$	$2\frac{3}{8}$	$4\frac{1}{32}$	$4\frac{1}{4}$	$6\frac{27}{32}$	3.3858	1.339
	UCT316-303D1	$1\frac{21}{32}$	$1\frac{3}{16}$	$5\frac{29}{32}$	$3\frac{27}{32}$	$2\frac{3}{32}$	$6\frac{5}{16}$	1.181	$8\frac{1}{32}$	$9\frac{1}{16}$	$11\frac{3}{32}$	$2\frac{3}{8}$	$4\frac{1}{32}$	$4\frac{1}{4}$	$6\frac{27}{32}$	3.3858	1.339
85 $3\frac{1}{4}$ $3\frac{5}{16}$ $3\frac{7}{16}$	UCT317D1	42	32	152	98	53	170	32	214	240	298	64	102	115	183	96	40
	UCT317-304D1	$1\frac{21}{32}$	$1\frac{1}{4}$	$5\frac{31}{32}$	$3\frac{27}{32}$	$2\frac{3}{32}$	$6\frac{11}{16}$	1.260	$8\frac{27}{64}$	$9\frac{7}{16}$	$11\frac{23}{32}$	$2\frac{17}{32}$	$4\frac{1}{32}$	$4\frac{17}{32}$	$7\frac{7}{32}$	3.7795	1.575
	UCT317-305D1	$1\frac{21}{32}$	$1\frac{1}{4}$	$5\frac{31}{32}$	$3\frac{27}{32}$	$2\frac{3}{32}$	$6\frac{11}{16}$	1.260	$8\frac{27}{64}$	$9\frac{7}{16}$	$11\frac{23}{32}$	$2\frac{17}{32}$	$4\frac{1}{32}$	$4\frac{17}{32}$	$7\frac{7}{32}$	3.7795	1.575
	UCT317-307D1	$1\frac{21}{32}$	$1\frac{1}{4}$	$5\frac{31}{32}$	$3\frac{27}{32}$	$2\frac{3}{32}$	$6\frac{11}{16}$	1.260	$8\frac{27}{64}$	$9\frac{7}{16}$	$11\frac{23}{32}$	$2\frac{17}{32}$	$4\frac{1}{32}$	$4\frac{17}{32}$	$7\frac{7}{32}$	3.7795	1.575
90 $3\frac{7}{16}$ $3\frac{1}{2}$	UCT318D1	46	32	160	106	57	175	32	228	255	312	66	110	120	192	96	40
	UCT318-307D1	$1\frac{13}{16}$	$1\frac{1}{4}$	$6\frac{5}{16}$	$4\frac{3}{16}$	$2\frac{1}{4}$	$6\frac{7}{8}$	1.260	$8\frac{31}{32}$	$10\frac{1}{32}$	$12\frac{9}{32}$	$2\frac{19}{32}$	$4\frac{11}{32}$	$4\frac{23}{32}$	$7\frac{9}{16}$	3.7795	1.575
	UCT318-308D1	$1\frac{13}{16}$	$1\frac{1}{4}$	$6\frac{5}{16}$	$4\frac{3}{16}$	$2\frac{1}{4}$	$6\frac{7}{8}$	1.260	$8\frac{31}{32}$	$10\frac{1}{32}$	$12\frac{9}{32}$	$2\frac{19}{32}$	$4\frac{11}{32}$	$4\frac{23}{32}$	$7\frac{9}{16}$	3.7795	1.575

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

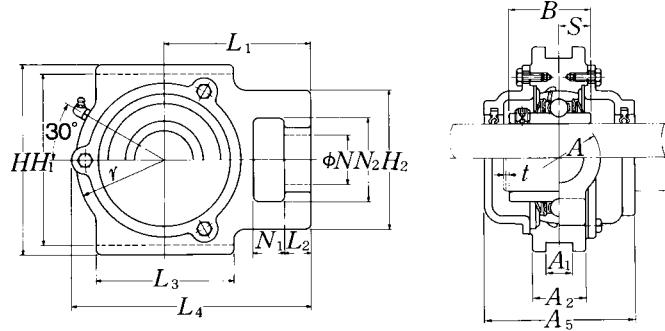
**Cast dust cover type**Open end: **C-UCT…D1**Closed end: **CM-UCT…D1**

Bearing number	Housing number	Unit number ¹⁾ cast dust cover type	Nominal dimensions			Mass of unit	
			t max.	L ₄	A ₅	kg UCT	lb C(CM)
UC312D1	T312D1	C(CM)-UCT312D1	4	227	135	7.6	10
UC312-204D1	T312D1	C(CM)-UCT312-204D1					
UC312-205D1	T312D1	C(CM)-UCT312-205D1					
UC312-206D1	T312D1	C(CM)-UCT312-206D1					
UC312-207D1	T312D1	C(CM)-UCT312-207D1					
UC313D1	T313D1	C(CM)-UCT313D1	4	244	140	9.4	12
UC313-208D1	T313D1	C(CM)-UCT313-208D1					
UC313-209D1	T313D1	C(CM)-UCT313-209D1					
UC314D1	T314D1	C(CM)-UCT314D1	4	258	140	11	14
UC314-210D1	T314D1	C(CM)-UCT314-210D1					
UC314-211D1	T314D1	C(CM)-UCT314-211D1					
UC314-212D1	T314D1	C(CM)-UCT314-212D1					
UC315D1	T315D1	C(CM)-UCT315D1	4	268	150	13	17
UC315-213D1	T315D1	C(CM)-UCT315-213D1					
UC315-214D1	T315D1	C(CM)-UCT315-214D1					
UC315-215D1	T315D1	C(CM)-UCT315-215D1					
UC315-300D1	T315D1	C(CM)-UCT315-300D1					
UC316D1	T316D1	C(CM)-UCT316D1	4	287	155	16	20
UC316-301D1	T316D1	C(CM)-UCT316-301D1					
UC316-302D1	T316D1	C(CM)-UCT316-302D1					
UC316-303D1	T316D1	C(CM)-UCT316-303D1					
UC317D1	T317D1	C(CM)-UCT317D1	5	303	170	19	25
UC317-304D1	T317D1	C(CM)-UCT317-304D1					
UC317-305D1	T317D1	C(CM)-UCT317-305D1					
UC317-307D1	T317D1	C(CM)-UCT317-307D1					
UC318D1	T318D1	C(CM)-UCT318D1	5	317	170	21	27
UC318-307D1	T318D1	C(CM)-UCT318-307D1					
UC318-308D1	T318D1	C(CM)-UCT318-308D1					

sale@technobearing.ru
Take-up units cast housing
Set screw type

www.technobearing.ru


8 (800) 700-72-07 (бесплатно)

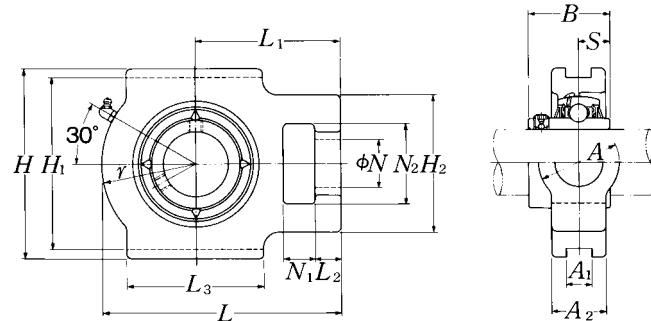

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions															
		mm								inch							
		N ₁	L ₂	H ₂	N ₂	N	L ₃	A ₁	H ₁	H	L	A ₂	A	r	L ₁	B	S
95 $3\frac{5}{8}$	UCT319D1	46	33	165	106	57	180	35	240	270	322	72	110	125	197	103	41
$3\frac{11}{16}$	UCT319-310D1	$1\frac{13}{16}$	$1\frac{5}{16}$	$6\frac{1}{2}$	$4\frac{3}{16}$	$2\frac{1}{4}$	$7\frac{3}{32}$	1.378	$9\frac{29}{64}$	$10\frac{5}{8}$	$12\frac{11}{16}$	$2\frac{27}{32}$	$4\frac{11}{32}$	$4\frac{29}{32}$	$7\frac{3}{4}$	4.0551	1.614
$3\frac{15}{16}$	UCT319-311D1																
$3\frac{3}{4}$	UCT319-312D1																
100 $3\frac{13}{16}$	UCT320D1	48	34	175	115	59	200	35	260	290	345	75	120	135	210	108	42
$3\frac{7}{8}$	UCT320-313D1	$1\frac{7}{8}$	$1\frac{11}{32}$	$6\frac{7}{8}$	$4\frac{17}{32}$	$2\frac{5}{16}$	$7\frac{7}{8}$	1.378	$10\frac{15}{64}$	$11\frac{13}{32}$	$13\frac{19}{32}$	$2\frac{15}{16}$	$4\frac{23}{32}$	$5\frac{5}{16}$	$8\frac{9}{32}$	4.2520	1.654
$3\frac{15}{16}$	UCT320-314D1																
4	UCT320-315D1																
	UCT320-400D1																
105	UCT321D1	48	34	175	115	59	200	35	260	290	347	75	120	135	212	112	44
110	UCT322D1	52	40	185	125	65	215	38	285	320	385	80	130	150	235	117	46
120	UCT324D1	60	44	210	140	70	230	45	320	355	432	90	140	165	267	126	51
130	UCT326D1	65	47	220	150	75	240	50	350	385	465	100	150	180	285	135	54
140	UCT328D1	70	52	230	160	80	255	50	380	415	515	100	155	200	315	145	59

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

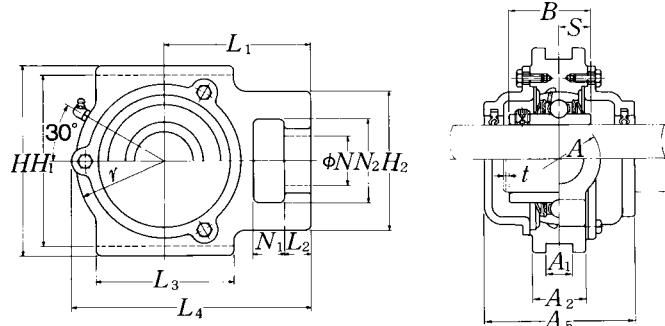
**Cast dust cover type**Open end: **C-UCT…D1**Closed end: **CM-UCT…D1**

Bearing number	Housing ¹⁾ number	Unit number ¹⁾ cast dust cover type	Nominal ¹⁾ dimensions			Mass of unit		
			mm max.	inch <i>t</i>	inch <i>L₄</i>	inch <i>A₅</i>	kg UCT	lb C(CM)
UC319D1	T319D1	C(CM)-UCT319D1	5	327	180		24	31
UC319-310D1	T319D1	C(CM)-UCT319-310D1						
UC319-311D1	T319D1	C(CM)-UCT319-311D1	$1\frac{3}{64}$	$12\frac{7}{8}$	$7\frac{3}{32}$		53	68
UC319-312D1	T319D1	C(CM)-UCT319-312D1						
UC320D1	T320D1	C(CM)-UCT320D1	5	350	190		30	38
UC320-313D1	T320D1	C(CM)-UCT320-313D1						
UC320-314D1	T320D1	C(CM)-UCT320-314D1						
UC320-315D1	T320D1	C(CM)-UCT320-315D1						
UC320-400D1	T320D1	C(CM)-UCT320-400D1						
UC321D1D1	T321D1	C(CM)-UCT321D1	5	359	195		32	43
UC322D1D1	T322D1	C(CM)-UCT322D1	5	395	200		40	55
UC324D1D1	T324D1	C(CM)-UCT324D1	5	439	215		55	71
UC326D1D1	T326D1	C(CM)-UCT326D1	6	476	225		69	92
UC328D1D1	T328D1	C(CM)-UCT328D1	6	519	235		84	111

sale@technobearing.ru
Take-up units cast housing
Set screw type

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

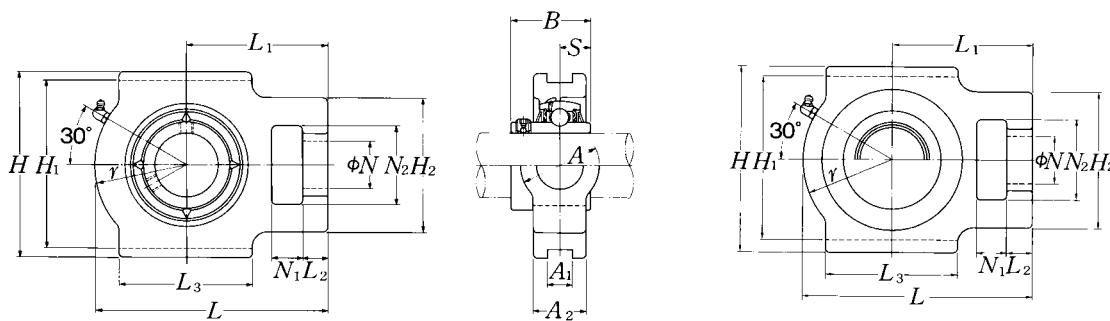
Pressed steel dust cover type


 Open end: **S-UCTX…D1**

 Closed end: **SM-UCTX…D1**

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions															
		mm								inch							
25 $\frac{13}{16}$ $\frac{7}{8}$ $\frac{15}{16}$ 1	UCTX05D1	16	12	56	37	22	57	12	89	102	113	28	37	43	70	38.1	15.9
	UCTX05-013D1	$\frac{5}{8}$	$\frac{15}{32}$	$2\frac{7}{32}$	$1\frac{15}{32}$	$\frac{7}{8}$	$2\frac{1}{4}$	0.472	$3\frac{1}{2}$	$4\frac{1}{32}$	$4\frac{7}{16}$	$1\frac{3}{32}$	$1\frac{15}{32}$	$1\frac{11}{16}$	$2\frac{3}{4}$	1.5000	0.626
	UCTX05-014D1																
	UCTX05-015D1																
	UCTX05-100D1																
30 $1\frac{1}{16}$ $1\frac{1}{8}$ $1\frac{3}{16}$ $1\frac{1}{4}$	UCTX06D1	16	15	64	37	22	64	12	89	102	129	30	37	51	78	42.9	17.5
	UCTX06-101D1	$\frac{5}{8}$	$1\frac{9}{32}$	$2\frac{17}{32}$	$1\frac{15}{32}$	$\frac{7}{8}$	$2\frac{17}{32}$	0.472	$3\frac{1}{2}$	$4\frac{1}{32}$	$5\frac{3}{32}$	$1\frac{3}{16}$	$1\frac{15}{32}$	2	$3\frac{1}{16}$	1.6890	0.689
	UCTX06-102D1																
	UCTX06-103D1																
	UCTX06-104D1																
35 $1\frac{5}{16}$ $1\frac{3}{8}$ $1\frac{7}{16}$	UCTX07D1	19	17	83	49	29	83	16	102	114	144	36	49	56	88	49.2	19
	UCTX07-105D1	$\frac{3}{4}$	$2\frac{1}{32}$	$3\frac{9}{32}$	$1\frac{15}{16}$	$1\frac{5}{32}$	$3\frac{9}{32}$	0.630	$4\frac{1}{64}$	$4\frac{1}{2}$	$5\frac{21}{32}$	$1\frac{13}{32}$	$1\frac{15}{16}$	$2\frac{7}{32}$	$3\frac{15}{32}$	1.9370	0.748
	UCTX07-106D1																
	UCTX07-107D1																
40 $1\frac{1}{2}$ $1\frac{3}{16}$	UCTX08D1	19	17	83	49	29	83	16	102	117	144	36	49	57	87	49.2	19
	UCTX08-108D1	$\frac{3}{4}$	$2\frac{1}{32}$	$3\frac{9}{32}$	$1\frac{15}{16}$	$1\frac{5}{32}$	$3\frac{9}{32}$	0.630	$4\frac{1}{64}$	$4\frac{19}{32}$	$5\frac{21}{32}$	$1\frac{13}{32}$	$1\frac{15}{16}$	$2\frac{1}{4}$	$3\frac{7}{16}$	1.9370	0.748
	UCTX08-109D1																
	UCTX09D1	19	18	83	49	29	86	16	102	117	151	38	49	59	92	51.6	19
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$ $1\frac{13}{16}$	UCTX09-110D1	$\frac{3}{4}$	$2\frac{3}{32}$	$3\frac{9}{32}$	$1\frac{15}{16}$	$1\frac{5}{32}$	$3\frac{3}{8}$	0.630	$4\frac{1}{64}$	$4\frac{19}{32}$	$5\frac{15}{16}$	$1\frac{1}{2}$	$1\frac{15}{16}$	$2\frac{5}{16}$	$3\frac{5}{8}$	2.0315	0.748
	UCTX09-111D1																
	UCTX09-112D1																
	UCTX09-113D1																
	UCTX10D1	25	21	102	64	35	95	22	130	146	171	42	64	65	106	55.6	22.2
50 $1\frac{7}{8}$ $1\frac{15}{16}$ 2	UCTX10-114D1	$\frac{31}{32}$	$1\frac{3}{16}$	$4\frac{1}{32}$	$2\frac{17}{32}$	$1\frac{3}{8}$	$3\frac{3}{4}$	0.866	$5\frac{1}{8}$	$5\frac{3}{4}$	$6\frac{23}{32}$	$1\frac{21}{32}$	$2\frac{17}{32}$	$2\frac{9}{16}$	$4\frac{3}{16}$	2.1890	0.874
	UCTX10-115D1																
	UCTX10-200D1																

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

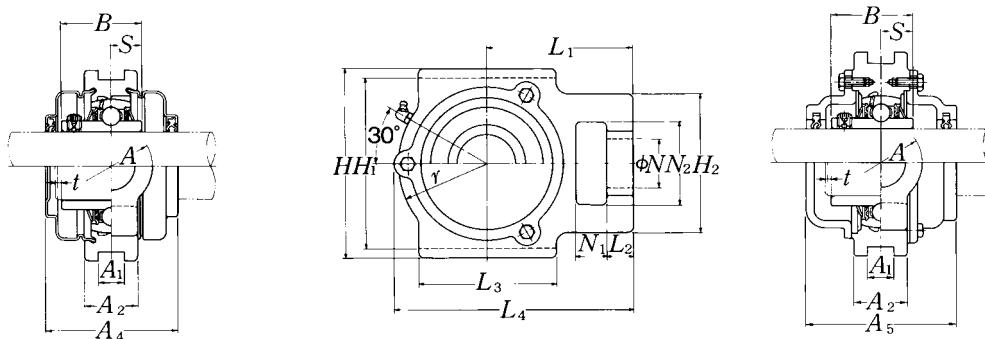


Cast dust cover type
Open end: **C-UCTX…D1**
Closed end: **CM-UCTX…D1**

Bearing number	Housing number	Unit number ¹⁾ pressed steel dust cover type	Unit number ¹⁾ cast dust cover type	Nominal dimensions			Mass of unit			
				t max.	A ₄	L ₄	A ₅	kg	lb	
				mm	inch			UCTX	S(SM)	C(CM)
UCX05D1	TX05D1	S(SM)-UCTX05D1	C(CM)-UCTX05D1	2	62	113.5	75	1.4	1.5	1.8
UCX05-013D1	TX05D1	S(SM)-UCTX05-013D1	C(CM)-UCTX05-013D1							
UCX05-014D1	TX05D1	S(SM)-UCTX05-014D1	C(CM)-UCTX05-014D1							
UCX05-015D1	TX05D1	S(SM)-UCTX05-015D1	C(CM)-UCTX05-015D1							
UCX05-100D1	TX05D1	S(SM)-UCTX05-100D1	C(CM)-UCTX05-100D1							
UCX06D1	TX06D1	S(SM)-UCTX06D1	C(CM)-UCTX06D1	2	72	129	80	1.8	2.0	2.3
UCX06-101D1	TX06D1	S(SM)-UCTX06-101D1	C(CM)-UCTX06-101D1							
UCX06-102D1	TX06D1	S(SM)-UCTX06-102D1	C(CM)-UCTX06-102D1							
UCX06-103D1	TX06D1	S(SM)-UCTX06-103D1	C(CM)-UCTX06-103D1							
UCX06-104D1	TX06D1	S(SM)-UCTX06-104D1	C(CM)-UCTX06-104D1							
UCX07D1	TX07D1	S(SM)-UCTX07D1	C(CM)-UCTX07D1	3	82	144	90	2.6	2.8	3.5
UCX07-105D1	TX07D1	S(SM)-UCTX07-105D1	C(CM)-UCTX07-105D1							
UCX07-106D1	TX07D1	S(SM)-UCTX07-106D1	C(CM)-UCTX07-106D1							
UCX07-107D1	TX07D1	S(SM)-UCTX07-107D1	C(CM)-UCTX07-107D1							
UCX08D1	TX08D1	S(SM)-UCTX08D1	C(CM)-UCTX08D1	3	82	144.5	95	2.6	2.8	3.5
UCX08-108D1	TX08D1	S(SM)-UCTX08-108D1	C(CM)-UCTX08-108D1							
UCX08-109D1	TX08D1	S(SM)-UCTX08-109D1	C(CM)-UCTX08-109D1							
UCX09D1	TX09D1	S(SM)-UCTX09D1	C(CM)-UCTX09D1	3	87	152	100	2.7	3.0	3.7
UCX09-110D1	TX09D1	S(SM)-UCTX09-110D1	C(CM)-UCTX09-110D1							
UCX09-111D1	TX09D1	S(SM)-UCTX09-111D1	C(CM)-UCTX09-111D1							
UCX09-112D1	TX09D1	S(SM)-UCTX09-112D1	C(CM)-UCTX09-112D1							
UCX09-113D1	TX09D1	S(SM)-UCTX09-113D1	C(CM)-UCTX09-113D1							
UCX10D1	TX10D1	S(SM)-UCTX10D1	C(CM)-UCTX10D1	3	92	171.5	100	4.2	4.6	5.4
UCX10-114D1	TX10D1	S(SM)-UCTX10-114D1	C(CM)-UCTX10-114D1							
UCX10-115D1	TX10D1	S(SM)-UCTX10-115D1	C(CM)-UCTX10-115D1							
UCX10-200D1	TX10D1	S(SM)-UCTX10-200D1	C(CM)-UCTX10-200D1							

sale@technobearing.ru
Take-up units cast housing
Set screw type

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

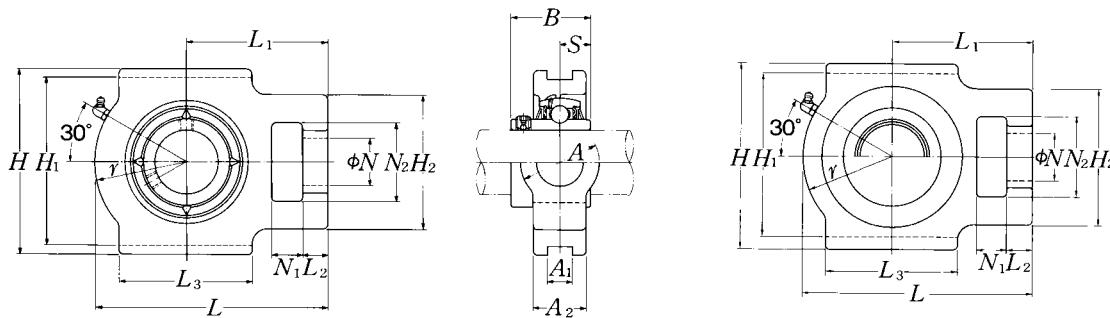

Pressed steel dust cover type


Open end: **S-UCTX…D1**

Closed end: **SM-UCTX…D1**

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions																
		mm								inch								
55 2½/16 2½/8 2¾/16 2¼/4 2⁹/₁₆	UCTX11D1	32	21	102	64	35	102	22	130	146	194	44	64	75	119	65.1	25.4	
	UCTX11-201D1	1½	1¾/16	4½/32	2½/32	1¾/8	4½/32	0.866	5½/8	5¾/4	7½/8	1½/32	2½/32	2½/16	4½/16	2.5630	1.000	
	UCTX11-202D1	1½	29/32	4¾/8	2¾/4	1½/8	4¾/4	1.024	5½/16	6¾/16	8½/16	1½/8	2¾/4	3¾/16	5½/32	2.5630	1.000	
	UCTX11-203D1	1½	29/32	4¾/8	2¾/4	1½/8	4¾/4	1.024	5½/16	6¾/16	8½/16	1½/8	2¾/4	3¾/16	5½/32	2.5630	1.000	
	UCTX11-204D1	1½	29/32	4¾/8	2¾/4	1½/8	4¾/4	1.024	5½/16	6¾/16	8½/16	1½/8	2¾/4	3¾/16	5½/32	2.5630	1.000	
	UCTX11-205D1	1½	29/32	4¾/8	2¾/4	1½/8	4¾/4	1.024	5½/16	6¾/16	8½/16	1½/8	2¾/4	3¾/16	5½/32	2.5630	1.000	
60	UCTX12D1	32	23	111	70	41	121	26	151	167	224	48	70	87	137	65.1	25.4	
65	UCTX13D1	32	23	111	70	41	121	26	151	167	224	48	70	87	137	74.6	30.2	
70	UCTX14D1	32	23	111	70	41	121	26	151	167	232	48	70	92	140	77.8	33.3	
75	UCTX15D1	32	23	111	70	41	121	28	165	184	235	48	70	95	140	82.6	33.3	
80	UCTX16D1	38	30	124	73	48	157	28	173	198	260	54	73	98	162	85.7	34.1	
85	UCTX17D1	38	30	124	73	48	157	28	173	198	260	54	73	98	162	96	39.7	

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

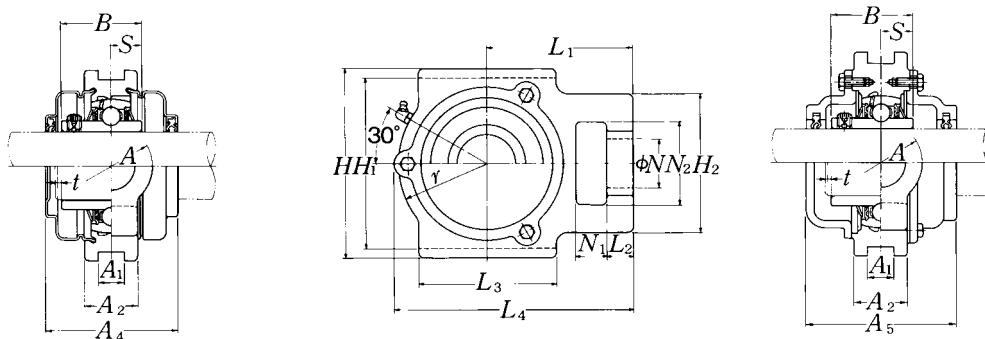


Cast dust cover type

Open end: C-UCTX...D1

Closed end: CM-UCTX...D1

Bearing number	Housing number	Unit number ¹⁾ pressed steel dust cover type	Unit number ¹⁾ cast dust cover type	Nominal dimensions			Mass of unit			
				t max.	A ₄	L ₄	inch	mm	kg	
								mm	lb	
							UCTX	S(SM)	C(CM)	
UCX11D1	TX11D1	S(SM)-UCTX11D1	C(CM)-UCTX11D1	4	102	194	115	5.2	5.6	6.7
UCX11-201D1	TX11D1	S(SM)-UCTX11-201D1	C(CM)-UCTX11-201D1							
UCX11-202D1	TX11D1	S(SM)-UCTX11-202D1	C(CM)-UCTX11-202D1							
UCX11-203D1	TX11D1	S(SM)-UCTX11-203D1	C(CM)-UCTX11-203D1							
UC212-204D1	TX11D1	S(SM)-UCTX11-204D1	C(CM)-UCTX11-204D1							
UC212-205D1	TX11D1	S(SM)-UCTX11-205D1	C(CM)-UCTX11-205D1							
UCX12D1	TX12D1	S(SM)-UCTX12D1	C(CM)-UCTX12D1	4	107	224	120	7.2	7.7	9.0
UCX12-206D1	TX12D1	S(SM)-UCTX12-206D1	C(CM)-UCTX12-206D1	$\frac{5}{32}$	$4\frac{1}{32}$	$8\frac{13}{16}$	$4\frac{23}{32}$	16	17	20
UCX12-207D1	TX12D1	S(SM)-UCTX12-207D1	C(CM)-UCTX12-207D1							
UCX13D1	TX13D1	—	C(CM)-UCTX13D1	4	—	224	135	7.5	—	9.8
UCX13-208D1	TX13D1	—	C(CM)-UCTX13-208D1	$\frac{5}{32}$	—	$8\frac{13}{16}$	$5\frac{5}{16}$	17	—	22
UCX13-209D1	TX13D1	—	C(CM)-UCTX13-209D1							
UCX14D1	TX14D1	—	C(CM)-UCTX14D1	4	—	232	135	7.7	—	10
UCX14-210D1	TX14D1	—	C(CM)-UCTX14-210D1							
UCX14-211D1	TX14D1	—	C(CM)-UCTX14-211D1	$\frac{5}{32}$	—	$9\frac{1}{8}$	$5\frac{5}{16}$	17	—	22
UCX14-212D1	TX14D1	—	C(CM)-UCTX14-212D1							
UCX15D1	TX15D1	—	C(CM)-UCTX15D1	4	—	235	145	8.3	—	11
UCX15-213D1	TX15D1	—	C(CM)-UCTX15-213D1							
UCX15-214D1	TX15D1	—	C(CM)-UCTX15-214D1	$\frac{5}{32}$	—	$9\frac{1}{4}$	$5\frac{23}{32}$	18	—	24
UCX15-215D1	TX15D1	—	C(CM)-UCTX15-215D1							
UCX15-300D1	TX15D1	—	C(CM)-UCTX15-300D1							
UCX16D1	TX16D1	—	C(CM)-UCTX16D1	4	—	260	155	11	—	14
UCX16-301D1	TX16D1	—	C(CM)-UCTX16-301D1							
UCX16-302D1	TX16D1	—	C(CM)-UCTX16-302D1	$\frac{5}{32}$	—	$10\frac{1}{4}$	$6\frac{3}{32}$	24	—	31
UCX16-303D1	TX16D1	—	C(CM)-UCTX16-303D1							
UC217-304D1	TX16D1	—	C(CM)-UCTX16-304D1							
UCX17D1	TX17D1	—	C(CM)-UCTX17D1	5	—	262	165	11	—	15
UCX17-305D1	TX17D1	—	C(CM)-UCTX17-305D1	$\frac{13}{64}$	—	$10\frac{5}{16}$	$6\frac{1}{2}$	24	—	33
UCX17-307D1	TX17D1	—	C(CM)-UCTX17-307D1							

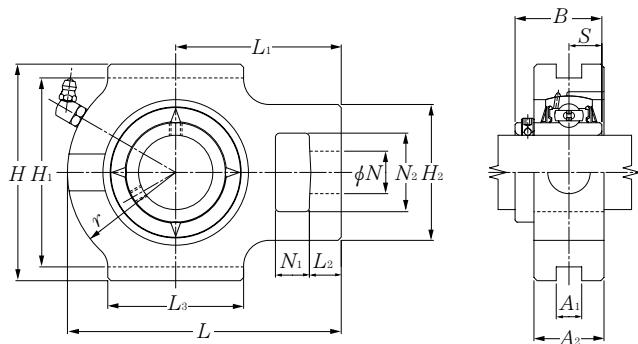


Shaft dia. mm	Unit number ¹⁾	Nominal dimensions														
		mm														
		<i>N</i> ₁	<i>L</i> ₂	<i>H</i> ₂	<i>N</i> ₂	<i>N</i>	<i>L</i> ₃	<i>A</i> ₁	<i>H</i> ₁	<i>H</i>	<i>L</i>	<i>A</i> ₂	<i>r</i>	<i>L</i> ₁	<i>B</i>	<i>S</i>
12	UCTG201D1	16	12	51	32	19	51	12	76	89	94	30	33	61	31	12.7
15	UCTG202D1	16	12	51	32	19	51	12	76	89	94	30	33	61	31	12.7
17	UCTG203D1	16	12	51	32	19	51	12	76	89	94	30	33	61	31	12.7
20	UCTG204D1	16	12	51	32	19	51	12	76	89	94	30	33	61	31	12.7
25	UCTG205D1	16	12	51	32	19	51	12	76	89	97	30	35	62	34.1	14.3
30	UCTG206D1	16	12	56	37	22	57	12	89	102	113	35	43	70	38.1	15.9
35	UCTG207D1	16	15	64	37	22	64	12	89	102	129	35	51	78	42.9	17.5
40	UCTG208D1	19	18	83	49	29	83	16	102	114	144	45	56	88	49.2	19
45	UCTG209D1	19	18	83	49	29	83	16	102	117	145	45	57	88	49.2	19
50	UCTG210D1	19	18	83	49	29	86	16	102	117	151	45	59	92	51.6	19
55	UCTG211D1	25	21	102	64	35	95	22	130	146	171	55	65	106	55.6	22.2
60	UCTG212D1	32	21	102	64	35	102	22	130	146	194	55	75	119	65.1	25.4
65	UCTG213D1	32	23	111	70	41	121	26	151	167	224	60	87	137	65.1	25.4
70	UCTG214D1	32	23	111	70	41	121	26	151	167	224	60	87	137	74.6	30.2
75	UCTG215D1	32	23	111	70	41	121	26	151	167	232	60	92	140	77.8	33.3
80	UCTG216D1	32	23	111	70	41	121	26	165	184	235	60	95	140	82.6	33.3
85	UCTG217D1	38	31	124	73	48	157	30	173	198	260	70	98	162	85.7	34.1

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

Bearing number	Housing ¹⁾ number	Mass of unit kg
UC201D1	TG204D1	1.2
UC202D1	TG204D1	1.2
UC203D1	TG204D1	1.1
UC204D1	TG204D1	1.1
UC205D1	TG205D1	1.1
UC206D1	TG206D1	1.7
UC207D1	TG207D1	2.0
UC208D1	TG208D1	3.3
UC209D1	TG209D1	3.2
UC210D1	TG210D1	3.3
UC211D1	TG211D1	5.7
UC212D1	TG212D1	6.4
UC213D1	TG213D1	9.6
UC214D1	TG214D1	9.4
UC215D1	TG215D1	9.7
UC216D1	TG216D1	10
UC217D1	TG217D1	15

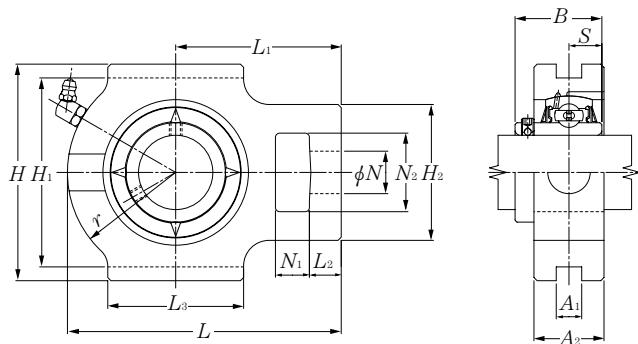

Shaft dia. mm	Unit number ¹⁾	Nominal dimensions															
		mm															
		<i>N</i> ₁	<i>L</i> ₂	<i>H</i> ₂	<i>N</i> ₂	<i>N</i>	<i>L</i> ₃	<i>A</i> ₁	<i>H</i> ₁	<i>H</i>	<i>L</i>	<i>A</i> ₂	<i>r</i>	<i>L</i> ₁	<i>B</i>	<i>S</i>	
25	UCTG305D1	16	14	62	36	26	65	12	80	89	122	35	46	76	38	15	
30	UCTG306D1	18	16	70	41	28	74	16	90	100	137	40	52	85	43	17	
35	UCTG307D1	20	17	75	45	30	80	16	100	111	150	40	56	94	48	19	
40	UCTG308D1	22	19	83	50	32	89	18	112	124	162	45	62	100	52	19	
45	UCTG309D1	24	20	90	55	34	97	18	125	138	178	50	68	110	57	22	
50	UCTG310D1	27	22	98	61	37	106	20	140	151	192	55	74	118	61	22	
55	UCTG311D1	29	23	105	66	39	115	22	150	163	207	60	80	127	66	25	
60	UCTG312D1	31	25	113	71	41	123	22	160	178	220	65	85	135	71	26	
65	UCTG313D1	32	27	116	70	43	134	26	170	190	238	65	92	146	75	30	
70	UCTG314D1	36	27	130	85	46	140	26	180	202	252	70	97	155	78	33	
75	UCTG315D1	36	27	132	85	46	150	26	192	216	262	70	102	160	82	32	
80	UCTG316D1	42	30	150	98	53	160	30	204	230	282	80	108	174	86	34	
85	UCTG317D1	42	32	152	98	53	170	32	214	240	298	80	115	183	96	40	
90	UCTG318D1	46	32	160	106	57	175	32	228	255	312	90	120	192	96	40	
95	UCTG319D1	46	33	165	106	57	180	35	240	270	322	90	125	197	103	41	
100	UCTG320D1	48	34	175	115	59	200	35	260	290	345	100	135	210	108	42	
105	UCTG321D1	48	34	175	115	59	200	35	260	290	347	100	135	212	112	44	
110	UCTG322D1	52	40	185	125	65	215	38	285	320	385	100	150	235	117	46	
120	UCTG324D1	60	44	210	140	70	230	45	320	355	432	110	165	267	126	51	
130	UCTG326D1	65	47	220	150	75	240	50	350	385	465	120	180	285	135	54	
140	UCTG328D1	70	52	230	160	80	255	50	380	415	515	120	200	315	145	59	

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

Bearing number	Housing number ¹⁾	Mass of unit kg
UC305D1	TG305D1	1.8
UC306D1	TG306D1	2.5
UC307D1	TG307D1	3.0
UC308D1	TG308D1	4.0
UC309D1	TG309D1	5.4
UC310D1	TG310D1	6.9
UC311D1	TG311D1	8.6
UC312D1	TG312D1	11
UC313D1	TG313D1	12
UC314D1	TG314D1	15
UC315D1	TG315D1	17
UC316D1	TG316D1	22
UC317D1	TG317D1	24
UC318D1	TG318D1	29
UC319D1	TG319D1	31
UC320D1	TG320D1	41
UC321D1	TG321D1	40
UC322D1	TG322D1	49
UC324D1	TG324D1	68
UC326D1	TG326D1	85
UC328D1	TG328D1	103


Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions					Bearing number	Housing number ¹⁾	Mass of unit kg lb
		H	A	r	B	S			
12 $\frac{1}{2}$	UCC201D1 UCC201-008D1	72 2.8346	20 $\frac{25}{32}$	2 0.079	31 1.2205	12.7 0.500	UC201D1 UC201-008D1	C204D1 C204D1	0.5 1.1
15 $\frac{9}{16}$ $\frac{5}{8}$	UCC202D1 UCC202-009D1 UCC202-010D1	72 2.8346	20 $\frac{25}{32}$	2 0.079	31 1.2205	12.7 0.500	UC202D1 UC202-009D1 UC202-010D1	C204D1 C204D1 C204D1	0.5 1.1
17 $\frac{11}{16}$	UCC203D1 UCC203-011D1	72 2.8346	20 $\frac{25}{32}$	2 0.079	31 1.2205	12.7 0.500	UC203D1 UC203-011D1	C204D1 C204D1	0.5 1.1
20 $\frac{3}{4}$	UCC204D1 UCC204-012D1	72 2.8346	20 $\frac{25}{32}$	2 0.079	31 1.2205	12.7 0.500	UC204D1 UC204-012D1	C204D1 C204D1	0.5 1.1
25 $\frac{13}{16}$ $\frac{7}{8}$ $\frac{15}{16}$ 1	UCC205D1 UCC205-013D1 UCC205-014D1 UCC205-015D1 UCC205-100D1	80 3.1496	22 $\frac{55}{64}$	2 0.079	34.1 1.3425	14.3 0.563	UC205D1 UC205-013D1 UC205-014D1 UC205-015D1 UC205-100D1	C205D1 C205D1 C205D1 C205D1 C205D1	0.6 1.3
30 $1\frac{1}{16}$ $1\frac{1}{8}$ $1\frac{3}{16}$ $1\frac{1}{4}$	UCC206D1 UCC206-101D1 UCC206-102D1 UCC206-103D1 UCC206-104D1	85 3.3465	27 $1\frac{1}{16}$	2 0.079	38.1 1.5000	15.9 0.626	UC206D1 UC206-101D1 UC206-102D1 UC206-103D1 UC206-104D1	C206D1 C206D1 C206D1 C206D1 C206D1	0.8 1.8
35 $1\frac{1}{4}$ $1\frac{5}{16}$ $1\frac{3}{8}$ $1\frac{7}{16}$	UCC207D1 UCC207-104D1 UCC207-105D1 UCC207-106D1 UCC207-107D1	90 3.5433	28 $1\frac{7}{64}$	2 0.079	42.9 1.6890	17.5 0.689	UC207D1 UC207-104D1 UC207-105D1 UC207-106D1 UC207-107D1	C207D1 C207D1 C207D1 C207D1 C207D1	0.9 2.0
40 $1\frac{1}{2}$ $1\frac{9}{16}$	UCC208D1 UCC208-108D1 UCC208-109D1	100 3.9370	30 $1\frac{3}{16}$	2.5 0.098	49.2 1.9370	19 0.748	UC208D1 UC208-108D1 UC208-109D1	C208D1 C208D1 C208D1	1.2 2.7
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UCC209D1 UCC209-110D1 UCC209-111D1 UCC209-112D1	110 4.3307	31 $1\frac{7}{32}$	2.5 0.098	49.2 1.9370	19 0.748	UC209D1 UC209-110D1 UC209-111D1 UC209-112D1	C209D1 C209D1 C209D1 C209D1	1.5 3.3

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".


sale@technobearing.ru 36 for size of grease fitting.

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

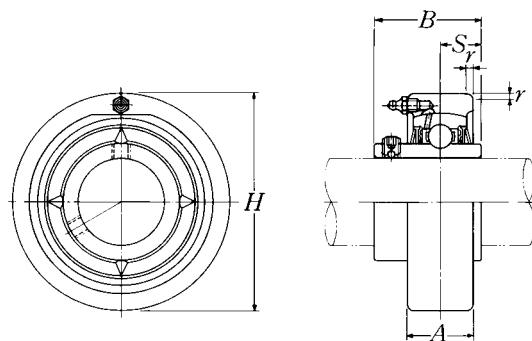


Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions					Bearing number	Housing number	Mass of unit kg lb
		H	A	r	B	S			
50 $1\frac{13}{16}$ $1\frac{7}{8}$ $1\frac{15}{16}$ 2	UCC210D1	120	33	2.5	51.6	19	UC210D1	C210D1	1.9
	UCC210-113D1						UC210-113D1	C210D1	
	UCC210-114D1	4.7244	$1\frac{19}{64}$	0.098	2.0315	0.748	UC210-114D1	C210D1	
	UCC210-115D1						UC210-115D1	C210D1	4.2
	UCC210-200D1						UC210-200D1	C210D1	
55 2 $2\frac{1}{16}$ $2\frac{1}{8}$ $2\frac{3}{16}$	UCC211D1	125	35	2.5	55.6	22.2	UC211D1	C211D1	2.1
	UCC211-200D1						UC211-200D1	C211D1	
	UCC211-201D1	4.9213	$1\frac{3}{8}$	0.098	2.1890	0.874	UC211-201D1	C211D1	
	UCC211-202D1						UC211-202D1	C211D1	4.6
	UCC211-203D1						UC211-203D1	C211D1	
60 $2\frac{1}{4}$ $2\frac{5}{16}$ $2\frac{3}{8}$ $2\frac{7}{16}$	UCC212D1	130	38	2.5	65.1	25.4	UC212D1	C212D1	2.5
	UCC212-204D1						UC212-204D1	C212D1	
	UCC212-205D1	5.1181	$1\frac{1}{2}$	0.098	2.5630	1.000	UC212-205D1	C212D1	
	UCC212-206D1						UC212-206D1	C212D1	5.5
	UCC212-207D1						UC212-207D1	C212D1	
65 $2\frac{1}{2}$ $2\frac{9}{16}$	UCC213D1	140	40	3	65.1	25.4	UC213D1	C213D1	3.0
	UCC213-208D1	5.5118	$1\frac{37}{64}$	0.118	2.5630	1.000	UC213-208D1	C213D1	
	UCC213-209D1						UC213-209D1	C213D1	6.6

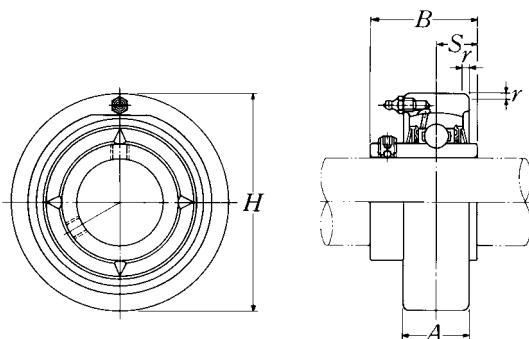


Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions					Bearing number	Housing number	Mass of unit kg lb
		H	A	r	B	S			
25 $\frac{13}{16}$ $\frac{7}{8}$ $\frac{15}{16}$ 1	UCC305D1	90	26	2.5	38	15	UC305D1	C305D1	1.0
	UCC305-013D1	3.5433	$1\frac{1}{32}$	0.098	1.4961	0.591	UC305-013D1	C305D1	
	UCC305-014D1						UC305-014D1	C305D1	
	UCC305-015D1						UC305-015D1	C305D1	
	UCC305-100D1						UC305-100D1	C305D1	
30 $1\frac{1}{16}$ $1\frac{1}{8}$ $1\frac{3}{16}$	UCC306D1	100	28	2.5	43	17	UC306D1	C306D1	1.3
	UCC306-101D1	3.9370	$1\frac{7}{64}$	0.098	1.6929	0.669	UC306-101D1	C306D1	
	UCC306-102D1						UC306-102D1	C306D1	
	UCC306-103D1						UC306-103D1	C306D1	
35 $1\frac{1}{4}$ $1\frac{5}{16}$ $1\frac{3}{8}$ $1\frac{7}{16}$	UCC307D1	110	32	3	48	19	UC307D1	C307D1	1.7
	UCC307-104D1	4.3307	$1\frac{17}{64}$	0.118	1.8898	0.748	UC307-104D1	C307D1	
	UCC307-105D1						UC307-105D1	C307D1	
	UCC307-106D1						UC307-106D1	C307D1	
	UCC307-107D1						UC307-107D1	C307D1	
40 $1\frac{1}{2}$ $1\frac{9}{16}$	UCC308D1	120	34	3	52	19	UC308D1	C308D1	2.1
	UCC308-108D1	4.7244	$1\frac{11}{32}$	0.118	2.0472	0.748	UC308-108D1	C308D1	
	UCC308-109D1						UC308-109D1	C308D1	
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UCC309D1	130	38	3.5	57	22	UC309D1	C309D1	2.7
	UCC309-110D1	5.1181	$1\frac{1}{2}$	0.138	2.2441	0.866	UC309-110D1	C309D1	
	UCC309-111D1						UC309-111D1	C309D1	
	UCC309-112D1						UC309-112D1	C309D1	
50 $1\frac{13}{16}$ $1\frac{7}{8}$ $1\frac{15}{16}$	UCC310D1	140	40	3.5	61	22	UC310D1	C310D1	3.3
	UCC310-113D1	5.5118	$1\frac{37}{64}$	0.138	2.4016	0.866	UC310-113D1	C310D1	
	UCC310-114D1						UC310-114D1	C310D1	
	UCC310-115D1						UC310-115D1	C310D1	
55 2 $2\frac{1}{16}$ $2\frac{1}{8}$ $2\frac{3}{16}$	UCC311D1	150	44	3.5	66	25	UC311D1	C311D1	4.0
	UCC311-200D1	5.9055	$1\frac{47}{64}$	0.138	2.5984	0.984	UC311-200D1	C311D1	
	UCC311-201D1						UC311-201D1	C311D1	
	UCC311-202D1						UC311-202D1	C311D1	
	UCC311-203D1						UC311-203D1	C311D1	

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".
Note: Please refer to page 36 for size of grease fitting.

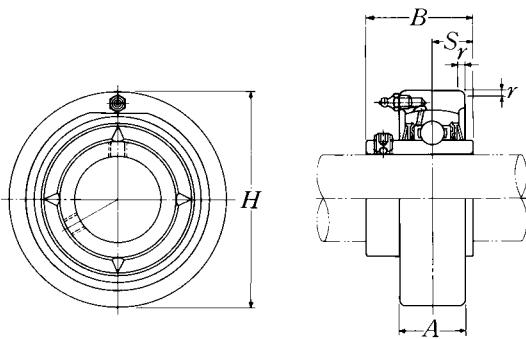


Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions					Bearing number	Housing ¹⁾ number	Mass of unit kg lb
		H	A	r	B	S			
60 2 1/4 2 5/16 2 3/8 2 7/16	UCC312D1	160	46	3.5	71	26	UC312D1	C312D1	4.8
	UCC312-204D1	6.2992	1 13/16	0.138	2.7953	1.024	UC312-204D1	C312D1	
	UCC312-205D1						UC312-205D1	C312D1	
	UCC312-206D1						UC312-206D1	C312D1	
	UCC312-207D1						UC312-207D1	C312D1	
65 2 1/2 2 9/16	UCC313D1	170	50	3.5	75	30	UC313D1	C313D1	5.8
	UCC313-208D1	6.6929	1 31/32	0.138	2.9528	1.181	UC313-208D1	C313D1	
	UCC313-209D1						UC313-209D1	C313D1	
70 2 5/8 2 11/16 2 3/4	UCC314D1	180	52	4	78	33	UC314D1	C314D1	6.8
	UCC314-210D1	7.0866	2 3/64	0.157	3.0709	1.299	UC314-210D1	C314D1	
	UCC314-211D1						UC314-211D1	C314D1	
	UCC314-212D1						UC314-212D1	C314D1	
75 2 13/16 2 7/8 2 15/16 3	UCC315D1	190	55	4	82	32	UC315D1	C315D1	7.9
	UCC315-213D1	7.4803	2 11/64	0.157	3.2283	1.260	UC315-213D1	C315D1	
	UCC315-214D1						UC315-214D1	C315D1	
	UCC315-215D1						UC315-215D1	C315D1	
	UCC315-300D1						UC315-300D1	C315D1	
80 3 1/16 3 1/8 3 3/16	UCC316D1	200	60	4	86	34	UC316D1	C316D1	9.3
	UCC316-301D1	7.8740	2 23/64	0.157	3.3858	1.339	UC316-301D1	C316D1	
	UCC316-302D1						UC316-302D1	C316D1	
	UCC316-303D1						UC316-303D1	C316D1	
85 3 1/4 3 5/16 3 7/16	UCC317D1	215	64	4	96	40	UC317D1	C317D1	11
	UCC317-304D1	8.4646	2 33/64	0.157	3.7795	1.575	UC317-304D1	C317D1	
	UCC317-305D1						UC317-305D1	C317D1	
	UCC317-307D1						UC317-307D1	C317D1	
90 3 1/2	UCC318D1	225	66	4	96	40	UC318D1	C318D1	13
	UCC318-308D1	8.8583	2 19/32	0.157	3.7795	1.575	UC318-308D1	C318D1	29
95 3 5/8 3 11/16 3 3/4	UCC319D1	240	72	4	103	41	UC319D1	C319D1	16
	UCC319-310D1	9.4488	2 53/64	0.157	4.0551	1.614	UC319-310D1	C319D1	
	UCC319-311D1						UC319-311D1	C319D1	
	UCC319-312D1						UC319-312D1	C319D1	

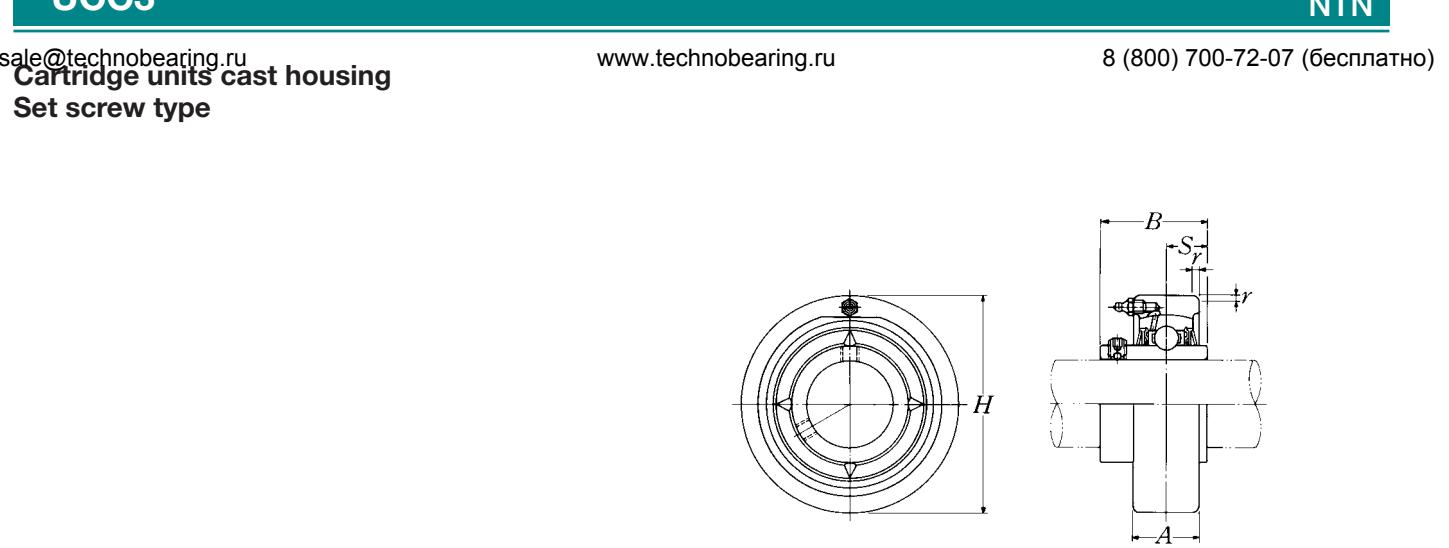

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions					Bearing number	Housing number	Mass of unit kg lb
		H	A	r	mm inch	B			
100 $3\frac{13}{16}$	UCC320D1	260	75	4	108	42	UC320D1	C320D1	20
$3\frac{7}{8}$	UCC320-313D1						UC320-313D1	C320D1	
$3\frac{15}{16}$	UCC320-314D1	10.2362	$2\frac{61}{64}$	0.157	4.2520	1.654	UC320-314D1	C320D1	44
4	UCC320-315D1						UC320-315D1	C320D1	
	UCC320-400D1						UC320-400D1	C320D1	
105	UCC321D1	260	75	4	112	44	UC321D1	C321D1	19
110	UCC322D1	300	80	5	117	46	UC322D1	C322D1	29
120	UCC324D1	320	90	5	126	51	UC324D1	C324D1	36
130	UCC326D1	340	100	5	135	54	UC326D1	C326D1	43
140	UCC328D1	360	100	5	145	59	UC328D1	C328D1	50

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".


Note: Please refer to page 36 for size of grease fitting.

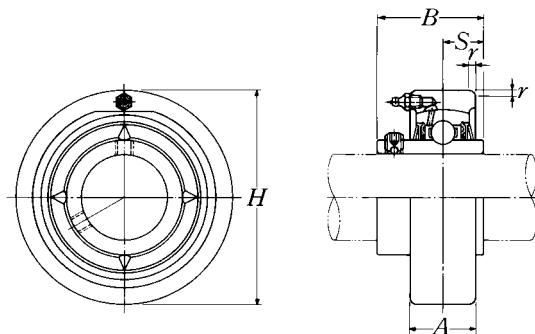

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions					Bearing number	Housing number	Mass of unit kg lb
		H	A	r	B	S			
25 $\frac{13}{16}$ $\frac{7}{8}$ $\frac{15}{16}$ 1	UCCX05D1	90	27	2	38.1	15.9	UCX05D1	CX05D1	1.1
	UCCX05-013D1	3.5433	$1\frac{1}{16}$	0.079	1.5000	0.626	UCX05-013D1	CX05D1	
	UCCX05-014D1						UCX05-014D1	CX05D1	
	UCCX05-015D1						UCX05-015D1	CX05D1	2.4
	UCCX05-100D1						UCX05-100D1	CX05D1	
30 $\frac{1}{16}$ $\frac{1}{8}$ $\frac{13}{16}$ $1\frac{1}{4}$	UCCX06D1	100	30	2.5	42.9	17.5	UCX06D1	CX06D1	1.6
	UCCX06-101D1	3.9370	$1\frac{3}{16}$	0.098	1.6890	0.689	UCX06-101D1	CX06D1	
	UCCX06-102D1						UCX06-102D1	CX06D1	
	UCCX06-103D1						UCX06-103D1	CX06D1	3.5
	UCCX06-104D1						UC207-104D1	CX06D1	
35 $\frac{15}{16}$ $\frac{13}{8}$ $1\frac{1}{16}$	UCCX07D1	110	34	2.5	49.2	19	UCX07D1	CX07D1	1.8
	UCCX07-105D1	4.3307	$1\frac{11}{32}$	0.098	1.9370	0.748	UCX07-105D1	CX07D1	
	UCCX07-106D1						UCX07-106D1	CX07D1	
	UCCX07-107D1						UCX07-107D1	CX07D1	4.0
40 $1\frac{1}{2}$ $1\frac{9}{16}$	UCCX08D1	120	38	2.5	49.2	19	UCX08D1	CX08D1	2.5
	UCCX08-108D1	4.7244	$1\frac{1}{2}$	0.098	1.9370	0.748	UCX08-108D1	CX08D1	
	UCCX08-109D1						UCX08-109D1	CX08D1	5.5
45 $\frac{15}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$ $1\frac{13}{16}$	UCCX09D1	120	38	2.5	51.6	19	UCX09D1	CX09D1	2.2
	UCCX09-110D1	4.7244	$1\frac{1}{2}$	0.098	2.0315	0.748	UCX09-110D1	CX09D1	
	UCCX09-111D1						UCX09-111D1	CX09D1	
	UCCX09-112D1						UCX09-112D1	CX09D1	4.9
	UCCX09-113D1						UC210-113D1	CX09D1	
50 $\frac{17}{8}$ $1\frac{15}{16}$ 2	UCCX10D1	130	40	2.5	55.6	22.2	UCX10D1	CX10D1	2.7
	UCCX10-114D1	5.1181	$1\frac{37}{64}$	0.098	2.1890	0.874	UCX10-114D1	CX10D1	
	UCCX10-115D1						UCX10-115D1	CX10D1	
	UCCX10-200D1						UC211-200D1	CX10D1	6.0

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".


Note: Please refer to page 36 for size of grease fitting.

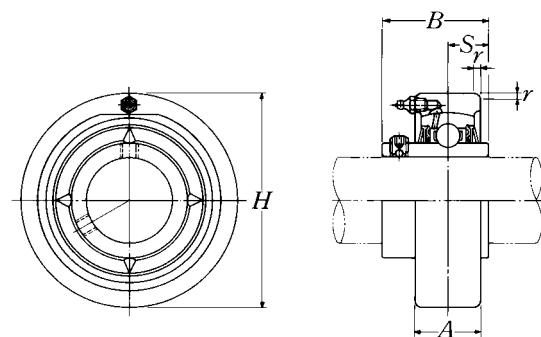

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions					Bearing number	Housing number	Mass of unit kg lb			
		mm		inch								
		H	A	r	B	S						
55 $2\frac{1}{16}$ $2\frac{1}{8}$ $2\frac{3}{16}$ $2\frac{1}{4}$ $2\frac{5}{16}$	UCCX11D1	150	42	3	65.1	25.4	UCX11D1	CX11D1	4.1			
	UCCX11-201D1	5.9055	$1\frac{21}{32}$	0.118	2.5630	1.000	UCX11-201D1	CX11D1				
	UCCX11-202D1						UCX11-202D1	CX11D1				
	UCCX11-203D1						UCX11-203D1	CX11D1	9.0			
	UCCX11-204D1						UC212-204D1	CX11D1				
	UCCX11-205D1						UC212-205D1	CX11D1				
60 $2\frac{3}{8}$ $2\frac{7}{16}$	UCCX12D1	160	44	3	65.1	25.4	UCX12D1	CX12D1	3.9			
	UCCX12-206D1	6.2992	$1\frac{47}{64}$	0.118	2.5630	1.000	UCX12-206D1	CX12D1				
	UCCX12-207D1						UCX12-207D1	CX12D1	8.6			


Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

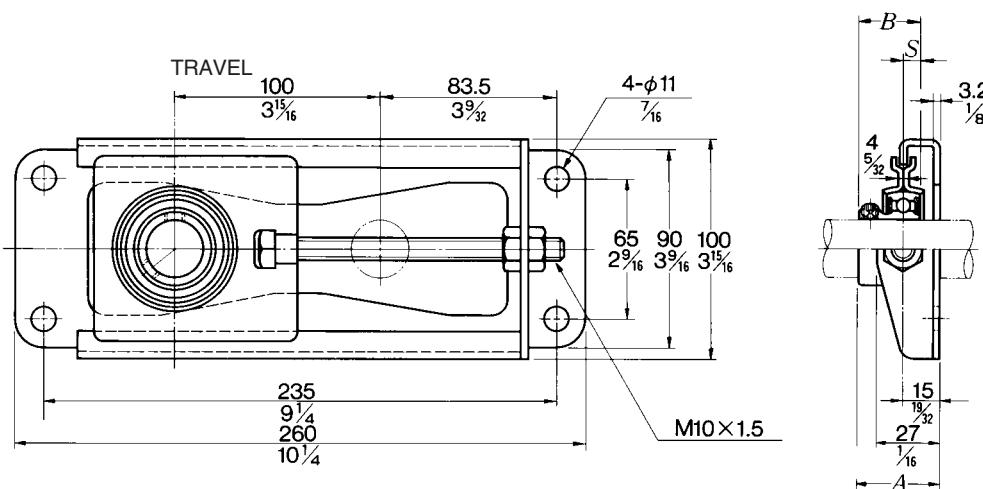

Shaft dia. mm inch	Unit number	Nominal dimensions			Bolt size mm inch	Max. load ¹⁾ recommended N lbf	Bearing number	Mass of unit kg lb
		A mm inch	B mm inch	S mm inch				
12 1/2	ASPT201-10	31 1 7/32	22 0.8661	6 0.236	M10 3/8	3 500 770	AS201 AS201-008	1.1 2.4
	ASPT201-008-10							
15 9/16 5/8	ASPT202-10	31 1 7/32	22 0.8661	6 0.236	M10 3/8	3 500 770	AS202 AS202-009 AS202-010	1.1 2.4
	ASPT202-009-10							
	ASPT202-010-10							
17 11/16	ASPT203-10	31 1 7/32	22 0.8661	6 0.236	M10 3/8	3 500 770	AS203 AS203-011	1.1 2.4
	ASPT203-011-10							
20 3/4	ASPT204-10	33 1 19/64	25 0.9843	7 0.276	M10 3/8	3 500 770	AS204 AS204-012	1.1 2.4
	ASPT204-012-10							
25 13/16 7/8 15/16 1	ASPT205-10	34.5 1 23/64	27 1.0630	7.5 0.295	M10 3/8	3 500 770	AS205 AS205-013 AS205-014 AS205-015 AS205-100	1.1 2.4
	ASPT205-013-10							
	ASPT205-014-10							
	ASPT205-015-10							
	ASPT205-100-10							

Remarks: 1) The Stretcher Unit is designed to only take a horizontal radial load, in line with the adjustment direction. Axial loads or vertical radical loads can deform or break the housing.

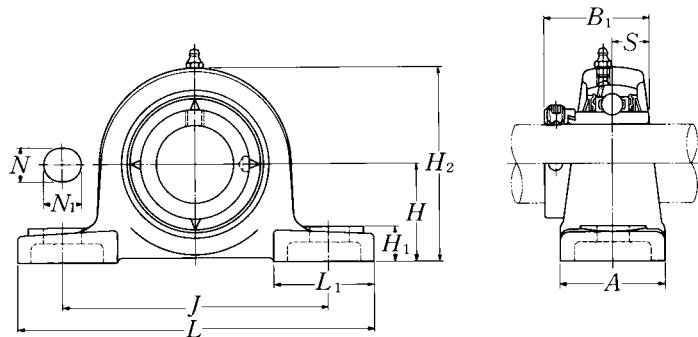


Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions											Bolt size mm inch
		H	L	J	A	N	N ₁	H ₁	H ₂	L ₁	B ₁	S	
20 $\frac{3}{4}$	UELPI204D1W3 UELPI204-012D1W3	33.3 $1\frac{5}{16}$	127 5	95 $3\frac{3}{4}$	38 $1\frac{1}{2}$	13 $\frac{1}{2}$	16 $\frac{5}{8}$	14 $\frac{9}{16}$	65 $2\frac{9}{16}$	42 $1\frac{21}{32}$	43.7 1.720	17.1 0.673	M10 $\frac{3}{8}$
25 $\frac{13}{16}$ $\frac{7}{8}$ $\frac{15}{16}$ 1	UELPI205D1W3 UELPI205-013D1W3 UELPI205-014D1W3 UELPI205-015D1W3 UELPI205-100D1W3	36.5 $1\frac{7}{16}$	140 $5\frac{1}{2}$	105 $4\frac{1}{8}$	38 $1\frac{1}{2}$	13 $\frac{1}{2}$	16 $\frac{5}{8}$	15 $\frac{19}{32}$	71 $2\frac{25}{32}$	42 $1\frac{21}{32}$	44.4 1.748	17.45 0.687	M10 $\frac{3}{8}$
30 $1\frac{1}{16}$ $1\frac{1}{8}$ $1\frac{3}{16}$ $1\frac{1}{4}$	UELPI206D1W3 UELPI206-101D1W3 UELPI206-102D1W3 UELPI206-103D1W3 UELPI206-104D1W3	42.9 $1\frac{11}{16}$	165 $6\frac{1}{2}$	121 $4\frac{3}{4}$	48 $1\frac{7}{8}$	17 $2\frac{1}{32}$	20 $2\frac{25}{32}$	17 $2\frac{1}{32}$	83 $3\frac{9}{32}$	54 $2\frac{1}{8}$	48.4 1.906	18.25 0.719	M14 $\frac{1}{2}$
35 $1\frac{1}{4}$ $1\frac{5}{16}$ $1\frac{3}{8}$ $1\frac{7}{16}$	UELPI207D1W3 UELPI207-104D1W3 UELPI207-105D1W3 UELPI207-106D1W3 UELPI207-107D1W3	47.6 $1\frac{7}{8}$	167 $6\frac{9}{16}$	127 5	48 $1\frac{7}{8}$	17 $2\frac{1}{32}$	20 $2\frac{25}{32}$	18 $2\frac{23}{32}$	93 $3\frac{21}{32}$	54 $2\frac{1}{8}$	51.1 2.012	18.8 0.740	M14 $\frac{1}{2}$
40 $1\frac{1}{2}$ $1\frac{9}{16}$	UELPI208D1W3 UELPI208-108D1W3 UELPI208-109D1W3	49.2 $1\frac{15}{16}$	184 $7\frac{1}{4}$	137 $5\frac{13}{32}$	54 $2\frac{1}{8}$	17 $2\frac{21}{32}$	20 $2\frac{25}{32}$	18 $2\frac{23}{32}$	98 $3\frac{27}{32}$	52 $2\frac{1}{16}$	56.3 2.217	21.4 0.843	M14 $\frac{1}{2}$
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UELPI209D1W3 UELPI209-110D1W3 UELPI209-111D1W3 UELPI209-112D1W3	54 $2\frac{1}{8}$	190 $7\frac{15}{32}$	146 $5\frac{3}{4}$	54 $2\frac{1}{8}$	17 $2\frac{21}{32}$	20 $2\frac{25}{32}$	20 $2\frac{25}{32}$	106 $4\frac{3}{16}$	60 $2\frac{3}{8}$	56.3 2.217	21.4 0.843	M14 $\frac{1}{2}$
50 $1\frac{13}{16}$ $1\frac{7}{8}$ $1\frac{15}{16}$ 2	UELPI210D1W3 UELPI210-113D1W3 UELPI210-114D1W3 UELPI210-115D1W3 UELPI210-200D1W3	57.2 $2\frac{1}{4}$	206 $8\frac{1}{8}$	159 $6\frac{1}{4}$	60 $2\frac{3}{8}$	20 $2\frac{25}{32}$	23 $2\frac{29}{32}$	21 $1\frac{13}{16}$	114 $4\frac{1}{2}$	65 $2\frac{9}{16}$	62.7 2.469	24.6 0.969	M16 $\frac{5}{8}$

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

Bearing number	Housing ¹⁾ number	Mass of unit
		kg lb
UEL204D1W3	P204D1	0.8
UEL204-012D1W3	P204D1	1.8
UEL205D1W3	P205D1	0.9
UEL205-013D1W3	P205D1	
UEL205-014D1W3	P205D1	2.0
UEL205-015D1W3	P205D1	
UEL205-100D1W3	P205D1	
UEL206D1W3	P206D1	1.5
UEL206-101D1W3	P206D1	
UEL206-102D1W3	P206D1	3.3
UEL206-103D1W3	P206D1	
UEL206-104D1W3	P206D1	
UEL207D1W3	P207D1	1.8
UEL207-104D1W3	P207D1	
UEL207-105D1W3	P207D1	4.0
UEL207-106D1W3	P207D1	
UEL207-107D1W3	P207D1	
UEL208D1W3	P208D1	2.1
UEL208-108D1W3	P208D1	
UEL208-109D1W3	P208D1	4.6
UEL209D1W3	P209D1	2.3
UEL209-110D1W3	P209D1	
UEL209-111D1W3	P209D1	5.1
UEL209-112D1W3	P209D1	
UEL210D1W3	P210D1	2.9
UEL210-113D1W3	P210D1	
UEL210-114D1W3	P210D1	6.4
UEL210-115D1W3	P210D1	
UEL210-200D1W3	P210D1	

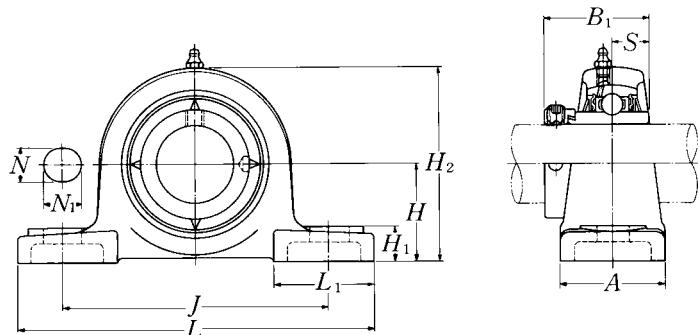


Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions											Bolt size mm inch
		H	L	J	A	N	N ₁	H ₁	H ₂	L ₁	B ₁	S	
55 2 $2\frac{1}{16}$ $2\frac{1}{8}$ $2\frac{3}{16}$	UEL P211D1W3	63.5	219	171	60	20	23	23	126	65	71.4	27.75	M16
	UEL P211-200D1W3	2 $\frac{1}{2}$	8 $\frac{5}{8}$	6 $\frac{23}{32}$	2 $\frac{3}{8}$	$\frac{25}{32}$	$\frac{29}{32}$	$\frac{29}{32}$	$4\frac{31}{32}$	$2\frac{9}{16}$	2.811	1.093	$\frac{5}{8}$
	UEL P211-201D1W3												
	UEL P211-202D1W3												
	UEL P211-203D1W3												
60 2 $\frac{1}{4}$ $2\frac{5}{16}$ $2\frac{3}{8}$ $2\frac{7}{16}$	UEL P212D1W3	69.8	241	184	70	20	23	25	138	70	77.8	30.95	M16
	UEL P212-204D1W3	2 $\frac{3}{4}$	9 $\frac{1}{2}$	7 $\frac{1}{4}$	2 $\frac{3}{4}$	$\frac{25}{32}$	$\frac{29}{32}$	$\frac{31}{32}$	$5\frac{7}{16}$	$2\frac{3}{4}$	3.063	1.219	$\frac{5}{8}$
	UEL P212-205D1W3												
	UEL P212-206D1W3												
	UEL P212-207D1W3												
65 2 $\frac{1}{2}$ $2\frac{9}{16}$	UEL P213D1W3	76.2	265	203	70	25	28	27	151	77	85.7	34.15	M20
	UEL P213-208D1W3	3	10 $\frac{7}{16}$	8	2 $\frac{3}{4}$	$\frac{31}{32}$	$1\frac{3}{32}$	$1\frac{1}{16}$	$5\frac{15}{16}$	$3\frac{1}{32}$	3.374	1.344	$\frac{3}{4}$
	UEL P213-209D1W3												
70 $2\frac{5}{8}$ $2\frac{11}{16}$ $2\frac{3}{4}$	UEL P214D1W3	79.4	266	210	72	25	28	27	157	77	85.7	34.15	M20
	UEL P214-210D1W3	3 $\frac{1}{8}$	10 $\frac{15}{32}$	8 $\frac{9}{32}$	2 $\frac{27}{32}$	$\frac{31}{32}$	$1\frac{3}{32}$	$1\frac{1}{16}$	$6\frac{3}{16}$	$3\frac{1}{32}$	3.374	1.344	$\frac{3}{4}$
	UEL P214-211D1W3												
	UEL P214-212D1W3												
75 $2\frac{13}{16}$ $2\frac{7}{8}$ $2\frac{15}{16}$ 3	UEL P215D1W3	82.6	275	217	74	25	28	28	163	80	92	37.3	M20
	UEL P215-213D1W3	3 $\frac{1}{4}$	10 $\frac{13}{16}$	8 $\frac{17}{32}$	2 $\frac{29}{32}$	$\frac{31}{32}$	$1\frac{3}{32}$	$1\frac{3}{32}$	$6\frac{13}{32}$	$3\frac{5}{32}$	3.622	1.469	$\frac{3}{4}$
	UEL P215-214D1W3												
	UEL P215-215D1W3												
	UEL P215-300D1W3												

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.


Bearing number	Housing ¹⁾ number	Mass of unit
		kg lb
UEL211D1W3	P211D1	3.7
UEL211-200D1W3	P211D1	
UEL211-201D1W3	P211D1	8.2
UEL211-202D1W3	P211D1	
UEL211-203D1W3	P211D1	
UEL212D1W3	P212D1	5.0
UEL212-204D1W3	P212D1	
UEL212-205D1W3	P212D1	11
UEL212-206D1W3	P212D1	
UEL212-207D1W3	P212D1	
UEL213D1W3	P213D1	6.2
UEL213-208D1W3	P213D1	14
UEL213-209D1W3	P213D1	
UEL214D1W3	P214D1	6.9
UEL214-210D1W3	P214D1	
UEL214-211D1W3	P214D1	15
UEL214-212D1W3	P214D1	
UEL215D1W3	P215D1	7.6
UEL215-213D1W3	P215D1	
UEL215-214D1W3	P215D1	17
UEL215-215D1W3	P215D1	
UEL215-300D1W3	P215D1	

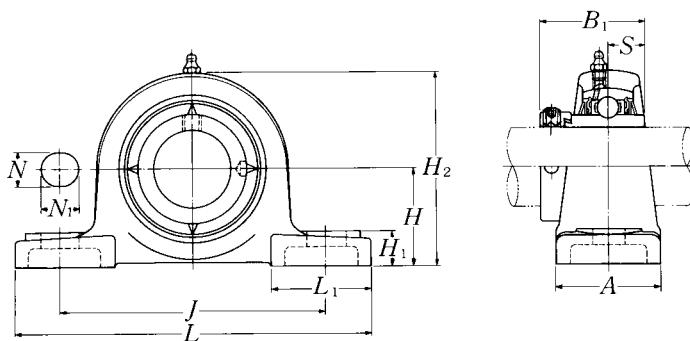

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions											Bolt size mm inch
		H	L	J	A	N	N ₁	H ₁	H ₂	L ₁	B ₁	S	
25 $\frac{13}{16}$ $\frac{7}{8}$ $\frac{15}{16}$ 1	UEL P305D1W3 UEL P305-013D1W3 UEL P305-014D1W3 UEL P305-015D1W3 UEL P305-100D1W3	45 $1\frac{49}{64}$	175 $6\frac{7}{8}$	132 $5\frac{3}{16}$	45 $1\frac{25}{32}$	17 $2\frac{1}{32}$	20 $2\frac{25}{32}$	15 $1\frac{19}{32}$	85 $3\frac{11}{32}$	54 $2\frac{1}{8}$	46.8 1.843	16.7 0.657	M14 $\frac{1}{2}$
30 $1\frac{1}{16}$ $1\frac{1}{8}$ $1\frac{3}{16}$	UEL P306D1W3 UEL P306-101D1W3 UEL P306-102D1W3 UEL P306-103D1W3	50 $1\frac{31}{32}$	180 $7\frac{3}{32}$	140 $5\frac{1}{2}$	50 $1\frac{31}{32}$	17 $2\frac{1}{32}$	20 $2\frac{25}{32}$	18 $2\frac{23}{32}$	95 $3\frac{3}{4}$	54 $2\frac{1}{8}$	50 1.969	17.5 0.689	M14 $\frac{1}{2}$
35 $1\frac{1}{4}$ $1\frac{5}{16}$ $1\frac{3}{8}$ $1\frac{7}{16}$	UEL P307D1W3 UEL P307-104D1W3 UEL P307-105D1W3 UEL P307-106D1W3 UEL P307-107D1W3	56 $2\frac{13}{64}$	210 $8\frac{9}{32}$	160 $6\frac{5}{16}$	56 $2\frac{7}{32}$	17 $2\frac{1}{32}$	25 $3\frac{1}{32}$	20 $2\frac{25}{32}$	106 $4\frac{3}{16}$	60 $2\frac{3}{8}$	51.6 2.031	18.3 0.720	M14 $\frac{1}{2}$
40 $1\frac{1}{2}$ $1\frac{9}{16}$	UEL P308D1W3 UEL P308-108D1W3 UEL P308-109D1W3	60 $2\frac{23}{64}$	220 $8\frac{21}{32}$	170 $6\frac{11}{16}$	60 $2\frac{3}{8}$	17 $2\frac{1}{32}$	27 $1\frac{1}{16}$	22 $\frac{7}{8}$	116 $4\frac{9}{16}$	60 $2\frac{3}{8}$	57.1 2.248	19.8 0.780	M14 $\frac{1}{2}$
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UEL P309D1W3 UEL P309-110D1W3 UEL P309-111D1W3 UEL P309-112D1W3	67 $2\frac{41}{64}$	245 $9\frac{21}{32}$	190 $7\frac{15}{32}$	67 $2\frac{5}{8}$	20 $2\frac{25}{32}$	30 $1\frac{3}{16}$	24 $\frac{15}{16}$	129 $5\frac{3}{32}$	65 $2\frac{9}{16}$	58.7 2.311	19.8 0.780	M16 $\frac{5}{8}$
50 $1\frac{13}{16}$ $1\frac{7}{8}$ $1\frac{15}{16}$	UEL P310D1W3 UEL P310-113D1W3 UEL P310-114D1W3 UEL P310-115D1W3	75 $2\frac{61}{64}$	275 $10\frac{13}{16}$	212 $8\frac{11}{32}$	75 $2\frac{15}{16}$	20 $2\frac{25}{32}$	35 $1\frac{3}{8}$	27 $1\frac{1}{16}$	143 $5\frac{5}{8}$	75 $2\frac{15}{16}$	66.6 2.622	24.6 0.969	M16 $\frac{5}{8}$
55 2 $2\frac{1}{16}$ $2\frac{1}{8}$ $2\frac{3}{16}$	UEL P311D1W3 UEL P311-200D1W3 UEL P311-201D1W3 UEL P311-202D1W3 UEL P311-203D1W3	80 $3\frac{5}{32}$	310 $12\frac{7}{32}$	236 $9\frac{9}{32}$	80 $3\frac{5}{32}$	20 $2\frac{25}{32}$	38 $1\frac{1}{2}$	30 $1\frac{3}{16}$	154 $6\frac{1}{16}$	85 $3\frac{11}{32}$	73 2.874	27.8 1.094	M16 $\frac{5}{8}$

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".
Note: Please refer to page 36 for size of grease fitting.

Bearing number	Housing ¹⁾ number	Mass of unit
		kg lb
UEL305D1W3	P305D1	1.5
UEL305-013D1W3	P305D1	
UEL305-014D1W3	P305D1	3.3
UEL305-015D1W3	P305D1	
UEL305-100D1W3	P305D1	
UEL306D1W3	P306D1	1.9
UEL306-101D1W3	P306D1	
UEL306-102D1W3	P306D1	4.2
UEL306-103D1W3	P306D1	
UEL307D1W3	P307D1	2.6
UEL307-104D1W3	P307D1	
UEL307-105D1W3	P307D1	5.7
UEL307-106D1W3	P307D1	
UEL307-107D1W3	P307D1	
UEL308D1W3	P308D1	3.2
UEL308-108D1W3	P308D1	
UEL308-109D1W3	P308D1	7.1
UEL309D1W3	P309D1	4.2
UEL309-110D1W3	P309D1	
UEL309-111D1W3	P309D1	9.3
UEL309-112D1W3	P309D1	
UEL310D1W3	P310D1	5.8
UEL310-113D1W3	P310D1	
UEL310-114D1W3	P310D1	13
UEL310-115D1W3	P310D1	
UEL311D1W3	P311D1	7.6
UEL311-200D1W3	P311D1	
UEL311-201D1W3	P311D1	17
UEL311-202D1W3	P311D1	
UEL311-203D1W3	P311D1	

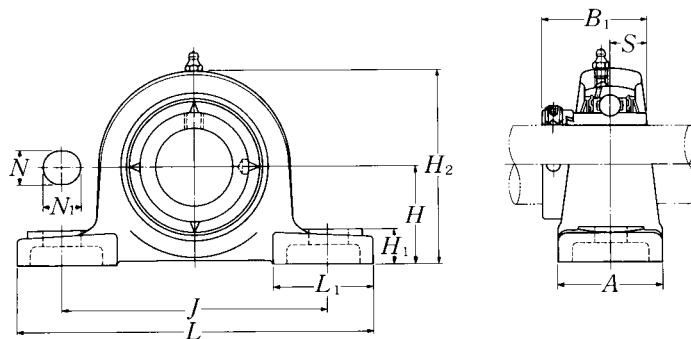


Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions											Bolt size mm inch	
		mm					inch							
		H	L	J	A	N	N ₁	H ₁	H ₂	L ₁	B ₁	S		
60 $2\frac{1}{4}$ $2\frac{5}{16}$ $2\frac{3}{8}$ $2\frac{7}{16}$	UEL312D1W3	85	330	250	85	25	38	32	165	95	79.4	30.95	M20	
	UEL312-204D1W3	$3\frac{11}{32}$	13	$9\frac{27}{32}$	$3\frac{11}{32}$	$3\frac{1}{32}$	$1\frac{1}{2}$	$1\frac{1}{4}$	$6\frac{1}{2}$	$3\frac{3}{4}$	3.126	1.219	$\frac{3}{4}$	
	UEL312-205D1W3													
	UEL312-206D1W3													
	UEL312-207D1W3													
65 $2\frac{1}{2}$ $2\frac{9}{16}$	UEL313D1W3	90	340	260	90	25	38	33	176	105	85.7	32.55	M20	
	UEL313-208D1W3	$3\frac{35}{64}$	$13\frac{3}{8}$	$10\frac{1}{4}$	$3\frac{17}{32}$	$3\frac{1}{32}$	$1\frac{1}{2}$	$1\frac{5}{16}$	$6\frac{15}{16}$	$4\frac{1}{8}$	3.374	1.281	$\frac{3}{4}$	
	UEL313-209D1W3													
70 $2\frac{5}{8}$ $2\frac{11}{16}$ $2\frac{3}{4}$	UEL314D1W3	95	360	280	90	27	40	35	187	105	92.1	34.15	M22	
	UEL314-210D1W3	$3\frac{47}{64}$	$14\frac{3}{16}$	$11\frac{1}{32}$	$3\frac{17}{32}$	$1\frac{1}{16}$	$1\frac{9}{16}$	$1\frac{3}{8}$	$7\frac{3}{8}$	$4\frac{1}{8}$	3.626	1.344	$\frac{7}{8}$	
	UEL314-211D1W3													
	UEL314-212D1W3													
75 $2\frac{13}{16}$ $2\frac{7}{8}$ $2\frac{15}{16}$ 3	UEL315D1W3	100	380	290	100	27	40	35	198	110	100	37.3	M22	
	UEL315-213D1W3	$3\frac{15}{16}$	$14\frac{31}{32}$	$11\frac{13}{32}$	$3\frac{15}{16}$	$1\frac{1}{16}$	$1\frac{9}{16}$	$1\frac{3}{8}$	$7\frac{25}{32}$	$4\frac{11}{32}$	3.937	1.469	$\frac{7}{8}$	
	UEL315-214D1W3													
	UEL315-215D1W3													
	UEL315-300D1W3													
80 $3\frac{1}{16}$ $3\frac{1}{8}$ $3\frac{3}{16}$	UEL316D1W3	106	400	300	110	27	40	40	210	110	106.4	40.5	M22	
	UEL316-301D1W3	$4\frac{11}{64}$	$15\frac{3}{4}$	$11\frac{13}{16}$	$4\frac{11}{32}$	$1\frac{1}{16}$	$1\frac{9}{16}$	$1\frac{9}{16}$	$8\frac{9}{32}$	$4\frac{11}{32}$	4.189	1.594	$\frac{7}{8}$	
	UEL316-302D1W3													
	UEL316-303D1W3													
85 $3\frac{1}{4}$ $3\frac{5}{16}$ $3\frac{7}{16}$	UEL317D1W3	112	420	320	110	33	45	40	220	120	109.5	42.05	M27	
	UEL317-304D1W3	$4\frac{13}{32}$	$16\frac{17}{32}$	$12\frac{19}{32}$	$4\frac{11}{32}$	$1\frac{5}{16}$	$1\frac{25}{32}$	$1\frac{9}{16}$	$8\frac{21}{32}$	$4\frac{23}{32}$	4.311	1.656	1	
	UEL317-305D1W3													
	UEL317-307D1W3													
90 $3\frac{7}{16}$ $3\frac{1}{2}$	UEL318D1W3	118	430	330	110	33	45	45	235	120	115.9	43.65	M27	
	UEL318-307D1W3	$4\frac{41}{64}$	$16\frac{15}{16}$	13	$4\frac{11}{32}$	$1\frac{5}{16}$	$1\frac{25}{32}$	$1\frac{25}{32}$	$9\frac{1}{4}$	$4\frac{23}{32}$	4.563	1.719	1	
	UEL318-308D1W3													

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

Bearing number	Housing ¹⁾ number	Mass of unit
		kg lb
UEL312D1W3	P312D1	9.7
UEL312-204D1W3	P312D1	
UEL312-205D1W3	P312D1	21
UEL312-206D1W3	P312D1	
UEL312-207D1W3	P312D1	
UEL313D1W3	P313D1	11
UEL313-208D1W3	P313D1	24
UEL313-209D1W3	P313D1	
UEL314D1W3	P314D1	12
UEL314-210D1W3	P314D1	
UEL314-211D1W3	P314D1	26
UEL314-212D1W3	P314D1	
UEL315D1W3	P315D1	15
UEL315-213D1W3	P315D1	
UEL315-214D1W3	P315D1	33
UEL315-215D1W3	P315D1	
UEL315-300D1W3	P315D1	
UEL316D1W3	P316D1	18
UEL316-301D1W3	P316D1	
UEL316-302D1W3	P316D1	40
UEL316-303D1W3	P316D1	
UEL317D1W3	P317D1	21
UEL317-304D1W3	P317D1	
UEL317-305D1W3	P317D1	46
UEL317-307D1W3	P317D1	
UEL318D1W3	P318D1	23
UEL318-307D1W3	P318D1	
UEL318-308D1W3	P318D1	51

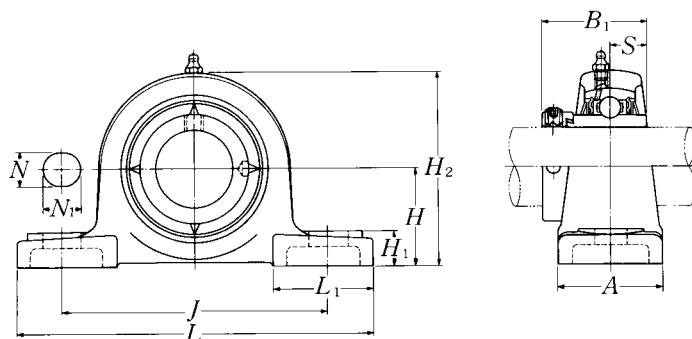


Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions											Bolt size mm inch
		H	L	J	A	N	N ₁	H ₁	H ₂	L ₁	B ₁	S	
95 3 ⁵ / ₈	UEL P319D1W3	125	470	360	120	36	50	45	250	125	122.3	38.9	M30
3 ¹¹ / ₁₆	UEL P319-310D1W3	4 ⁵⁹ / ₆₄	18 ¹ / ₂	14 ³ / ₁₆	4 ²³ / ₃₂	1 ¹³ / ₃₂	1 ³¹ / ₃₂	1 ²⁵ / ₃₂	9 ²⁷ / ₃₂	4 ²⁹ / ₃₂	4.815	1.531	1 ¹ / ₈
3 ³ / ₄	UEL P319-311D1W3												
	UEL P319-312D1W3												
100 3 ¹³ / ₁₆	UEL P320D1W3	140	490	380	120	36	50	50	275	130	128.6	50	M30
3 ⁷ / ₈	UEL P320-313D1W3	5 ³³ / ₆₄	19 ⁹ / ₃₂	14 ³¹ / ₃₂	4 ²³ / ₃₂	1 ¹³ / ₃₂	1 ³¹ / ₃₂	1 ³¹ / ₃₂	10 ¹³ / ₁₆	5 ¹ / ₈	5.063	1.969	1 ¹ / ₈
3 ¹⁵ / ₁₆	UEL P320-314D1W3												
4	UEL P320-315D1W3												
	UEL P320-400D1W3												
105	UEL P321D1W3	140	490	380	120	36	50	50	280	130	139.7	48.4	M30
110	UEL P322D1W3	150	520	400	140	40	55	55	300	135	141.3	49.2	M33

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

Bearing number	Housing ¹⁾ number	Mass of unit
		kg lb
UEL319D1W3	P319D1	28
UEL319-310D1W3	P319D1	
UEL319-311D1W3	P319D1	66
UEL319-312D1W3	P319D1	
UEL320D1W3	P320D1	35
UEL320-313D1W3	P320D1	
UEL320-314D1W3	P320D1	82
UEL320-315D1W3	P320D1	
UEL320-400D1W3	P320D1	
UEL321D1W3	P321D1	37
UEL322D1W3	P322D1	46

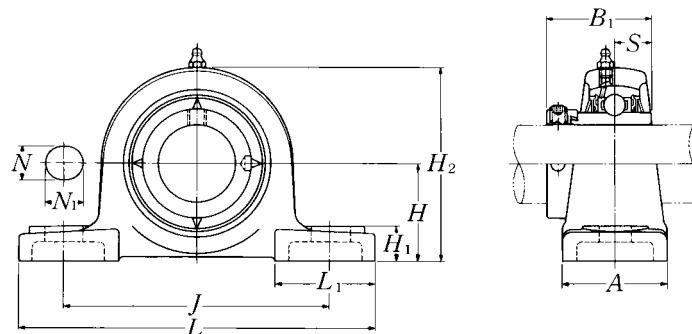

Shaft dia. mm inch	Unit number 1)2)3)	Nominal dimensions											Bolt size mm inch	
		mm						inch						
		H	L	J	A	N	N ₁	H ₁	H ₂	L ₁	B ₁	S		
20 $\frac{3}{4}$	UELPL204D1W3 UELPL204-012D1W3	31.75 $1\frac{1}{4}$	127 5	95 $3\frac{3}{4}$	38 $1\frac{1}{2}$	13 $\frac{1}{2}$	16 $\frac{5}{8}$	14 $\frac{9}{16}$	64 $2\frac{17}{32}$	42 $1\frac{21}{32}$	43.7 1.720	17.1 0.673	M10 $\frac{3}{8}$	
$25\frac{13}{16}$ $\frac{7}{8}$ $15\frac{15}{16}$ 1	UELPL205D1W3 UELPL205-013D1W3	33.34	140	105	38	13	16	15	68	42	44.4	17.45	M10	
	UELPL205-014D1W3 UELPL205-015D1W3 UELPL205-100D1W3	$1\frac{5}{16}$	$5\frac{1}{2}$	$4\frac{1}{8}$	$1\frac{1}{2}$	$\frac{1}{2}$	$\frac{5}{8}$	$\frac{19}{32}$	$2\frac{11}{16}$	$1\frac{21}{32}$	1.748	0.687	$\frac{3}{8}$	
	UELPL206D1W3 UELPL206-101D1W3 UELPL206-102D1W3 UELPL206-103D1W3 UELPL206-104D1W3	39.69	165	121	48	17	20	17	80	54	48.4	18.25	M14	
		$1\frac{9}{16}$	$6\frac{1}{2}$	$4\frac{3}{4}$	$1\frac{7}{8}$	$2\frac{1}{32}$	$2\frac{5}{32}$	$2\frac{1}{32}$	$3\frac{5}{32}$	$2\frac{1}{8}$	1.906	0.719	$\frac{1}{2}$	
	UELPL207D1W3 UELPL207-104D1W3 UELPL207-105D1W3 UELPL207-106D1W3 UELPL207-107D1W3	46.04	167	127	48	17	20	18	91	54	51.1	18.8	M14	
$45\frac{15}{16}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UELPL209D1W3 UELPL209-110D1W3 UELPL209-111D1W3 UELPL209-112D1W3	52.39	190	146	54	17	20	20	104	60	56.3	21.4	M14	
		$2\frac{1}{16}$	$7\frac{15}{32}$	$5\frac{3}{4}$	$2\frac{1}{8}$	$2\frac{1}{32}$	$2\frac{5}{32}$	$2\frac{5}{32}$	$4\frac{3}{32}$	$2\frac{3}{8}$	2.217	0.843	$\frac{1}{2}$	
	UELPL210D1W3 UELPL210-113D1W3 UELPL210-114D1W3 UELPL210-115D1W3 UELPL210-200D1W3	55.56	206	159	60	20	23	21	112	65	62.7	24.6	M16	
		$2\frac{3}{16}$	$8\frac{1}{8}$	$6\frac{1}{4}$	$2\frac{3}{8}$	$2\frac{5}{32}$	$2\frac{9}{32}$	$1\frac{3}{16}$	$4\frac{13}{32}$	$2\frac{9}{16}$	2.469	0.969	$\frac{5}{8}$	


Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1"

2) UELPL204 and UELPL205 has solid bases.

3) UELPL208 has the same dimension as UELP208 shown in page 230

Note: Please refer to page 36 for size of grease fitting.

Bearing number	Housing ¹⁾ number	Mass of unit
		kg lb
UEL204D1W3	PL204D1	0.8
UEL204-012D1W3	PL204D1	1.8
UEL205D1W3	PL205D1	0.9
UEL205-013D1W3	PL205D1	
UEL205-014D1W3	PL205D1	2.0
UEL205-015D1W3	PL205D1	
UEL205-100D1W3	PL205D1	
UEL206D1W3	PL206D1	1.4
UEL206-101D1W3	PL206D1	
UEL206-102D1W3	PL206D1	3.1
UEL206-103D1W3	PL206D1	
UEL206-104D1W3	PL206D1	
UEL207D1W3	PL207D1	1.7
UEL207-104D1W3	PL207D1	
UEL207-105D1W3	PL207D1	3.7
UEL207-106D1W3	PL207D1	
UEL207-107D1W3	PL207D1	
UEL209D1W3	PL209D1	2.3
UEL209-110D1W3	PL209D1	
UEL209-111D1W3	PL209D1	5.1
UEL209-112D1W3	PL209D1	
UEL210D1W3	PL210D1	3.0
UEL210-113D1W3	PL210D1	
UEL210-114D1W3	PL210D1	6.6
UEL210-115D1W3	PL210D1	
UEL210-200D1W3	PL210D1	

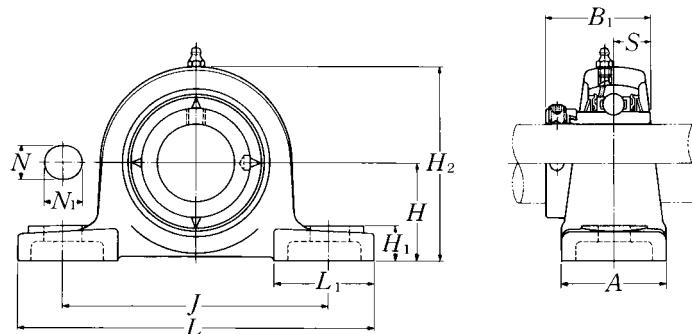


Shaft dia. mm inch	Unit number 1)2)3)	Nominal dimensions											Bolt size mm inch	
		H	L	J	A	mm	inch	N	N1	H1	H2	L1	B1	S
55 2 $2\frac{1}{16}$ $2\frac{1}{8}$ $2\frac{3}{16}$	UELPL211D1W3 UELPL211-200D1W3 UELPL211-201D1W3 UELPL211-202D1W3 UELPL211-203D1W3	61.91	219	171	60	20	23	23	23	124	65	71.4	27.75	M16
		$2\frac{7}{16}$	$8\frac{5}{8}$	$6\frac{23}{32}$	$2\frac{3}{8}$	$\frac{25}{32}$	$\frac{29}{32}$	$\frac{29}{32}$	$\frac{29}{32}$	$4\frac{7}{8}$	$2\frac{9}{16}$	2.811	1.093	$\frac{5}{8}$
60 $2\frac{1}{4}$ $2\frac{5}{16}$ $2\frac{3}{8}$ $2\frac{7}{16}$	UELPL212D1W3 UELPL212-204D1W3 UELPL212-205D1W3 UELPL212-206D1W3 UELPL212-207D1W3	68.26	241	184	70	20	23	25	25	136	70	77.8	30.95	M16
		$2\frac{11}{16}$	$9\frac{1}{2}$	$7\frac{1}{4}$	$2\frac{3}{4}$	$\frac{25}{32}$	$\frac{29}{32}$	$\frac{31}{32}$	$\frac{31}{32}$	$5\frac{11}{32}$	$2\frac{3}{4}$	3.063	1.219	$\frac{5}{8}$

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

Bearing number	Housing ¹⁾ number	Mass of unit
		kg lb
UEL211D1W3	PL211D1	3.7
UEL211-200D1W3	PL211D1	
UEL211-201D1W3	PL211D1	8.2
UEL211-202D1W3	PL211D1	
UEL211-203D1W3	PL211D1	
UEL212D1W3	PL212D1	5.0
UEL212-204D1W3	PL212D1	
UEL212-205D1W3	PL212D1	11
UEL212-206D1W3	PL212D1	
UEL212-207D1W3	PL212D1	

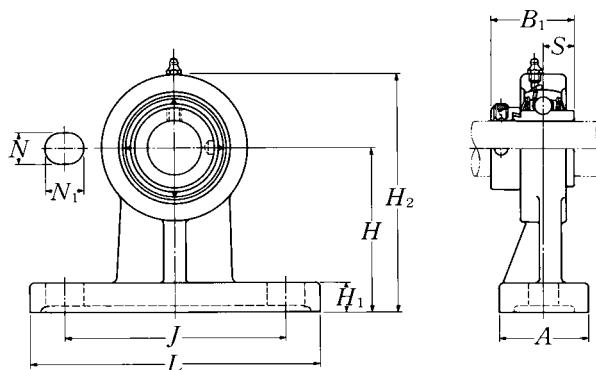


Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions										Bolt size mm inch	Bearing number
		H	L	J	A	N	N ₁	H ₁	H ₂	B ₁	S		
20 $\frac{3}{4}$	UELHP204D1W3 UELHP204-012D1W3	70 $2\frac{3}{4}$	127 5	95 $3\frac{3}{4}$	40 $1\frac{9}{16}$	13 $\frac{1}{2}$	19 $\frac{3}{4}$	13 $\frac{1}{2}$	101 $3\frac{31}{32}$	43.7 1.720	17.1 0.673	M10 $\frac{3}{8}$	UEL204D1W3 UEL204-012D1W3
25 $\frac{13}{16}$ $\frac{7}{8}$ $\frac{15}{16}$ 1	UELHP205D1W3 UELHP205-013D1W3 UELHP205-014D1W3 UELHP205-015D1W3 UELHP205-100D1W3	80 $3\frac{5}{32}$	142 $5\frac{19}{32}$	105 $4\frac{1}{8}$	50 $1\frac{31}{32}$	13 $\frac{1}{2}$	19 $\frac{3}{4}$	13 $\frac{1}{2}$	114 $4\frac{1}{2}$	44.4 1.748	17.45 0.687	M10 $\frac{3}{8}$	UEL205D1W3 UEL205-013D1W3 UEL205-014D1W3 UEL205-015D1W3 UEL205-100D1W3
30 $1\frac{1}{16}$ $1\frac{1}{8}$ $1\frac{3}{16}$ $1\frac{1}{4}$	UELHP206D1W3 UELHP206-101D1W3 UELHP206-102D1W3 UELHP206-103D1W3 UELHP206-104D1W3	90 $3\frac{35}{64}$	165 $6\frac{1}{2}$	120 $4\frac{23}{32}$	50 $1\frac{31}{32}$	17 $2\frac{1}{32}$	21 $1\frac{13}{16}$	16 $\frac{5}{8}$	130 $5\frac{1}{8}$	48.4 1.906	18.25 0.719	M14 $\frac{1}{2}$	UEL206D1W3 UEL206-101D1W3 UEL206-102D1W3 UEL206-103D1W3 UEL206-104D1W3
35 $1\frac{1}{4}$ $1\frac{5}{16}$ $1\frac{3}{8}$ $1\frac{7}{16}$	UELHP207D1W3 UELHP207-104D1W3 UELHP207-105D1W3 UELHP207-106D1W3 UELHP207-107D1W3	95 $3\frac{47}{64}$	166 $6\frac{17}{32}$	127 5	60 $2\frac{3}{8}$	17 $2\frac{1}{32}$	21 $1\frac{13}{16}$	18 $\frac{23}{32}$	140 $5\frac{1}{2}$	51.1 2.012	18.8 0.740	M14 $\frac{1}{2}$	UEL207D1W3 UEL207-104D1W3 UEL207-105D1W3 UEL207-106D1W3 UEL207-107D1W3
40 $1\frac{1}{2}$ $1\frac{9}{16}$	UELHP208D1W3 UELHP208-108D1W3 UELHP208-109D1W3	100 $3\frac{15}{16}$	184 $7\frac{1}{4}$	136 $5\frac{11}{32}$	70 $2\frac{3}{4}$	17 $2\frac{1}{32}$	21 $1\frac{13}{16}$	20 $\frac{25}{32}$	150 $5\frac{29}{32}$	56.3 2.217	21.4 0.843	M14 $\frac{1}{2}$	UEL208D1W3 UEL208-108D1W3 UEL208-109D1W3
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UELHP209D1W3 UELHP209-110D1W3 UELHP209-111D1W3 UELHP209-112D1W3	105 $4\frac{9}{64}$	190 $7\frac{15}{32}$	146 $5\frac{3}{4}$	70 $2\frac{3}{4}$	17 $2\frac{1}{32}$	22 $\frac{7}{8}$	20 $\frac{25}{32}$	158 $6\frac{7}{32}$	56.3 2.217	21.4 0.843	M14 $\frac{1}{2}$	UEL209D1W3 UEL209-110D1W3 UEL209-111D1W3 UEL209-112D1W3
50 $1\frac{13}{16}$ $1\frac{7}{8}$ $1\frac{15}{16}$ 2	UELHP210D1W3 UELHP210-113D1W3 UELHP210-114D1W3 UELHP210-115D1W3 UELHP210-200D1W3	110 $4\frac{21}{64}$	206 $8\frac{1}{8}$	159 $6\frac{1}{4}$	70 $2\frac{3}{4}$	20 $\frac{25}{32}$	22 $\frac{7}{8}$	22 $\frac{7}{8}$	165 $6\frac{1}{2}$	62.7 2.469	24.6 0.969	M16 $\frac{5}{8}$	UEL210D1W3 UEL210-113D1W3 UEL210-114D1W3 UEL210-115D1W3 UEL210-200D1W3

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

Housing number	Mass of unit
	kg lb
HP204D1	0.9
HP204D1	2.0
HP205D1	1.3
HP205D1	
HP205D1	2.9
HP205D1	
HP205D1	
HP206D1	1.9
HP206D1	
HP206D1	4.2
HP206D1	
HP206D1	
HP207D1	2.4
HP207D1	
HP207D1	5.3
HP207D1	
HP207D1	
HP208D1	3.3
HP208D1	
HP208D1	7.3
HP208D1	
HP209D1	3.7
HP209D1	
HP209D1	8.2
HP209D1	
HP210D1	4.1
HP210D1	
HP210D1	9.0
HP210D1	
HP210D1	

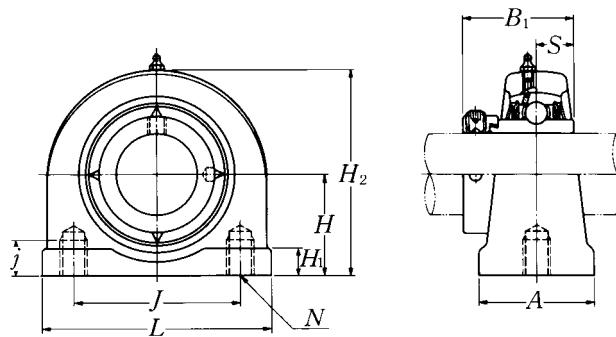**Narrow pillow blocks cast housing
Eccentric locking collar type**


Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions										Bearing number
		mm					inch					
		H	L	J	A	j	H ₁	H ₂	B ₁	S	N	
20 $\frac{3}{4}$	UELUP204D1W3 UELUP204-012D1W3	30.2 $1\frac{3}{16}$	76 3	52 $2\frac{1}{16}$	38 $1\frac{1}{2}$	13 $\frac{1}{2}$	11 $\frac{7}{16}$	62 $2\frac{7}{16}$	43.7 1.720	17.1 0.673	M10 × 1.5 M10 × 1.5	UEL204D1W3 UEL204-012D1W3
25 $\frac{13}{16}$ $\frac{7}{8}$ $\frac{15}{16}$ 1	UELUP205D1W3 UELUP205-013D1W3 UELUP205-014D1W3 UELUP205-015D1W3 UELUP205-100D1W3	36.5 $1\frac{7}{16}$	84 $3\frac{5}{16}$	56 $2\frac{7}{32}$	38 $1\frac{1}{2}$	15 $1\frac{9}{32}$	12 $1\frac{15}{32}$	72 $2\frac{27}{32}$	44.4 1.748	17.45 0.687	M10 × 1.5 M10 × 1.5	UEL205D1W3 UEL205-013D1W3 UEL205-014D1W3 UEL205-015D1W3 UEL205-100D1W3
30 $1\frac{1}{16}$ $1\frac{1}{8}$ $1\frac{3}{16}$ $1\frac{1}{4}$	UELUP206D1W3 UELUP206-101D1W3 UELUP206-102D1W3 UELUP206-103D1W3 UELUP206-104D1W3	42.9 $1\frac{11}{16}$	94 $3\frac{11}{16}$	66 $2\frac{19}{32}$	48 $1\frac{7}{8}$	18 $2\frac{3}{32}$	12 $1\frac{15}{32}$	84 $3\frac{5}{16}$	48.4 1.906	18.25 0.719	M14 × 2 M14 × 2	UEL206D1W3 UEL206-101D1W3 UEL206-102D1W3 UEL206-103D1W3 UEL206-104D1W3
35 $1\frac{1}{4}$ $1\frac{5}{16}$ $1\frac{3}{8}$ $1\frac{7}{16}$	UELUP207D1W3 UELUP207-104D1W3 UELUP207-105D1W3 UELUP207-106D1W3 UELUP207-107D1W3	47.6 $1\frac{7}{8}$	110 $4\frac{11}{32}$	80 $3\frac{5}{32}$	48 $1\frac{7}{8}$	20 $2\frac{5}{32}$	13 $\frac{1}{2}$	95 $3\frac{3}{4}$	51.1 2.012	18.8 0.740	M14 × 2 M14 × 2	UEL207D1W3 UEL207-104D1W3 UEL207-105D1W3 UEL207-106D1W3 UEL207-107D1W3
40 $1\frac{1}{2}$ $1\frac{9}{16}$	UELUP208D1W3 UELUP208-108D1W3 UELUP208-109D1W3	49.2 $1\frac{15}{16}$	116 $4\frac{9}{16}$	84 $3\frac{5}{16}$	54 $2\frac{1}{8}$	20 $2\frac{5}{32}$	13 $\frac{1}{2}$	100 $3\frac{15}{16}$	56.3 2.217	21.4 0.843	M14 × 2 M14 × 2	UEL208D1W3 UEL208-108D1W3 UEL208-109D1W3
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UELUP209D1W3 UELUP209-110D1W3 UELUP209-111D1W3 UELUP209-112D1W3	54.2 $2\frac{1}{8}$	120 $4\frac{23}{32}$	90 $3\frac{17}{32}$	54 $2\frac{1}{8}$	25 $3\frac{1}{32}$	13 $\frac{1}{2}$	108 $4\frac{1}{4}$	56.3 2.217	21.4 0.843	M14 × 2 M14 × 2	UEL209D1W3 UEL209-110D1W3 UEL209-111D1W3 UEL209-112D1W3
50 $1\frac{13}{16}$ $1\frac{7}{8}$ $1\frac{15}{16}$ 2	UELUP210D1W3 UELUP210-113D1W3 UELUP210-114D1W3 UELUP210-115D1W3 UELUP210-200D1W3	57.2 $2\frac{1}{4}$	130 $5\frac{1}{8}$	94 $3\frac{11}{16}$	60 $2\frac{3}{8}$	25 $3\frac{1}{32}$	14 $\frac{1}{16}$	116 $4\frac{9}{16}$	62.7 2.469	24.6 0.969	M16 × 2 M16 × 2	UEL210D1W3 UEL210-113D1W3 UEL210-114D1W3 UEL210-115D1W3 UEL210-200D1W3

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".


Note: Please refer to page 36 for size of grease fitting.

Housing number	Mass of unit
	kg lb
UP204D1	0.6
UP204D1	1.3
UP205D1	0.8
UP205D1	
UP205D1	1.8
UP205D1	
UP205D1	
UP206D1	1.3
UP206D1	
UP206D1	2.9
UP206D1	
UP206D1	
UP207D1	1.7
UP207D1	
UP207D1	3.8
UP207D1	
UP207D1	
UP208D1	2.0
UP208D1	4.4
UP208D1	
UP209D1	2.3
UP209D1	
UP209D1	5.1
UP209D1	
UP210D1	2.8
UP210D1	
UP210D1	6.2
UP210D1	
UP210D1	

sale@technobearing.ru

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

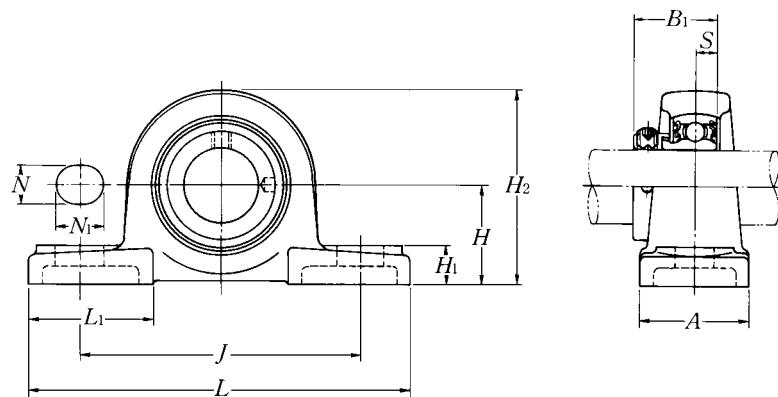Pillow blocks cast housing low center height**Eccentric locking collar type**


Shaft dia. mm inch	Unit number 1) 2) 3)	Nominal dimensions											Bolt size mm inch
		H	L	J	A	N	N ₁	H ₁	H ₂	L ₁	B ₁	S	
12 1/2	AELPL201W3 AELPL201-008W3	26.99 1 1/16	121 4 3/4	89 3 1/2	35 1 3/8	11 7/16	14 9/16	13 1/2	54 2 1/8	40 1 9/16	28.6 1.126	6.5 0.256	M10 3/8
15 9/16 5/8	AELPL202W3 AELPL202-009W3 AELPL202-010W3	26.99 1 1/16	121 4 3/4	89 3 1/2	35 1 3/8	11 7/16	14 9/16	13 1/2	54 2 1/8	40 1 9/16	28.6 1.126	6.5 0.256	M10 3/8
17 11/16	AELPL203W3 AELPL203-011W3	26.99 1 1/16	121 4 3/4	89 3 1/2	35 1 3/8	11 7/16	14 9/16	13 1/2	54 2 1/8	40 1 9/16	28.6 1.126	6.5 0.256	M10 3/8
20 3/4	AELPL204W3 AELPL204-012W3	31.75 1 1/4	127 5	95 3 3/4	38 1 1/2	13 1/2	16 5/8	14 9/16	64 2 17/32	42 1 21/32	31 12 1/32	7.5 1.220	M10 3/8
25 13/16 7/8 15/16 1	AELPL205W3 AELPL205-013W3 AELPL205-014W3 AELPL205-015W3 AELPL205-100W3	33.34 1 5/16	140 5 1/2	105 4 1/8	38 1 1/2	13 1/2	16 5/8	15 19/32	68 2 11/16	42 1 21/32	31 1.220	7.5 0.295	M10 3/8
30 1 1/16 1 1/8 1 3/16 1 1/4	AELPL206W3 AELPL206-101W3 AELPL206-102W3 AELPL206-103W3 AELPL206-104W3	39.69 1 9/16	165 6 1/2	121 4 3/4	48 1 7/8	17 2 1/32	20 25/32	17 21/32	80 3 5/32	54 2 1/8	35.7 1.406	9 0.354	M14 1/2
35 1 1/4 1 5/16 1 3/8 1 7/16	AELPL207W3 AELPL207-104W3 AELPL207-105W3 AELPL207-106W3 AELPL207-107W3	46.04 1 13/16	167 6 9/16	127 5	48 1 7/8	17 2 1/32	20 25/32	18 23/32	91 3 19/32	54 2 1/8	38.9 1.531	9.5 0.374	M14 1/2
40 1 1/2 1 9/16	AELP208W3 AELP208-108W3 AELP208-109W3	49.2 1 15/16	184 7 1/4	137 5 13/32	54 2 1/8	17 2 1/32	20 25/32	18 23/32	98 3 27/32	52 2 1/16	43.7 1.720	11 0.433	M14 1/2

Remarks: 1) AELPL201 to AELPL205 has solid base.

2) If relubricatable type is needed, please order with suffix "D1".

3) AELPL208 has the same dimension as AELP208.

Bearing number ²⁾	Housing ²⁾ number	Mass of unit kg lb
AEL201W3	PL201	0.5
AEL201-008W3	PL201	1.1
AEL202W3	PL201	0.5
AEL202-009W3	PL201	
AEL202-010W3	PL201	
AEL203W3	PL201	0.5
AEL203-011W3	PL201	1.1
AEL204W3	PL204	0.7
AEL204-012W3	PL204	1.5
AEL205W3	PL205	0.8
AEL205-013W3	PL205	
AEL205-014W3	PL205	
AEL205-015W3	PL205	
AEL205-100W3	PL205	
AEL206W3	PL206	1.3
AEL206-101W3	PL206	
AEL206-102W3	PL206	
AEL206-103W3	PL206	
AEL206-104W3	PL206	
AEL207W3	PL207	1.6
AEL207-104W3	PL207	
AEL207-105W3	PL207	
AEL207-106W3	PL207	
AEL207-107W3	PL207	
AEL208W3	P208	2.0
AEL208-108W3	P208	
AEL208-109W3	P208	

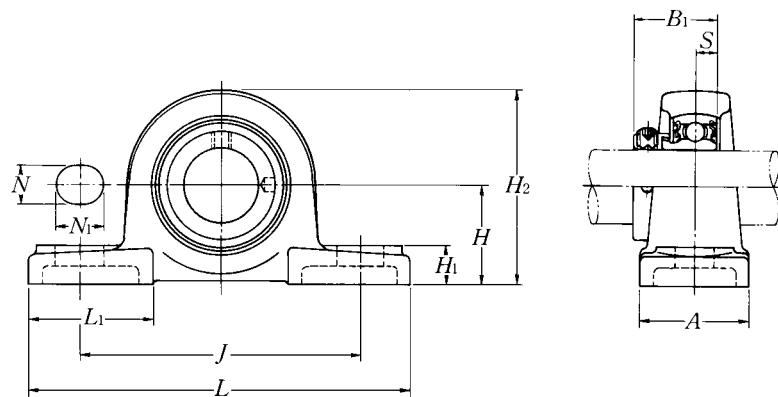

Shaft dia. mm inch	Unit number 1) 2) 3)	Nominal dimensions											Bolt size mm inch	
		H	L	J	A	mm	inch	N	N ₁	H ₁	H ₂	L ₁	B ₁	S
45 1 5/8 1 11/16 1 3/4	AELPL209W3 AELPL209-110W3 AELPL209-111W3 AELPL209-112W3	52.39 2 1/16	190 7 15/32	146 5 3/4	54 2 1/8	17 2 1/32	20 25/32	20 25/32	20 25/32	104 4 3/8	60 2 3/8	43.7 1.720	11 0.433	M14 1/2
50 1 13/16 1 7/8 1 15/16 2	AELPL210W3 AELPL210-113W3 AELPL210-114W3 AELPL210-115W3 AELPL210-200W3	55.56 2 3/16	206 8 1/8	159 6 1/4	60 2 3/8	20 25/32	23 29/32	21 13/16	112 4 13/32	65 2 9/16	43.7 1.720	11 0.433	M16 5/8	
55 2 2 1/16 2 1/8 2 3/16	AELPL211W3 AELPL211-200W3 AELPL211-201W3 AELPL211-202W3 AELPL211-203W3	61.91 2 7/16	219 8 5/8	171 6 23/32	60 2 3/8	20 25/32	23 29/32	23 29/32	124 4 7/8	65 2 9/16	48.4 1.906	12 0.472	M16 5/8	
60 2 1/4 2 5/16 2 3/8 2 7/16	AELPL212W3 AELPL212-204W3 AELPL212-205W3 AELPL212-206W3 AELPL212-207W3	68.26 2 11/16	241 9 1/2	184 7 1/4	70 2 3/4	20 25/32	23 29/32	25 31/32	136 5 11/32	70 2 3/4	53.1 2.091	13.5 0.531	M16 5/8	

Remarks: 1) AELPL201 to AELPL205 has solid base.

2) If relubricatable type is needed, please order with suffix "D1".



3) AELPL208 has the same dimension as AELP208

Bearing number ²⁾	Housing ²⁾ number	Mass of unit kg lb
AEL209W3	PL209	2.2
AEL209-110W3	PL209	
AEL209-111W3	PL209	4.9
AEL209-112W3	PL209	
AEL210W3	PL210	2.7
AEL210-113W3	PL210	
AEL210-114W3	PL210	6.0
AEL210-115W3	PL210	
AEL210-200W3	PL210	
AEL211W3	PL211	3.3
AEL211-200W3	PL211	
AEL211-201W3	PL211	7.3
AEL211-202W3	PL211	
AEL211-203W3	PL211	
AEL212W3	PL212	4.5
AEL212-204W3	PL212	
AEL212-205W3	PL212	9.9
AEL212-206W3	PL212	
AEL212-207W3	PL212	

sale@technobearing.ru

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

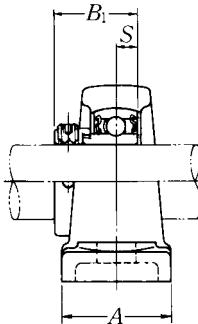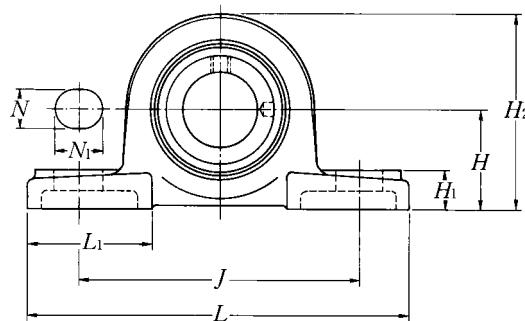Pillow blocks cast housing low center height**Eccentric locking collar type**



Shaft dia. mm inch	Unit number 1) 2) 3) JELPL201W3 JELPL201-008W3	Nominal dimensions											Bolt size mm inch	
		mm						inch						
		H	L	J	A	N	Ni	H1	H2	L1	B1	S		
12 1/2	JELPL201W3 JELPL201-008W3	26.99 1 1/16	121 4 3/4	89 3 1/2	35 1 3/8	11 7/16	14 9/16	13 1/2	54 2 1/8	40 1 9/16	28.6 1.126	6.5 0.256	M10 3/8	
15 9/16 5/8	JELPL202W3 JELPL202-009W3 JELPL202-010W3	26.99 1 1/16	121 4 3/4	89 3 1/2	35 1 3/8	11 7/16	14 9/16	13 1/2	54 2 1/8	40 1 9/16	28.6 1.126	6.5 0.256	M10 3/8	
17 11/16	JELPL203W3 JELPL203-011W3	26.99 1 1/16	121 4 3/4	89 3 1/2	35 1 3/8	11 7/16	14 9/16	13 1/2	54 2 1/8	40 1 9/16	28.6 1.126	6.5 0.256	M10 3/8	
20 3/4	JELPL204W3 JELPL204-012W3	31.75 1 1/4	127 5	95 3 3/4	38 1 1/2	13 1/2	16 5/8	14 9/16	64 2 17/32	42 1 21/32	31 1 21/32	7.5 1.220	M10 3/8	
25 13/16 7/8 15/16 1	JELPL205W3 JELPL205-013W3 JELPL205-014W3 JELPL205-015W3 JELPL205-100W3	33.34 1 5/16	140 5 1/2	105 4 1/8	38 1 1/2	13 1/2	16 5/8	15 19/32	68 2 11/16	42 1 21/32	31 1.220	7.5 0.295	M10 3/8	
30 1 1/16 1 1/8 1 3/16 1 1/4	JELPL206W3 JELPL206-101W3 JELPL206-102W3 JELPL206-103W3 JELPL206-104W3	39.69 1 9/16	165 6 1/2	121 4 3/4	48 1 7/8	17 2 1/32	20 25/32	17 21/32	80 3 5/32	54 2 1/8	35.7 1.406	9 0.354	M14 1/2	
35 1 1/4 1 5/16 1 3/8 1 7/16	JELPL207W3 JELPL207-104W3 JELPL207-105W3 JELPL207-106W3 JELPL207-107W3	46.04 1 13/16	167 6 9/16	127 5	48 1 7/8	17 2 1/32	20 25/32	18 23/32	91 3 19/32	54 2 1/8	38.9 1.531	9.5 0.374	M14 1/2	
40 1 1/2 1 9/16	JELP208W3 JELP208-108W3 JELP208-109W3	49.2 1 15/16	184 7 1/4	137 5 13/32	54 2 1/8	17 2 1/32	20 25/32	18 23/32	98 3 27/32	52 2 1/16	43.7 1.720	11 0.433	M14 1/2	

Remarks: 1) JELPL201 to JELPL205 has solid base.

2) If relubricatable type is needed, please order with suffix "D1".

3) JELPL208 has the same dimension as JELP208.

Bearing number ²⁾	Housing ²⁾ number	Mass of unit kg lb
JEL201W3	PL201	0.5
JEL201-008W3	PL201	1.1
JEL202W3	PL201	0.5
JEL202-009W3	PL201	
JEL202-010W3	PL201	
JEL203W3	PL201	0.5
JEL203-011W3	PL201	1.1
JEL204W3	PL204	0.7
JEL204-012W3	PL204	1.5
JEL205W3	PL205	0.8
JEL205-013W3	PL205	
JEL205-014W3	PL205	
JEL205-015W3	PL205	
JEL205-100W3	PL205	
JEL206W3	PL206	1.3
JEL206-101W3	PL206	
JEL206-102W3	PL206	
JEL206-103W3	PL206	
JEL206-104W3	PL206	
JEL207W3	PL207	1.6
JEL207-104W3	PL207	
JEL207-105W3	PL207	
JEL207-106W3	PL207	
JEL207-107W3	PL207	
JEL208W3	P208	2.0
JEL208-108W3	P208	
JEL208-109W3	P208	

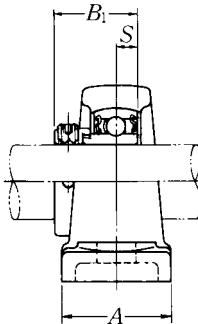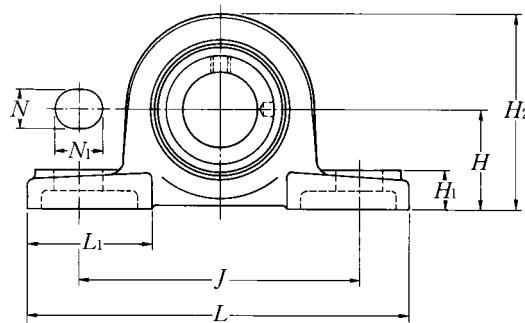Pillow blocks cast housing low center height**Eccentric locking collar type**


Shaft dia. mm inch	Unit number 1) 2) 3)	Nominal dimensions											Bolt size mm inch	
		H	L	J	A	mm	inch	N	N ₁	H ₁	H ₂	L ₁	B ₁	
45 $1\frac{5}{8}$	JELPL209W3	52.39	190	146	54	17	20	20	20	104	60	43.7	11	M14
$1\frac{11}{16}$	JELPL209-110W3	$2\frac{1}{16}$	$7\frac{15}{32}$	$5\frac{3}{4}$	$2\frac{1}{8}$	$2\frac{1}{32}$	$2\frac{5}{32}$	$2\frac{5}{32}$	$2\frac{5}{32}$	$4\frac{3}{32}$	$2\frac{3}{8}$	1.720	0.433	$\frac{1}{2}$
$1\frac{3}{4}$	JELPL209-111W3													
	JELPL209-112W3													
50 $1\frac{13}{16}$	JELPL210W3	55.56	206	159	60	20	23	21	112	65	43.7	11	M16	
$1\frac{7}{8}$	JELPL210-113W3	$2\frac{3}{16}$	$8\frac{1}{8}$	$6\frac{1}{4}$	$2\frac{3}{8}$	$2\frac{5}{32}$	$2\frac{9}{32}$	$1\frac{3}{16}$	$4\frac{13}{32}$	$2\frac{9}{16}$	1.720	0.433	$\frac{5}{8}$	
$1\frac{15}{16}$	JELPL210-114W3													
2	JELPL210-115W3													
	JELPL210-200W3													
55 2	JELPL211W3	61.91	219	171	60	20	23	23	124	65	48.4	12	M16	
$2\frac{1}{16}$	JELPL211-200W3	$2\frac{7}{16}$	$8\frac{5}{8}$	$6\frac{23}{32}$	$2\frac{3}{8}$	$2\frac{5}{32}$	$2\frac{9}{32}$	$2\frac{9}{32}$	$4\frac{7}{8}$	$2\frac{9}{16}$	1.906	0.472	$\frac{5}{8}$	
$2\frac{1}{8}$	JELPL211-201W3													
$2\frac{3}{16}$	JELPL211-202W3													
	JELPL211-203W3													
60 $2\frac{1}{4}$	JELPL212W3	68.26	241	184	70	20	23	25	136	70	53.1	13.5	M16	
$2\frac{5}{16}$	JELPL212-204W3	$2\frac{11}{16}$	$9\frac{1}{2}$	$7\frac{1}{4}$	$2\frac{3}{4}$	$2\frac{5}{32}$	$2\frac{9}{32}$	$3\frac{1}{32}$	$5\frac{11}{32}$	$2\frac{3}{4}$	2.091	0.531	$\frac{5}{8}$	
$2\frac{3}{8}$	JELPL212-205W3													
$2\frac{7}{16}$	JELPL212-206W3													
	JELPL212-207W3													

Remarks: 1) JELPL201 to JELPL205 has solid base.

2) If relubricatable type is needed, please order with suffix "D1".

3) JELPL208 has the same dimension as JELP208.


Bearing number ²⁾	Housing ²⁾ number	Mass of unit kg lb
JEL209W3	PL209	2.2
JEL209-110W3	PL209	
JEL209-111W3	PL209	4.9
JEL209-112W3	PL209	
JEL210W3	PL210	2.8
JEL210-113W3	PL210	
JEL210-114W3	PL210	6.2
JEL210-115W3	PL210	
JEL210-200W3	PL210	
JEL211W3	PL211	3.5
JEL211-200W3	PL211	
JEL211-201W3	PL211	7.7
JEL211-202W3	PL211	
JEL211-203W3	PL211	
JEL212W3	PL212	4.7
JEL212-204W3	PL212	
JEL212-205W3	PL212	10
JEL212-206W3	PL212	
JEL212-207W3	PL212	

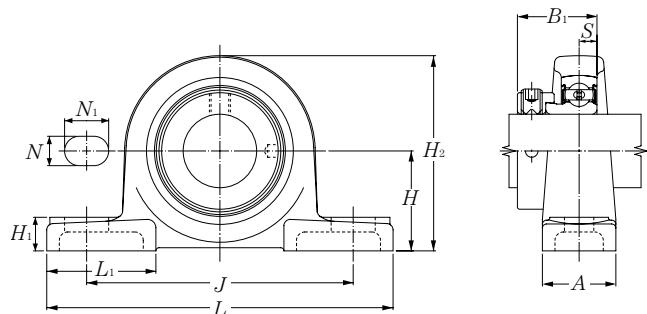

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions											Bolt size mm inch
		H	L	J	A	N	N ₁	H ₁	H ₂	L ₁	B ₁	S	
12 1/2	AELPB201W3 AELPB201-008W3	30.2 1 3/16	114 4 1/2	87 3 7/16	25 31/32	11 7/16	16 5/8	12 15/32	57 2 1/4	38 1 1/2	28.6 1.126	6.5 0.256	M8 5/16
15 9/16 5/8	AELPB202W3 AELPB202-009W3 AELPB202-010W3	30.2 1 3/16	114 4 1/2	87 3 7/16	25 31/32	11 7/16	16 5/8	12 15/32	57 2 1/4	38 1 1/2	28.6 1.126	6.5 0.256	M8 5/16
17 11/16	AELPB203W3 AELPB203-011W3	30.2 1 3/16	114 4 1/2	87 3 7/16	25 31/32	11 7/16	16 5/8	12 15/32	57 2 1/4	38 1 1/2	28.6 1.126	6.5 0.256	M8 5/16
20 3/4	AELPB204W3 AELPB204-012W3	33.3 1 5/16	125 4 29/32	97 3 13/16	27 1 1/16	11 7/16	16 5/8	13 1/2	65 2 9/16	40 1 9/16	31 1.220	7.5 0.295	M8 5/16
25 13/16 7/8 15/16 1	AELPB205W3 AELPB205-013W3 AELPB205-014W3 AELPB205-015W3 AELPB205-100W3	36.5 1 7/16	130 5 1/8	100 3 15/16	29 1 5/32	11 7/16	16 5/8	13 1/2	71 2 25/32	42 1 21/32	31 1.220	7.5 0.295	M8 5/16
30 1 1/16 1 1/8 1 3/16 1 1/4	AELPB206W3 AELPB206-101W3 AELPB206-102W3 AELPB206-103W3 AELPB206-104W3	42.9 1 11/16	156 6 5/32	120 4 23/32	33 1 5/16	14 9/16	21 13/16	14 9/16	83 3 9/32	52 2 1/16	35.7 1.406	9 0.354	M12 1/2
35 1 1/4 1 5/16 1 3/8 1 7/16	AELPB207W3 AELPB207-104W3 AELPB207-105W3 AELPB207-106W3 AELPB207-107W3	47.6 1 7/8	165 6 1/2	127 5	35 1 3/8	14 9/16	21 13/16	16 5/8	93 3 21/32	52 2 1/16	38.9 1.531	9.5 0.374	M12 1/2
40 1 1/2 1 9/16	AELPB208W3 AELPB208-108W3 AELPB208-109W3	50.8 2	184 7 1/4	140 5 1/2	37 1 15/32	14 9/16	22 7/8	18 23/32	102 4 1/32	52 2 1/16	43.7 1.720	11 0.433	M12 1/2

Remarks: 1) If relubricatable type is needed, please order with suffix "D1".


Bearing number ¹⁾	Housing ¹⁾ number	Mass of unit kg lb
AEL201W3	PB201	0.4
AEL201-008W3	PB201	0.9
AEL202W3	PB201	0.4
AEL202-009W3	PB201	0.9
AEL202-010W3		
AEL203W3	PB201	0.4
AEL203-011W3	PB201	0.9
AEL204W3	PB204	0.6
AEL204-012W3	PB204	1.3
AEL205W3	PB205	0.7
AEL205-013W3		
AEL205-014W3	PB205	1.5
AEL205-015W3		
AEL205-100W3		
AEL206W3	PB206	1.1
AEL206-101W3		
AEL206-102W3	PB206	2.4
AEL206-103W3		
AEL206-104W3		
AEL207W3	PB207	1.4
AEL207-104W3		
AEL207-105W3	PB207	3.1
AEL207-106W3		
AEL207-107W3		
AEL208W3	PB208	2.0
AEL208-108W3	PB208	4.4
AEL208-109W3		

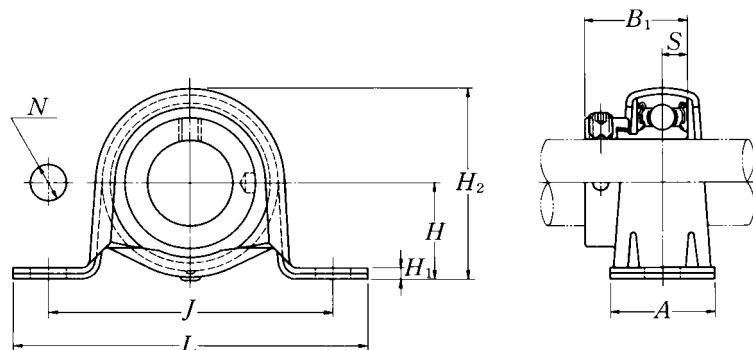

Shaft dia. mm inch	Unit number	Nominal dimensions										Bolt size mm inch	Bearing number
		H	L	J	A	N	H ₁	H ₂	B ₁	S			
12 1/2	AELPP201W3 AELPP201-008W3	22.2 7/8	86 3 3/8	68 2 11/16	25 31/32	9.5 3/8	3.2 0.126	43.8 1 23/32	28.6 1.126	6.5 0.256	M 8 5/16	AEL201W3 AEL201-008W3	
15 9/16 5/8	AELPP202W3 AELPP202-009W3 AELPP202-010W3	22.2 7/8	86 3 3/8	68 2 11/16	25 31/32	9.5 3/8	3.2 0.126	43.8 1 23/32	28.6 1.126	6.5 0.256	M 8 5/16	AEL202W3 AEL202-009W3 AEL202-010W3	
17 11/16	AELPP203W3 AELPP203-011W3	22.2 7/8	86 3 3/8	68 2 11/16	25 31/32	9.5 3/8	3.2 0.126	43.8 1 23/32	28.6 1.126	6.5 0.256	M 8 5/16	AEL203W3 AEL203-011W3	
20 3/4	AELPP204W3 AELPP204-012W3	25.4 1	98 3 27/32	76 3	32 1 1/4	9.5 3/8	3.2 0.126	50.5 2	31 1.220	7.5 0.295	M 8 5/16	AEL204W3 AEL204-012W3	
25 13/16 7/8 15/16 1	AELPP205W3 AELPP205-013W3 AELPP205-014W3 AELPP205-015W3 AELPP205-100W3	28.6 1 1/8	108 4 1/4	86 3 3/8	32 1 1/4	11.5 29/64	4 0.157	56.6 2 7/32	31 1.220	7.5 0.295	M10 3/8	AEL205W3 AEL205-013W3 AEL205-014W3 AEL205-015W3 AEL205-100W3	
30 1 1/16 1 1/8 1 3/16 1 1/4	AELPP206W3 AELPP206-101W3 AELPP206-102W3 AELPP206-103W3 AELPP206-104W3	33.3 1 5/16	117 4 19/32	95 3 3/4	38 1 1/2	11.5 29/64	4 0.157	66.3 2 5/8	35.7 1.406	9 0.354	M10 3/8	AEL206W3 AEL206-101W3 AEL206-102W3 AEL206-103W3 AEL206-104W3	
35 1 1/4 1 5/16 1 3/8 1 7/16	AELPP207W3 AELPP207-104W3 AELPP207-105W3 AELPP207-106W3 AELPP207-107W3	39.7 1 9/16	129 5 3/32	106 4 3/16	42 12 1/32	11.5 29/64	4.6 0.181	78 3 1/16	38.9 1.531	9.5 0.374	M10 3/8	AEL207W3 AEL207-104W3 AEL207-105W3 AEL207-106W3 AEL207-107W3	

Remarks: 1) The permissible load only applies in applications where the load is stable and the speed is 2400 min⁻¹ or less.
The mounting surface should be flat.

Housing number	Mass of unit kg lb	Max. load ¹⁾ recommended	
		N radial	Ibf axial
PP203	0.2	2 000	800
PP203	0.4	440	160
PP203	0.2	2 000	800
PP203	0.4	440	160
PP203	0.2	2 000	800
PP203	0.4	440	160
PP204	0.3	2 500	1 000
PP204	0.7	550	200
PP205	0.3	3 500	1 400
PP205			
PP205	0.7	770	280
PP205			
PP205			
PP206	0.5	4 000	1 600
PP206			
PP206	1.1	880	320
PP206			
PP206			
PP207	0.8	4 500	1 800
PP207			
PP207	1.8	990	360
PP207			
PP207			

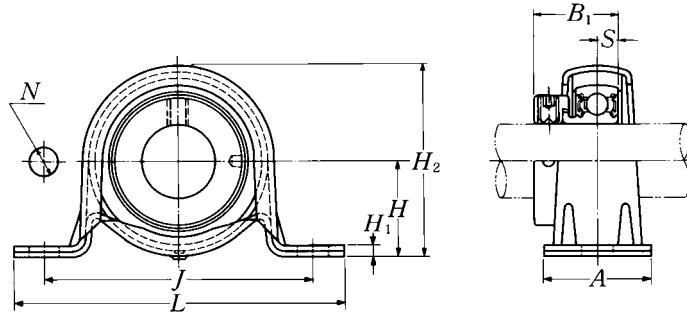


Shaft dia. mm inch	Unit number	Nominal dimensions										Bolt size mm inch	Bearing number
		H	L	J	A	N	H1	H2	B1	S			
12 1/2	AELRPP201W3	25.4	98	76	32	9.5	3.2	50.5	28.6	6.5	M 8	AEL201W3	
	AELRPP201-008W3	1	3 ²⁷ / ₃₂	3	1 ¹ / ₄	3/8	0.126	2	1.126	0.256	5/16		
15 9/16 5/8	AELRPP202W3	25.4	98	76	32	9.5	3.2	50.5	28.6	6.5	M 8	AEL202W3	
	AELRPP202-009W3	1	3 ²⁷ / ₃₂	3	1 ¹ / ₄	3/8	0.126	2	1.126	0.256	5/16		
	AELRPP202-010W3												
17 11/16	AELRPP203W3	25.4	98	76	32	9.5	3.2	50.5	28.6	6.5	M 8	AEL203W3	
	AELRPP203-011W3	1	3 ²⁷ / ₃₂	3	1 ¹ / ₄	3/8	0.126	2	1.126	0.256	5/16		
20 3/4	AELRPP204W3	28.6	108	86	32	11.5	4	56.6	31	7.5	M10	AEL204W3	
	AELRPP204-012W3	1 ¹ / ₈	4 ¹ / ₄	3 ³ / ₈	1 ¹ / ₄	29/ ₆₄	0.157	2 ⁵ / ₃₂	1.220	0.295	3/8		
25 13/16 7/8 15/16 1	AELRPP205W3	33.3	117	95	38	11.5	4	66.3	31	7.5	M10	AEL205W3	
	AELRPP205-013W3												
	AELRPP205-014W3												
	AELRPP205-015W3												
	AELRPP205-100W3												
30 1 1/16 1 1/8 1 3/16 1 1/4	AELRPP206W3	39.7	129	106	42	11.5	4.6	78	35.7	9	M10	AEL206W3	
	AELRPP206-101W3												
	AELRPP206-102W3												
	AELRPP206-103W3												
	AELRPP206-104W3												

Remarks: 1) The permissible load only applies in applications where the load is stable and the speed is 2400 min⁻¹ or less.

The mounting surface should be flat.

2) When an anti-vibration rubber ring is used, the self alignment capability will be reduced.


Housing number		Mass of unit kg lb	Max. load ¹⁾ recommended	
rubber ring	steel		radial	axial
R201	PP204	0.2	1 000	200
R201	PP204	0.4	220	40
R201	PP204	0.2	1 000	200
R201	PP204	0.4	220	40
R201	PP204	0.2	1 000	200
R201	PP204	0.4	220	40
R204	PP205	0.3	1 150	200
R204	PP205	0.7	250	40
R205	PP206	0.4	1 300	200
R205	PP206			
R205	PP206			
R205	PP206	0.9	280	40
R205	PP206			
R206	PP207	0.6	1 500	200
R206	PP207			
R206	PP207			
R206	PP207	1.3	330	40
R206	PP207			

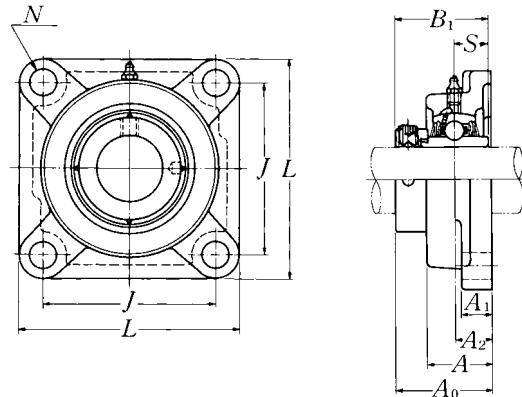

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions										Bolt size mm inch	Bearing number		
		mm					inch								
		L	J	A ₂	A ₁	A	N	A ₀	B ₁	S					
20 $\frac{3}{4}$	UEL FU204D1W3	86	63.5	19	15	29.5	11.5	45.6	43.7	17.1	M10	$\frac{3}{8}$	UEL204D1W3		
	UEL FU204-012D1W3	$3\frac{3}{8}$	$2\frac{1}{2}$	$\frac{3}{4}$	$1\frac{19}{32}$	$1\frac{5}{32}$	$2\frac{29}{64}$	$1\frac{51}{64}$	1.720	0.673	UEL204-012D1W3				
25 $\frac{13}{16}$ $\frac{7}{8}$ $\frac{15}{16}$ 1	UEL FU205D1W3	96	70	19	15	30	11.5	45.9	44.4	17.45	M10	$\frac{3}{8}$	UEL205D1W3		
	UEL FU205-013D1W3	$3\frac{25}{32}$	$2\frac{3}{4}$	$\frac{3}{4}$	$1\frac{19}{32}$	$1\frac{3}{16}$	$2\frac{29}{64}$	$1\frac{13}{16}$	1.748	0.687	UEL205-013D1W3				
	UEL FU205-014D1W3										UEL205-014D1W3				
	UEL FU205-015D1W3										UEL205-015D1W3				
	UEL FU205-100D1W3										UEL205-100D1W3				
30 $1\frac{1}{16}$ $1\frac{1}{8}$ $1\frac{3}{16}$ $1\frac{1}{4}$	UEL FU206D1W3	109	82.5	20	16	33	11.5	50.1	48.4	18.25	M10	$\frac{3}{8}$	UEL206D1W3		
	UEL FU206-101D1W3	$4\frac{9}{32}$	$3\frac{1}{4}$	$2\frac{5}{32}$	$\frac{5}{8}$	$1\frac{5}{16}$	$2\frac{29}{64}$	$1\frac{31}{32}$	1.906	0.719	UEL206-101D1W3				
	UEL FU206-102D1W3										UEL206-102D1W3				
	UEL FU206-103D1W3										UEL206-103D1W3				
	UEL FU206-104D1W3										UEL206-104D1W3				
35 $1\frac{1}{4}$ $1\frac{5}{16}$ $1\frac{3}{8}$ $1\frac{7}{16}$	UEL FU207D1W3	118	92	21	17	36	14	53.3	51.1	18.8	M12	$\frac{1}{2}$	UEL207D1W3		
	UEL FU207-104D1W3	$4\frac{21}{32}$	$3\frac{5}{8}$	$5\frac{3}{64}$	$2\frac{1}{32}$	$1\frac{13}{32}$	$3\frac{5}{64}$	$2\frac{3}{32}$	2.012	0.740	UEL207-104D1W3				
	UEL FU207-105D1W3										UEL207-105D1W3				
	UEL FU207-106D1W3										UEL207-106D1W3				
	UEL FU207-107D1W3										UEL207-107D1W3				
40 $1\frac{1}{2}$ $1\frac{9}{16}$	UEL FU208D1W3	131	101.5	24	17	39	14	58.9	56.3	21.4	M12	$\frac{1}{2}$	UEL208D1W3		
	UEL FU208-108D1W3	$5\frac{5}{32}$	4	$1\frac{5}{16}$	$2\frac{1}{32}$	$1\frac{17}{32}$	$3\frac{5}{64}$	$2\frac{5}{16}$	2.217	0.843	UEL208-108D1W3				
	UEL FU208-109D1W3										UEL208-109D1W3				
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UEL FU209D1W3	137	105	24	18	40	16	58.9	56.3	21.4	M14	$\frac{1}{2}$	UEL209D1W3		
	UEL FU209-110D1W3	$5\frac{13}{32}$	$4\frac{9}{64}$	$1\frac{5}{16}$	$2\frac{23}{32}$	$1\frac{9}{16}$	$\frac{5}{8}$	$2\frac{5}{16}$	2.217	0.843	UEL209-110D1W3				
	UEL FU209-111D1W3										UEL209-111D1W3				
	UEL FU209-112D1W3										UEL209-112D1W3				
50 $1\frac{13}{16}$ $1\frac{7}{8}$ $1\frac{15}{16}$ 2	UEL FU210D1W3	144	111	28	20	46	18	66.1	62.7	24.6	M16	$\frac{5}{8}$	UEL210D1W3		
	UEL FU210-113D1W3	$5\frac{21}{32}$	$4\frac{3}{8}$	$1\frac{7}{64}$	$2\frac{25}{32}$	$1\frac{13}{16}$	$4\frac{5}{64}$	$2\frac{39}{64}$	2.469	0.969	UEL210-113D1W3				
	UEL FU210-114D1W3										UEL210-114D1W3				
	UEL FU210-115D1W3										UEL210-115D1W3				
	UEL FU210-200D1W3										UEL210-200D1W3				

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".
Note: Please refer to page 36 for size of grease fitting.

Housing number	Mass of unit
	kg lb
FU204D1	0.8
FU204D1	1.8
FU205D1	1.0
FU205D1	
FU205D1	2.2
FU205D1	
FU205D1	
FU206D1	1.4
FU206D1	
FU206D1	3.1
FU206D1	
FU206D1	
FU207D1	1.7
FU207D1	
FU207D1	3.8
FU207D1	
FU207D1	
FU208D1	2.2
FU208D1	4.9
FU208D1	
FU209D1	2.4
FU209D1	
FU209D1	5.3
FU209D1	
FU210D1	2.9
FU210D1	
FU210D1	6.4
FU210D1	
FU210D1	

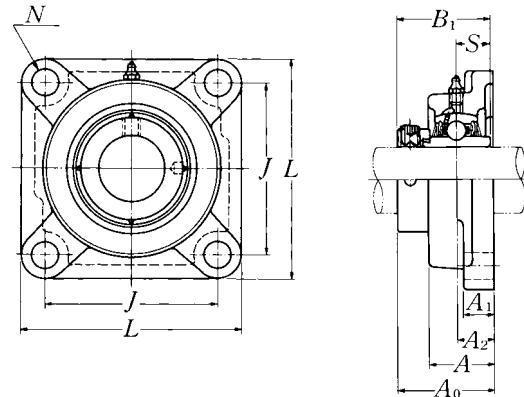

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions										Bolt size mm inch	Bearing number
		mm					inch						
		L	J	A ₂	A ₁	A	N	A ₀	B ₁	S			
55 2 2½/16 2¾/8 2¾/16	UELFU211D1W3	163	130	31	21	49	18	74.6	71.4	27.75	M16	UEL211D1W3	
	UELFU211-200D1W3	6 ¹³ / ₃₂	5 ¹ / ₈	1 ⁷ / ₃₂	1 ³ / ₁₆	1 ¹⁵ / ₁₆	45/ ₆₄	2 ¹⁵ / ₁₆	2.811	1.093	5/8	UEL211-200D1W3	
	UELFU211-201D1W3											UEL211-201D1W3	
	UELFU211-202D1W3											UEL211-202D1W3	
	UELFU211-203D1W3											UEL211-203D1W3	
60 2½/4 2½/16 2¾/8 2¾/16	UELFU212D1W3	175	143	34	21	53	18	80.8	77.8	30.95	M16	UEL212D1W3	
	UELFU212-204D1W3	6 ⁷ / ₈	5 ⁵ / ₈	1 ¹¹ / ₃₂	1 ³ / ₁₆	2 ³ / ₃₂	45/ ₆₄	3 ³ / ₁₆	3.063	1.219	5/8	UEL212-204D1W3	
	UELFU212-205D1W3											UEL212-205D1W3	
	UELFU212-206D1W3											UEL212-206D1W3	
	UELFU212-207D1W3											UEL212-207D1W3	
65 2½/2 2¾/16	UELFU213D1W3	187	149	38	22	59	20.5	89.55	85.7	34.15	M18	UEL213D1W3	
	UELFU213-208D1W3	7 ³ / ₈	5 ⁵⁵ / ₆₄	1 ¹ / ₂	7/8	2 ⁵ / ₁₆	13/ ₁₆	3 ¹⁷ / ₃₂	3.374	1.344	5/8	UEL213-208D1W3	
	UELFU213-209D1W3											UEL213-209D1W3	
70 2½/8 2½/16 2¾/4	UELFU214D1W3	193	152	38	22	62	20.5	89.55	85.7	34.15	M18	UEL214D1W3	
	UELFU214-210D1W3	7 ¹⁹ / ₃₂	5 ⁶³ / ₆₄	1 ¹ / ₂	7/8	2 ⁷ / ₁₆	13/ ₁₆	3 ¹⁷ / ₃₂	3.374	1.344	5/8	UEL214-210D1W3	
	UELFU214-211D1W3											UEL214-211D1W3	
	UELFU214-212D1W3											UEL214-212D1W3	
75 2¾/16 2¾/8 2½/16 3	UELFU215D1W3	200	159	41	22	64	20.5	95.7	92	37.3	M18	UEL215D1W3	
	UELFU215-213D1W3	7 ⁷ / ₈	6 ¹⁷ / ₆₄	1 ³⁹ / ₆₄	7/8	2 ³³ / ₆₄	13/ ₁₆	3 ⁴⁹ / ₆₄	3.622	1.469	5/8	UEL215-213D1W3	
	UELFU215-214D1W3											UEL215-214D1W3	
	UELFU215-215D1W3											UEL215-215D1W3	
	UELFU215-300D1W3											UEL215-300D1W3	

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".


Note: Please refer to page 36 for size of grease fitting.

Housing number ¹⁾	Mass of unit
	kg lb
FU211D1	3.9
FU211D1	
FU211D1	8.6
FU211D1	
FU211D1	
FU212D1	4.7
FU212D1	
FU212D1	10
FU212D1	
FU212D1	
FU213D1	6.3
FU213D1	
FU213D1	14
FU213D1	
FU214D1	6.7
FU214D1	
FU214D1	15
FU214D1	
FU215D1	7.0
FU215D1	
FU215D1	15
FU215D1	
FU215D1	

sale@technobearing.ru
Square flanged units cast housing
Eccentric locking collar type

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

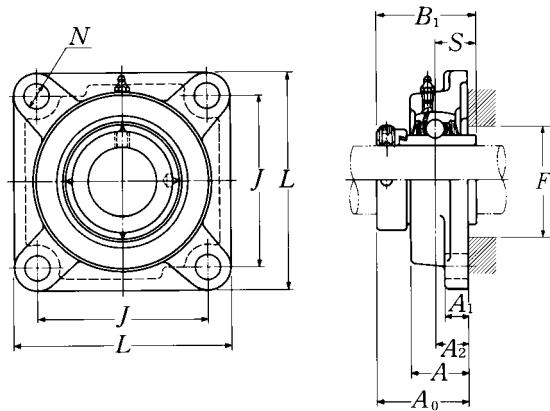

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions										Bolt size mm inch
		L	J	A ₂	A ₁	A	N	A ₀	B ₁	S	F min.	
20 $\frac{3}{4}$	UEL204D1W3 UEL204-012D1W3	86 $3\frac{3}{8}$	64 $2\frac{33}{64}$	15 $1\frac{9}{32}$	11 $\frac{7}{16}$	25.5 1	12 $1\frac{15}{32}$	41.6 $1\frac{41}{64}$	43.7 1.720	17.1 0.673	34 $1\frac{11}{32}$	M10 $\frac{3}{8}$
25 $\frac{13}{16}$ $\frac{7}{8}$ $\frac{15}{16}$ 1	UEL205D1W3 UEL205-013D1W3 UEL205-014D1W3 UEL205-015D1W3 UEL205-100D1W3	95 $3\frac{3}{4}$	70 $2\frac{3}{4}$	16 $\frac{5}{8}$	13 $\frac{1}{2}$	27 $1\frac{1}{16}$	12 $1\frac{15}{32}$	42.9 $1\frac{11}{16}$	44.4 1.748	17.45 0.687	38 $1\frac{1}{2}$	M10
30 $1\frac{1}{16}$ $1\frac{1}{8}$ $1\frac{3}{16}$ $1\frac{1}{4}$	UEL206D1W3 UEL206-101D1W3 UEL206-102D1W3 UEL206-103D1W3 UEL206-104D1W3	108 $4\frac{1}{4}$	83 $3\frac{17}{64}$	18 $4\frac{5}{64}$	13 $\frac{1}{2}$	31 $1\frac{7}{32}$	12 $1\frac{15}{32}$	48.1 $1\frac{57}{64}$	48.4 1.906	18.25 0.719	45 $1\frac{25}{32}$	M10 $\frac{3}{8}$
35 $1\frac{1}{4}$ $1\frac{5}{16}$ $1\frac{3}{8}$ $1\frac{7}{16}$	UEL207D1W3 UEL207-104D1W3 UEL207-105D1W3 UEL207-106D1W3 UEL207-107D1W3	117 $4\frac{19}{32}$	92 $3\frac{5}{8}$	19 $\frac{3}{4}$	15 $1\frac{9}{32}$	34 $1\frac{11}{32}$	14 $3\frac{5}{64}$	51.3 $2\frac{1}{64}$	51.1 2.012	18.8 0.740	51 2	M12 $\frac{7}{16}$
40 $1\frac{1}{2}$ $1\frac{9}{16}$	UEL208D1W3 UEL208-108D1W3 UEL208-109D1W3	130 $5\frac{1}{8}$	102 $4\frac{1}{64}$	21 $5\frac{3}{64}$	15 $1\frac{9}{32}$	36 $1\frac{13}{32}$	16 $\frac{5}{8}$	55.9 $2\frac{13}{64}$	56.3 2.217	21.4 0.843	57 $2\frac{1}{4}$	M14 $\frac{1}{2}$
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UEL209D1W3 UEL209-110D1W3 UEL209-111D1W3 UEL209-112D1W3	137 $5\frac{13}{32}$	105 $4\frac{9}{64}$	22 $5\frac{5}{64}$	16 $\frac{5}{8}$	38 $1\frac{1}{2}$	16 $\frac{5}{8}$	56.9 $2\frac{15}{64}$	56.3 2.217	21.4 0.843	62 $2\frac{7}{16}$	M14 $\frac{1}{2}$
50 $1\frac{13}{16}$ $1\frac{7}{8}$ $1\frac{15}{16}$ 2	UEL210D1W3 UEL210-113D1W3 UEL210-114D1W3 UEL210-115D1W3 UEL210-200D1W3	143 $5\frac{5}{8}$	111 $4\frac{3}{8}$	22 $5\frac{5}{64}$	16 $\frac{5}{8}$	40 $1\frac{9}{16}$	16 $\frac{5}{8}$	60.1 $2\frac{23}{64}$	62.7 2.469	24.6 0.969	67 $2\frac{41}{64}$	M14 $\frac{1}{2}$

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".


Note: Please refer to page 36 for size of grease fitting.

Bearing number	Housing number ¹⁾	Mass of unit kg lb
UEL204D1W3	F204D1	0.6
UEL204-012D1W3	F204D1	1.3
UEL205D1W3	F205D1	0.9
UEL205-013D1W3	F205D1	
UEL205-014D1W3	F205D1	2.0
UEL205-015D1W3	F205D1	
UEL205-100D1W3	F205D1	
UEL206D1W3	F206D1	1.2
UEL206-101D1W3	F206D1	
UEL206-102D1W3	F206D1	2.6
UEL206-103D1W3	F206D1	
UEL206-104D1W3	F206D1	
UEL207D1W3	F207D1	1.6
UEL207-104D1W3	F207D1	
UEL207-105D1W3	F207D1	3.5
UEL207-106D1W3	F207D1	
UEL207-107D1W3	F207D1	
UEL208D1W3	F208D1	1.9
UEL208-108D1W3	F208D1	
UEL208-109D1W3	F208D1	4.2
UEL209D1W3	F209D1	2.3
UEL209-110D1W3	F209D1	
UEL209-111	F209D1	5.1
UEL209-112	F209D1	
UEL210D1W3	F210D1	2.7
UEL210-113D1W3	F210D1	
UEL210-114D1W3	F210D1	6.0
UEL210-115D1W3	F210D1	
UEL210-200D1W3	F210D1	

sale@technobearing.ru
Square flanged units cast housing
Eccentric locking collar type

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

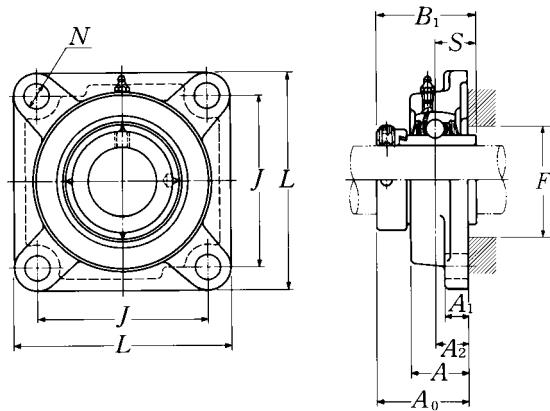

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions										Bolt size mm inch
		L	J	A ₂	A ₁	A	N	A ₀	B ₁	S	F min.	
55 2 $2\frac{1}{16}$ $2\frac{1}{8}$ $2\frac{3}{16}$	UEL211D1W3	162	130	25	18	43	19	68.6	71.4	27.75	73	M16
	UEL211-200D1W3	$6\frac{3}{8}$	$5\frac{1}{8}$	$\frac{63}{64}$	$\frac{23}{32}$	$1\frac{11}{16}$	$\frac{3}{4}$	$2\frac{45}{64}$	2.811	1.093	$2\frac{7}{8}$	$\frac{5}{8}$
	UEL211-201D1W3											
	UEL211-202D1W3											
	UEL211-203D1W3											
60 $2\frac{1}{4}$ $2\frac{5}{16}$ $2\frac{3}{8}$ $2\frac{7}{16}$	UEL212D1W3	175	143	29	18	48	19	75.8	77.8	30.95	81	M16
	UEL212-204D1W3	$6\frac{7}{8}$	$5\frac{5}{8}$	$1\frac{9}{64}$	$\frac{23}{32}$	$1\frac{7}{8}$	$\frac{3}{4}$	$2\frac{63}{64}$	3.063	1.219	$3\frac{3}{16}$	$\frac{5}{8}$
	UEL212-205D1W3											
	UEL212-206D1W3											
	UEL212-207D1W3											
65 $2\frac{1}{2}$ $2\frac{9}{16}$	UEL213D1W3	187	149	30	22	50	19	81.55	85.7	34.15	87	M16
	UEL213-208D1W3	$7\frac{3}{8}$	$5\frac{55}{64}$	$1\frac{3}{16}$	$\frac{7}{8}$	$1\frac{31}{32}$	$\frac{3}{4}$	$3\frac{13}{16}$	3.374	1.344	$3\frac{7}{16}$	$\frac{5}{8}$
	UEL213-209D1W3											
70 $2\frac{5}{8}$ $2\frac{11}{16}$ $2\frac{3}{4}$	UEL214D1W3	193	152	31	22	54	19	82.55	85.7	34.15	91	M16
	UEL214-210D1W3	$7\frac{19}{32}$	$5\frac{63}{64}$	$1\frac{7}{32}$	$\frac{7}{8}$	$2\frac{7}{32}$	$\frac{3}{4}$	$3\frac{1}{4}$	3.374	1.344	$3\frac{37}{64}$	$\frac{5}{8}$
	UEL214-211D1W3											
	UEL214-212D1W3											
75 $2\frac{13}{16}$ $2\frac{7}{8}$ $2\frac{15}{16}$ 3	UEL215D1W3	200	159	34	22	56	19	88.7	92	37.3	97	M16
	UEL215-213D1W3	$7\frac{7}{8}$	$6\frac{17}{64}$	$1\frac{11}{32}$	$\frac{7}{8}$	$2\frac{7}{32}$	$\frac{3}{4}$	$3\frac{31}{64}$	3.622	1.469	$3\frac{13}{16}$	$\frac{5}{8}$
	UEL215-214D1W3											
	UEL215-215D1W3											
	UEL215-300D1W3											

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".


Note: Please refer to page 36 for size of grease fitting.

Bearing number	Housing number ¹⁾	Mass of unit kg lb
UEL211D1W3	F211D1	3.6
UEL211-200D1W3	F211D1	
UEL211-201D1W3	F211D1	7.9
UEL211-202D1W3	F211D1	
UEL211-203D1W3	F211D1	
UEL212D1W3	F212D1	4.2
UEL212-204D1W3	F212D1	
UEL212-205D1W3	F212D1	9.3
UEL212-206D1W3	F212D1	
UEL212-207D1W3	F212D1	
UEL213D1W3	F213D1	6.1
UEL213-208D1W3	F213D1	13
UEL213-209D1W3	F213D1	
UEL214D1W3	F214D1	6.6
UEL214-210D1W3	F214D1	
UEL214-211D1W3	F214D1	15
UEL214-212D1W3	F214D1	
UEL215D1W3	F215D1	6.9
UEL215-213D1W3	F215D1	
UEL215-214D1W3	F215D1	15
UEL215-215D1W3	F215D1	
UEL215-300D1W3	F215D1	

sale@technobearing.ru
Square flanged units cast housing
Eccentric locking collar type

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

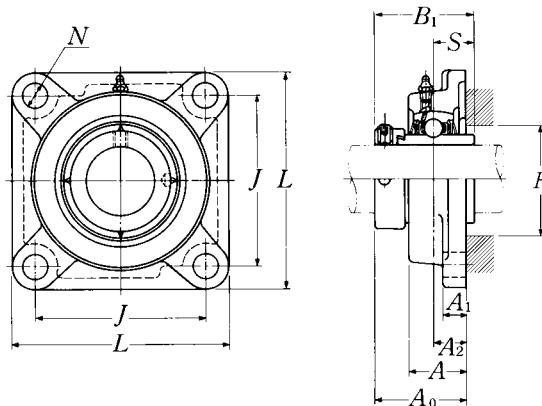

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions										Bolt size mm inch
		L	J	A ₂	A ₁	A	N	A ₀	B ₁	S	F min.	
25 $\frac{13}{16}$ $\frac{7}{8}$ $\frac{15}{16}$ 1	UEL305D1W3 UEL305-013D1W3 UEL305-014D1W3 UEL305-015D1W3 UEL305-100D1W3	110 $4\frac{11}{32}$	80 $3\frac{5}{32}$	16 $\frac{5}{8}$	13 $\frac{1}{2}$	29 $1\frac{5}{32}$	16 $\frac{5}{8}$	46.1 $1\frac{3}{16}$	46.8 1.843	16.7 0.657	41 $1\frac{39}{64}$	M14 $\frac{1}{2}$
30 $1\frac{1}{16}$ $1\frac{1}{8}$ $1\frac{3}{16}$	UEL306D1W3 UEL306-101D1W3 UEL306-102D1W3 UEL306-103D1W3	125 $4\frac{29}{32}$	95 $3\frac{47}{64}$	18 $\frac{45}{64}$	15 $1\frac{9}{32}$	32 $1\frac{1}{4}$	16 $\frac{5}{8}$	50.5 $1\frac{63}{64}$	50 1.969	17.5 0.689	49 $1\frac{15}{16}$	M14 $\frac{1}{2}$
35 $1\frac{1}{4}$ $1\frac{5}{16}$ $1\frac{3}{8}$ $1\frac{7}{16}$	UEL307D1W3 UEL307-104D1W3 UEL307-105D1W3 UEL307-106D1W3 UEL307-107D1W3	135 $5\frac{5}{16}$	100 $3\frac{15}{16}$	20 $\frac{25}{32}$	16 $\frac{5}{8}$	36 $1\frac{13}{32}$	19 $\frac{3}{4}$	53.3 $2\frac{3}{32}$	51.6 2.031	18.3 0.720	—	M16 $\frac{5}{8}$
40 $1\frac{1}{2}$ $1\frac{9}{16}$	UEL308D1W3 UEL308-108D1W3 UEL308-109D1W3	150 $5\frac{29}{32}$	112 $4\frac{13}{32}$	23 $\frac{29}{32}$	17 $2\frac{1}{32}$	40 $1\frac{9}{16}$	19 $\frac{3}{4}$	60.3 $2\frac{3}{8}$	57.1 2.248	19.8 0.780	—	M16 $\frac{5}{8}$
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UEL309D1W3 UEL309-110D1W3 UEL309-111D1W3 UEL309-112D1W3	160 $6\frac{5}{16}$	125 $4\frac{59}{64}$	25 $\frac{63}{64}$	18 $\frac{23}{32}$	44 $1\frac{23}{32}$	19 $\frac{3}{4}$	63.9 $2\frac{33}{64}$	58.7 2.311	19.8 0.780	—	M16 $\frac{5}{8}$
50 $1\frac{13}{16}$ $1\frac{7}{8}$ $1\frac{15}{16}$	UEL310D1W3 UEL310-113D1W3 UEL310-114D1W3 UEL310-115D1W3	175 $6\frac{7}{8}$	132 $5\frac{13}{64}$	28 $1\frac{7}{64}$	19 $\frac{3}{4}$	48 $1\frac{1}{8}$	23 $\frac{29}{32}$	70 $2\frac{3}{4}$	66.6 2.622	24.6 0.969	—	M20 $\frac{3}{4}$
55 2 $2\frac{1}{16}$ $2\frac{1}{8}$ $2\frac{3}{16}$	UEL311D1W3 UEL311-200D1W3 UEL311-201D1W3 UEL311-202D1W3 UEL311-203D1W3	185 $7\frac{9}{32}$	140 $5\frac{33}{64}$	30 $1\frac{3}{16}$	20 $\frac{25}{32}$	52 $2\frac{1}{16}$	23 $\frac{29}{32}$	75.2 $2\frac{61}{64}$	73 2.874	27.8 1.094	—	M20 $\frac{3}{4}$

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1"
 2) Inner race face does not protrude from the housing face except UELF305 and UELF316.


Note: Please refer to page 36 for size of grease fitting.

Bearing number	Housing number ¹⁾	Mass of unit kg lb
UEL305D1W3	F305D1	1.2
UEL305-013D1W3	F305D1	
UEL305-014D1W3	F305D1	2.6
UEL305-015D1W3	F305D1	
UEL305-100D1W3	F305D1	
UEL306D1W3	F306D1	1.8
UEL306-101D1W3	F306D1	
UEL306-102D1W3	F306D1	4.0
UEL306-103D1W3	F306D1	
UEL307D1W3	F307D1	2.2
UEL307-104D1W3	F307D1	
UEL307-105D1W3	F307D1	4.9
UEL307-106D1W3	F307D1	
UEL307-107D1W3	F307D1	
UEL308D1W3	F308D1	2.9
UEL308-108D1W3	F308D1	
UEL308-109D1W3	F308D1	6.4
UEL309D1W3	F309D1	3.6
UEL309-110D1W3	F309D1	
UEL309-111D1W3	F309D1	7.9
UEL309-112D1W3	F309D1	
UEL310D1W3	F310D1	4.6
UEL310-113D1W3	F310D1	
UEL310-114D1W3	F310D1	10
UEL310-115D1W3	F310D1	
UEL311D1W3	F311D1	5.6
UEL311-200D1W3	F311D1	
UEL311-201D1W3	F311D1	12
UEL311-202D1W3	F311D1	
UEL311-203D1W3	F311D1	

sale@technobearing.ru
Square flanged units cast housing
Eccentric locking collar type

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

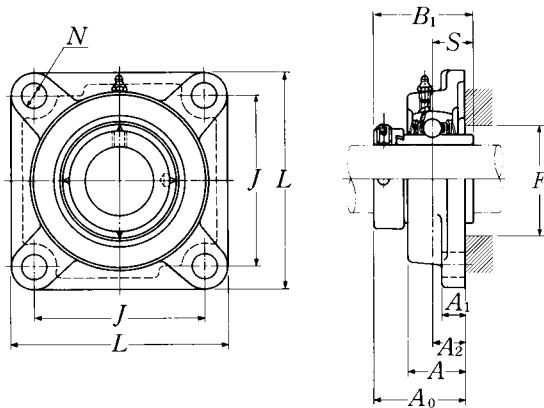

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions										Bolt size mm inch
		L	J	A ₂	A ₁	A	N	A ₀	B ₁	S	F min.	
60 $2\frac{1}{4}$	UEL312D1W3 UEL312-204D1W3	195	150	33	22	56	23	81.45	79.4	30.95	—	M20
$2\frac{5}{16}$ $2\frac{3}{8}$ $2\frac{7}{16}$	UEL312-205D1W3 UEL312-206D1W3 UEL312-207D1W3	$7\frac{11}{16}$	$5\frac{29}{32}$	$1\frac{19}{64}$	$\frac{7}{8}$	$2\frac{7}{32}$	$\frac{29}{32}$	$3\frac{13}{64}$	3.126	1.219	—	$\frac{3}{4}$
65 $2\frac{1}{2}$ $2\frac{9}{16}$	UEL313D1W3 UEL313-208D1W3 UEL313-209D1W3	208	166	33	22	58	23	86.15	85.7	32.55	93	M20
$2\frac{5}{8}$		$8\frac{3}{16}$	$6\frac{17}{32}$	$1\frac{19}{64}$	$\frac{7}{8}$	$2\frac{9}{32}$	$\frac{29}{32}$	$3\frac{25}{64}$	3.374	1.281	$3\frac{21}{32}$	$\frac{3}{4}$
70 $2\frac{5}{8}$ $2\frac{11}{16}$ $2\frac{3}{4}$	UEL314D1W3 UEL314-210D1W3 UEL314-211D1W3 UEL314-212D1W3	226	178	36	25	61	25	93.95	92.1	34.15	—	M22
$2\frac{29}{32}$		$8\frac{29}{32}$	$6\frac{1}{64}$	$1\frac{27}{64}$	$3\frac{1}{32}$	$2\frac{13}{32}$	$\frac{63}{64}$	$3\frac{45}{64}$	3.626	1.344	—	$\frac{7}{8}$
75 $2\frac{13}{16}$ $2\frac{7}{8}$ $2\frac{15}{16}$ 3	UEL315D1W3 UEL315-213D1W3 UEL315-214D1W3 UEL315-215D1W3 UEL315-300D1W3	236	184	39	25	66	25	101.7	100	37.3	106	M22
$9\frac{9}{32}$		$9\frac{27}{32}$	$7\frac{1}{4}$	$1\frac{17}{32}$	$3\frac{1}{32}$	$2\frac{19}{32}$	$\frac{63}{64}$	4	3.937	1.469	$4\frac{11}{64}$	$\frac{7}{8}$
80 $3\frac{1}{16}$ $3\frac{1}{8}$ $3\frac{3}{16}$	UEL316D1W3 UEL316-301D1W3 UEL316-302D1W3 UEL316-303D1W3	250	196	38	27	68	31	103.9	106.4	40.5	112	M27
$9\frac{23}{32}$		$9\frac{27}{32}$	$7\frac{23}{32}$	$1\frac{1}{2}$	$1\frac{1}{16}$	$2\frac{11}{16}$	$1\frac{1}{32}$	$4\frac{3}{32}$	4.189	1.594	$4\frac{13}{32}$	1
85 $3\frac{1}{4}$ $3\frac{5}{16}$ $3\frac{7}{16}$	UEL317D1W3 UEL317-304D1W3 UEL317-305D1W3 UEL317-307D1W3	260	204	44	27	74	31	111.45	109.5	42.05	119	M27
$10\frac{1}{4}$		$8\frac{1}{32}$	$1\frac{47}{64}$	$1\frac{1}{16}$	$2\frac{29}{32}$	$1\frac{1}{32}$	$4\frac{25}{64}$	4.311	1.656	$4\frac{11}{16}$	1	
90 $3\frac{7}{16}$ $3\frac{1}{2}$	UEL318D1W3 UEL318-307D1W3 UEL318-308D1W3	280	216	44	30	76	35	116.25	115.9	43.65	125	M30
$11\frac{1}{32}$		$8\frac{1}{2}$	$1\frac{47}{64}$	$1\frac{3}{16}$	3	$1\frac{3}{8}$	$4\frac{37}{64}$	4.563	1.719	$4\frac{59}{64}$	$1\frac{1}{8}$	

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

2) Inner race face does not protrude from the housing face except UELF305 and UELF316.

Note: Please refer to page 36 for size of grease fitting.


Bearing number	Housing number	Mass of unit kg lb
UEL312D1W3	F312D1	6.7
UEL312-204D1W3	F312D1	
UEL312-205D1W3	F312D1	15
UEL312-206D1W3	F312D1	
UEL312-207D1W3	F312D1	
UEL313D1W3	F313D1	8.4
UEL313-208D1W3	F313D1	19
UEL313-209D1W3	F313D1	
UEL314D1W3	F314D1	10
UEL314-210D1W3	F314D1	
UEL314-211D1W3	F314D1	22
UEL314-212D1W3	F314D1	
UEL315D1W3	F315D1	12
UEL315-213D1W3	F315D1	
UEL315-214D1W3	F315D1	
UEL315-215D1W3	F315D1	26
UEL315-300D1W3	F315D1	
UEL316D1W3	F316D1	15
UEL316-301D1W3	F316D1	
UEL316-302D1W3	F316D1	33
UEL316-303D1W3	F316D1	
UEL317D1W3	F317D1	16
UEL317-304D1W3	F317D1	
UEL317-305D1W3	F317D1	35
UEL317-307D1W3	F317D1	
UEL318D1W3	F318D1	20
UEL318-308D1W3	F318D1	44
UEL318-308D1W3	F318D1	

sale@technobearing.ru

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

Square flanged units cast housing
Eccentric locking collar type

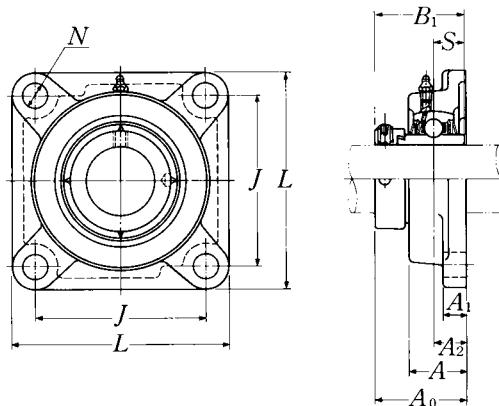

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions										Bolt size mm inch	Bearing number		
		mm					inch								
		L	J	A ₂	A ₁	A	N	A ₀	B ₁	S					
95 3 ⁵ / ₈	UEL319D1W3	290	228	59	30	94	35	142.4	122.3	38.9	M30	UEL319D1W3			
3 ¹¹ / ₁₆	UEL319-310D1W3											UEL319-310D1W3			
3 ⁷ / ₁₆	UEL319-311D1W3	11 ¹³ / ₃₂	8 ³ / ₃₂	2 ²¹ / ₆₄	1 ³ / ₁₆	3 ¹¹ / ₁₆	1 ³ / ₈	5 ³⁹ / ₆₄	4.815	1.531	1 ¹ / ₈	UEL319-311D1W3			
3 ³ / ₄	UEL319-312D1W3											UEL319-312D1W3			
100 3 ¹³ / ₁₆	UEL320D1W3	310	242	59	32	94	38	137.6	128.6	50	M33	UEL320D1W3			
3 ⁷ / ₈	UEL320-313D1W3											UEL320-313D1W3			
3 ¹⁵ / ₁₆	UEL320-314D1W3	12 ⁷ / ₃₂	9 ¹⁷ / ₃₂	2 ²¹ / ₆₄	1 ¹ / ₄	3 ¹¹ / ₁₆	1 ¹ / ₂	5 ²⁷ / ₆₄	5.063	1.969	1 ¹ / ₄	UEL320-314D1W3			
4	UEL320-315D1W3											UEL320-315D1W3			
	UEL320-400D1W3											UEL320-400D1W3			
105	UEL321D1W3	310	242	59	32	94	38	150.3	139.7	48.4	M33	UEL321D1W3			
110	UEL322D1W3	340	266	60	35	96	41	152.1	141.3	49.2	M36	UEL322D1W3			

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".



Note: Please refer to page 36 for size of grease fitting.

Housing number ¹⁾	Mass of unit
	kg lb
F319D1	24
F319D1	
F319D1	53
F319D1	
F320D1	29
F320D1	
F320D1	64
F320D1	
F320D1	
F321D1	28
F322D1	37

sale@technobearing.ru

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

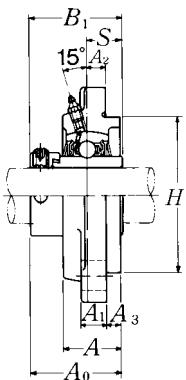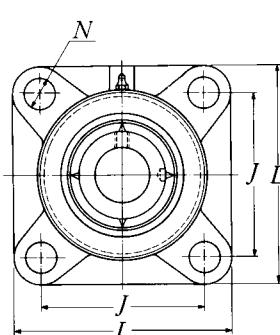Square flanged units cast housing w/spigot joint**Eccentric locking collar type**

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions											Bolt size mm inch
		L	J	A ₂	N	A ₃	A ₁	A	H ₃	A ₀	B ₁	S	
25 $\frac{13}{16}$ $\frac{7}{8}$ $\frac{15}{16}$ 1	UELFS305D1W3 UELFS305-013D1W3 UELFS305-014D1W3 UELFS305-015D1W3 UELFS305-100D1W3	110 $4\frac{11}{32}$	80 $3\frac{5}{32}$	9 $\frac{23}{64}$	16 $\frac{5}{8}$	7 $\frac{9}{32}$	13 $\frac{1}{2}$	29 $1\frac{9}{64}$	80 3.1496	46.1 $1\frac{13}{16}$	46.8 1.843	16.7 0.657	M14 $\frac{1}{2}$
30 $1\frac{1}{16}$ $1\frac{1}{8}$ $1\frac{3}{16}$	UELFS306D1W3 UELFS306-101D1W3 UELFS306-102D1W3 UELFS306-103D1W3	125 $4\frac{29}{32}$	95 $3\frac{47}{64}$	10 $\frac{25}{64}$	16 $\frac{5}{8}$	8 $\frac{5}{16}$	15 $1\frac{17}{32}$	32 3.5433	90 $1\frac{63}{64}$	50.5 1.969	50 0.689	17.5	M14 $\frac{1}{2}$
35 $1\frac{1}{4}$ $1\frac{5}{16}$ $1\frac{3}{8}$ $1\frac{7}{16}$	UELFS307D1W3 UELFS307-104D1W3 UELFS307-105D1W3 UELFS307-106D1W3 UELFS307-107D1W3	135 $5\frac{5}{16}$	100 $3\frac{15}{16}$	11 $\frac{7}{16}$	19 $\frac{3}{4}$	9 $\frac{23}{64}$	16 $\frac{5}{8}$	36 $1\frac{13}{32}$	100 3.9370	53.3 $2\frac{3}{32}$	51.6 2.031	18.3 0.720	M16 $\frac{5}{8}$
40 $1\frac{1}{2}$ $1\frac{9}{16}$	UELFS308D1W3 UELFS308-108D1W3 UELFS308-109D1W3	150 $5\frac{29}{32}$	112 $4\frac{13}{32}$	13 $\frac{33}{64}$	19 $\frac{3}{4}$	10 $\frac{25}{64}$	17 $2\frac{1}{32}$	40 $1\frac{9}{16}$	115 4.5276	60.3 $2\frac{3}{8}$	57.1 2.248	19.8 0.780	M16 $\frac{5}{8}$
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UELFS309D1W3 UELFS309-110D1W3 UELFS309-111D1W3 UELFS309-112D1W3	160 $6\frac{5}{16}$	125 $4\frac{59}{64}$	14 $\frac{35}{64}$	19 $\frac{3}{4}$	11 $\frac{7}{16}$	18 $\frac{23}{32}$	44 $1\frac{47}{64}$	125 4.9213	63.9 $2\frac{33}{64}$	58.7 2.311	19.8 0.780	M16 $\frac{5}{8}$
50 $1\frac{13}{16}$ $1\frac{7}{8}$ $1\frac{15}{16}$	UELFS310D1W3 UELFS310-113D1W3 UELFS310-114D1W3 UELFS310-115D1W3	175 $6\frac{7}{8}$	132 $5\frac{13}{64}$	16 $\frac{5}{8}$	23 $\frac{29}{32}$	12 $\frac{15}{32}$	19 $\frac{3}{4}$	48 $1\frac{57}{64}$	140 5.5118	70 $2\frac{3}{4}$	66.6 2.622	24.6 0.969	M20 $\frac{3}{4}$
55 2 $2\frac{1}{16}$ $2\frac{1}{8}$ $2\frac{3}{16}$	UELFS311D1W3 UELFS311-200D1W3 UELFS311-201D1W3 UELFS311-202D1W3 UELFS311-203D1W3	185 $7\frac{9}{32}$	140 $5\frac{33}{64}$	17 $\frac{43}{64}$	23 $\frac{29}{32}$	13 $\frac{33}{64}$	20 $\frac{25}{32}$	52 $2\frac{3}{64}$	150 5.9055	75.2 $2\frac{61}{64}$	73 2.874	27.8 1.094	M20 $\frac{3}{4}$

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".



Note: Please refer to page 36 for size of grease fitting.

Bearing number	Housing ¹⁾ number	Mass of unit
		kg lb
UEL305D1W3	FS305D1	1.3
UEL305-013D1W3	FS305D1	
UEL305-014D1W3	FS305D1	2.9
UEL305-015D1W3	FS305D1	
UEL305-100D1W3	FS305D1	
UEL306D1W3	FS306D1	1.9
UEL306-101D1W3	FS306D1	
UEL306-102D1W3	FS306D1	4.2
UEL306-103D1W3	FS306D1	
UEL307D1W3	FS307D1	2.3
UEL307-104D1W3	FS307D1	
UEL307-105D1W3	FS307D1	5.1
UEL307-106D1W3	FS307D1	
UEL307-107D1W3	FS307D1	
UEL308D1W3	FS308D1	3.3
UEL308-108D1W3	FS308D1	
UEL308-109D1W3	FS308D1	7.3
UEL309D1W3	FS309D1	4.0
UEL309-110D1W3	FS309D1	
UEL309-111D1W3	FS309D1	8.8
UEL309-112D1W3	FS309D1	
UEL310D1W3	FS310D1	5.2
UEL310-113D1W3	FS310D1	
UEL310-114D1W3	FS310D1	11
UEL310-115D1W3	FS310D1	
UEL311D1W3	FS311D1	6.2
UEL311-200D1W3	FS311D1	
UEL311-201D1W3	FS311D1	14
UEL311-202D1W3	FS311D1	
UEL311-203D1W3	FS311D1	

sale@technobearing.ru

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

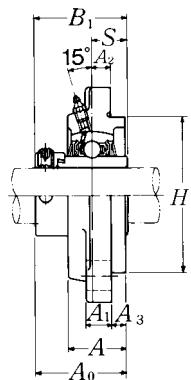
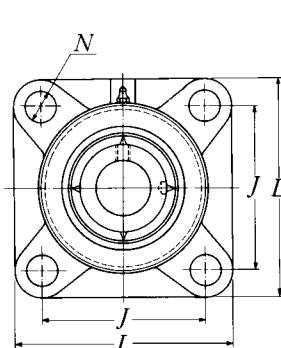
Square flanged units cast housing w/spigot joint**Eccentric locking collar type**

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions											Bolt size mm inch
		L	J	A ₂	N	A ₃	A ₁	A	H ₃	A ₀	B ₁	S	
60 $2\frac{1}{4}$ $2\frac{5}{16}$ $2\frac{3}{8}$ $2\frac{7}{16}$	UELFS312D1W3	195	150	19	23	14	22	56	160	81.5	79.4	30.95	M20
	UELFS312-204D1W3	$7\frac{11}{16}$	$5\frac{29}{32}$	$\frac{3}{4}$	$\frac{29}{32}$	$\frac{35}{64}$	$\frac{7}{8}$	$2\frac{13}{16}$	6.2992	$3\frac{13}{64}$	3.126	1.219	$\frac{3}{4}$
	UELFS312-205D1W3												
	UELFS312-206D1W3												
	UELFS312-207D1W3												
65 $2\frac{1}{2}$ $2\frac{9}{16}$	UELFS313D1W3	208	166	15	23	18	22	58	175	86.2	85.7	32.55	M20
	UELFS313-208D1W3	$8\frac{3}{16}$	$6\frac{17}{32}$	$\frac{19}{32}$	$\frac{29}{32}$	$\frac{45}{64}$	$\frac{7}{8}$	$2\frac{9}{32}$	6.8898	$3\frac{25}{64}$	3.374	1.281	$\frac{3}{4}$
	UELFS313-209D1W3												
70 $2\frac{5}{8}$ $2\frac{11}{16}$ $2\frac{3}{4}$	UELFS314D1W3	226	178	18	25	18	25	61	185	94.0	92.1	34.15	M22
	UELFS314-210D1W3	$8\frac{29}{32}$	$7\frac{1}{64}$	$\frac{45}{64}$	$\frac{63}{64}$	$\frac{45}{64}$	$\frac{31}{32}$	$2\frac{13}{32}$	7.2835	$3\frac{45}{64}$	3.626	1.344	$\frac{7}{8}$
	UELFS314-211D1W3												
	UELFS314-212D1W3												
75 $2\frac{13}{16}$ $2\frac{7}{8}$ $2\frac{15}{16}$ 3	UELFS315D1W3	236	184	21	25	18	25	66	200	101.7	100	37.3	M22
	UELFS315-213D1W3	$9\frac{9}{32}$	$7\frac{1}{4}$	$\frac{53}{64}$	$\frac{63}{64}$	$\frac{45}{64}$	$\frac{31}{32}$	$2\frac{19}{32}$	7.8740	4	3.937	1.469	$\frac{7}{8}$
	UELFS315-214D1W3												
	UELFS315-215D1W3												
	UELFS315-300D1W3												
80 $3\frac{1}{16}$ $3\frac{1}{8}$ $3\frac{3}{16}$	UELFS316D1W3	250	196	18	31	20	27	68	210	103.9	106.4	40.5	M27
	UELFS316-301D1W3	$9\frac{27}{32}$	$7\frac{23}{32}$	$\frac{45}{64}$	$1\frac{1}{32}$	$\frac{25}{32}$	$1\frac{1}{16}$	$2\frac{43}{64}$	8.2677	$4\frac{3}{32}$	4.189	1.594	1
	UELFS316-302D1W3												
	UELFS316-303D1W3												
85 $3\frac{1}{4}$ $3\frac{5}{16}$ $3\frac{7}{16}$	UELFS317D1W3	260	204	24	31	20	27	74	220	111.5	109.5	42.05	M27
	UELFS317-304D1W3	$10\frac{1}{4}$	$8\frac{1}{32}$	$\frac{15}{16}$	$1\frac{1}{32}$	$\frac{25}{32}$	$1\frac{1}{16}$	$2\frac{29}{32}$	8.6614	$4\frac{25}{64}$	4.311	1.656	1
	UELFS317-305D1W3												
	UELFS317-307D1W3												
90 $3\frac{7}{16}$ $3\frac{1}{2}$	UELFS318D1W3	280	216	24	35	20	30	76	240	116.3	115.9	43.65	M30
	UELFS318-307D1W3	$11\frac{1}{32}$	$8\frac{1}{2}$	$\frac{15}{16}$	$1\frac{3}{8}$	$\frac{25}{32}$	$1\frac{1}{16}$	$2\frac{63}{64}$	9.4488	$4\frac{37}{64}$	4.563	1.719	$1\frac{1}{8}$
	UELFS318-308D1W3												

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

Bearing number	Housing ¹⁾ number	Mass of unit
		kg lb
UEL312D1W3	FS312D1	7.4
UEL312-204D1W3	FS312D1	
UEL312-205D1W3	FS312D1	16
UEL312-206D1W3	FS312D1	
UEL312-207D1W3	FS312D1	
UEL313D1W3	FS313D1	9.0
UEL313-208D1W3	FS313D1	20
UEL313-209D1W3	FS313D1	
UEL314D1W3	FS314D1	11
UEL314-210D1W3	FS314D1	
UEL314-211D1W3	FS314D1	24
UEL314-212D1W3	FS314D1	
UEL315D1W3	FS315D1	13
UEL315-213D1W3	FS315D1	
UEL315-214D1W3	FS315D1	29
UEL315-215D1W3	FS315D1	
UEL315-300D1W3	FS315D1	
UEL316D1W3	FS316D1	16
UEL316-301D1W3	FS316D1	
UEL316-302D1W3	FS316D1	35
UEL316-303D1W3	FS316D1	
UEL317D1W3	FS317D1	18
UEL317-304D1W3	FS317D1	
UEL317-305D1W3	FS317D1	40
UEL317-307D1W3	FS317D1	
UEL318D1W3	FS318D1	22
UEL318-307D1W3	FS318D1	49
UEL318-308D1W3	FS318D1	

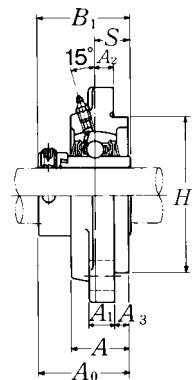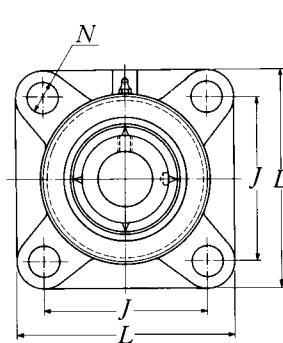

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions											Bolt size mm inch
		L	J	A ₂	N	A ₃	A ₁	A	H ₃	A ₀	B ₁	S	
95 3 ⁵ / ₈	UELFS319D1W3	290	228	39	35	20	30	94	250	142.4	122.3	38.9	M30
3 ¹¹ / ₁₆	UELFS319-310D1W3	11 ¹³ / ₃₂	8 ³¹ / ₃₂	1 ¹⁷ / ₃₂	1 ³ / ₈	2 ⁵ / ₃₂	1 ³ / ₁₆	3 ⁴⁵ / ₆₄	9.8425	5 ³⁹ / ₆₄	4.815	1.531	1 ¹ / ₈
3 ³ / ₄	UELFS319-311D1W3												
100 3 ¹³ / ₁₆	UELFS320D1W3	310	242	39	38	20	32	94	260	137.6	128.6	50	M33
3 ⁷ / ₈	UELFS320-313D1W3	12 ⁷ / ₃₂	9 ¹⁷ / ₃₂	1 ¹⁷ / ₃₂	1 ¹ / ₂	2 ⁵ / ₃₂	1 ¹ / ₄	3 ⁴⁵ / ₆₄	10.2362	5 ²⁷ / ₆₄	5.063	1.969	1 ¹ / ₄
3 ¹⁵ / ₁₆	UELFS320-314D1W3												
4	UELFS320-315D1W3												
	UELFS320-400D1W3												
105	UELFS321D1W3	310	242	39	38	20	32	94	260	150.3	139.7	48.4	M33
110	UELFS322D1W3	340	266	35	41	25	35	96	300	152.1	141.3	49.2	M36

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

Bearing number	Housing ¹⁾ number	Mass of unit
		kg lb
UEL319D1W3	FS319D1	26
UEL319-310D1W3	FS319D1	
UEL319-311D1W3	FS319D1	57
UEL319-312D1W3	FS319D1	
UEL320D1W3	FS320D1	31
UEL320-313D1W3	FS320D1	
UEL320-314D1W3	FS320D1	68
UEL320-315D1W3	FS320D1	
UEL320-400D1W3	FS320D1	
UEL321D1W3	FS321D1	31
UEL322D1W3	FS322D1	41


sale@technobearing.ru

Round flanged units cast housing w/spigot joint

Eccentric locking collar type

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

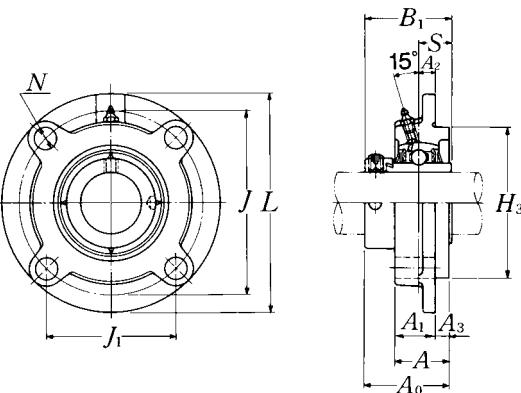


Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions												Bolt size mm inch	
		mm						inch							
		L	J	(J ₁)	A ₂	N	A ₃	A ₁	A	H ₃	A ₀	B ₁	S		
20 $\frac{3}{4}$	UELFC204D1W3 UELFC204-012D1W3	100 $3\frac{15}{16}$	78 $3\frac{5}{64}$	55.2 $2\frac{11}{64}$	10 $\frac{25}{64}$	12 $1\frac{15}{32}$	5 $\frac{13}{64}$	20.5 $1\frac{13}{16}$	25.5 1	62 2.4409	41.6 $1\frac{41}{64}$	43.7 1.720	17.1 0.673	M10 $\frac{3}{8}$	
$25\frac{13}{16}$ $\frac{7}{8}$ $1\frac{15}{16}$ $1\frac{1}{16}$	UELFC205D1W3 UELFC205-013D1W3	115 $4\frac{17}{32}$	90 $3\frac{35}{64}$	63.6 $2\frac{1}{2}$	10 $\frac{25}{64}$	12 $1\frac{15}{32}$	6 $\frac{15}{64}$	21 $\frac{13}{16}$	27 $1\frac{1}{16}$	70 2.7559	42.9 $1\frac{11}{16}$	44.4 1.748	17.45 0.687	M10	
	UELFC205-014D1W3 UELFC205-015D1W3 UELFC205-100D1W3														
	UELFC206D1W3 UELFC206-110D1W3 UELFC206-102D1W3 UELFC206-103D1W3 UELFC206-104D1W3	125 $4\frac{29}{32}$	100 $3\frac{15}{16}$	70.7 $2\frac{25}{32}$	10 $\frac{25}{64}$	12 $1\frac{15}{32}$	8 $\frac{5}{16}$	23 $\frac{29}{32}$	31 $1\frac{1}{32}$	80 3.1496	48.1 $1\frac{57}{64}$	48.4 1.906	18.25 0.719	M10 $\frac{3}{8}$	
	UELFC207D1W3 UELFC207-104D1W3 UELFC207-105D1W3 UELFC207-106D1W3 UELFC207-107D1W3	135 $5\frac{5}{16}$	110 $4\frac{21}{64}$	77.8 $3\frac{1}{16}$	11 $\frac{7}{16}$	14 $\frac{35}{64}$	8 $\frac{5}{16}$	26 $1\frac{1}{32}$	34 $1\frac{11}{32}$	90 3.5433	51.3 $2\frac{1}{64}$	51.1 2.012	18.8 0.740	M12 $\frac{7}{16}$	
	UELFC208D1W3 UELFC208-108D1W3 UELFC208-109D1W3	145 $5\frac{23}{32}$	120 $4\frac{23}{32}$	84.9 $3\frac{11}{32}$	11 $\frac{7}{16}$	14 $\frac{35}{64}$	10 $\frac{25}{64}$	26 $1\frac{1}{32}$	36 $1\frac{27}{64}$	100 3.9370	55.9 $2\frac{13}{64}$	56.3 2.217	21.4 0.843	M12 $\frac{7}{16}$	
$45\frac{1}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UELFC209D1W3 UELFC209-110D1W3 UELFC209-111D1W3 UELFC209-112D1W3	160 $6\frac{5}{16}$	132 $5\frac{13}{64}$	93.3 $3\frac{43}{64}$	10 $\frac{25}{64}$	16 $\frac{5}{8}$	12 $\frac{15}{32}$	26 $1\frac{1}{32}$	38 $1\frac{1}{2}$	105 4.1339	56.9 $2\frac{15}{64}$	56.3 2.217	21.4 0.843	M14 $\frac{1}{2}$	
	UELFC210D1W3 UELFC210-113D1W3 UELFC210-114D1W3 UELFC210-115D1W3 UELFC210-200D1W3	165 $6\frac{1}{2}$	138 $5\frac{7}{16}$	97.6 $3\frac{27}{32}$	10 $\frac{25}{64}$	16 $\frac{5}{8}$	12 $\frac{15}{32}$	28 $1\frac{3}{32}$	40 $1\frac{37}{64}$	110 4.3307	60.1 $2\frac{23}{64}$	62.7 2.469	24.6 0.969	M14 $\frac{1}{2}$	

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

Bearing number	Housing ¹⁾ number	Mass of unit
		kg lb
UEL204D1W3	FC204D1	0.8
UEL204-012D1W3	FC204D1	1.8
UEL205D1W3	FC205D1	1.1
UEL205-013D1W3	FC205D1	
UEL205-014D1W3	FC205D1	2.4
UEL205-015D1W3	FC205D1	
UEL205-100D1W3	FC205D1	
UEL206D1W3	FC206D1	1.4
UEL206-101D1W3	FC206D1	
UEL206-102D1W3	FC206D1	3.1
UEL206-103D1W3	FC206D1	
UEL206-104D1W3	FC206D1	
UEL207D1W3	FC207D1	1.8
UEL207-104D1W3	FC207D1	
UEL207-105D1W3	FC207D1	4.0
UEL207-106D1W3	FC207D1	
UEL207-107D1W3	FC207D1	
UEL208D1W3	FC208D1	2.1
UEL208-108D1W3	FC208D1	
UEL208-109D1W3	FC208D1	4.6
UEL209D1W3	FC209D1	2.8
UEL209-110D1W3	FC209D1	
UEL209-111D1W3	FC209D1	6.2
UEL209-112D1W3	FC209D1	
UEL210D1W3	FC210D1	3.1
UEL210-113D1W3	FC210D1	
UEL210-114D1W3	FC210D1	6.8
UEL210-115D1W3	FC210D1	
UEL210-200D1W3	FC210D1	

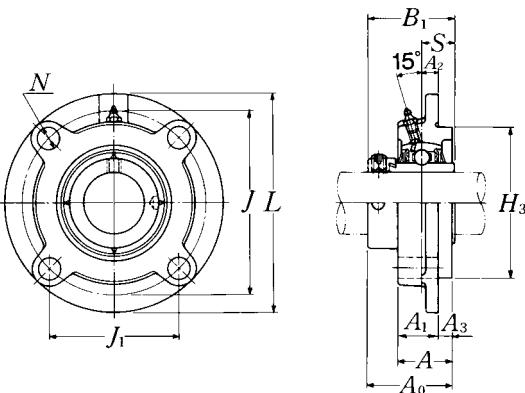

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.


Bearing number	Housing ¹⁾ number	Mass of unit
		kg lb
UEL211D1W3	FC211D1	4.3
UEL211-200D1W3	FC211D1	
UEL211-201D1W3	FC211D1	9.5
UEL211-202D1W3	FC211D1	
UEL211-203D1W3	FC211D1	
UEL212D1W3	FC212D1	5.2
UEL212-204D1W3	FC212D1	
UEL212-205D1W3	FC212D1	11
UEL212-206D1W3	FC212D1	
UEL212-207D1W3	FC212D1	
UEL213D1W3	FC213D1	6.5
UEL213-208D1W3	FC213D1	14
UEL213-209D1W3	FC213D1	
UEL214D1W3	FC214D1	7.4
UEL214-210D1W3	FC214D1	
UEL214-211D1W3	FC214D1	16
UEL214-212D1W3	FC214D1	
UEL215D1W3	FC215D1	7.8
UEL215-213D1W3	FC215D1	
UEL215-214D1W3	FC215D1	17
UEL215-215D1W3	FC215D1	
UEL215-300D1W3	FC215D1	

sale@technobearing.ru

Rhombus flanged units cast housing
Eccentric locking collar type

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

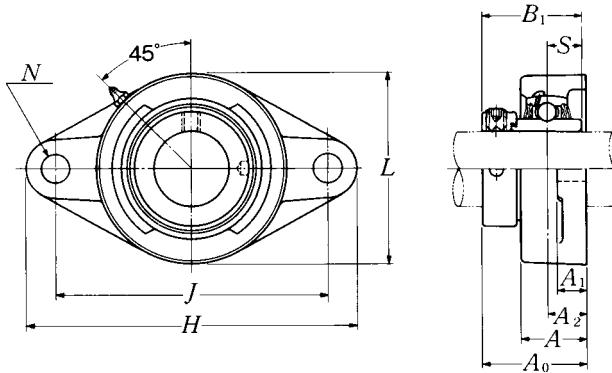

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions										Bolt size mm inch
		H	J	A ₂	A ₁	A	N	L	A ₀	B ₁	S	
20 $\frac{3}{4}$	UELFLU204D1W3 UELFLU204-012D1W3	113 $4\frac{7}{16}$	90 $3\frac{35}{64}$	19 $\frac{3}{4}$	15 $1\frac{19}{32}$	29.5 $1\frac{5}{32}$	11.5 $\frac{29}{64}$	61 $2\frac{13}{32}$	45.6 $1\frac{51}{64}$	43.7 1.720	17.1 0.673	M10 $\frac{5}{16}$
25 $\frac{13}{16}$ $\frac{7}{8}$ $\frac{15}{16}$ 1	UELFLU205D1W3 UELFLU205-013D1W3 UELFLU205-014D1W3 UELFLU205-015D1W3 UELFLU205-100D1W3	125 $4\frac{29}{32}$	99 $3\frac{57}{64}$	19 $\frac{3}{4}$	15 $1\frac{19}{32}$	30 $1\frac{3}{16}$	11.5 $\frac{29}{64}$	70 $2\frac{3}{4}$	45.9 $1\frac{13}{16}$	44.4 1.748	17.45 0.687	M10 $\frac{3}{8}$
30 $1\frac{1}{16}$ $1\frac{1}{8}$ $1\frac{3}{16}$ $1\frac{1}{4}$	UELFLU206D1W3 UELFLU206-101D1W3 UELFLU206-102D1W3 UELFLU206-103D1W3 UELFLU206-104D1W3	142 $5\frac{19}{32}$	116.5 $4\frac{19}{32}$	20 $2\frac{5}{32}$	16 $\frac{5}{8}$	33 $1\frac{5}{16}$	11.5 $\frac{29}{64}$	83 $3\frac{9}{32}$	50.1 $1\frac{31}{32}$	48.4 1.906	18.25 0.719	M10 $\frac{3}{8}$
35 $1\frac{1}{4}$ $1\frac{5}{16}$ $1\frac{3}{8}$ $1\frac{7}{16}$	UELFLU207D1W3 UELFLU207-104D1W3 UELFLU207-105D1W3 UELFLU207-106D1W3 UELFLU207-107D1W3	156 $6\frac{5}{32}$	130 $5\frac{1}{8}$	21 $5\frac{3}{64}$	17 $2\frac{1}{32}$	36 $1\frac{13}{32}$	14 $\frac{35}{64}$	96 $3\frac{25}{32}$	53.3 $2\frac{3}{32}$	51.1 2.012	18.8 0.740	M12 $\frac{1}{2}$
40 $1\frac{1}{2}$ $1\frac{9}{16}$	UELFLU208D1W3 UELFLU208-108D1W3 UELFLU208-109D1W3	172 $6\frac{25}{32}$	143.5 $5\frac{21}{32}$	24 $1\frac{5}{16}$	17 $2\frac{1}{32}$	39 $1\frac{17}{32}$	14 $\frac{35}{64}$	105 $4\frac{1}{8}$	58.9 $2\frac{5}{16}$	56.3 2.217	21.4 0.843	M12 $\frac{1}{2}$
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UELFLU209D1W3 UELFLU209-110D1W3 UELFLU209-111D1W3 UELFLU209-112D1W3	180 $7\frac{3}{32}$	148.5 $5\frac{27}{32}$	24 $1\frac{5}{16}$	18 $2\frac{3}{32}$	40 $1\frac{9}{16}$	16 $\frac{5}{8}$	111 $4\frac{3}{8}$	58.9 $2\frac{5}{16}$	56.3 2.217	21.4 0.843	M14 $\frac{1}{2}$
50 $1\frac{13}{16}$ $1\frac{7}{8}$ $1\frac{15}{16}$ 2	UELFLU210D1W3 UELFLU210-113D1W3 UELFLU210-114D1W3 UELFLU210-115D1W3 UELFLU210-200D1W3	190 $7\frac{15}{32}$	157 $6\frac{3}{16}$	28 $1\frac{7}{64}$	20 $2\frac{5}{32}$	46 $1\frac{13}{16}$	18 $\frac{45}{64}$	116 $4\frac{9}{16}$	66.1 $2\frac{39}{64}$	62.7 2.469	24.6 0.969	M16 $\frac{5}{8}$

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".


Note: Please refer to page 36 for size of grease fitting.

Bearing number	Housing ¹⁾ number	Mass of unit
		kg lb
UEL204D1W3	FLU204D1	0.6
UEL204-012D1W3	FLU204D1	1.3
UEL205D1W3	FLU205D1	0.7
UEL205-013D1W3	FLU205D1	
UEL205-014D1W3	FLU205D1	1.5
UEL205-015D1W3	FLU205D1	
UEL205-100D1W3	FLU205D1	
UEL206D1W3	FLU206D1	1.1
UEL206-101D1W3	FLU206D1	
UEL206-102D1W3	FLU206D1	2.4
UEL206-103D1W3	FLU206D1	
UEL206-104D1W3	FLU206D1	
UEL207D1W3	FLU207D1	1.5
UEL207-104D1W3	FLU207D1	
UEL207-105D1W3	FLU207D1	3.3
UEL207-106D1W3	FLU207D1	
UEL207-107D1W3	FLU207D1	
UEL208D1W3	FLU208D1	1.9
UEL208-108D1W3	FLU208D1	4.2
UEL208-109D1W3	FLU208D1	
UEL209D1W3	FLU209D1	2.3
UEL209-110D1W3	FLU209D1	
UEL209-111D1W3	FLU209D1	5.1
UEL209-112D1W3	FLU209D1	
UEL210D1W3	FLU210D1	2.9
UEL210-113D1W3	FLU210D1	
UEL210-114D1W3	FLU210D1	6.4
UEL210-115D1W3	FLU210D1	
UEL210-200D1W3	FLU210D1	

sale@technobearing.ru

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

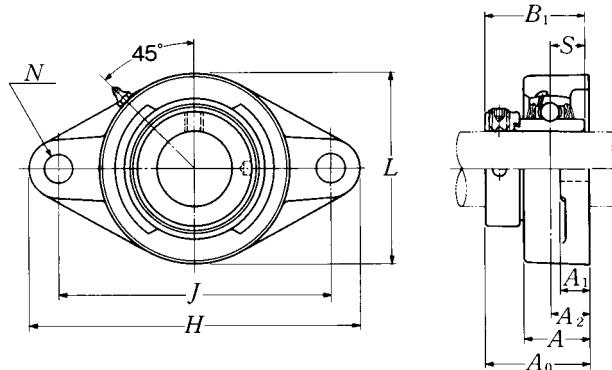
Rhombus flanged units cast housing
Eccentric locking collar type


Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions										Bolt size mm inch
		H	J	A ₂	A ₁	A	N	L	A ₀	B ₁	S	
55 2 $2\frac{1}{16}$ $2\frac{1}{8}$ $2\frac{3}{16}$	UELFLU211D1W3	217	184	31	21	49	18	134	74.6	71.4	27.75	M16
	UELFLU211-200D1W3	$8\frac{17}{32}$	$7\frac{1}{4}$	$1\frac{7}{32}$	$\frac{13}{16}$	$1\frac{15}{16}$	$\frac{45}{64}$	$5\frac{9}{32}$	$2\frac{15}{16}$	2.811	1.093	$\frac{5}{8}$
	UELFLU211-201D1W3											
	UELFLU211-202D1W3											
	UELFLU211-203D1W3											
60 $2\frac{1}{4}$ $2\frac{5}{16}$ $2\frac{3}{8}$ $2\frac{7}{16}$	UELFLU212D1W3	235	202	34	21	53	18	138	80.8	77.8	30.95	M16
	UELFLU212-204D1W3	$9\frac{1}{4}$	$7\frac{61}{64}$	$1\frac{11}{32}$	$\frac{13}{16}$	$2\frac{3}{32}$	$\frac{45}{64}$	$5\frac{7}{16}$	$3\frac{3}{16}$	3.063	1.219	$\frac{5}{8}$
	UELFLU212-205D1W3											
	UELFLU212-206D1W3											
	UELFLU212-207D1W3											
65 $2\frac{1}{2}$ $2\frac{9}{16}$	UELFLU213D1W3	248	210	38	22	59	20.5	152	89.55	85.7	34.15	M18
	UELFLU213-208D1W3	$9\frac{3}{4}$	$8\frac{17}{64}$	$1\frac{1}{2}$	$\frac{7}{8}$	$2\frac{5}{16}$	$1\frac{3}{16}$	$5\frac{31}{32}$	$3\frac{17}{32}$	3.374	1.344	$\frac{5}{8}$
	UELFLU213-209D1W3											
70 $2\frac{5}{8}$ $2\frac{11}{16}$ $2\frac{3}{4}$	UELFLU214D1W3	257	216	38	22	62	20.5	159	89.55	85.7	34.15	M18
	UELFLU214-210D1W3	$10\frac{1}{8}$	$8\frac{1}{2}$	$1\frac{1}{2}$	$\frac{7}{8}$	$2\frac{7}{16}$	$1\frac{3}{16}$	$6\frac{1}{4}$	$3\frac{17}{32}$	3.374	1.344	$\frac{5}{8}$
	UELFLU214-211D1W3											
	UELFLU214-212D1W3											
75 $2\frac{13}{16}$ $2\frac{7}{8}$ $2\frac{15}{16}$ 3	UELFLU215D1W3	266	225	41	22	65	20.5	165	95.7	92	37.3	M18
	UELFLU215-213D1W3	$10\frac{15}{32}$	$8\frac{55}{64}$	$1\frac{39}{64}$	$\frac{7}{8}$	$2\frac{9}{16}$	$1\frac{3}{16}$	$6\frac{1}{2}$	$3\frac{49}{64}$	3.622	1.469	$\frac{5}{8}$
	UELFLU215-214D1W3											
	UELFLU215-215D1W3											
	UELFLU215-300D1W3											

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

Bearing number	Housing ¹⁾ number	Mass of unit
		kg lb
UEL211D1W3	FLU211D1	3.6
UEL211-200D1W3	FLU211D1	
UEL211-201D1W3	FLU211D1	7.9
UEL211-202D1W3	FLU211D1	
UEL211-203D1W3	FLU211D1	
UEL212D1W3	FLU212D1	4.0
UEL212-204D1W3	FLU212D1	
UEL212-205D1W3	FLU212D1	8.8
UEL212-206D1W3	FLU212D1	
UEL212-207D1W3	FLU212D1	
UEL213D1W3	FLU213D1	5.6
UEL213-208D1W3	FLU213D1	12
UEL213-209D1W3	FLU213D1	
UEL214D1W3	FLU214D1	6.3
UEL214-210D1W3	FLU214D1	
UEL214-211D1W3	FLU214D1	14
UEL214-212D1W3	FLU214D1	
UEL215D1W3	FLU215D1	6.8
UEL215-213D1W3	FLU215D1	
UEL215-214D1W3	FLU215D1	15
UEL215-215D1W3	FLU215D1	
UEL215-300D1W3	FLU215D1	

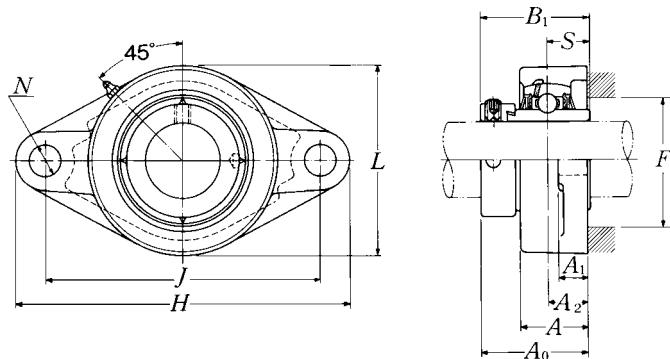

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions												Bolt size mm inch
		H	J	A ₂	A ₁	mm A	inch N	L	A ₀	B ₁	S	F min.		
20 $\frac{3}{4}$	UELFL204D1W3 UELFL204-012D1W3	113 $4\frac{7}{16}$	90 $3\frac{35}{64}$	15 $1\frac{19}{32}$	11 $\frac{7}{16}$	25.5 1	12 $1\frac{15}{32}$	60 $2\frac{3}{8}$	41.6 $1\frac{41}{64}$	43.7 1.720	17.1 0.673	34 $1\frac{11}{32}$	M10 $\frac{3}{8}$	
25 $\frac{13}{16}$ $\frac{7}{8}$ $\frac{15}{16}$ 1	UELFL205D1W3 UELFL205-013D1W3 UELFL205-014D1W3 UELFL205-015D1W3 UELFL205-100D1W3	130 $5\frac{1}{8}$	99 $3\frac{57}{64}$	16 $\frac{5}{8}$	13 $\frac{1}{2}$	27 $1\frac{1}{16}$	16 $\frac{5}{8}$	68 $2\frac{11}{64}$	42.9 $1\frac{11}{16}$	44.4 1.748	17.45 0.687	38 $1\frac{1}{2}$	M14	
30 $1\frac{1}{6}$ $1\frac{1}{8}$ $1\frac{3}{16}$ $1\frac{1}{4}$	UELFL206D1W3 UELFL206-101D1W3 UELFL206-102D1W3 UELFL206-103D1W3 UELFL206-104D1W3	148 $5\frac{13}{16}$	117 $4\frac{9}{64}$	18 $4\frac{5}{64}$	13 $\frac{1}{2}$	31 $1\frac{7}{32}$	16 $\frac{5}{8}$	80 $3\frac{5}{32}$	48.1 $1\frac{57}{64}$	48.4 1.906	18.25 0.719	45 $1\frac{25}{32}$	M14 $\frac{1}{2}$	
35 $1\frac{1}{4}$ $1\frac{5}{16}$ $1\frac{3}{8}$ $1\frac{7}{16}$	UELFL207D1W3 UELFL207-104D1W3 UELFL207-105D1W3 UELFL207-106D1W3 UELFL207-107D1W3	161 $6\frac{1}{32}$	130 $5\frac{1}{8}$	19 $\frac{3}{4}$	15 $1\frac{19}{32}$	34 $1\frac{11}{32}$	16 $\frac{5}{8}$	90 $3\frac{17}{32}$	51.3 $2\frac{1}{64}$	51.1 2.012	18.8 0.740	51 2	M14 $\frac{1}{2}$	
40 $1\frac{1}{2}$ $1\frac{9}{16}$	UELFL208D1W3 UELFL208-108D1W3 UELFL208-109D1W3	175 $6\frac{7}{8}$	144 $5\frac{43}{64}$	21 $5\frac{3}{64}$	15 $1\frac{19}{32}$	36 $1\frac{13}{32}$	16 $\frac{5}{8}$	100 $3\frac{15}{16}$	55.9 $2\frac{13}{16}$	56.3 2.217	21.4 0.843	57 $2\frac{1}{4}$	M14 $\frac{1}{2}$	
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UELFL209D1W3 UELFL209-110D1W3 UELFL209-111D1W3 UELFL209-112D1W3	188 $7\frac{13}{32}$	148 $5\frac{53}{64}$	22 $5\frac{55}{64}$	16 $\frac{5}{8}$	38 $1\frac{1}{2}$	19 $\frac{3}{4}$	108 $4\frac{1}{4}$	56.9 $2\frac{15}{64}$	56.3 2.217	21.4 0.843	62 $2\frac{7}{16}$	M16 $\frac{5}{8}$	
50 $1\frac{13}{16}$ $1\frac{7}{8}$ $1\frac{15}{16}$ 2	UELFL210D1W3 UELFL210-113D1W3 UELFL210-114D1W3 UELFL210-115D1W3 UELFL210-200D1W3	197 $7\frac{3}{4}$	157 $6\frac{3}{16}$	22 $5\frac{55}{64}$	16 $\frac{5}{8}$	40 $1\frac{9}{16}$	19 $\frac{3}{4}$	115 $4\frac{17}{32}$	60.1 $2\frac{23}{64}$	62.7 2.469	24.6 0.969	67 $2\frac{41}{64}$	M16 $\frac{5}{8}$	

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".


Note: Please refer to page 36 for size of grease fitting.

Bearing number	Housing ¹⁾ number	Mass of unit
		kg lb
UEL204D1W3	FL204D1	0.5
UEL204-012D1W3	FL204D1	1.1
UEL205D1W3	FL205D1	0.7
UEL205-013D1W3	FL205D1	
UEL205-014D1W3	FL205D1	1.5
UEL205-015D1W3	FL205D1	
UEL205-100D1W3	FL205D1	
UEL206D1W3	FL206D1	1.0
UEL206-101D1W3	FL206D1	
UEL206-102D1W3	FL206D1	2.2
UEL206-103D1W3	FL206D1	
UEL206-104D1W3	FL206D1	
UEL207D1W3	FL207D1	1.3
UEL207-104D1W3	FL207D1	
UEL207-105D1W3	FL207D1	2.9
UEL207-106D1W3	FL207D1	
UEL207-107D1W3	FL207D1	
UEL208D1W3	FL208D1	1.6
UEL208-108D1W3	FL208D1	
UEL208-109D1W3	FL208D1	3.5
UEL209D1W3	FL209D1	2.0
UEL209-110D1W3	FL209D1	
UEL209-111D1W3	FL209D1	4.4
UEL209-112D1W3	FL209D1	
UEL210D1W3	FL210D1	2.2
UEL210-113D1W3	FL210D1	
UEL210-114D1W3	FL210D1	4.9
UEL210-115D1W3	FL210D1	
UEL210-200D1W3	FL210D1	

sale@technobearing.ru

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

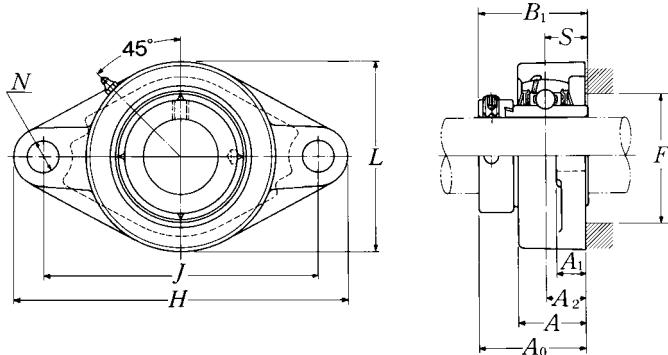Rhombus flanged units cast housing
Eccentric locking collar type


Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions												Bolt size mm inch
		H	J	A ₂	A ₁	mm A	inch N	L	A ₀	B ₁	S	F min.		
55 2 $2\frac{1}{16}$ $2\frac{1}{8}$ $2\frac{3}{16}$	UELFL211D1W3	224	184	25	18	43	19	130	68.6	71.4	27.75	73	M16	
	UELFL211-200D1W3	$8\frac{13}{16}$	$7\frac{1}{4}$	$\frac{63}{64}$	$\frac{23}{32}$	$1\frac{11}{16}$	$\frac{3}{4}$	$5\frac{1}{8}$	$2\frac{45}{64}$	2.811	1.093	$2\frac{7}{8}$	$\frac{5}{8}$	
	UELFL211-201D1W3													
	UELFL211-202D1W3													
	UELFL211-203D1W3													
60 $2\frac{1}{4}$ $2\frac{5}{16}$ $2\frac{3}{8}$ $2\frac{7}{16}$	UELFL212D1W3	250	202	29	18	48	23	140	75.8	77.8	30.95	81	M20	
	UELFL212-204D1W3	$9\frac{27}{32}$	$7\frac{61}{64}$	$1\frac{9}{64}$	$\frac{23}{32}$	$1\frac{7}{8}$	$\frac{29}{32}$	$5\frac{1}{2}$	$2\frac{63}{64}$	3.063	1.219	$3\frac{3}{16}$	$\frac{3}{4}$	
	UELFL212-205D1W3													
	UELFL212-206D1W3													
	UELFL212-207D1W3													
65 $2\frac{1}{2}$ $2\frac{9}{16}$	UELFL213D1W3	258	210	30	22	50	23	155	81.55	85.7	34.15	87	M20	
	UELFL213-208D1W3	$10\frac{5}{32}$	$8\frac{17}{64}$	$1\frac{3}{16}$	$\frac{7}{8}$	$1\frac{31}{32}$	$\frac{29}{32}$	$6\frac{3}{32}$	$3\frac{13}{64}$	3.374	1.344	$3\frac{7}{16}$	$\frac{3}{4}$	
	UELFL213-209D1W3													
70 $2\frac{5}{8}$ $2\frac{11}{16}$ $2\frac{3}{4}$	UELFL214D1W3	265	216	31	22	54	23	160	82.55	85.7	34.15	91	M20	
	UELFL214-210D1W3	$10\frac{7}{16}$	$8\frac{1}{2}$	$1\frac{7}{32}$	$\frac{7}{8}$	$2\frac{1}{8}$	$\frac{29}{32}$	$6\frac{5}{16}$	$3\frac{1}{4}$	3.374	1.344	$3\frac{37}{64}$	$\frac{3}{4}$	
	UELFL214-211D1W3													
	UELFL214-212D1W3													
75 $2\frac{13}{16}$ $2\frac{7}{8}$ $2\frac{15}{16}$ 3	UELFL215D1W3	275	225	34	22	56	23	165	88.7	92	37.3	97	M20	
	UELFL215-213D1W3	$10\frac{13}{16}$	$8\frac{55}{64}$	$1\frac{11}{32}$	$\frac{7}{8}$	$2\frac{7}{32}$	$\frac{29}{32}$	$6\frac{1}{2}$	$3\frac{31}{64}$	3.622	1.469	$3\frac{13}{16}$	$\frac{3}{4}$	
	UELFL215-214D1W3													
	UELFL215-215D1W3													
	UELFL215-300D1W3													

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.


Bearing number	Housing ¹⁾ number	Mass of unit
		kg lb
UEL211D1W3	FL211D1	3.2
UEL211-200D1W3	FL211D1	
UEL211-201D1W3	FL211D1	7.1
UEL211-202D1W3	FL211D1	
UEL211-203D1W3	FL211D1	
UEL212D1W3	FL212D1	4.1
UEL212-204D1W3	FL212D1	
UEL212-205D1W3	FL212D1	9.0
UEL212-206D1W3	FL212D1	
UEL212-207D1W3	FL212D1	
UEL213D1W3	FL213D1	5.5
UEL213-208D1W3	FL213D1	12
UEL213-209D1W3	FL213D1	
UEL214D1W3	FL214D1	5.8
UEL214-210D1W3	FL214D1	
UEL214-211D1W3	FL214D1	13
UEL214-212D1W3	FL214D1	
UEL215D1W3	FL215D1	6.3
UEL215-213D1W3	FL215D1	
UEL215-214D1W3	FL215D1	14
UEL215-215D1W3	FL215D1	
UEL215-300D1W3	FL215D1	

sale@technobearing.ru

**Rhombus flanged units cast housing
Eccentric locking collar type**

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

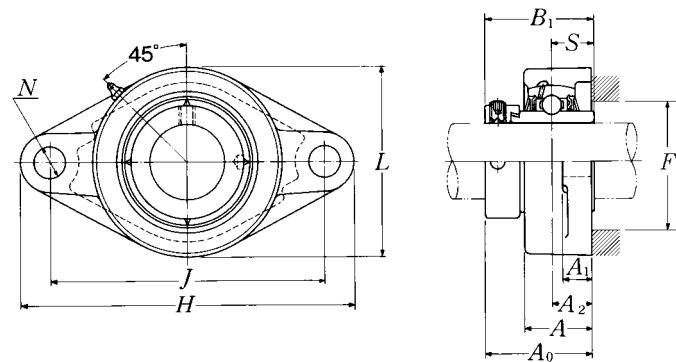

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions												Bolt size mm inch
		H	J	A ₂	A ₁	mm A	inch N	L	A ₀	B ₁	S	F min.		
25 $\frac{13}{16}$ $\frac{7}{8}$ $\frac{15}{16}$ 1	UELFL305D1W3	150	113	16	13	29	19	80	46.1	46.8	16.7	41	M16	
	UELFL305-013D1W3	$5\frac{29}{32}$	$4\frac{29}{64}$	$\frac{5}{8}$	$\frac{1}{2}$	$1\frac{5}{32}$	$\frac{3}{4}$	$3\frac{5}{32}$	$1\frac{13}{16}$	1.843	0.657	$1\frac{39}{64}$	$\frac{5}{8}$	
	UELFL305-014D1W3													
	UELFL305-015D1W3													
	UELFL305-100D1W3													
30 $1\frac{1}{16}$ $1\frac{1}{8}$ $1\frac{3}{16}$	UELFL306D1W3	180	134	18	15	32	23	90	50.5	50	17.5	49	M20	
	UELFL306-101D1W3	$7\frac{3}{32}$	$5\frac{9}{32}$	$4\frac{5}{64}$	$1\frac{19}{32}$	$1\frac{1}{4}$	$2\frac{29}{32}$	$3\frac{17}{32}$	$1\frac{63}{64}$	1.969	0.689	$1\frac{15}{16}$	$\frac{3}{4}$	
	UELFL306-102D1W3													
	UELFL306-103D1W3													
35 $1\frac{1}{4}$ $1\frac{5}{16}$ $1\frac{3}{8}$ $1\frac{7}{16}$	UELFL307D1W3	185	141	20	16	36	23	100	53.3	51.6	18.3	—	M20	
	UELFL307-104D1W3	$7\frac{9}{32}$	$5\frac{35}{64}$	$2\frac{25}{32}$	$\frac{5}{8}$	$1\frac{13}{32}$	$2\frac{29}{32}$	$3\frac{15}{16}$	$2\frac{3}{32}$	2.031	0.720	—	$\frac{3}{4}$	
	UELFL307-105D1W3													
	UELFL307-106D1W3													
	UELFL307-107D1W3													
40 $1\frac{1}{2}$ $1\frac{9}{16}$	UELFL308D1W3	200	158	23	17	40	23	112	60.3	57.1	19.8	—	M20	
	UELFL308-108D1W3	$7\frac{7}{8}$	$6\frac{7}{32}$	$2\frac{29}{32}$	$2\frac{1}{32}$	$1\frac{9}{16}$	$2\frac{29}{32}$	$4\frac{13}{32}$	$2\frac{3}{8}$	2.248	0.780	—	$\frac{3}{4}$	
	UELFL308-109D1W3													
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UELFL309D1W3	230	177	25	18	44	25	125	63.9	58.7	19.8	—	M22	
	UELFL309-110D1W3	$9\frac{1}{16}$	$6\frac{31}{32}$	$6\frac{3}{64}$	$2\frac{23}{32}$	$1\frac{23}{32}$	$6\frac{3}{64}$	$4\frac{29}{32}$	$2\frac{33}{64}$	2.311	0.780	—	$\frac{7}{8}$	
	UELFL309-111D1W3													
	UELFL309-112D1W3													
50 $1\frac{13}{16}$ $1\frac{7}{8}$ $1\frac{15}{16}$	UELFL310D1W3	240	187	28	19	48	25	140	70	66.6	24.6	—	M22	
	UELFL310-113D1W3	$9\frac{7}{16}$	$7\frac{23}{64}$	$1\frac{7}{64}$	$\frac{3}{4}$	$1\frac{7}{8}$	$6\frac{3}{64}$	$5\frac{1}{2}$	$2\frac{3}{4}$	2.622	0.969	—	$\frac{7}{8}$	
	UELFL310-114D1W3													
	UELFL310-115D1W3													
55 2 $2\frac{1}{16}$ $2\frac{1}{8}$ $2\frac{3}{16}$	UELFL311D1W3	250	198	30	20	52	25	150	75.2	73	27.8	—	M22	
	UELFL311-200D1W3	$9\frac{27}{32}$	$7\frac{51}{64}$	$1\frac{3}{16}$	$2\frac{25}{32}$	$2\frac{1}{16}$	$6\frac{3}{64}$	$5\frac{29}{32}$	$2\frac{61}{64}$	2.874	1.094	—	$\frac{7}{8}$	
	UELFL311-201D1W3													
	UELFL311-202D1W3													
	UELFL311-203D1W3													

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

2) Inner race face does not protrude from the housing face except UELFL305 and UELFL316.

Note: Please refer to page 36 for size of grease fitting.


Bearing number	Housing ¹⁾ number	Mass of unit
		kg lb
UEL305D1W3	FL305D1	1.0
UEL305-013D1W3	FL305D1	
UEL305-014D1W3	FL305D1	2.2
UEL305-015D1W3	FL305D1	
UEL305-100D1W3	FL305D1	
UEL306D1W3	FL306D1	1.6
UEL306-101D1W3	FL306D1	
UEL306-102D1W3	FL306D1	3.5
UEL306-103D1W3	FL306D1	
UEL307D1W3	FL307D1	1.8
UEL307-104D1W3	FL307D1	
UEL307-105D1W3	FL307D1	4.0
UEL307-106D1W3	FL307D1	
UEL307-107D1W3	FL307D1	
UEL308D1W3	FL308D1	2.3
UEL308-108D1W3	FL308D1	
UEL308-109D1W3	FL308D1	5.1
UEL309D1W3	FL309D1	3.1
UEL309-110D1W3	FL309D1	
UEL309-111D1W3	FL309D1	6.8
UEL309-112D1W3	FL309D1	
UEL310D1W3	FL310D1	4.2
UEL310-113D1W3	FL310D1	
UEL310-114D1W3	FL310D1	9.3
UEL310-115D1W3	FL310D1	
UEL311D1W3	FL311D1	4.9
UEL311-200D1W3	FL311D1	
UEL311-201D1W3	FL311D1	11
UEL311-202D1W3	FL311D1	
UEL311-203D1W3	FL311D1	

sale@technobearing.ru

Rhombus flanged units cast housing
Eccentric locking collar type

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

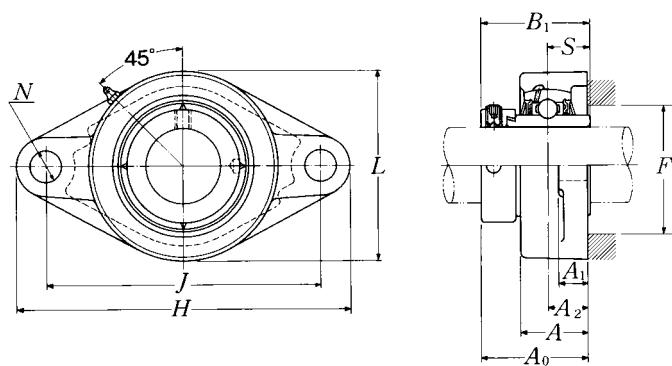

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions												Bolt size mm inch
		H	J	A ₂	A ₁	mm A	inch N	L	A ₀	B ₁	S	F min.		
60 2 1/4 2 5/16 2 3/8 2 7/16	UELFL312D1W3	270	212	33	22	56	31	160	81.45	79.4	30.95	—	M27	
	UELFL312-204D1W3	10 5/8	8 11/32	1 19/64	7/8	2 7/32	1 1/32	6 5/16	3 13/64	3.126	1.219	—	1	
	UELFL312-205D1W3													
	UELFL312-206D1W3													
	UELFL312-207D1W3													
65 2 1/2 2 9/16	UELFL313D1W3	295	240	33	25	58	31	175	86.15	85.7	32.55	93	M27	
	UELFL313-208D1W3	11 5/8	9 29/64	1 19/64	3 1/32	2 9/32	1 1/32	6 7/8	3 25/64	3.374	1.281	3 21/32	1	
	UELFL313-209D1W3													
70 2 5/8 2 11/16 2 3/4	UELFL314D1W3	315	250	36	28	61	35	185	93.95	92.1	34.15	—	M30	
	UELFL314-210D1W3	12 13/32	9 27/32	1 27/64	1 3/32	2 13/32	1 3/8	7 9/32	3 45/64	3.626	1.344	—	1 1/8	
	UELFL314-211D1W3													
	UELFL314-212D1W3													
75 2 13/16 2 7/8 2 15/16 3	UELFL315D1W3	320	260	39	30	66	35	195	101.7	100	37.3	106	M30	
	UELFL315-213D1W3	12 19/32	10 15/64	1 17/32	1 3/16	2 19/32	1 3/8	7 11/16	4	3.937	1.469	4 11/64	1 1/8	
	UELFL315-214D1W3													
	UELFL315-215D1W3													
	UELFL315-300D1W3													
80 3 1/16 3 1/8 3 3/16	UELFL316D1W3	355	285	38	32	68	38	210	103.9	106.4	40.5	112	M33	
	UELFL316-301D1W3	13 31/32	11 7/32	1 1/2	1 1/4	2 11/16	1 1/2	8 9/32	4 3/32	4.189	1.594	4 13/32	1 1/4	
	UELFL316-302D1W3													
	UELFL316-303D1W3													
85 3 1/4 3 5/16 3 7/16	UELFL317D1W3	370	300	44	32	74	38	220	111.45	109.5	42.05	119	M33	
	UELFL317-304D1W3	14 9/16	11 13/16	1 47/64	1 1/4	2 29/32	1 1/2	8 21/32	4 25/64	4.311	1.656	4 11/16	1 1/4	
	UELFL317-305D1W3													
	UELFL317-307D1W3													
90 3 7/16 3 1/2	UELFL318D1W3	385	315	44	36	76	38	235	116.25	115.9	43.65	125	M33	
	UELFL318-307D1W3	15 5/32	12 13/32	1 47/64	1 13/32	3	1 1/2	9 1/4	4 37/64	4.563	1.719	4 59/64	1 1/4	
	UELFL318-308D1W3													

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

2) Inner race face does not protrude from the housing face except UELFL305 and UELFL316.


Note: Please refer to page 36 for size of grease fitting.

Bearing number	Housing ¹⁾ number	Mass of unit
		kg lb
UEL312D1W3	FL312D1	6.1
UEL312-204D1W3	FL312D1	
UEL312-205D1W3	FL312D1	13
UEL312-206D1W3	FL312D1	
UEL312-207D1W3	FL312D1	
UEL313D1W3	FL313D1	8.0
UEL313-208D1W3	FL313D1	18
UEL313-209D1W3	FL313D1	
UEL314D1W3	FL314D1	9.2
UEL314-210D1W3	FL314D1	
UEL314-211D1W3	FL314D1	20
UEL314-212D1W3	FL314D1	
UEL315D1W3	FL315D1	10
UEL315-213D1W3	FL315D1	
UEL315-214D1W3	FL315D1	22
UEL315-215D1W3	FL315D1	
UEL315-300D1W3	FL315D1	
UEL316D1W3	FL316D1	14
UEL316-301D1W3	FL316D1	
UEL316-302D1W3	FL316D1	31
UEL316-303D1W3	FL316D1	
UEL317D1W3	FL317D1	16
UEL317-304D1W3	FL317D1	
UEL317-305D1W3	FL317D1	35
UEL317-307D1W3	FL317D1	
UEL318D1W3	FL318D1	19
UEL318-307D1W3	FL318D1	
UEL318-308D1W3	FL318D1	42

sale@technobearing.ru

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)


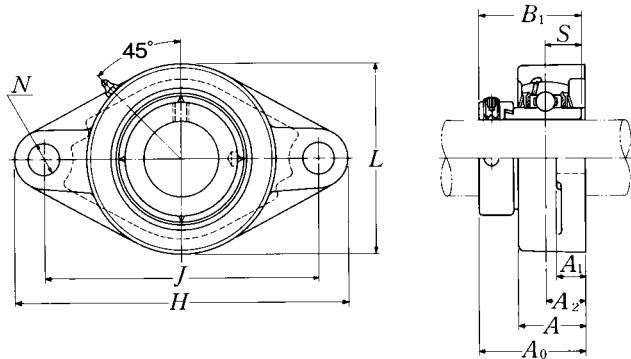
Rhombus flanged units cast housing
Eccentric locking collar type


Shaft dia. mm inch	Unit number ^{1) 2)}	Nominal dimensions										Bolt size mm inch	Bearing number
		H	J	A ₂	A ₁	A	N	L	A ₀	B ₁	S		
95 $3\frac{5}{8}$	UELFL319D1W3	405	330	59	40	94	41	250	142.4	122.3	38.9	M36	UEL319D1W3
$3\frac{11}{16}$	UELFL319-310D1W3	$15\frac{15}{16}$	$12\frac{63}{64}$	$2\frac{21}{64}$	$1\frac{9}{16}$	$3\frac{11}{16}$	$1\frac{39}{64}$	$9\frac{27}{32}$	$5\frac{39}{64}$	4.815	1.531	$1\frac{3}{8}$	UEL319-310D1W3
$3\frac{3}{4}$	UELFL319-311D1W3												UEL319-311D1W3
	UELFL319-312D1W3												UEL319-312D1W3
100 $3\frac{13}{16}$	UELFL320D1W3	440	360	59	40	94	44	270	137.6	128.6	50	M39	UEL320D1W3
$3\frac{7}{8}$	UELFL320-313D1W3	$17\frac{5}{16}$	$14\frac{11}{64}$	$2\frac{21}{64}$	$1\frac{9}{16}$	$3\frac{11}{16}$	$1\frac{47}{64}$	$10\frac{5}{8}$	$5\frac{27}{64}$	5.063	1.969	$1\frac{1}{2}$	UEL320-313D1W3
$3\frac{15}{16}$	UELFL320-314D1W3												UEL320-314D1W3
4	UELFL320-315D1W3												UEL320-315D1W3
	UELFL320-400D1W3												UEL320-400D1W3
105	UELFL321D1W3	440	360	59	40	94	44	270	150.3	139.7	48.4	M39	UEL321D1W3
110	UELFL322D1W3	470	390	60	42	96	44	300	152.1	141.3	49.2	M39	UEL322D1W3

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.


Housing number ¹⁾	Mass of unit
	kg lb
FL319D1	24
FL319D1	
FL319D1	53
FL319D1	
FL320D1	28
FL320D1	
FL320D1	62
FL320D1	
FL320D1	
FL321D1	30
FL322D1	36

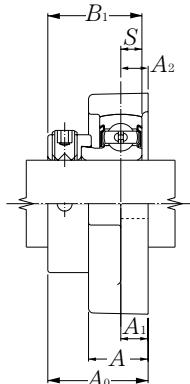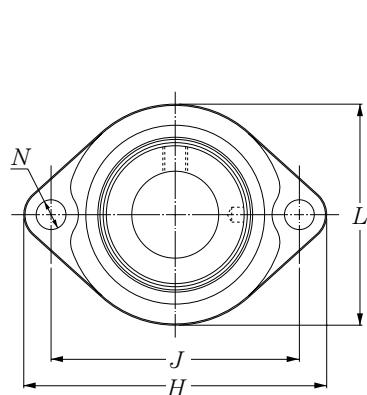

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions										Bolt size mm inch	Bearing number ¹⁾		
		mm					inch								
		H	J	A ₂	A ₁	A	N	L	A ₀	B ₁	S				
12 1/2	AELFB201W3	81	63.5	9.5	9.5	18	7	56	31.6	28.6	6.5	M6	AEL201W3		
	AELFB201-008W3	3 ³ / ₁₆	2 ¹ / ₂	3/8	3/8	2 ³ / ₃₂	9/32	2 ⁷ / ₃₂	1 ¹ / ₄	1.126	0.256	1/4	AEL201-008W3		
15 9/16 5/8	AELFB202W3	81	63.5	9.5	9.5	18	7	56	31.6	28.6	6.5	M6	AEL202W3		
	AELFB202-009W3	3 ³ / ₁₆	2 ¹ / ₂	3/8	3/8	2 ³ / ₃₂	9/32	2 ⁷ / ₃₂	1 ¹ / ₄	1.126	0.256	1/4	AEL202-009W3		
	AELFB202-010W3												AEL202-010W3		
17 11/16	AELFB203W3	81	63.5	9.5	9.5	18	7	56	31.6	28.6	6.5	M6	AEL203W3		
	AELFB203-011W3	3 ³ / ₁₆	2 ¹ / ₂	3/8	3/8	2 ³ / ₃₂	9/32	2 ⁷ / ₃₂	1 ¹ / ₄	1.126	0.256	1/4	AEL203-011W3		
20 3/4	AELFB204W3	90	71.5	11	11	20	10	61	34.5	31	7.5	M8	AEL204W3		
	AELFB204-012W3	3 ³⁵ / ₆₄	2 ¹³ / ₁₆	7/16	7/16	2 ⁵ / ₃₂	25/64	2 ¹⁷ / ₃₂	1 ²³ / ₆₄	1.220	0.295	5/16	AEL204-012W3		
25 13/16 7/8 15/16 1	AELFB205W3	95	76	11	11	20	10	64	34.5	31	7.5	M8	AEL205W3		
	AELFB205-013W3												AEL205-013W3		
	AELFB205-014W3												AEL205-014W3		
	AELFB205-015W3												AEL205-015W3		
	AELFB205-100W3												AEL205-100W3		
30 1 1/16 1 1/8 1 3/16 1 1/4	AELFB206W3	113	90.5	12	12	22.5	12	76	38.7	35.7	9	M10	AEL206W3		
	AELFB206-101W3												AEL206-101W3		
	AELFB206-102W3												AEL206-102W3		
	AELFB206-103W3												AEL206-103W3		
	AELFB206-104W3												AEL206-104W3		
35 1 1/4 1 5/16 1 3/8 1 7/16	AELFB207W3	122	100	11	13	24	12	89	40.4	38.9	9.5	M10	AEL207W3		
	AELFB207-104W3												AEL207-104W3		
	AELFB207-105W3												AEL207-105W3		
	AELFB207-106W3												AEL207-106W3		
	AELFB207-107W3												AEL207-107W3		

Remarks: 1) If relubricatable type is needed, please order with suffix "D1".


Housing number	Mass of unit
	kg lb
FB201	0.3
FB201	0.7
FB201	0.3
FB201	0.7
FB201	0.3
FB201	0.7
FB204	0.4
FB204	0.9
FB205	0.4
FB205	0.9
FB206	0.6
FB206	1.3
FB207	0.9
FB207	2.0

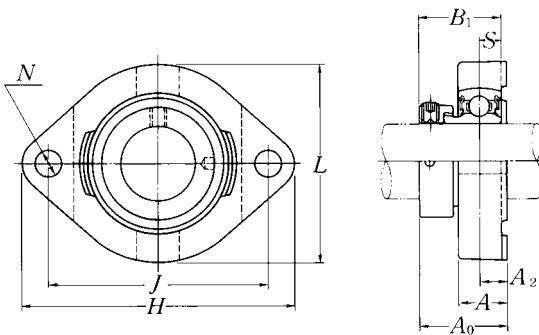

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions									Bolt size mm inch	Bearing ¹⁾ number	Housing ¹⁾ number	Mass of unit kg lb		
		mm		inch												
		H	J	A ₂	A	N	L	A ₀	B ₁	S						
12 1/2	AELFD201W3	81	63	8.5	15	7	59	30.6	28.6	6.5	M 6 1/4	AEL201W3	FD201	0.3		
	AELFD201-008W3	3 3/16	2 31/64	21/64	19/32	9/32	2 5/16	1 13/64	1.126	0.256		AEL201-008W3	FD201	0.7		
15 9/16 5/8	AELFD202W3	81	63	8.5	15	7	59	30.6	28.6	6.5	M 6 1/4	AEL202W3	FD201	0.3		
	AELFD202-009W3	3 3/16	2 31/64	21/64	19/32	9/32	2 5/16	1 13/64	1.126	0.256		AEL202-009W3	FD201	0.7		
	AELFD202-010W3											AEL202-010W3	FD201			
17 11/16	AELFD203W3	81	63	8.5	15	7	59	30.6	28.6	6.5	M 6 1/4	AEL203W3	FD201	0.3		
	AELFD203-011W3	3 3/16	2 31/64	21/64	19/32	9/32	2 5/16	1 13/64	1.126	0.256		AEL203-011W3	FD201	0.7		
20 3/4	AELFD204W3	90	71	9.5	17	10	67	33	31	7.5	M 8 5/16	AEL204W3	FD204	0.4		
	AELFD204-012W3	3 17/32	2 51/64	3/8	21/32	25/64	2 5/8	1 19/64	1.220	0.295		AEL204-012W3	FD204	0.9		
25 13/16 7/8 15/16 1	AELFD205W3	95	76	9.5	17	10	71	33	31	7.5	M 8 5/16	AEL205W3	FD205	0.5		
	AELFD205-013W3											AEL205-013W3	FD205			
	AELFD205-014W3											AEL205-014W3	FD205			
	AELFD205-015W3											AEL205-015W3	FD205			
	AELFD205-100W3											AEL205-100W3	FD205	1.1		
30 1 1/16 1 1/8 1 3/16 1 1/4	AELFD206W3	113	90	12	21	12	84	38.7	35.7	9	M10 3/8	AEL206W3	FD206	0.8		
	AELFD206-101W3											AEL206-101W3	FD206			
	AELFD206-102W3											AEL206-102W3	FD206			
	AELFD206-103W3											AEL206-103W3	FD206	1.8		
	AELFD206-104W3											AEL206-104W3	FD206			
35 1 1/4 1 5/16 1 3/8 1 7/16	AELFD207W3	125	100	12.5	22	12	94	41.9	38.9	9.5	M10 3/8	AEL207W3	FD207	1.1		
	AELFD207-104W3											AEL207-104W3	FD207			
	AELFD207-105W3											AEL207-105W3	FD207			
	AELFD207-106W3											AEL207-106W3	FD207			
	AELFD207-107W3											AEL207-107W3	FD207	2.4		
40 1 1/2 1 1/16	AELFD208W3	148	119	14.5	25	13.5	104	47.2	43.7	11	M12 7/16	AEL208W3	FD208	1.5		
	AELFD208-108W3											AEL208-108W3	FD208			
	AELFD208-109W3											AEL208-109W3	FD208	3.3		

Remarks: 1) If relubricatable type is needed, please order with prefix "A-" and suffix "D1".


Example: A-AELFD201D1W3

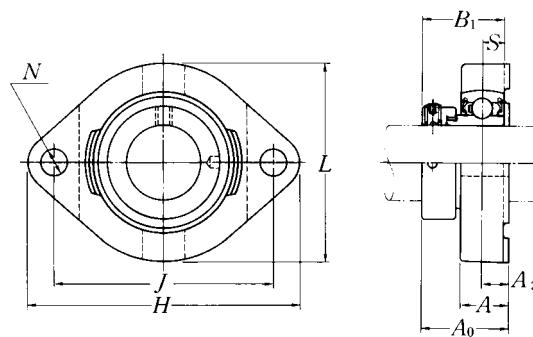Light rhombus flanged units cast housing
Eccentric locking collar type


Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions										Bolt size mm inch	Bearing ¹⁾ number	Housing ¹⁾ number	Mass of unit kg lb				
		mm					inch												
		H	J	A ₂	A	N	L	A ₀	B ₁	S									
12 1/2	JELFD201W3	81	63	8.5	15	7	59	30.6	28.6	6.5	M 6	JEL201W3	FD201	0.3					
	JELFD201-008W3	3 ³ / ₁₆	2 ³¹ / ₆₄	2 ¹ / ₆₄	19 ¹ / ₃₂	9 ¹ / ₃₂	2 ⁵ / ₁₆	1 ¹³ / ₆₄	1.126	0.256	1/4	JEL201-008W3	FD201	0.7					
15 9/16 5/8	JELFD202W3	81	63	8.5	15	7	59	30.6	28.6	6.5	M 6	JEL202W3	FD201	0.3					
	JELFD202-009W3	3 ³ / ₁₆	2 ³¹ / ₆₄	2 ¹ / ₆₄	19 ¹ / ₃₂	9 ¹ / ₃₂	2 ⁵ / ₁₆	1 ¹³ / ₆₄	1.126	0.256	1/4	JEL202-009W3	FD201	0.7					
	JELFD202-010W3											JEL202-010W3	FD201						
17 11/16	JELFD203W3	81	63	8.5	15	7	59	30.6	28.6	6.5	M 6	JEL203W3	FD201	0.3					
	JELFD203-011W3	3 ³ / ₁₆	2 ³¹ / ₆₄	2 ¹ / ₆₄	19 ¹ / ₃₂	9 ¹ / ₃₂	2 ⁵ / ₁₆	1 ¹³ / ₆₄	1.126	0.256	1/4	JEL203-011W3	FD201	0.7					
20 3/4	JELFD204W3	90	71	9.5	17	10	67	33	31	7.5	M 8	JEL204W3	FD204	0.4					
	JELFD204-012W3	3 ¹⁷ / ₃₂	2 ⁵¹ / ₆₄	3/8	2 ¹ / ₃₂	25 ⁵ / ₆₄	2 ⁵ / ₈	1 ¹⁹ / ₆₄	1.220	0.295	5/16	JEL204-012W3	FD204	0.9					
25 13/16 7/8 15/16 1	JELFD205W3	95	76	9.5	17	10	71	33	31	7.5	M 8	JEL205W3	FD205	0.5					
	JELFD205-013W3											JEL205-013W3	FD205						
	JELFD205-014W3											JEL205-014W3	FD205						
	JELFD205-015W3											JEL205-015W3	FD205						
	JELFD205-100W3											JEL205-100W3	FD205						
30 1 1/16 1 1/8 1 3/16 1 1/4	JELFD206W3	113	90	12	21	12	84	38.7	35.7	9	M10	JEL206W3	FD206	0.8					
	JELFD206-101W3											JEL206-101W3	FD206						
	JELFD206-102W3											JEL206-102W3	FD206						
	JELFD206-103W3											JEL206-103W3	FD206						
	JELFD206-104W3											JEL206-104W3	FD206						
35 1 1/4 1 5/16 1 3/8 1 7/16	JELFD207W3	125	100	12.5	22	12	94	41.9	38.9	9.5	M10	JEL207W3	FD207	1.1					
	JELFD207-104W3											JEL207-104W3	FD207						
	JELFD207-105W3											JEL207-105W3	FD207						
	JELFD207-106W3											JEL207-106W3	FD207						
	JELFD207-107W3											JEL207-107W3	FD207						
40 1 1/2 1 9/16	JELFD208W3	148	119	14.5	25	13.5	104	47.2	43.7	11	M12	JEL208W3	FD208	1.5					
	JELFD208-108W3											JEL208-108W3	FD208						
	JELFD208-109W3											JEL208-109W3	FD208						

Remarks: 1) If relubricatable type is needed, please order with prefix "A-" and suffix "D1".

Example: A-JELFD201D1W3

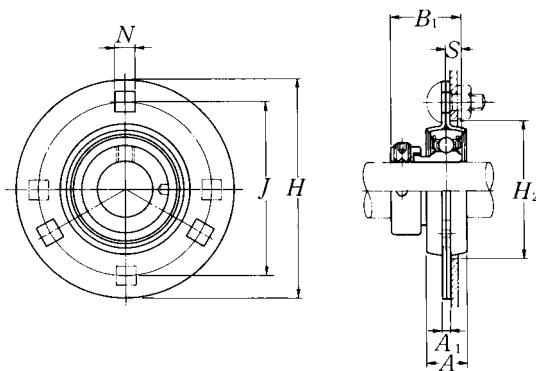
Round flanged units pressed steel housing**Eccentric locking collar type**

Shaft dia. mm inch	Unit number	Nominal dimensions								Bolt size mm inch	Max. load recommended		Bearing number
		mm				inch					radial N	axial lbf	
12 1/2	AELPF201W3	81	63.5	4	7.1	14	28.6	6.5	49	M6	2 700	1 350	AEL201W3
	AELPF201-008W3	3 3/16	2 1/2	0.157	9/32	9/16	1.126	0.256	1 59/64	1/4	600	300	AEL201-008W3
15 9/16 5/8	AELPF202W3	81	63.5	4	7.1	14	28.6	6.5	49	M6	2 700	1 350	AEL202W3
	AELPF202-009W3	3 3/16	2 1/2	0.157	9/32	9/16	1.126	0.256	1 59/64	1/4	600	300	AEL202-009W3
	AELPF202-010W3	3 3/16	2 1/2	0.157	9/32	9/16	1.126	0.256	1 59/64	1/4	600	300	AEL202-010W3
17 11/16	AELPF203W3	81	63.5	4	7.1	14	28.6	6.5	49	M6	2 700	1 350	AEL203W3
	AELPF203-011W3	3 3/16	2 1/2	0.157	9/32	9/16	1.126	0.256	1 59/64	1/4	600	300	AEL203-011W3
20 3/4	AELPF204W3	90	71.5	4	9	16	31	7.5	56	M8	3 000	1 500	AEL204W3
	AELPF204-012W3	3 13/32	2 13/16	0.157	23/64	5/8	1.220	0.295	2 13/64	5/16	660	330	AEL204-012W3
25 13/16 7/8 15/16 1	AELPF205W3	95	76	4	9	18	31	7.5	60	M8	4 000	2 000	AEL205W3
	AELPF205-013W3	3 3/4	2 63/64	0.157	23/64	23/32	1.220	0.295	2 23/64	5/16	880	440	AEL205-013W3
	AELPF205-014W3	3 3/4	2 63/64	0.157	23/64	23/32	1.220	0.295	2 23/64	5/16	880	440	AEL205-014W3
	AELPF205-015W3	3 3/4	2 63/64	0.157	23/64	23/32	1.220	0.295	2 23/64	5/16	880	440	AEL205-015W3
	AELPF205-100W3	3 3/4	2 63/64	0.157	23/64	23/32	1.220	0.295	2 23/64	5/16	880	440	AEL205-100W3
30 1 1/16 1 1/8 1 3/16 1 1/4	AELPF206W3	113	90.5	5.2	11	18	35.7	9	71	M10	5 000	2 500	AEL206W3
	AELPF206-101W3	4 7/16	3 9/16	0.205	7/16	23/32	1.406	0.354	2 51/64	3/8	1 100	550	AEL206-101W3
	AELPF206-102W3	4 7/16	3 9/16	0.205	7/16	23/32	1.406	0.354	2 51/64	3/8	1 100	550	AEL206-102W3
	AELPF206-103W3	4 7/16	3 9/16	0.205	7/16	23/32	1.406	0.354	2 51/64	3/8	1 100	550	AEL206-103W3
	AELPF206-104W3	4 7/16	3 9/16	0.205	7/16	23/32	1.406	0.354	2 51/64	3/8	1 100	550	AEL206-104W3
35 1 1/4 1 5/16 1 3/8 1 7/16	AELPF207W3	122	100	5.2	11	20	38.9	9.5	81	M10	6 000	3 000	AEL207W3
	AELPF207-104W3	4 13/16	3 15/16	0.205	7/16	25/32	1.531	0.374	3 3/16	3/8	1 300	650	AEL207-104W3
	AELPF207-105W3	4 13/16	3 15/16	0.205	7/16	25/32	1.531	0.374	3 3/16	3/8	1 300	650	AEL207-105W3
	AELPF207-106W3	4 13/16	3 15/16	0.205	7/16	25/32	1.531	0.374	3 3/16	3/8	1 300	650	AEL207-106W3
	AELPF207-107W3	4 13/16	3 15/16	0.205	7/16	25/32	1.531	0.374	3 3/16	3/8	1 300	650	AEL207-107W3
40 1 1/2 1 9/16	AELPF208W3	148	119	6.8	13.5	21	43.7	11	91	M12	7 000	3 500	AEL208W3
	AELPF208-108W3	5 13/16	4 11/16	0.268	17/32	13/16	1.720	0.433	3 37/64	1/2	1 500	750	AEL208-108W3
	AELPF208-109W3	5 13/16	4 11/16	0.268	17/32	13/16	1.720	0.433	3 37/64	1/2	1 500	750	AEL208-109W3

Remarks: 1) AELPF208 has four bolt holes.

2) The permissible load only applies in applications where the load is stable and the speed is 2400 min⁻¹ or less.

Housing number	Mass of unit kg lb
PF203	0.3
PF203	0.7
PF203	0.3
PF203	0.7
PF203	0.7
PF203	0.3
PF203	0.7
PF204	0.3
PF204	0.7
PF205	0.4
PF205	
PF205	0.9
PF205	
PF205	
PF206	0.6
PF206	
PF206	1.3
PF206	
PF206	
PF207	0.8
PF207	
PF207	1.8
PF207	
PF207	
PF208	1.4
PF208	3.1
PF208	

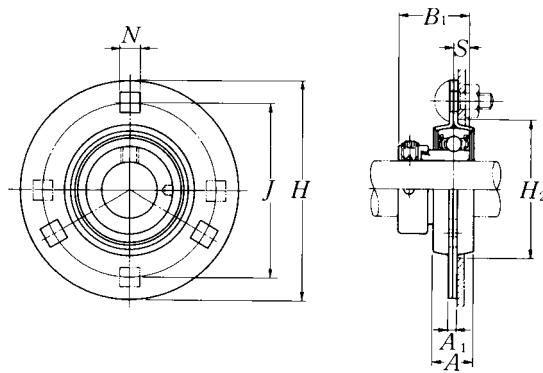Round flanged units pressed steel housing**Eccentric locking collar type**

Shaft dia. mm inch	Unit number	Nominal dimensions								Bolt size mm inch	Max. load recommended		Bearing number
		mm				inch					radial N	axial lbf	
12 1/2	JELPF201W3	81	63.5	4	7.1	14	28.6	6.5	49	M6	2 700	1 350	JEL201W3
	JELPF201-008W3	3 3/16	2 1/2	0.157	9/32	9/16	1.126	0.256	1 59/64	1/4	600	300	JEL201-008W3
15 9/16 5/8	JELPF202W3	81	63.5	4	7.1	14	28.6	6.5	49	M6	2 700	1 350	JEL202W3
	JELPF202-009W3	3 3/16	2 1/2	0.157	9/32	9/16	1.126	0.256	1 59/64	1/4	600	300	JEL202-009W3
	JELPF202-010W3												JEL202-010W3
17 11/16	JELPF203W3	81	63.5	4	7.1	14	28.6	6.5	49	M6	2 700	1 350	JEL203W3
	JELPF203-011W3	3 3/16	2 1/2	0.157	9/32	9/16	1.126	0.256	1 59/64	1/4	600	300	JEL203-011W3
20 3/4	JELPF204W3	90	71.5	4	9	16	31	7.5	56	M8	3 000	1 500	JEL204W3
	JELPF204-012W3	3 17/32	2 13/16	0.157	23/64	5/8	1.220	0.295	2 13/64	5/16	660	330	JEL204-012W3
25 13/16 7/8 15/16 1	JELPF205W3	95	76	4	9	18	31	7.5	60	M8	4 000	2 000	JEL205W3
	JELPF205-013W3												JEL205-013W3
	JELPF205-014W3												JEL205-014W3
	JELPF205-015W3												JEL205-015W3
	JELPF205-100W3												JEL205-100W3
30 1 1/16 1 1/8 1 3/16 1 1/4	JELPF206W3	113	90.5	5.2	11	18	35.7	9	71	M10	5 000	2 500	JEL206W3
	JELPF206-101W3												JEL206-101W3
	JELPF206-102W3												JEL206-102W3
	JELPF206-103W3												JEL206-103W3
	JELPF206-104W3												JEL206-104W3
35 1 1/4 1 5/16 1 3/8 1 7/16	JELPF207W3	122	100	5.2	11	20	38.9	9.5	81	M10	6 000	3 000	JEL207W3
	JELPF207-104W3												JEL207-104W3
	JELPF207-105W3												JEL207-105W3
	JELPF207-106W3												JEL207-106W3
	JELPF207-107W3												JEL207-107W3
40 1 1/2 1 9/16	JELPF208W3	148	119	6.8	13.5	21	43.7	11	91	M12	7 000	3 500	JEL208W3
	JELPF208-108W3												JEL208-108W3
	JELPF208-109W3												JEL208-109W3

Remarks: 1) JELPF208 has four bolt holes.


2) The permissible load only applies in applications where the load is stable and the speed is 2400 min⁻¹ or less.

Housing number	Mass of unit
	kg lb
PF203	0.3
PF203	0.7
PF203	0.2
PF203	0.4
PF203	
PF203	0.2
PF203	0.4
PF204	0.3
PF204	0.7
PF205	0.4
PF205	
PF205	0.9
PF205	
PF205	
PF206	0.6
PF206	
PF206	1.3
PF206	
PF206	
PF207	0.8
PF207	
PF207	1.8
PF207	
PF207	
PF208	1.4
PF208	
PF208	3.1
PF208	

sale@technobearing.ru


www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

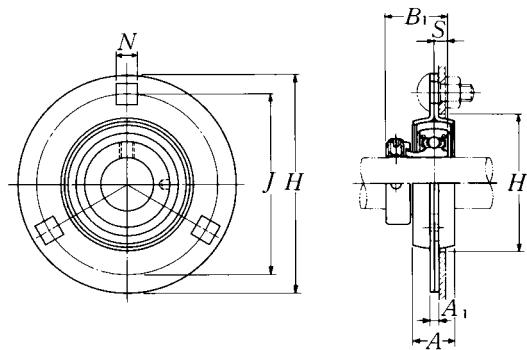Round flanged units pressed steel housing with rubber ring**Eccentric locking collar type**

Shaft dia. mm inch	Unit number	Nominal dimensions								Bolt size mm inch	Max. load recommended		Bearing number
		mm				inch					radial N	axial lbf	
		H	J	A ₁	N	A	B ₁	S	H ₂ min.				
12 1/2	AELRPF201W3	90	71.5	4	9	16	28.6	6.5	56	M8	1 000	200	AEL201W3
	AELRPF201-008W3	3 ¹⁷ / ₃₂	2 ¹³ / ₁₆	0.157	2 ³ / ₆₄	5/8	1.126	0.256	2 ¹³ / ₆₄	5/16	220	40	AEL201-008W3
15 9/16 5/8	AELRPF202W3	90	71.5	4	9	16	28.6	6.5	56	M8	1 000	200	AEL202W3
	AELRPF202-009W3	3 ¹⁷ / ₃₂	2 ¹³ / ₁₆	0.157	2 ³ / ₆₄	5/8	1.126	0.256	2 ¹³ / ₆₄	5/16	220	40	AEL202-009W3
	AELRPF202-010W3												AEL202-010W3
17 11/16	AELRPF203W3	90	71.5	4	9	16	28.6	6.5	56	M8	1 000	200	AEL203W3
	AELRPF203-011W3	3 ¹⁷ / ₃₂	2 ¹³ / ₁₆	0.157	2 ³ / ₆₄	5/8	1.126	0.256	2 ¹³ / ₆₄	5/16	220	40	AEL203-011W3
20 3/4	AELRPF204W3	95	76	4	9	18	31	7.5	60	M8	1 150	200	AEL204W3
	AELRPF204-012W3	3 ³ / ₄	2 ⁶³ / ₆₄	0.157	2 ³ / ₆₄	2 ³ / ₃₂	1.220	0.295	2 ²³ / ₆₄	5/16	250	40	AEL204-012W3
25 13/16 7/8 15/16 1	AELRPF205W3	113	90.5	5.2	11	18	31	7.5	71	M10	1 300	200	AEL205W3
	AELRPF205-013W3												AEL205-013W3
	AELRPF205-014W3												AEL205-014W3
	AELRPF205-015W3												AEL205-015W3
	AELRPF205-100W3												AEL205-100W3
30 1 1/16 1 1/8 1 3/16 1 1/4	AELRPF206W3	122	100	5.2	11	20	35.7	9	81	M10	1 500	200	AEL206W3
	AELRPF206-101W3												AEL206-101W3
	AELRPF206-102W3												AEL206-102W3
	AELRPF206-103W3												AEL206-103W3
	AELRPF206-104W3												AEL206-104W3


Housing number		Mass of unit kg lb
Rubber	Steel	
R201	PF204	0.3
R201	PF204	0.7
R201	PF204	0.3
R201	PF204	0.7
R201	PF204	0.3
R201	PF204	0.7
R204	PF205	0.4
R204	PF205	0.9
R205	PF206	0.5
R205	PF206	
R205	PF206	
R205	PF206	1.1
R205	PF206	
R206	PF207	0.7
R206	PF207	
R206	PF207	
R206	PF207	1.5
R206	PF207	

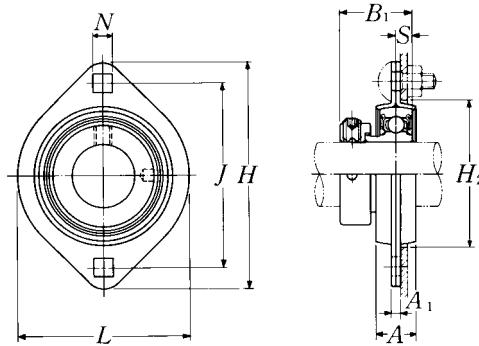

Shaft dia. mm inch	Unit number	Nominal dimensions									Bolt size mm inch	Max. load recommended		
		mm				inch						radial N	axial lbf	
		H	J	A1	N	A	L	B1	S	H2				
12 1/2	AELPFL201W3	81	63.5	4	7.1	14	59	28.6	6.5	49	M 6	2 700	1 350	
	AELPFL201-008W3	3 ³ / ₁₆	2 ¹ / ₂	0.157	9 ¹ / ₃₂	9 ¹ / ₁₆	2 ⁵ / ₁₆	1.126	0.256	1 ⁵⁹ / ₆₄	1/4	600	300	
15 9/16 5/8	AELPFL202W3	81	63.5	4	7.1	14	59	28.6	6.5	49	M 6	2 700	1 350	
	AELPFL202-009W3	3 ³ / ₁₆	2 ¹ / ₂	0.157	9 ¹ / ₃₂	9 ¹ / ₁₆	2 ⁵ / ₁₆	1.126	0.256	1 ⁵⁹ / ₆₄	1/4	600	300	
17 11/16	AELPFL203W3	81	63.5	4	7.1	14	59	28.6	6.5	49	M 6	2 700	1 350	
	AELPFL203-011W3	3 ³ / ₁₆	2 ¹ / ₂	0.157	9 ¹ / ₃₂	9 ¹ / ₁₆	2 ⁵ / ₁₆	1.126	0.256	1 ⁵⁹ / ₆₄	1/4	600	300	
20 3/4	AELPFL204W3	90	71.5	4	9	16	67	31	7.5	56	M 8	3 000	1 500	
	AELPFL204-012W3	3 ¹⁷ / ₃₂	2 ¹³ / ₁₆	0.157	2 ³ / ₆₄	5/8	2 ⁵ / ₈	1.220	0.295	2 ¹³ / ₆₄	5/16	660	330	
25 13/16 7/8 15/16 1	AELPFL205W3	95	76	4	9	18	71	31	7.5	60	M 8	4 000	2 000	
	AELPFL205-013W3	3 ³ / ₄	2 ⁶³ / ₆₄	0.157	2 ³ / ₆₄	2 ³ / ₃₂	2 ²⁵ / ₃₂	1.220	0.295	2 ²³ / ₆₄	5/16	880	440	
30 1 1/16 1 1/8 1 3/16 1 1/4	AELPFL206W3	113	90.5	5.2	11	18	84	35.7	9	71	M10	5 000	2 500	
	AELPFL206-101W3	4 ⁷ / ₁₆	3 ⁹ / ₁₆	0.205	7/16	23 ¹ / ₃₂	3 ⁵ / ₁₆	1.406	0.354	2 ⁵¹ / ₆₄	3/8	1 100	550	
35 1 1/4 1 5/16 1 3/8 1 7/16	AELPFL207W3	122	100	5.2	11	20	94	38.9	9.5	81	M10	6 000	3 000	
	AELPFL207-104W3	4 ¹³ / ₁₆	3 ¹⁵ / ₁₆	0.205	7/16	25 ¹ / ₃₂	3 ¹¹ / ₁₆	1.531	0.374	3 ³ / ₁₆	3/8	1 300	650	
40 1 1/2 1 9/16	AELPFL208W3	148	119	6.8	13.5	21	100	43.7	11	91	M12	6 000	3 000	
	AELPFL208-108W3	5 ¹³ / ₁₆	4 ¹¹ / ₁₆	0.268	17 ¹ / ₃₂	13 ¹ / ₁₆	3 ¹⁵ / ₁₆	1.720	0.433	3 ³⁷ / ₆₄	1/2	1 300	650	
	AELPFL208-109W3													

Remarks: 1) The permissible load only applies in applications where the load is stable and the speed is 2400 min⁻¹ or less.


Bearing number	Housing number	Mass of unit kg lb
AEL201W3	PFL203	0.3
AEL201-008W3	PFL203	0.7
AEL202W3	PFL203	0.3
AEL202-009W3	PFL203	0.7
AEL202-010W3	PFL203	
AEL203W3	PFL203	0.3
AEL203-011W3	PFL203	0.7
AEL204W3	PFL204	0.3
AEL204-012W3	PFL204	0.7
AEL205W3	PFL205	0.4
AEL205-013W3	PFL205	
AEL205-014W3	PFL205	0.9
AEL205-015W3	PFL205	
AEL205-100W3	PFL205	
AEL206W3	PFL206	0.6
AEL206-101W3	PFL206	
AEL206-102W3	PFL206	1.3
AEL206-103W3	PFL206	
AEL206-104W3	PFL206	
AEL207W3	PFL207	0.9
AEL207-104W3	PFL207	
AEL207-105W3	PFL207	2.0
AEL207-106W3	PFL207	
AEL207-107W3	PFL207	
AEL208W3	PFL208	1.3
AEL208-108W3	PFL208	
AEL208-109W3	PFL208	2.9

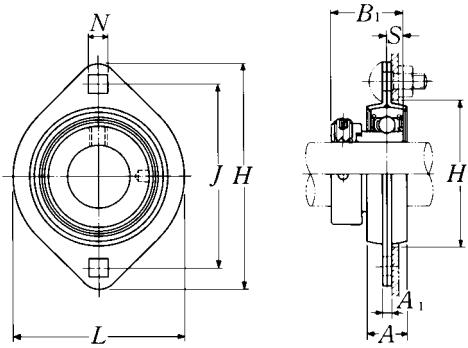

Shaft dia. mm inch	Unit number	Nominal dimensions									Bolt size mm inch	Max. load recommended		
		mm				inch						radial N	axial lbf	
		H	J	A ₁	N	A	L	B ₁	S	H ₂				
12 1/2	JELPFL201W3	81	63	4	7.1	14	59	28.6	6.5	49	M 6 1/4	2 700 600	1 350 300	
15 9/16 5/8	JELPFL201-008W3	3 3/16	2 31/64	0.157	9/32	9/16	2 5/16	1.126	0.256	1 59/64	M 6 1/4	2 700 600	1 350 300	
17 11/16	JELPFL202W3	81	63	4	7.1	14	59	28.6	6.5	49	M 6 1/4	2 700 600	1 350 300	
17 11/16	JELPFL202-009W3	3 3/16	2 31/64	0.157	9/32	9/16	2 5/16	1.126	0.256	1 59/64	M 6 1/4	2 700 600	1 350 300	
17 11/16	JELPFL202-010W3	3 3/16	2 31/64	0.157	9/32	9/16	2 5/16	1.126	0.256	1 59/64	M 6 1/4	2 700 600	1 350 300	
20 3/4	JELPFL203W3	81	63	4	7.1	14	59	28.6	6.5	49	M 6 1/4	2 700 600	1 350 300	
20 3/4	JELPFL203-011W3	3 3/16	2 31/64	0.157	9/32	9/16	2 5/16	1.126	0.256	1 59/64	M 6 1/4	2 700 600	1 350 300	
20 3/4	JELPFL204W3	90	71	4	9	16	67	31	7.5	56	M 8 5/16	3 000 660	1 500 330	
20 3/4	JELPFL204-012W3	3 17/32	2 51/64	0.157	23/64	5/8	2 5/8	1.220	0.295	2 13/64	M 8 5/16	3 000 660	1 500 330	
25 13/16 7/8 15/16 1	JELPFL205W3	95	76	4	9	18	71	31	7.5	60	M 8 5/16	4 000 880	2 000 440	
25 13/16 7/8 15/16 1	JELPFL205-013W3	3 3/4	2 63/64	0.157	23/64	23/32	2 25/32	1.220	0.295	2 23/64	M 8 5/16	4 000 880	2 000 440	
25 13/16 7/8 15/16 1	JELPFL205-014W3	3 3/4	2 63/64	0.157	23/64	23/32	2 25/32	1.220	0.295	2 23/64	M 8 5/16	4 000 880	2 000 440	
25 13/16 7/8 15/16 1	JELPFL205-015W3	3 3/4	2 63/64	0.157	23/64	23/32	2 25/32	1.220	0.295	2 23/64	M 8 5/16	4 000 880	2 000 440	
25 13/16 7/8 15/16 1	JELPFL205-100W3	3 3/4	2 63/64	0.157	23/64	23/32	2 25/32	1.220	0.295	2 23/64	M 8 5/16	4 000 880	2 000 440	
30 1 1/16 1 1/8 1 3/16 1 1/4	JELPFL206W3	113	90	5.2	11	18	84	35.7	9	71	M10	5 000	2 500	
30 1 1/16 1 1/8 1 3/16 1 1/4	JELPFL206-101W3	4 7/16	3 35/64	0.205	7/16	23/32	3 5/16	1.406	0.354	2 51/64	M10 3/8	1 100	550	
30 1 1/16 1 1/8 1 3/16 1 1/4	JELPFL206-102W3	4 7/16	3 35/64	0.205	7/16	23/32	3 5/16	1.406	0.354	2 51/64	M10 3/8	1 100	550	
30 1 1/16 1 1/8 1 3/16 1 1/4	JELPFL206-103W3	4 7/16	3 35/64	0.205	7/16	23/32	3 5/16	1.406	0.354	2 51/64	M10 3/8	1 100	550	
30 1 1/16 1 1/8 1 3/16 1 1/4	JELPFL206-104W3	4 7/16	3 35/64	0.205	7/16	23/32	3 5/16	1.406	0.354	2 51/64	M10 3/8	1 100	550	
35 1 1/4 1 5/16 1 3/8 1 7/16	JELPFL207W3	122	100	5.2	11	20	94	38.9	9.5	81	M10	6 000	3 000	
35 1 1/4 1 5/16 1 3/8 1 7/16	JELPFL207-104W3	4 13/16	3 15/16	0.205	7/16	25/32	3 11/16	1.531	0.374	3 3/16	M10 3/8	1 300	650	
35 1 1/4 1 5/16 1 3/8 1 7/16	JELPFL207-105W3	4 13/16	3 15/16	0.205	7/16	25/32	3 11/16	1.531	0.374	3 3/16	M10 3/8	1 300	650	
35 1 1/4 1 5/16 1 3/8 1 7/16	JELPFL207-106W3	4 13/16	3 15/16	0.205	7/16	25/32	3 11/16	1.531	0.374	3 3/16	M10 3/8	1 300	650	
35 1 1/4 1 5/16 1 3/8 1 7/16	JELPFL207-107W3	4 13/16	3 15/16	0.205	7/16	25/32	3 11/16	1.531	0.374	3 3/16	M10 3/8	1 300	650	
40 1 1/2 1 9/16	JELPFL208W3	148	119	6.8	13.5	21	100	43.7	11	91	M12	6 000	3 000	
40 1 1/2 1 9/16	JELPFL208-108W3	5 13/16	4 11/16	0.268	17/32	13/16	3 15/16	1.720	0.433	3 37/64	M12 1/2	1 300	650	
40 1 1/2 1 9/16	JELPFL208-109W3	5 13/16	4 11/16	0.268	17/32	13/16	3 15/16	1.720	0.433	3 37/64	M12 1/2	1 300	650	

Remarks: 1) The permissible load only applies in applications where the load is stable and the speed is 2400 min⁻¹ or less.


Bearing number	Housing number	Mass of unit kg lb
JEL201W3	PFL203	0.3
JEL201-008W3	PFL203	0.7
JEL202W3	PFL203	0.3
JEL202-009W3	PFL203	0.7
JEL202-010W3	PFL203	
JEL203W3	PFL203	0.3
JEL203-011W3	PFL203	0.7
JEL204W3	PFL204	0.3
JEL204-012W3	PFL204	0.7
JEL205W3	PFL205	0.4
JEL205-013W3	PFL205	
JEL205-014W3	PFL205	0.9
JEL205-015W3	PFL205	
JEL205-100W3	PFL205	
JEL206W3	PFL206	0.7
JEL206-101W3	PFL206	
JEL206-102W3	PFL206	1.5
JEL206-103W3	PFL206	
JEL206-104W3	PFL206	
JEL207W3	PFL207	0.9
JEL207-104W3	PFL207	
JEL207-105W3	PFL207	2.0
JEL207-106W3	PFL207	
JEL207-107W3	PFL207	
JEL208W3	PFL208	1.3
JEL208-108W3	PFL208	
JEL208-109W3	PFL208	2.9

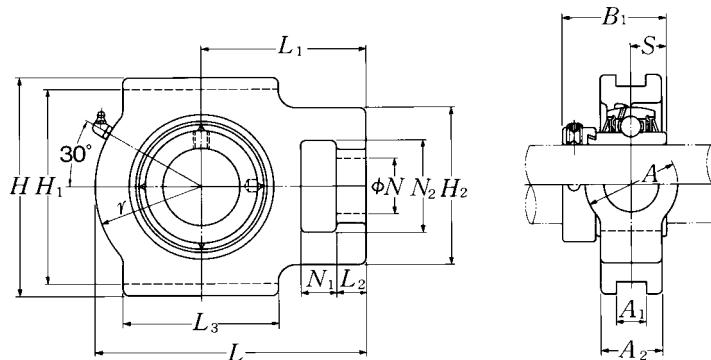

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions															
		mm							inch								
		<i>N</i> ₁	<i>L</i> ₂	<i>H</i> ₂	<i>N</i> ₂	<i>N</i>	<i>L</i> ₃	<i>A</i> ₁	<i>H</i> ₁	<i>H</i>	<i>L</i>	<i>A</i> ₂	<i>A</i>	<i>r</i>	<i>L</i> ₁	<i>B</i> ₁	<i>S</i>
20 $\frac{3}{4}$	UELT204D1W3 UELT204-012D1W3	16 $\frac{5}{8}$	12 $\frac{15}{32}$	51 2	32 $1\frac{1}{4}$	19 $\frac{3}{4}$	51 2	12 0.472	76 $2\frac{63}{64}$	89 $3\frac{1}{2}$	94 $3\frac{13}{16}$	21 $1\frac{13}{16}$	32 $1\frac{1}{4}$	33 $1\frac{5}{16}$	61 $2\frac{13}{32}$	43.7 1.720	17.1 0.673
25 $\frac{13}{16}$ $\frac{7}{8}$ $\frac{15}{16}$	UELT205D1W3 UELT205-013D1W3 UELT205-014D1W3 UELT205-015D1W3 UELT205-100D1W3	16 $\frac{5}{8}$	12 $\frac{15}{32}$	51 2	32 $1\frac{1}{4}$	19 $\frac{3}{4}$	51 2	12 0.472	76 $2\frac{63}{64}$	89 $3\frac{1}{2}$	97 $3\frac{13}{16}$	24 $1\frac{5}{16}$	32 $1\frac{1}{4}$	35 $1\frac{3}{8}$	62 $2\frac{7}{16}$	44.4 1.748	17.45 0.687
30 $1\frac{1}{16}$ $1\frac{1}{8}$ $1\frac{3}{16}$ $1\frac{1}{4}$	UELT206D1W3 UELT206-101D1W3 UELT206-102D1W3 UELT206-103D1W3 UELT206-104D1W3	16 $\frac{5}{8}$	12 $\frac{15}{32}$	56 $2\frac{7}{32}$	37 $1\frac{15}{32}$	22 $\frac{7}{8}$	57 $2\frac{1}{4}$	12 0.472	89 $3\frac{1}{2}$	102 $4\frac{1}{32}$	113 $4\frac{7}{16}$	28 $1\frac{3}{32}$	37 $1\frac{15}{32}$	43 $1\frac{11}{16}$	70 $2\frac{3}{4}$	48.4 1.906	18.25 0.719
35 $1\frac{1}{4}$ $1\frac{5}{16}$ $1\frac{3}{8}$ $1\frac{7}{16}$	UELT207D1W3 UELT207-104D1W3 UELT207-105D1W3 UELT207-106D1W3 UELT207-107D1W3	16 $\frac{5}{8}$	15 $\frac{19}{32}$	64 $2\frac{17}{32}$	37 $1\frac{15}{32}$	22 $\frac{7}{8}$	64 $2\frac{17}{32}$	12 0.472	89 $3\frac{1}{2}$	102 $4\frac{1}{32}$	129 $5\frac{3}{32}$	30 $1\frac{3}{16}$	37 $1\frac{15}{32}$	51 2	78 $3\frac{1}{16}$	51.1 2.012	18.8 0.740
40 $1\frac{1}{2}$ $1\frac{9}{16}$	UELT208D1W3 UELT208-108D1W3 UELT208-109D1W3	19 $\frac{3}{4}$	18 $\frac{23}{32}$	83 $3\frac{9}{32}$	49 $1\frac{15}{16}$	29 $1\frac{5}{32}$	83 $3\frac{9}{32}$	16 0.630	102 $4\frac{1}{64}$	114 $4\frac{1}{2}$	144 $5\frac{21}{32}$	33 $1\frac{5}{16}$	49 $1\frac{15}{16}$	56 $2\frac{7}{32}$	88 $3\frac{15}{32}$	56.3 2.217	21.4 0.843
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UELT209D1W3 UELT209-110D1W3 UELT209-111D1W3 UELT209-112D1W3	19 $\frac{3}{4}$	18 $\frac{23}{32}$	83 $3\frac{9}{32}$	49 $1\frac{15}{16}$	29 $1\frac{5}{32}$	83 $3\frac{9}{32}$	16 0.630	102 $4\frac{1}{64}$	117 $4\frac{19}{32}$	145 $5\frac{23}{32}$	35 $1\frac{3}{8}$	49 $1\frac{15}{16}$	57 $2\frac{1}{4}$	88 $3\frac{15}{32}$	56.3 2.217	21.4 0.843
50 $1\frac{13}{16}$ $1\frac{7}{8}$ $1\frac{15}{16}$ 2	UELT210D1W3 UELT210-113D1W3 UELT210-114D1W3 UELT210-115D1W3 UELT210-200D1W3	19 $\frac{3}{4}$	18 $\frac{23}{32}$	83 $3\frac{9}{32}$	49 $1\frac{15}{16}$	29 $1\frac{5}{32}$	86 $3\frac{3}{8}$	16 0.630	102 $4\frac{1}{64}$	117 $4\frac{19}{32}$	151 $5\frac{15}{16}$	37 $1\frac{15}{32}$	49 $1\frac{15}{16}$	59 $2\frac{5}{16}$	92 $3\frac{5}{8}$	62.7 2.469	24.6 0.969

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".
Note: Please refer to page 36 for size of grease fitting.

Bearing number	Housing number	Mass of unit kg lb
UEL204D1W3	T204D1	0.6
UEL204-012D1W3	T204D1	1.3
UEL205D1W3	T205D1	0.9
UEL205-013D1W3	T205D1	
UEL205-014D1W3	T205D1	
UEL205-015D1W3	T205D1	2.0
UEL205-100D1W3	T205D1	
UEL206D1W3	T206D1	1.4
UEL206-101D1W3	T206D1	
UEL206-102D1W3	T206D1	
UEL206-103D1W3	T206D1	3.1
UEL206-104D1W3	T206D1	
UEL207D1W3	T207D1	1.7
UEL207-104D1W3	T207D1	
UEL207-105D1W3	T207D1	
UEL207-106D1W3	T207D1	3.8
UEL207-107D1W3	T207D1	
UEL208D1W3	T208D1	2.5
UEL208-108D1W3	T208D1	
UEL208-109D1W3	T208D1	5.5
UEL209D1W3	T209D1	2.5
UEL209-110D1W3	T209D1	
UEL209-111D1W3	T209D1	
UEL209-112D1W3	T209D1	5.5
UEL210D1W3	T210D1	2.7
UEL210-113D1W3	T210D1	
UEL210-114D1W3	T210D1	
UEL210-115D1W3	T210D1	6.0
UEL210-200D1W3	T210D1	

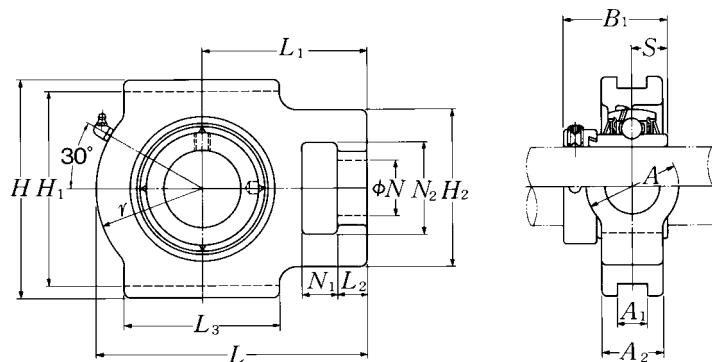

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions																	
		mm								inch									
<i>N</i> ₁	<i>L</i> ₂	<i>H</i> ₂	<i>N</i> ₂	<i>N</i>	<i>L</i> ₃	<i>A</i> ₁	<i>H</i> ₁	<i>H</i>	<i>L</i>	<i>A</i> ₂	<i>A</i>	<i>r</i>	<i>L</i> ₁	<i>B</i> ₁	<i>S</i>				
55 2 $2\frac{1}{16}$ $2\frac{1}{8}$ $2\frac{3}{16}$	UEL211D1W3 UEL211-200D1W3 UEL211-201D1W3 UEL211-202D1W3 UEL211-203D1W3	25 $3\frac{1}{32}$	21 $1\frac{3}{16}$	102 $4\frac{1}{32}$	64 $2\frac{17}{32}$	35 $1\frac{3}{8}$	95 $3\frac{3}{4}$	22 0.866	130 $5\frac{1}{8}$	146 $5\frac{3}{4}$	171 $6\frac{23}{32}$	38 $1\frac{1}{2}$	64 $2\frac{17}{32}$	65 $2\frac{9}{16}$	106 $4\frac{3}{16}$	71.4 2.811	27.75 1.093		
60 $2\frac{1}{4}$ $2\frac{5}{16}$ $2\frac{3}{8}$ $2\frac{7}{16}$	UEL212D1W3 UEL212-204D1W3 UEL212-205D1W3 UEL212-206D1W3 UEL212-207D1W3	32 $1\frac{1}{4}$	21 $1\frac{3}{16}$	102 $4\frac{1}{32}$	64 $2\frac{17}{32}$	35 $1\frac{3}{8}$	102 $4\frac{1}{32}$	22 0.866	130 $5\frac{1}{8}$	146 $5\frac{3}{4}$	194 $7\frac{5}{8}$	42 $1\frac{21}{32}$	64 $2\frac{17}{32}$	75 $2\frac{15}{16}$	119 $4\frac{11}{16}$	77.8 3.063	30.95 1.219		
65 $2\frac{1}{2}$ $2\frac{9}{16}$	UEL213D1W3 UEL213-208D1W3 UEL213-209D1W3	32 $1\frac{1}{4}$	23 $\frac{29}{32}$	111 $4\frac{3}{8}$	70 $2\frac{3}{4}$	41 $1\frac{5}{8}$	121 $4\frac{3}{4}$	26 1.024	151 $5\frac{15}{16}$	167 $6\frac{9}{16}$	224 $8\frac{13}{16}$	44 $1\frac{23}{32}$	70 $2\frac{3}{4}$	87 $3\frac{7}{16}$	137 $5\frac{13}{32}$	85.7 3.374	34.15 1.344		
70 $2\frac{5}{8}$ $2\frac{11}{16}$ $2\frac{3}{4}$	UEL214D1W3 UEL214-210D1W3 UEL214-211D1W3 UEL214-212D1W3	32 $1\frac{1}{4}$	23 $\frac{29}{32}$	111 $4\frac{3}{8}$	70 $2\frac{3}{4}$	41 $1\frac{5}{8}$	121 $4\frac{3}{4}$	26 1.024	151 $5\frac{15}{16}$	167 $6\frac{9}{16}$	224 $8\frac{13}{16}$	46 $1\frac{13}{16}$	70 $2\frac{3}{4}$	87 $3\frac{7}{16}$	137 $5\frac{13}{32}$	85.7 3.374	34.15 1.344		
75 $2\frac{13}{16}$ $2\frac{7}{8}$ $2\frac{15}{16}$ 3	UEL215D1W3 UEL215-213D1W3 UEL215-214D1W3 UEL215-215D1W3 UEL215-300D1W3	32 $1\frac{1}{4}$	23 $\frac{29}{32}$	111 $4\frac{3}{8}$	70 $2\frac{3}{4}$	41 $1\frac{5}{8}$	121 $4\frac{3}{4}$	26 1.024	151 $5\frac{15}{16}$	167 $6\frac{9}{16}$	232 $9\frac{1}{8}$	48 $1\frac{7}{8}$	70 $2\frac{3}{4}$	92 $3\frac{5}{8}$	140 $5\frac{1}{2}$	92 3.622	37.3 1.469		

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".


Note: Please refer to page 36 for size of grease fitting.

Bearing number	Housing ¹⁾ number	Mass of unit
		kg lb
UEL211D1W3	T211D1	4.2
UEL211-200D1W3	T211D1	
UEL211-201D1W3	T211D1	9.3
UEL211-202D1W3	T211D1	
UEL211-203D1W3	T211D1	
UEL212D1W3	T212D1	5.2
UEL212-204D1W3	T212D1	
UEL212-205D1W3	T212D1	11
UEL212-206D1W3	T212D1	
UEL212-207D1W3	T212D1	
UEL213D1W3	T213D1	7.7
UEL213-208D1W3	T213D1	
UEL213-209D1W3	T213D1	17
UEL214D1W3	T214D1	7.3
UEL214-210D1W3	T214D1	
UEL214-211D1W3	T214D1	16
UEL214-212D1W3	T214D1	
UEL215D1W3	T215D1	7.8
UEL215-213D1W3	T215D1	
UEL215-214D1W3	T215D1	17
UEL215-215D1W3	T215D1	
UEL215-300D1W3	T215D1	

sale@technobearing.ru
Take-up units cast housing
Eccentric locking collar type

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

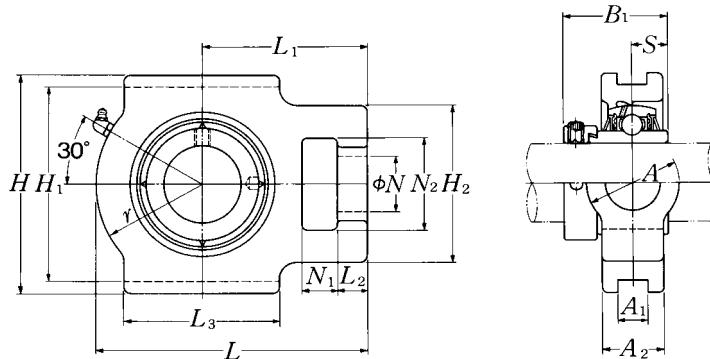


Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions															
		mm								inch							
<i>N</i> ₁	<i>L</i> ₂	<i>H</i> ₂	<i>N</i> ₂	<i>N</i>	<i>L</i> ₃	<i>A</i> ₁	<i>H</i> ₁	<i>H</i>	<i>L</i>	<i>A</i> ₂	<i>A</i>	<i>r</i>	<i>L</i> ₁	<i>B</i> ₁	<i>S</i>		
25 $\frac{13}{16}$ $\frac{7}{8}$ $\frac{15}{16}$ 1	UELT305D1W3	16	14	62	36	26	65	12	80	89	122	26	36	46	76	46.8	16.7
	UELT305-013D1W3	$\frac{5}{8}$	$\frac{9}{16}$	$2\frac{7}{16}$	$1\frac{13}{32}$	$1\frac{1}{32}$	$2\frac{9}{16}$	0.472	$3\frac{5}{32}$	$3\frac{1}{2}$	$4\frac{13}{16}$	$1\frac{1}{32}$	$1\frac{13}{32}$	$1\frac{13}{16}$	3	1.843	0.657
	UELT305-014D1W3																
	UELT305-015D1W3																
	UELT305-100D1W3																
30 $1\frac{1}{16}$ $1\frac{1}{8}$ $1\frac{3}{16}$	UELT306D1W3	18	16	70	41	28	74	16	90	100	137	28	41	52	85	50	17.5
	UELT306-101D1W3	$2\frac{3}{32}$	$\frac{5}{8}$	$2\frac{3}{4}$	$1\frac{5}{8}$	$1\frac{3}{32}$	$2\frac{29}{32}$	0.630	$3\frac{35}{64}$	$3\frac{15}{16}$	$5\frac{13}{32}$	$1\frac{3}{32}$	$1\frac{5}{8}$	$2\frac{1}{16}$	$3\frac{11}{32}$	1.969	0.689
	UELT306-102D1W3																
	UELT306-103D1W3																
35 $1\frac{1}{4}$ $1\frac{5}{16}$ $1\frac{3}{8}$ $1\frac{7}{16}$	UELT307D1W3	20	17	75	45	30	80	16	100	111	150	32	45	56	94	51.6	18.3
	UELT307-104D1W3	$2\frac{5}{32}$	$2\frac{1}{32}$	$2\frac{15}{16}$	$1\frac{25}{32}$	$1\frac{3}{16}$	$3\frac{5}{32}$	0.630	$3\frac{15}{16}$	$4\frac{3}{8}$	$5\frac{29}{32}$	$1\frac{1}{4}$	$1\frac{25}{32}$	$2\frac{7}{32}$	$3\frac{11}{16}$	2.031	0.720
	UELT307-105D1W3																
	UELT307-106D1W3																
	UELT307-107D1W3																
40 $1\frac{1}{2}$ $1\frac{9}{16}$	UELT308D1W3	22	19	83	50	32	89	18	112	124	162	34	50	62	100	57.1	19.8
	UELT308-108D1W3	$\frac{7}{8}$	$\frac{3}{4}$	$3\frac{9}{32}$	$1\frac{31}{32}$	$1\frac{1}{4}$	$3\frac{1}{2}$	0.709	$4\frac{13}{32}$	$4\frac{7}{8}$	$6\frac{3}{8}$	$1\frac{11}{32}$	$1\frac{31}{32}$	$2\frac{7}{16}$	$3\frac{15}{16}$	2.248	0.780
	UELT308-109D1W3																
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UELT309D1W3	24	20	90	55	34	97	18	125	138	178	38	55	68	110	58.7	19.8
	UELT309-110D1W3	$1\frac{15}{16}$	$2\frac{5}{32}$	$3\frac{17}{32}$	$2\frac{5}{32}$	$1\frac{11}{32}$	$3\frac{13}{16}$	0.709	$4\frac{59}{64}$	$5\frac{7}{16}$	7	$1\frac{1}{2}$	$2\frac{5}{32}$	$2\frac{11}{16}$	$4\frac{11}{32}$	2.311	0.780
	UELT309-111D1W3																
	UELT309-112D1W3																
50 $1\frac{13}{16}$ $1\frac{7}{8}$ $1\frac{15}{16}$	UELT310D1W3	27	22	98	61	37	106	20	140	151	192	40	61	74	118	66.6	24.6
	UELT310-113D1W3	$1\frac{1}{16}$	$\frac{7}{8}$	$3\frac{27}{32}$	$2\frac{13}{32}$	$1\frac{15}{32}$	$4\frac{3}{16}$	0.787	$5\frac{33}{64}$	$5\frac{15}{16}$	$7\frac{9}{16}$	$1\frac{9}{16}$	$2\frac{13}{32}$	$2\frac{29}{32}$	$4\frac{21}{32}$	2.622	0.969
	UELT310-114D1W3																
	UELT310-115D1W3																
55 2 $2\frac{1}{16}$ $2\frac{1}{8}$ $2\frac{3}{16}$	UELT311D1W3	29	23	105	66	39	115	22	150	163	207	44	66	80	127	73	27.8
	UELT311-200D1W3	$1\frac{5}{32}$	$\frac{29}{32}$	$4\frac{1}{8}$	$2\frac{19}{32}$	$1\frac{17}{32}$	$4\frac{17}{32}$	0.866	$5\frac{29}{32}$	$6\frac{13}{32}$	$8\frac{5}{32}$	$1\frac{23}{32}$	$2\frac{19}{32}$	$3\frac{5}{32}$	5	2.874	1.094
	UELT311-201D1W3																
	UELT311-202D1W3																
	UELT311-203D1W3																

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".
Note: Please refer to page 36 for size of grease fitting.

Bearing number	Housing number	Mass of unit kg lb
UEL305D1W3	T305D1	1.4
UEL305-013D1W3	T305D1	
UEL305-014D1W3	T305D1	3.1
UEL305-015D1W3	T305D1	
UEL305-100D1W3	T305D1	
UEL306D1W3	T306D1	1.9
UEL306-101D1W3	T306D1	
UEL306-102D1W3	T306D1	4.2
UEL306-103D1W3	T306D1	
UEL307D1W3	T307D1	2.4
UEL307-104D1W3	T307D1	
UEL307-105D1W3	T307D1	5.3
UEL307-106D1W3	T307D1	
UEL307-107D1W3	T307D1	
UEL308D1W3	T308D1	3.1
UEL308-108D1W3	T308D1	
UEL308-109D1W3	T308D1	6.8
UEL309D1W3	T309D1	4.1
UEL309-110D1W3	T309D1	
UEL309-111D1W3	T309D1	9.0
UEL309-112D1W3	T309D1	
UEL310D1W3	T310D1	5.2
UEL310-113D1W3	T310D1	
UEL310-114D1W3	T310D1	11
UEL310-115D1W3	T310D1	
UEL311D1W3	T311D1	6.6
UEL311-200D1W3	T311D1	
UEL311-201D1W3	T311D1	15
UEL311-202D1W3	T311D1	
UEL311-203D1W3	T311D1	


sale@technobearing.ru
Take-up units cast housing
Eccentric locking collar type

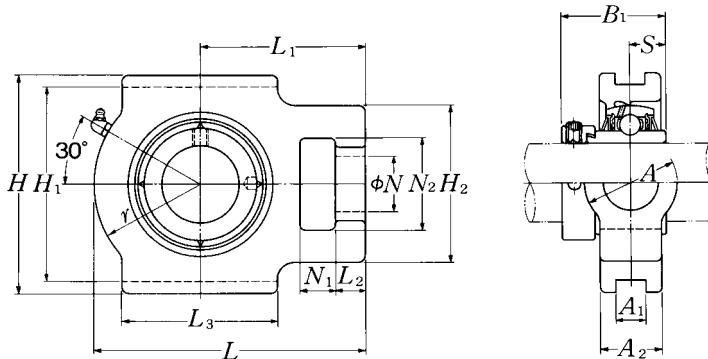

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions															
		mm								inch							
<i>N</i> ₁	<i>L</i> ₂	<i>H</i> ₂	<i>N</i> ₂	<i>N</i>	<i>L</i> ₃	<i>A</i> ₁	<i>H</i> ₁	<i>H</i>	<i>L</i>	<i>A</i> ₂	<i>A</i>	<i>r</i>	<i>L</i> ₁	<i>B</i> ₁	<i>S</i>		
60 2 1/4	UELT312D1W3	31	25	113	71	41	123	22	160	178	220	46	71	85	135	79.4	30.95
	UELT312-204D1W3	1 7/32	3 1/32	4 7/16	2 25/32	1 5/8	4 27/32	0.866	6 19/64	7	8 21/32	1 13/16	2 25/32	3 11/32	5 5/16	3.126	1.219
	UELT312-205D1W3																
	UELT312-206D1W3																
	UELT312-207D1W3																
65 2 1/2 2 9/16	UELT313D1W3	32	27	116	70	43	134	26	170	190	238	50	80	92	146	85.7	32.55
	UELT313-208D1W3	1 1/4	1 1/16	4 9/16	2 3/4	1 11/16	5 5/32	1.024	6 11/16	7 15/32	9 3/8	1 31/32	3 5/32	3 5/8	5 3/4	3.374	1.281
	UELT313-209D1W3																
70 2 5/8 2 11/16 2 3/4	UELT314D1W3	36	27	130	85	46	140	26	180	202	252	52	90	97	155	92.1	34.15
	UELT314-210D1W3	1 13/32	1 1/16	5 1/8	3 11/32	1 13/16	5 1/2	1.024	7 3/32	7 15/16	9 29/32	2 1/16	3 17/32	3 13/16	6 3/32	3.626	1.344
	UELT314-211D1W3																
	UELT314-212D1W3																
75 2 13/16 2 7/8 2 15/16 3	UELT315D1W3	36	27	132	85	46	150	26	192	216	262	55	90	102	160	100	37.3
	UELT315-213D1W3	1 13/32	1 1/16	5 3/16	3 11/32	1 13/16	5 29/32	1.024	7 9/16	8 1/2	10 5/16	2 5/32	3 17/32	4 1/32	6 5/16	3.937	1.469
	UELT315-214D1W3																
	UELT315-215D1W3																
	UELT315-300D1W3																
80 3 1/16 3 1/8 3 3/16	UELT316D1W3	42	30	150	98	53	160	30	204	230	282	60	102	108	174	106.4	40.5
	UELT316-301D1W3	1 21/32	1 3/16	5 29/32	3 27/32	2 3/32	6 5/16	1.181	8 1/32	9 1/16	11 3/32	2 3/8	4 1/32	4 1/4	6 27/32	4.189	1.594
	UELT316-302D1W3																
	UELT316-303D1W3																
85 3 1/4 3 5/16 3 7/16	UELT317D1W3	42	32	152	98	53	170	32	214	240	298	64	102	115	183	109.5	42.05
	UELT317-304D1W3	1 21/32	1 1/4	5 31/32	3 27/32	2 3/32	6 11/16	1.260	8 27/64	9 7/16	11 23/32	2 17/32	4 1/32	4 17/32	7 7/32	4.311	1.656
	UELT317-305D1W3																
	UELT317-307D1W3																
90 3 7/16 3 1/2	UELT318D1W3	46	32	160	106	57	175	32	228	255	312	66	110	120	192	115.9	43.65
	UELT318-307D1W3	1 13/16	1 1/4	6 5/16	4 3/16	2 1/4	6 7/8	1.260	8 31/32	10 1/32	12 9/32	2 19/32	4 11/32	4 23/32	7 9/16	4.563	1.719
	UELT318-308D1W3																

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".
Note: Please refer to page 36 for size of grease fitting.

Bearing number	Housing number	Mass of unit kg lb
UEL312D1W3	T312D1	7.9
UEL312-204D1W3	T312D1	
UEL312-205D1W3	T312D1	17
UEL312-206D1W3	T312D1	
UEL312-207D1W3	T312D1	
UEL313D1W3	T313D1	9.8
UEL313-208D1W3	T313D1	22
UEL313-209D1W3	T313D1	
UEL314D1W3	T314D1	11
UEL314-210D1W3	T314D1	
UEL314-211D1W3	T314D1	24
UEL314-212D1W3	T314D1	
UEL315D1W3	T315D1	14
UEL315-213D1W3	T315D1	
UEL315-214D1W3	T315D1	31
UEL315-215D1W3	T315D1	
UEL315-300D1W3	T315D1	
UEL316D1W3	T316D1	17
UEL316-301D1W3	T316D1	
UEL316-302D1W3	T316D1	37
UEL316-303D1W3	T316D1	
UEL317D1W3	T317D1	20
UEL317-304D1W3	T317D1	
UEL317-305D1W3	T317D1	44
UEL317-307D1W3	T317D1	
UEL318D1W3	T318D1	23
UEL318-307D1W3	T318D1	51
UEL318-308D1W3	T318D1	

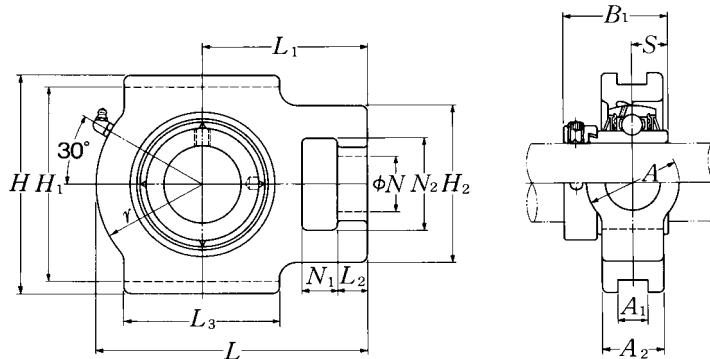

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions															
		mm								inch							
95 3 5/8 3 11/16 3 3/4	UELT319D1W3	46	33	165	106	57	180	35	240	270	322	72	110	125	197	122.3	38.9
	UELT319-310D1W3	1 13/16	1 5/16	6 1/2	4 3/16	2 1/4	7 3/32	1.378	9 29/64	10 5/8	12 11/16	2 27/32	4 11/32	4 29/32	7 3/4	4.815	1.531
	UELT319-311D1W3	1 13/16	1 5/16	6 1/2	4 3/16	2 1/4	7 3/32	1.378	9 29/64	10 5/8	12 11/16	2 27/32	4 11/32	4 29/32	7 3/4	4.815	1.531
	UELT319-312D1W3	1 13/16	1 5/16	6 1/2	4 3/16	2 1/4	7 3/32	1.378	9 29/64	10 5/8	12 11/16	2 27/32	4 11/32	4 29/32	7 3/4	4.815	1.531
100 3 13/16 3 7/8 3 15/16 4	UELT320D1W3	48	34	175	115	59	200	35	260	290	345	75	120	135	210	128.6	50
	UELT320-313D1W3	1 7/8	1 11/32	6 7/8	4 17/32	2 5/16	7 7/8	1.378	10 15/64	11 13/32	13 19/32	2 15/16	4 23/32	5 5/16	8 9/32	5.063	1.969
	UELT320-314D1W3	1 7/8	1 11/32	6 7/8	4 17/32	2 5/16	7 7/8	1.378	10 15/64	11 13/32	13 19/32	2 15/16	4 23/32	5 5/16	8 9/32	5.063	1.969
	UELT320-315D1W3	1 7/8	1 11/32	6 7/8	4 17/32	2 5/16	7 7/8	1.378	10 15/64	11 13/32	13 19/32	2 15/16	4 23/32	5 5/16	8 9/32	5.063	1.969
	UELT320-400D1W3	1 7/8	1 11/32	6 7/8	4 17/32	2 5/16	7 7/8	1.378	10 15/64	11 13/32	13 19/32	2 15/16	4 23/32	5 5/16	8 9/32	5.063	1.969
105	UELT321D1W3	48	34	175	115	59	200	35	260	290	347	75	120	135	212	139.7	48.4
110	UELT322D1W3	52	40	185	125	65	215	38	285	320	385	80	130	150	235	141.3	49.2

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".


Note: Please refer to page 36 for size of grease fitting.

Bearing number	Housing number	Mass of unit
		kg lb
UEL319D1W3	T319D1	26
UEL319-310D1W3	T319D1	
UEL319-311D1W3	T319D1	57
UEL319-312D1W3	T319D1	
UEL320D1W3	T320D1	32
UEL320-313D1W3	T320D1	
UEL320-314D1W3	T320D1	
UEL320-315D1W3	T320D1	71
UEL320-400D1W3	T320D1	
UEL321D1D1W3	T321D1	33
UEL322D1D1W3	T322D1	42

sale@technobearing.ru
Cartridge units cast housing
Eccentric locking collar type

www.technobearing.ru


8 (800) 700-72-07 (бесплатно)

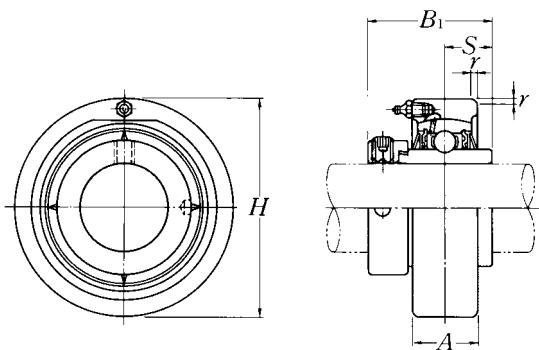

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions					Bearing number	Housing ¹⁾ number	Mass of unit kg lb
		H	A	r	B ₁	S			
20 $\frac{3}{4}$	UEL204D1W3 UEL204-012D1W3	72 2.8346	20 $\frac{25}{32}$	2 0.079	43.7 1.720	17.1 0.673	UEL204D1W3 UEL204-012D1W3	C204D1 C204D1	0.6 1.3
25 $\frac{13}{16}$ $\frac{7}{8}$ $\frac{15}{16}$ 1	UEL205D1W3 UEL205-013D1W3 UEL205-014D1W3 UEL205-015D1W3 UEL205-100D1W3	80 3.1496	22 $\frac{55}{64}$	2 0.079	44.4 1.748	17.45 0.687	UEL205D1W3 UEL205-013D1W3 UEL205-014D1W3 UEL205-015D1W3 UEL205-100D1W3	C205D1 C205D1 C205D1 C205D1 C205D1	0.7 1.5
30 $1\frac{1}{16}$ $1\frac{1}{8}$ $1\frac{3}{16}$ $1\frac{1}{4}$	UEL206D1W3 UEL206-101D1W3 UEL206-102D1W3 UEL206-103D1W3 UEL206-104D1W3	85 3.3465	27 $1\frac{1}{16}$	2 0.079	48.4 1.906	18.25 0.719	UEL206D1W3 UEL206-101D1W3 UEL206-102D1W3 UEL206-103D1W3 UEL206-104D1W3	C206D1 C206D1 C206D1 C206D1 C206D1	0.9 2.0
35 $1\frac{1}{4}$ $1\frac{5}{16}$ $1\frac{3}{8}$ $1\frac{7}{16}$	UEL207D1W3 UEL207-104D1W3 UEL207-105D1W3 UEL207-106D1W3 UEL207-107D1W3	90 3.5433	28 $1\frac{7}{64}$	2 0.079	51.1 2.012	18.8 0.740	UEL207D1W3 UEL207-104D1W3 UEL207-105D1W3 UEL207-106D1W3 UEL207-107D1W3	C207D1 C207D1 C207D1 C207D1 C207D1	1.0 2.2
40 $1\frac{1}{2}$ $1\frac{9}{16}$	UEL208D1W3 UEL208-108D1W3 UEL208-109D1W3	100 3.9370	30 $1\frac{3}{16}$	2.5 0.098	56.3 2.217	21.4 0.843	UEL208D1W3 UEL208-108D1W3 UEL208-109D1W3	C208D1 C208D1 C208D1	1.4 3.1
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UEL209D1W3 UEL209-110D1W3 UEL209-111D1W3 UEL209-112D1W3	110 4.3307	31 $1\frac{7}{32}$	2.5 0.098	56.3 2.217	21.4 0.843	UEL209D1W3 UEL209-110D1W3 UEL209-111D1W3 UEL209-112D1W3	C209D1 C209D1 C209D1 C209D1	1.6 3.5
50 $1\frac{13}{16}$ $1\frac{7}{8}$ $1\frac{15}{16}$ 2	UEL210D1W3 UEL210-113D1W3 UEL210-114D1W3 UEL210-115D1W3 UEL210-200D1W3	120 4.7244	33 $1\frac{19}{64}$	2.5 0.098	62.7 2.469	24.6 0.969	UEL210D1W3 UEL210-113D1W3 UEL210-114D1W3 UEL210-115D1W3 UEL210-200D1W3	C210D1 C210D1 C210D1 C210D1 C210D1	2.1 4.6

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".


Note: Please refer to page 36 for size of grease fitting.

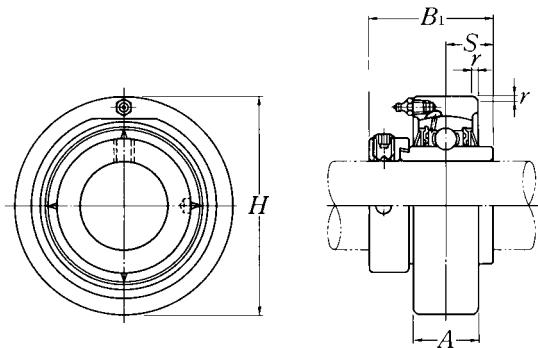

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions					Bearing number	Housing ¹⁾ number	Mass of unit kg lb
		H	A	r	B ₁	S			
55 2 2½/16 2½/8 2¾/16	UELC211D1W3	125	35	2.5	71.4	27.75	UEL211D1W3	C211D1	2.4
	UELC211-200D1W3						UEL211-200D1W3	C211D1	
	UELC211-201D1W3	4.9213	1¾/8	0.098	2.811	1.093	UEL211-201D1W3	C211D1	
	UELC211-202D1W3						UEL211-202D1W3	C211D1	5.3
	UELC211-203D1W3						UEL211-203D1W3	C211D1	
60 2½/4 2½/16 2¾/8 2¾/16	UELC212D1W3	130	38	2.5	77.8	30.95	UEL212D1W3	C212D1	2.8
	UELC212-204D1W3						UEL212-204D1W3	C212D1	
	UELC212-205D1W3	5.1181	1½/2	0.098	3.063	1.219	UEL212-205D1W3	C212D1	
	UELC212-206D1W3						UEL212-206D1W3	C212D1	6.2
	UELC212-207D1W3						UEL212-207D1W3	C212D1	


Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

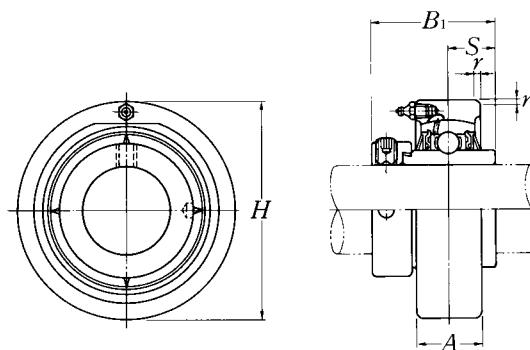

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions					Bearing number	Housing ¹⁾ number	Mass of unit kg lb
		H	A	r	B ₁	S			
25 $\frac{13}{16}$ $\frac{7}{8}$ $\frac{15}{16}$ 1	UEL305D1W3	90	26	2.5	46.8	16.7	UEL305D1W3	C305D1	1.0
	UEL305-013D1W3	3.5433	$1\frac{1}{32}$	0.098	1.843	0.657	UEL305-013D1W3	C305D1	
	UEL305-014D1W3						UEL305-014D1W3	C305D1	
	UEL305-015D1W3						UEL305-015D1W3	C305D1	
	UEL305-100D1W3						UEL305-100D1W3	C305D1	
30 $1\frac{1}{16}$ $1\frac{1}{8}$ $1\frac{3}{16}$	UEL306D1W3	100	28	2.5	50	17.5	UEL306D1W3	C306D1	1.4
	UEL306-101D1W3	3.9370	$1\frac{7}{64}$	0.098	1.969	0.689	UEL306-101D1W3	C306D1	
	UEL306-102D1W3						UEL306-102D1W3	C306D1	
	UEL306-103D1W3						UEL306-103D1W3	C306D1	
35 $1\frac{1}{4}$ $1\frac{5}{16}$ $1\frac{3}{8}$ $1\frac{7}{16}$	UEL307D1W3	110	32	3	51.6	18.3	UEL307D1W3	C307D1	1.8
	UEL307-104D1W3	4.3307	$1\frac{17}{64}$	0.118	2.031	0.720	UEL307-104D1W3	C307D1	
	UEL307-105D1W3						UEL307-105D1W3	C307D1	
	UEL307-106D1W3						UEL307-106D1W3	C307D1	
	UEL307-107D1W3						UEL307-107D1W3	C307D1	
40 $1\frac{1}{2}$ $1\frac{3}{16}$	UEL308D1W3	120	34	3	57.1	19.8	UEL308D1W3	C308D1	2.3
	UEL308-108D1W3	4.7244	$1\frac{1}{32}$	0.118	2.248	0.780	UEL308-108D1W3	C308D1	
	UEL308-109D1W3						UEL308-109D1W3	C308D1	
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UEL309D1W3	130	38	3.5	58.7	19.8	UEL309D1W3	C309D1	2.9
	UEL309-110D1W3	5.1181	$1\frac{1}{2}$	0.138	2.311	0.780	UEL309-110D1W3	C309D1	
	UEL309-111D1W3						UEL309-111D1W3	C309D1	
	UEL309-112D1W3						UEL309-112D1W3	C309D1	
50 $1\frac{13}{16}$ $1\frac{7}{8}$ $1\frac{15}{16}$	UEL310D1W3	140	40	3.5	66.6	24.6	UEL310D1W3	C310D1	3.5
	UEL310-113D1W3	5.5118	$1\frac{37}{64}$	0.138	2.622	0.969	UEL310-113D1W3	C310D1	
	UEL310-114D1W3						UEL310-114D1W3	C310D1	
	UEL310-115D1W3						UEL310-115D1W3	C310D1	
55 2 $2\frac{1}{16}$ $2\frac{1}{8}$ $2\frac{3}{16}$	UEL311D1W3	150	44	3.5	73	27.8	UEL311D1W3	C311D1	4.3
	UEL311-200D1W3	5.9055	$1\frac{47}{64}$	0.138	2.874	1.094	UEL311-200D1W3	C311D1	
	UEL311-201D1W3						UEL311-201D1W3	C311D1	
	UEL311-202D1W3						UEL311-202D1W3	C311D1	
	UEL311-203D1W3						UEL311-203D1W3	C311D1	


Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".
Note: Please refer to page 36 for size of grease fitting.

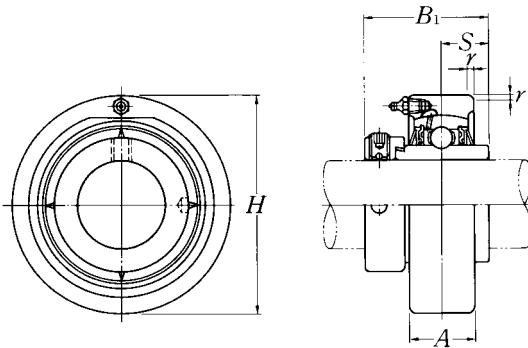

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions					Bearing number	Housing ¹⁾ number	Mass of unit kg lb
		H	A	r	B ₁	S			
60 2 1/4 2 5/16 2 3/8 2 7/16	UELC312D1W3	160	46	3.5	79.4	30.95	UEL312D1W3	C312D1	5.1
	UELC312-204D1W3						UEL312-204D1W3	C312D1	
	UELC312-205D1W3	6.2992	1 13/16	0.138	3.126	1.219	UEL312-205D1W3	C312D1	
	UELC312-206D1W3						UEL312-206D1W3	C312D1	11
	UELC312-207D1W3						UEL312-207D1W3	C312D1	
65 2 1/2 2 9/16	UELC313D1W3	170	50	3.5	85.7	32.55	UEL313D1W3	C313D1	6.2
	UELC313-208D1W3	6.6929	1 31/32	0.138	3.374	1.281	UEL313-208D1W3	C313D1	
	UELC313-209D1W3						UEL313-209D1W3	C313D1	14
70 2 5/8 2 11/16 2 3/4	UELC314D1W3	180	52	4	92.1	34.15	UEL314D1W3	C314D1	7.3
	UELC314-210D1W3						UEL314-210D1W3	C314D1	
	UELC314-211D1W3	7.0866	2 3/64	0.157	3.626	1.344	UEL314-211D1W3	C314D1	
	UELC314-212D1W3						UEL314-212D1W3	C314D1	16
75 2 13/16 2 7/8 2 15/16 3	UELC315D1W3	190	55	4	100	37.3	UEL315D1W3	C315D1	8.5
	UELC315-213D1W3						UEL315-213D1W3	C315D1	
	UELC315-214D1W3	7.4803	2 11/64	0.157	3.937	1.469	UEL315-214D1W3	C315D1	
	UELC315-215D1W3						UEL315-215D1W3	C315D1	19
	UELC315-300D1W3						UEL315-300D1W3	C315D1	
80 3 1/16 3 1/8 3 3/16	UELC316D1W3	200	60	4	106.4	40.5	UEL316D1W3	C316D1	10
	UELC316-301D1W3						UEL316-301D1W3	C316D1	
	UELC316-302D1W3	7.8740	2 23/64	0.157	4.189	1.594	UEL316-302D1W3	C316D1	
	UELC316-303D1W3						UEL316-303D1W3	C316D1	22
85 3 1/4 3 5/16 3 7/16	UELC317D1W3	215	64	4	109.5	42.05	UEL317D1W3	C317D1	13
	UELC317-304D1W3						UEL317-304D1W3	C317D1	
	UELC317-305D1W3	8.4646	2 33/64	0.157	4.311	1.656	UEL317-305D1W3	C317D1	
	UELC317-307D1W3						UEL317-307D1W3	C317D1	29
90 3 7/16 3 1/2	UELC318D1W3	225	66	4	115.9	43.65	UEL318D1W3	C318D1	14
	UELC318-307D1W3	8.8583	2 19/32	0.157	4.563	1.719	UEL318-307D1W3	C318D1	
	UELC318-308D1W3						UEL318-308D1W3	C318D1	31

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

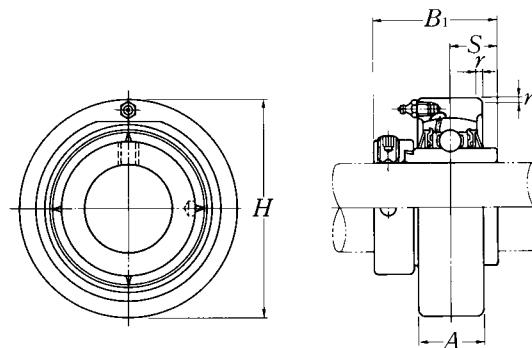

Shaft dia. mm inch	Unit number ¹⁾	Nominal dimensions					Bearing number	Housing number	Mass of unit kg lb
		mm		inch					
		H	A	r	B ₁	S			
95 3 5/8 3 11/16 3 3/4	UELC319D1W3	240	72	4	122.3	38.9	UEL319D1W3	C319D1	17
	UELC319-310D1W3						UEL319-310D1W3	C319D1	
	UELC319-311D1W3	9.4488	2 53/64	0.157	4.815	1.531	UEL319-311D1W3	C319D1	37
	UELC319-312D1W3						UEL319-312D1W3	C319D1	
100 3 13/16 3 7/8 3 15/16 4	UELC320D1W3	260	75	4	128.6	50	UEL320D1W3	C320D1	22
	UELC320-313D1W3						UEL320-313D1W3	C320D1	
	UELC320-314D1W3	10.2362	2 61/64	0.157	5.063	1.969	UEL320-314D1W3	C320D1	49
	UELC320-315D1W3						UEL320-315D1W3	C320D1	
	UELC320-400D1W3						UEL320-400D1W3	C320D1	
105	UELC321D1W3	260	75	4	139.7	48.4	UEL321D1W3	C321D1	21
110	UELC322D1W3	300	80	5	141.3	49.2	UEL322D1W3	C322D1	31

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.

sale@technobearing.ru

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

sale@technobearing.ru


www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

sale@technobearing.ru
Mini stretcher units®
Eccentric locking collar type


www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

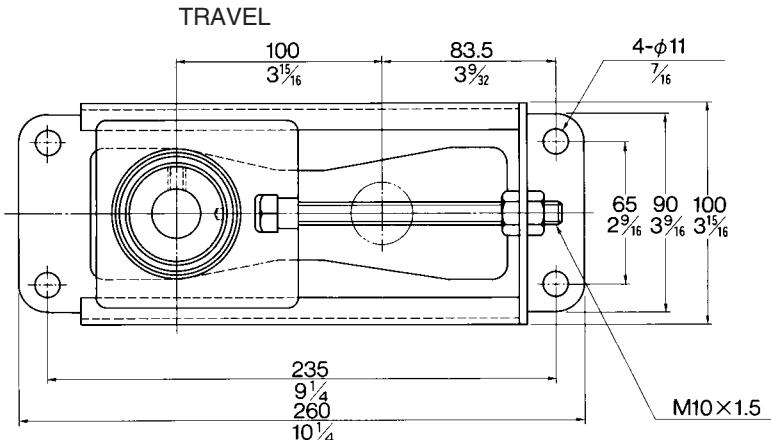

Shaft dia. mm inch	Unit number	Nominal dimensions			Bolt size mm inch	Max. load ¹⁾ recommended N lbf	Bearing number	Mass of unit kg lb
		mm A	inch B ₁	inch S				
12 1/2	AELPT201-10W3	37.1	28.6	6.5	M10	3 500	AEL201W3	1.1
	AELPT201-008-10W3	1 29/64	1.126	0.256	3/8	770	AEL201-008W3	2.4
15 9/16 5/8	AELPT202-10W3	37.1	28.6	6.5	M10	3 500	AEL202W3	1.1
	AELPT202-009-10W3	1 29/64	1.126	0.256	3/8	770	AEL202-009W3	2.4
	AELPT202-010-10W3						AEL202-010W3	
17 11/16	AELPT203-10W3	37.1	28.6	6.5	M10	3 500	AEL203W3	1.1
	AELPT203-011-10W3	1 29/64	1.126	0.256	3/8	770	AEL203-011W3	2.4
20 3/4	AELPT204-10W3	38.5	31	7.5	M10	3 500	AEL204W3	1.1
	AELPT204-012-10W3	1 33/64	1.220	0.295	3/8	770	AEL204-012W3	2.4
25 13/16 7/8 15/16 1	AELPT205-10W3	38.5	31	7.5	M10	3 500	AEL205W3	1.2
	AELPT205-013-10W3						AEL205-013W3	
	AELPT205-014-10W3						AEL205-014W3	
	AELPT205-015-10W3						AEL205-015W3	
	AELPT205-100-10W3						AEL205-100W3	2.7

Remarks: 1) The Stretcher Unit is designed to only take a horizontal radial load, in line with the adjustment direction. Axial loads or vertical radial loads can deform or break the housing.

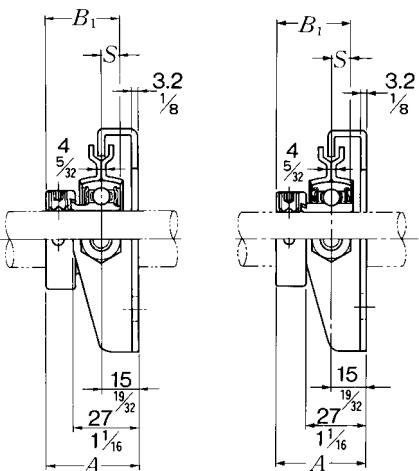

AELPT type

JELPT type



Shaft dia. mm inch	Unit number	Nominal dimensions			Bolt size mm inch	Max. load ¹⁾ recommended N lbf	Bearing number	Mass of unit kg lb
		A mm	B ₁ mm	S inch				
12 1/2	JELPT201-10W3	37.1	28.6	6.5	M10	3 500	JEL201W3	1.1
	JELPT201-008-10W3	1 ²⁹ / ₆₄	1.126	0.256	3/8	770	JEL201-008W3	2.4
15 9/16 5/8	JELPT202-10W3	37.1	28.6	6.5	M10	3 500	JEL202W3	1.1
	JELPT202-009-10W3	1 ²⁹ / ₆₄	1.126	0.256	3/8	770	JEL202-009W3	2.4
	JELPT202-010-10W3						JEL202-010W3	
17 11/16	JELPT203-10W3	37.1	28.6	6.5	M10	3 500	JEL203W3	1.1
	JELPT203-011-10W3	1 ²⁹ / ₆₄	1.126	0.256	3/8	770	JEL203-011W3	2.4
20 3/4	JELPT204-10W3	38.5	31	7.5	M10	3 500	JEL204W3	1.1
	JELPT204-012-10W3	1 ³³ / ₆₄	1.220	0.295	3/8	770	JEL204-012W3	2.4
25 13/16 7/8 15/16 1	JELPT205-10W3	38.5	31	7.5	M10	3 500	JEL205W3	1.1
	JELPT205-013-10W3						JEL205-013W3	
	JELPT205-014-10W3						JEL205-014W3	
	JELPT205-015-10W3	1 ³³ / ₆₄	1.220	0.295	3/8	770	JEL205-015W3	2.4
	JELPT205-100-10W3						JEL205-100W3	

Remarks: 1) The Stretcher Unit is designed to only take a horizontal radial load, in line with the adjustment direction. Axial loads or vertical radial loads can deform or break the housing.

sale@technobearing.ru
Pillow blocks cast housing
Adapter type

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

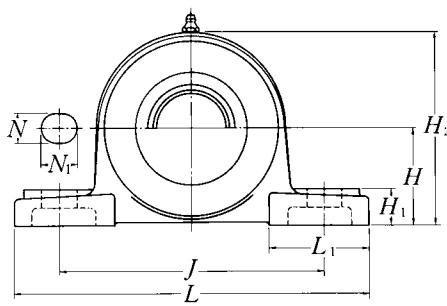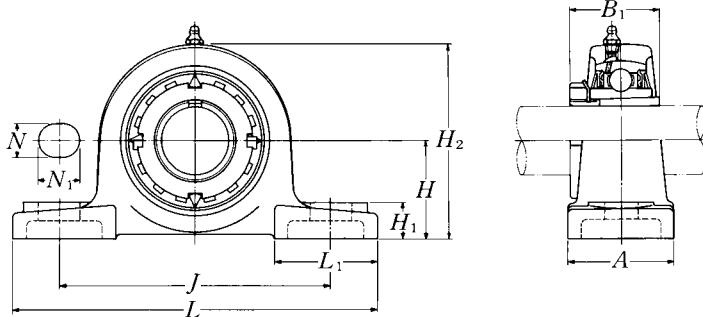**Pressed steel dust cover type**Open end: **S-UKP…D1**Closed end: **SM-UKP…D1**

Shaft dia. mm inch	Unit number ^{1) 2) 3)}	Nominal dimensions										Bolt size mm inch	Bearing number ^{2) 3)}
		mm					inch						
		H	L	J	A	N	N1	H1	H2	B1	L1		
20 $\frac{3}{4}$	UKP205D1;H2305X UKP205D1;HE2305	36.5 $1\frac{7}{16}$	140 $5\frac{1}{2}$	105 $4\frac{1}{8}$	38 $1\frac{1}{2}$	13 $\frac{1}{2}$	16 $\frac{5}{8}$	15 $\frac{19}{32}$	71 $2\frac{25}{32}$	35 1.378	42 $1\frac{21}{32}$	M10 $\frac{3}{8}$	UK205D1;H2305X UK205D1;HE2305
25 $\frac{7}{8}$ 1	UKP206D1;H2306X UKP206D1;HS2306 UKP206D1;HE2306X	42.9 $1\frac{11}{16}$	165 $6\frac{1}{2}$	121 $4\frac{3}{4}$	48 $1\frac{7}{8}$	17 $2\frac{1}{32}$	20 $\frac{25}{32}$	17 $\frac{21}{32}$	83 $3\frac{9}{32}$	38 1.496	54 $2\frac{1}{8}$	M14 $\frac{1}{2}$	UK206D1;H2306X UK206D1;HS2306 UK206D1;HE2306X
30 $\frac{1}{8}$	UKP207D1;H2307X UKP207D1;HS2307	47.6 $1\frac{7}{8}$	167 $6\frac{9}{16}$	127 5	48 $1\frac{7}{8}$	17 $2\frac{1}{32}$	20 $\frac{25}{32}$	18 $\frac{23}{32}$	93 $3\frac{21}{32}$	43 1.693	54 $2\frac{1}{8}$	M14 $\frac{1}{2}$	UK207D1;H2307X UK207D1;HS2307
35 $\frac{1}{4}$ $\frac{13}{8}$	UKP208D1;H2308X UKP208D1;HE2308X UKP208D1;HS2308X	49.2 $1\frac{15}{16}$	184 $7\frac{1}{4}$	137 $5\frac{13}{32}$	54 $2\frac{1}{8}$	17 $2\frac{1}{32}$	20 $\frac{25}{32}$	18 $\frac{23}{32}$	98 $3\frac{27}{32}$	46 1.811	52 $2\frac{1}{16}$	M14 $\frac{1}{2}$	UK208D1;H2308X UK208D1;HE2308X UK208D1;HS2308X
40 $\frac{17}{16}$ $\frac{1}{2}$ $\frac{15}{8}$	UKP209D1;H2309X UKP209D1;HA2309 UKP209D1;HE2309X UKP209D1;HS2309X	54 $2\frac{1}{8}$	190 $7\frac{15}{32}$	146 $5\frac{3}{4}$	54 $2\frac{1}{8}$	17 $2\frac{1}{32}$	20 $\frac{25}{32}$	20 $\frac{25}{32}$	106 $4\frac{3}{16}$	50 1.969	60 $2\frac{3}{8}$	M14 $\frac{1}{2}$	UK209D1;H2309X UK209D1;HA2309 UK209D1;HE2309X UK209D1;HS2309X
45 $\frac{15}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UKP210D1;H2310X UKP210D1;HS2310 UKP210D1;HA2310 UKP210D1;HE2310X	57.2 $2\frac{1}{4}$	206 $8\frac{1}{8}$	159 $6\frac{1}{4}$	60 $2\frac{3}{8}$	20 $2\frac{25}{32}$	23 $\frac{29}{32}$	21 $\frac{13}{16}$	114 $4\frac{1}{2}$	55 2.165	65 $2\frac{9}{16}$	M16 $\frac{5}{8}$	UK210D1;H2310X UK210D1;HS2310 UK210D1;HA2310 UK210D1;HE2310X
50 $\frac{17}{8}$ $1\frac{15}{16}$ 2	UKP211D1;H2311X UKP211D1;HS2311 UKP211D1;HA2311 UKP211D1;HE2311XY	63.5 $2\frac{1}{2}$	219 $8\frac{5}{8}$	171 $6\frac{23}{32}$	60 $2\frac{3}{8}$	20 $\frac{25}{32}$	23 $\frac{29}{32}$	23 $\frac{29}{32}$	126 $4\frac{31}{32}$	59 2.323	65 $2\frac{9}{16}$	M16 $\frac{5}{8}$	UK211D1;H2311X UK211D1;HS2311 UK211D1;HA2311 UK211D1;HE2311XY
55 $2\frac{1}{8}$	UKP212D1;H2312X UKP212D1;HS2312	69.8 $2\frac{3}{4}$	241 $9\frac{1}{2}$	184 $7\frac{1}{4}$	70 $2\frac{3}{4}$	20 $\frac{25}{32}$	23 $\frac{29}{32}$	25 $\frac{31}{32}$	138 $5\frac{7}{16}$	62 2.441	70 $2\frac{3}{4}$	M16 $\frac{5}{8}$	UK212D1;H2312X UK212D1;HS2312
60 $2\frac{3}{16}$ $2\frac{1}{4}$ $2\frac{3}{8}$	UKP213D1;H2313X UKP213D1;HA2313 UKP213D1;HE2313X UKP213D1;HS2313X	76.2 3	265 $10\frac{7}{16}$	203 8	70 $2\frac{3}{4}$	25 $\frac{31}{32}$	28 $1\frac{3}{32}$	27 $1\frac{1}{16}$	151 $5\frac{15}{16}$	65 2.559	77 $3\frac{1}{32}$	M20 $\frac{3}{4}$	UK213D1;H2313X UK213D1;HA2313 UK213D1;HE2313X UK213D1;HS2313X

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

2) Adapter number with suffix "X" means a narrow slot type adapter sleeve.

In this case the lock washer with the straight inner prong should be used.

3) For HE2311XY, screw thread pitch different from the standard is applied, because of the thin thread section of sleeve.


To distinguish it, a suffix "Y" is added.

Note: Please refer to page 36 for size of grease fitting.

sale@technobearing.ru

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

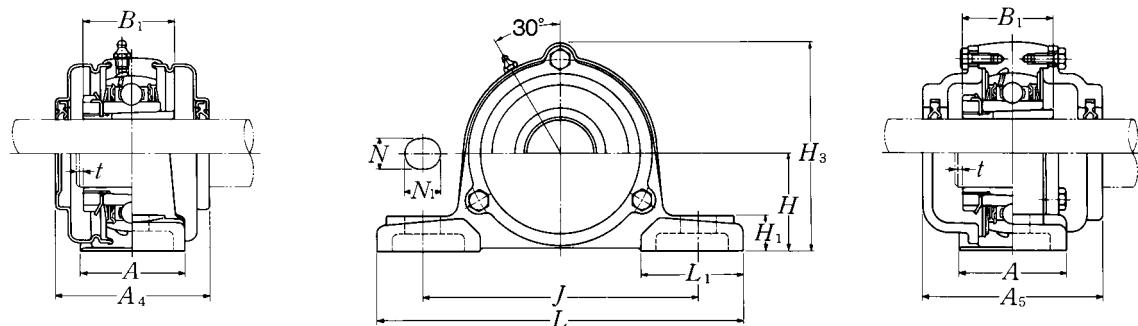
**Cast dust cover type**Open end: **C-UKP…D1**Closed end: **CM-UKP…D1**

Housing ¹⁾ number	Unit number ^{1) 2) 3)} pressed steel dust cover type	Unit number ^{1) 2) 3)} cast dust cover type	Nominal dimensions				Mass of unit		
			t max.	A ₄	H ₃	A ₅	kg	lb	
P205D1	S(SM)-UKP205D1;H2305X	C(CM)-UKP205D1;H2305X	2 $\frac{5}{64}$	57 $2\frac{1}{4}$	76 3	70 $2\frac{3}{4}$	0.8	0.9	1.2
P205D1	S(SM)-UKP205ED1;HE2305	C(CM)-UKP205ED1;HE2305					1.8	2.0	2.7
P206D1	S(SM)-UKP206D1;H2306X	C(CM)-UKP206D1;H2306X	2 $\frac{5}{64}$	62 $2\frac{7}{16}$	88 $3\frac{15}{32}$	75 $2\frac{15}{16}$	1.4	1.5	1.8
P206D1	S(SM)-UKP206SD1;HS2306	C(CM)-UKP206SD1;HS2306					3.1	3.3	4.0
P206D1	S(SM)-UKP206ED1;HE2306X	C(CM)-UKP206ED1;HE2306X							
P207D1	S(SM)-UKP207D1;H2307X	C(CM)-UKP207D1;H2307X	3 $\frac{1}{8}$	72 $2\frac{7}{32}$	99 $3\frac{29}{32}$	80 $3\frac{5}{32}$	1.7	1.8	2.1
P207D1	S(SM)-UKP207SD1;HS2307	C(CM)-UKP207SD1;HS2307					3.7	4.0	4.6
P208D1	S(SM)-UKP208D1;H2308X	C(CM)-UKP208D1;H2308X	3 $\frac{1}{8}$	82 $3\frac{7}{32}$	105 $4\frac{1}{8}$	90 $3\frac{17}{32}$	2.0	2.2	2.8
P208D1	S(SM)-UKP208ED1;HE2308X	C(CM)-UKP208ED1;HE2308X					4.4	4.9	6.2
P208D1	S(SM)-UKP208SD1;HS2308X	C(CM)-UKP208SD1;HS2308X							
P209D1	S(SM)-UKP209D1;H2309X	C(CM)-UKP209D1;H2309X	3 $\frac{1}{8}$	82 $3\frac{7}{32}$	113 $4\frac{7}{16}$	95 $3\frac{3}{4}$	2.3	2.5	3.3
P209D1	S(SM)-UKP209AD1;HA2309	C(CM)-UKP209AD1;HA2309					5.1	5.5	7.3
P209D1	S(SM)-UKP209ED1;HE2309X	C(CM)-UKP209ED1;HE2309X							
P209D1	S(SM)-UKP209SD1;HS2309X	C(CM)-UKP209SD1;HS2309X							
P210D1	S(SM)-UKP210D1;H2310X	C(CM)-UKP210D1;H2310X	3 $\frac{1}{8}$	87 $3\frac{7}{16}$	119 $4\frac{11}{16}$	100 $3\frac{15}{16}$	2.9	3.0	3.9
P210D1	S(SM)-UKP210SD1;HS2310	C(CM)-UKP210SD1;HS2310					6.4	6.6	8.6
P210D1	S(SM)-UKP210AD1;HA2310	C(CM)-UKP210AD1;HA2310							
P210D1	S(SM)-UKP210ED1;HE2310X	C(CM)-UKP210ED1;HE2310X							
P211D1	S(SM)-UKP211D1;H2311X	C(CM)-UKP211D1;H2311X	4 $\frac{5}{32}$	92 $3\frac{5}{8}$	130 $5\frac{1}{8}$	100 $3\frac{15}{16}$	3.6	3.7	4.8
P211D1	S(SM)-UKP211SD1;HS2311	C(CM)-UKP211SD1;HS2311					7.9	8.2	11
P211D1	S(SM)-UKP211AD1;HA2311	C(CM)-UKP211AD1;HA2311							
P211D1	S(SM)-UKP211ED1;HE2311XY	C(CM)-UKP211ED1;HE2311XY							
P212D1	S(SM)-UKP212D1;H2312X	C(CM)-UKP212D1;H2312X	4 $\frac{5}{32}$	102 $4\frac{1}{32}$	143 $5\frac{5}{8}$	115 $4\frac{17}{32}$	4.7	5.1	6.2
P212D1	S(SM)-UKP212SD1;HS2312	C(CM)-UKP212SD1;HS2312					10	11	14
P213D1	S(SM)-UKP213D1;H2313X	C(CM)-UKP213D1;H2313X	4 $\frac{5}{32}$	107 $4\frac{7}{32}$	155 $6\frac{3}{32}$	120 $4\frac{23}{32}$	5.7	5.9	7.6
P213D1	S(SM)-UKP213AD1;HA2313	C(CM)-UKP213AD1;HA2313					13	13	17
P213D1	S(SM)-UKP213ED1;HE2313X	C(CM)-UKP213ED1;HE2313X							
P213D1	S(SM)-UKP213SD1;HS2313X	C(CM)-UKP213SD1;HS2313X							

sale@technobearing.ru
Pillow blocks cast housing
Adapter type

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

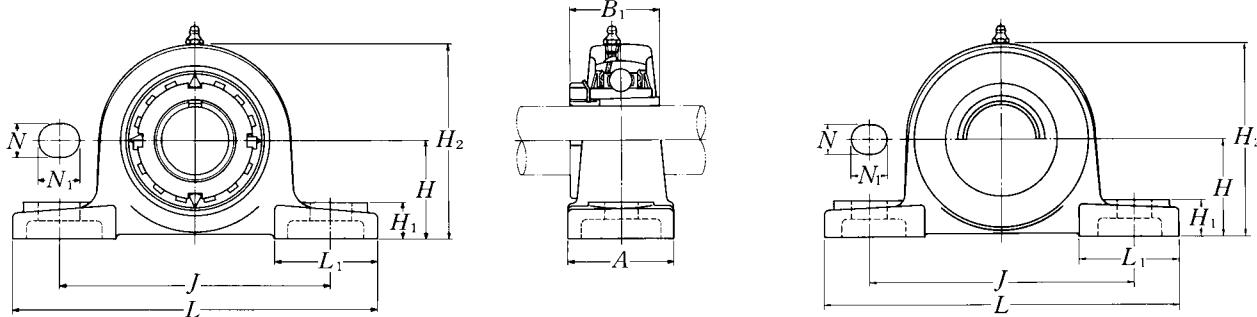

Pressed steel dust cover type

Open end: **S-UKP…D1**

Closed end: **SM-UKP…D1**

Shaft dia. mm inch	Unit number ^{1) 2) 3)}	Nominal dimensions										Bolt size mm inch	Bearing number ^{2) 3)}		
		mm					inch								
		H	L	J	A	N	N ₁	H ₁	H ₂	B ₁	L ₁				
65 $2\frac{7}{16}$ $2\frac{1}{2}$	UKP215D1;H2315X	82.6	275	217	74	25	28	28	163	73	80	M20	UK215D1;H2315X		
	UKP215D1;HA2315	$3\frac{1}{4}$	$10\frac{13}{16}$	$8\frac{17}{32}$	$2\frac{29}{32}$	$3\frac{1}{32}$	$1\frac{3}{32}$	$1\frac{3}{32}$	$6\frac{13}{32}$	2.874	$3\frac{5}{32}$	$\frac{3}{4}$	UK215D1;HA2315		
	UKP215D1;HE2315X												UK215D1;HE2315X		
70 $2\frac{11}{16}$ $2\frac{3}{4}$	UKP216D1;H2316X	88.9	292	232	78	25	28	30	175	78	85	M20	UK216D1;H2316X		
	UKP216D1;HA2316	$3\frac{1}{2}$	$11\frac{1}{2}$	$9\frac{1}{8}$	$3\frac{1}{16}$	$3\frac{1}{32}$	$1\frac{3}{32}$	$1\frac{3}{16}$	$6\frac{7}{8}$	3.071	$3\frac{11}{32}$	$\frac{3}{4}$	UK216D1;HA2316		
	UKP216D1;HE2316X												UK216D1;HE2316X		
75 $2\frac{15}{16}$ 3	UKP217D1;H2317X	95.2	310	247	83	25	28	32	187	82	85	M20	UK217D1;H2317X		
	UKP217D1;HA2317X	$3\frac{3}{4}$	$12\frac{7}{32}$	$9\frac{23}{32}$	$3\frac{9}{32}$	$3\frac{1}{32}$	$1\frac{3}{32}$	$1\frac{1}{4}$	$7\frac{3}{8}$	3.228	$3\frac{11}{32}$	$\frac{3}{4}$	UK217D1;HA2317X		
	UKP217D1;HE2317X												UK217D1;HE2317X		
80 $3\frac{3}{16}$	UKP218D1;H2318X	101.6	327	262	88	27	30	33	200	86	90	M22	UK218D1;H2318X		
	UKP218D1;HA2318X	4	$12\frac{7}{8}$	$10\frac{5}{16}$	$3\frac{15}{32}$	$1\frac{1}{16}$	$1\frac{3}{16}$	$1\frac{5}{16}$	$7\frac{7}{8}$	3.386	$3\frac{17}{32}$	$\frac{7}{8}$	UK218D1;HA2318X		

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".


2) Adapter number with suffix "X" means a narrow slot type adapter sleeve.

In this case the lock washer with the straight inner prong should be used.


3) For HE2311XY, screw thread pitch different from the standard is applied, because of the thin thread section of sleeve.

To distinguish it, a suffix "Y" is added.

Note: Please refer to page 36 for size of grease fitting.

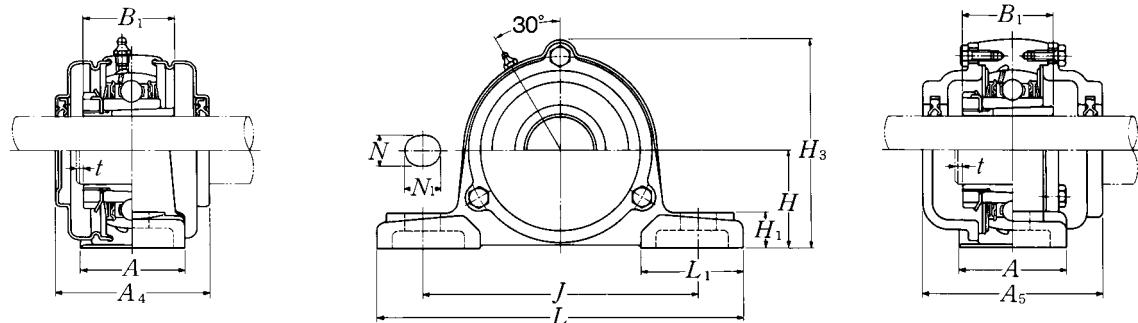**Cast dust cover type**Open end: **C-UKP…D1**Closed end: **CM-UKP…D1**

Housing ¹⁾ number	Unit number ^{1) 2) 3)} pressed steel dust cover type	Unit number ^{1) 2) 3)} cast dust cover type	Nominal dimensions				Mass of unit		
			t max.	A ₄	H ₃	A ₅	kg	lb	
UKP	S(SM)	C(CM)							
P215D1	—	C(CM)-UKP215D1;H2315X	4	—	168	135	7.5	—	10
P215D1	—	C(CM)-UKP215AD1;HA2315	5/32	—	6 5/8	5 5/16	17	—	22
P215D1	—	C(CM)-UKP215ED1;HE2315X							
P216D1	—	C(CM)-UKP216D1;H2316X	4	—	181	145	9.2	—	12
P216D1	—	C(CM)-UKP216AD1;HA2316	5/32	—	7 1/8	5 23/32	20	—	26
P216D1	—	C(CM)-UKP216ED1;HE2316X							
P217D1	—	C(CM)-UKP217D1;H2317X	5	—	191	155	11	—	14
P217D1	—	C(CM)-UKP217AD1;HA2317X	13/64	—	7 17/32	6 3/32	24	—	31
P217D1	—	C(CM)-UKP217ED1;HE2317X							
P218D1	—	C(CM)-UKP218D1;H2318X	5	—	204	165	13	—	16
P218D1	—	C(CM)-UKP218AD1;HA2318X	13/64	—	8 1/32	6 1/2	29	—	35

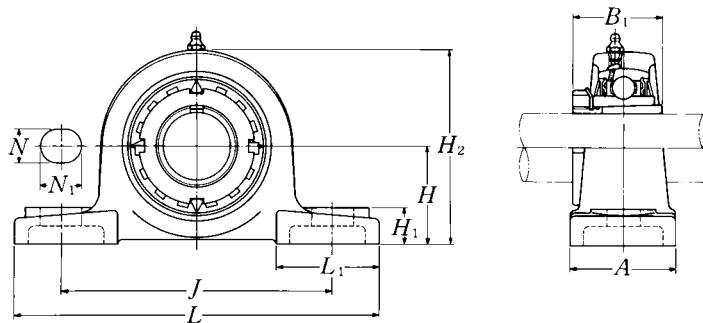

Shaft dia. mm inch	Unit number ^{1) 2) 3)}	Nominal dimensions										Bolt size mm inch	Bearing number ^{2) 3)}		
		mm					inch								
		H	L	J	A	N	N ₁	H ₁	H ₂	B ₁	L ₁				
20 $\frac{3}{4}$	UKP305D1;H2305X UKP305D1;HE2305	45 $1\frac{49}{64}$	175 $6\frac{7}{8}$	132 $5\frac{3}{16}$	45 $1\frac{25}{32}$	17 $2\frac{21}{32}$	20 $2\frac{25}{32}$	15 $1\frac{19}{32}$	85 $3\frac{11}{32}$	35 1.378	54 $2\frac{1}{8}$	M14 $\frac{1}{2}$	UK305D1;H2305X UK305D1;HE2305		
25 $\frac{7}{8}$ 1	UKP306D1;H2306X UKP306D1;HS2306 UKP306D1;HE2306X	50 $1\frac{31}{32}$	180 $7\frac{3}{32}$	140 $5\frac{1}{2}$	50 $1\frac{31}{32}$	17 $2\frac{21}{32}$	20 $2\frac{25}{32}$	18 $2\frac{23}{32}$	95 $3\frac{3}{4}$	38 1.496	54 $2\frac{1}{8}$	M14 $\frac{1}{2}$	UK306D1;H2306X UK306D1;HS2306 UK306D1;HE2306X		
30 $1\frac{1}{8}$	UKP307D1;H2307X UKP307D1;HS2307	56 $2\frac{13}{64}$	210 $8\frac{9}{32}$	160 $6\frac{5}{16}$	56 $2\frac{7}{32}$	17 $2\frac{1}{32}$	25 $3\frac{1}{32}$	20 $2\frac{25}{32}$	106 $4\frac{3}{16}$	43 1.693	60 $2\frac{3}{8}$	M14 $\frac{1}{2}$	UK307D1;H2307X UK307D1;HS2307		
35 $1\frac{1}{4}$ $1\frac{3}{8}$	UKP308D1;H2308X UKP308D1;HE2308X UKP308D1;HS2308X	60 $2\frac{23}{64}$	220 $8\frac{21}{32}$	170 $6\frac{11}{16}$	60 $2\frac{3}{8}$	17 $2\frac{21}{32}$	27 $1\frac{1}{16}$	22 $\frac{7}{8}$	116 $4\frac{9}{16}$	46 1.811	60 $2\frac{3}{8}$	M14 $\frac{1}{2}$	UK308D1;H2308X UK308D1;HE2308X UK308D1;HS2308X		
40 $1\frac{7}{16}$ $1\frac{1}{2}$ $1\frac{5}{8}$	UKP309D1;H2309X UKP309D1;HA2309 UKP309D1;HE2309X UKP309D1;HS2309X	67 $2\frac{41}{64}$	245 $9\frac{21}{32}$	190 $7\frac{15}{32}$	67 $2\frac{5}{8}$	20 $2\frac{25}{32}$	30 $1\frac{3}{16}$	24 $\frac{15}{16}$	129 $5\frac{3}{32}$	50 1.969	65 $2\frac{9}{16}$	M16 $\frac{5}{8}$	UK309D1;H2309X UK309D1;HA2309 UK309D1;HE2309X UK309D1;HS2309X		
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UKP310D1;H2310X UKP310D1;HS2310 UKP310D1;HA2310 UKP310D1;HE2310X	75 $2\frac{61}{64}$	275 $10\frac{13}{16}$	212 $8\frac{11}{32}$	75 $2\frac{15}{16}$	20 $2\frac{25}{32}$	35 $1\frac{3}{8}$	27 $1\frac{1}{16}$	143 $5\frac{5}{8}$	55 2.165	75 $2\frac{15}{16}$	M16 $\frac{5}{8}$	UK310D1;H2310X UK310D1;HS2310 UK310D1;HA2310 UK310D1;HE2310X		
50 $1\frac{7}{8}$ $1\frac{15}{16}$ 2	UKP311D1;H2311X UKP311D1;HS2311 UKP311D1;HA2311 UKP311D1;HE2311XY	80 $3\frac{5}{32}$	310 $12\frac{7}{32}$	236 $9\frac{9}{32}$	80 $3\frac{5}{32}$	20 $2\frac{25}{32}$	38 $1\frac{1}{2}$	30 $1\frac{3}{16}$	154 $6\frac{1}{16}$	59 2.323	85 $3\frac{11}{32}$	M16 $\frac{5}{8}$	UK311D1;H2311X UK311D1;HS2311 UK311D1;HA2311 UK311D1;HE2311XY		
55 $2\frac{1}{8}$	UKP312D1;H2312X UKP312D1;HS2312	85 $3\frac{1}{32}$	330 13	250 $9\frac{27}{32}$	85 $3\frac{11}{32}$	25 $3\frac{1}{32}$	38 $1\frac{1}{2}$	32 $1\frac{1}{4}$	165 $6\frac{1}{2}$	62 2.441	95 $3\frac{3}{4}$	M20 $\frac{3}{4}$	UK312D1;H2312X UK312D1;HS2312		
60 $2\frac{3}{16}$ $2\frac{1}{4}$ $2\frac{3}{8}$	UKP313D1;H2313X UKP313D1;HA2313 UKP313D1;HE2313X UKP313D1;HS2313X	90 $3\frac{35}{64}$	340 $13\frac{3}{8}$	260 $10\frac{1}{4}$	90 $3\frac{17}{32}$	25 $3\frac{1}{32}$	38 $1\frac{1}{2}$	33 $1\frac{5}{16}$	176 $6\frac{15}{16}$	65 2.559	105 $4\frac{1}{8}$	M20 $\frac{3}{4}$	UK313D1;H2313X UK313D1;HA2313 UK313D1;HE2313X UK313D1;HS2313X		

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".


2) Adapter number with suffix "X" means a narrow slot type adapter sleeve.

In this case the lock washer with the straight inner prong should be used.


3) For HE2311XY, screw thread pitch different from the standard is applied, because of the thin thread section of sleeve.

To distinguish it, a suffix "Y" is added.

Note: Please refer to page 36 for size of grease fitting.

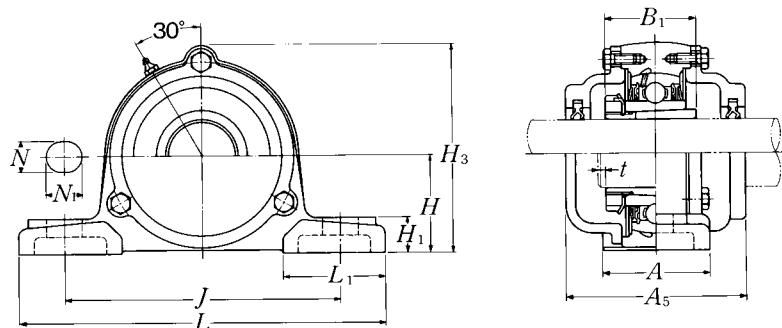**Cast dust cover type**Open end: **C-UKP…D1**Closed end: **CM-UKP…D1**

Housing ¹⁾ number	Unit number ^{1) 2) 3)} cast dust cover type	Nominal dimensions			Mass of unit	
		t max.	H ₃	A ₅	kg UKP	lb C(CM)
P305D1	C(CM)-UKP305D1;H2305X	2	91	80	1.4	1.9
P305D1	C(CM)-UKP305ED1;HE2305	5/64	3 19/32	3 5/32	3.1	4.2
P306D1	C(CM)-UKP306D1;H2306X	2	105	85	1.8	2.6
P306D1	C(CM)-UKP306SD1;HS2306	5/64	4 1/8	3 11/32	4.0	5.7
P306D1	C(CM)-UKP306ED1;HE2306X					
P307D1	C(CM)-UKP307D1;H2307X	3	115	95	2.6	3.3
P307D1	C(CM)-UKP307SD1;HS2307	1/8	4 17/32	3 3/4	5.7	7.3
P308D1	C(CM)-UKP308D1;H2308X	3	125	105	3.1	4.2
P308D1	C(CM)-UKP308ED1;HE2308X	1/8	4 29/32	4 1/8	6.8	9.3
P308D1	C(CM)-UKP308SD1;HS2308X					
P309D1	C(CM)-UKP309D1;H2309X	3	140	110	4.1	5.6
P309D1	C(CM)-UKP309AD1;HA2309	1/8	5 1/2	4 11/32	9.0	12
P309D1	C(CM)-UKP309ED1;HE2309X					
P309D1	C(CM)-UKP309SD1;HS2309X					
P310D1	C(CM)-UKP310D1;H2310X	3	156	120	5.6	7.2
P310D1	C(CM)-UKP310SD1;HS2310	1/8	6 5/32	4 23/32	12	16
P310D1	C(CM)-UKP310AD1;HA2310					
P310D1	C(CM)-UKP310ED1;HE2310X					
P311D1	C(CM)-UKP311D1;H2311X	4	166	125	7.3	9.0
P311D1	C(CM)-UKP311SD1;HS2311	5/32	6 17/32	4 29/32	16	20
P311D1	C(CM)-UKP311AD1;HA2311					
P311D1	C(CM)-UKP311ED1;HE2311XY					
P312D1	C(CM)-UKP312D1;H2312X	4	179	135	9.3	11
P312D1	C(CM)-UKP312SD1;HS2312	5/32	7 1/16	5 5/16	21	24
P312D1	C(CM)-UKP312AD1;HA2312					
P313D1	C(CM)-UKP313D1;H2313X	4	190	140	10	12
P313D1	C(CM)-UKP313AD1;HA2313	5/32	7 15/32	5 1/2	22	26
P313D1	C(CM)-UKP313ED1;HE2313X					
P313D1	C(CM)-UKP313SD1;HS2313X					

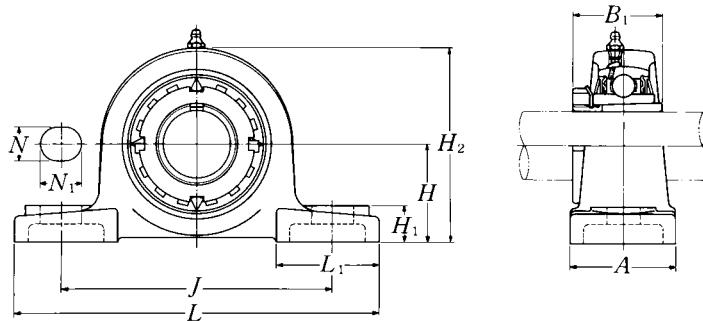

Shaft dia. mm inch	Unit number ^{1) 2) 3)}	Nominal dimensions										Bolt size mm inch	Bearing number ^{2) 3)}		
		mm					inch								
		H	L	J	A	N	N ₁	H ₁	H ₂	B ₁	L ₁				
65 2 $\frac{7}{16}$ 2 $\frac{1}{2}$	UKP315D1;H2315X UKP315D1;HA2315 UKP315D1;HE2315X	100 3 $\frac{15}{16}$	380 14 $\frac{31}{32}$	290 11 $\frac{13}{32}$	100 3 $\frac{15}{16}$	27 1 $\frac{1}{16}$	40 1 $\frac{9}{16}$	35 1 $\frac{3}{8}$	198 7 $\frac{25}{32}$	73 2.874	110 4 $\frac{11}{32}$	M22 $\frac{7}{8}$	UK315D1;H2315X UK315D1;HA2315 UK315D1;HE2315X		
70 2 $\frac{11}{16}$ 2 $\frac{3}{4}$	UKP316D1;H2316X UKP316D1;HA2316 UKP316D1;HE2316X	106 4 $\frac{11}{64}$	400 15 $\frac{3}{4}$	300 11 $\frac{13}{16}$	110 4 $\frac{11}{32}$	27 1 $\frac{1}{16}$	40 1 $\frac{9}{16}$	40 1 $\frac{9}{16}$	210 8 $\frac{9}{32}$	78 3.071	110 4 $\frac{11}{32}$	M22 $\frac{7}{8}$	UK316D1;H2316X UK316D1;HA2316 UK316D1;HE2316X		
75 2 $\frac{15}{16}$ 3	UKP317D1;H2317X UKP317D1;HA2317X UKP317D1;HE2317X	112 4 $\frac{13}{32}$	420 16 $\frac{17}{32}$	320 12 $\frac{19}{32}$	110 4 $\frac{11}{32}$	33 1 $\frac{5}{16}$	45 1 $\frac{25}{32}$	40 1 $\frac{9}{16}$	220 8 $\frac{21}{32}$	82 3.228	120 4 $\frac{23}{32}$	M27 1	UK317D1;H2317X UK317D1;HA2317X UK317D1;HE2317X		
80 3 $\frac{3}{16}$	UKP318D1;H2318X UKP318D1;HA2318X	118 4 $\frac{41}{64}$	430 16 $\frac{15}{16}$	330 13	110 4 $\frac{11}{32}$	33 1 $\frac{5}{16}$	45 1 $\frac{25}{32}$	45 1 $\frac{25}{32}$	235 9 $\frac{1}{4}$	86 3.386	120 4 $\frac{23}{32}$	M27 1	UK318D1;H2318X UK318D1;HA2318X		
85 3 $\frac{1}{4}$	UKP319D1;H2319X UKP319D1;HE2319X	125 4 $\frac{59}{64}$	470 18 $\frac{1}{2}$	360 14 $\frac{3}{16}$	120 4 $\frac{23}{32}$	36 1 $\frac{13}{32}$	50 1 $\frac{31}{32}$	45 1 $\frac{25}{32}$	250 9 $\frac{27}{32}$	90 3.543	125 4 $\frac{29}{32}$	M30 $1\frac{1}{8}$	UK319D1;H2319X UK319D1;HE2319X		
90 3 $\frac{7}{16}$ 3 $\frac{1}{2}$	UKP320D1;H2320X UKP320D1;HA2320 UKP320D1;HE2320X	140 5 $\frac{33}{64}$	490 19 $\frac{9}{32}$	380 14 $\frac{31}{32}$	120 4 $\frac{23}{32}$	36 1 $\frac{13}{32}$	50 1 $\frac{31}{32}$	50 1 $\frac{31}{32}$	275 10 $\frac{13}{16}$	97 3.819	130 5 $\frac{1}{8}$	M30 $1\frac{1}{8}$	UK320D1;H2320X UK320D1;HA2320 UK320D1;HE2320X		
100	UKP322D1;H2322X	150	520	400	140	40	55	55	300	105	135	M33	UK322D1;H2322X		
110	UKP324D1;H2324X	160	570	450	140	40	55	65	320	112	140	M33	UK324D1;H2324X		
115	UKP326D1;H2326	180	600	480	140	40	55	75	355	121	140	M33	UK326D1;H2326		
125	UKP328D1;H2328	200	620	500	140	40	55	75	390	131	140	M33	UK328D1;H2328		

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".


2) Adapter number with suffix "X" means a narrow slot type adapter sleeve.

In this case the lock washer with the straight inner prong should be used.


3) For HE2311XY, screw thread pitch different from the standard is applied, because of the thin thread section of sleeve.

To distinguish it, a suffix "Y" is added.

Note: Please refer to page 36 for size of grease fitting.

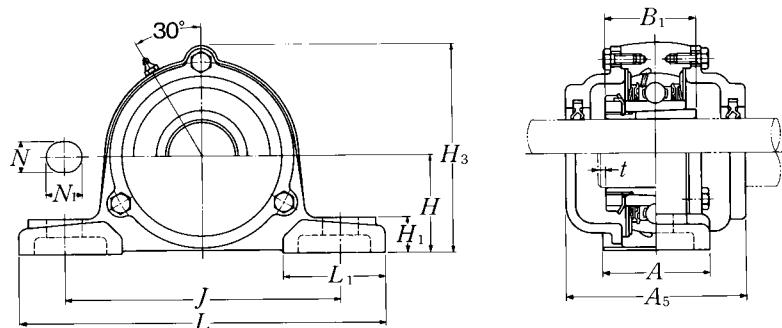**Cast dust cover type**Open end: **C-UKP…D1**Closed end: **CM-UKP…D1**

Housing 1) number	Unit number 1) 2) 3) cast dust cover type	Nominal dimensions			Mass of unit	
		t max.	H ₃	A ₅	kg UKP	lb C(CM)
P315D1	C(CM)-UKP315D1;H2315X	4	210	150	14	18
P315D1	C(CM)-UKP315AD1;HA2315	5 ₃₂	8 ₉ ₃₂	5 ₂₉ ₃₂	31	40
P315D1	C(CM)-UKP315ED1;HE2315X					
P316D1	C(CM)-UKP316D1;H2316X	4	221	155	17	21
P316D1	C(CM)-UKP316AD1;HA2316	5 ₃₂	8 ₁₁ ₁₆	6 ₃ ₃₂	37	46
P316D1	C(CM)-UKP316ED1;HE2316X					
P317D1	C(CM)-UKP317D1;H2317X	5	235	170	19	24
P317D1	C(CM)-UKP317AD1;HA2317X	13 ₆₄	9 ₁ ₄	6 ₁₁ ₁₆	44	60
P317D1	C(CM)-UKP317ED1;HE2317X					
P318D1	C(CM)-UKP318D1;H2318X	5	246	170	22	28
P318D1	C(CM)-UKP318AD1;HA2318X	13 ₆₄	9 ₁₁ ₁₆	6 ₁₁ ₁₆	53	68
P319D1	C(CM)-UKP319D1;H2319X	5	258	180	27	33
P319D1	C(CM)-UKP319ED1;HE2319X	13 ₆₄	10 ₅ ₃₂	7 ₃ ₃₂	64	84
P320D1	C(CM)-UKP320D1;H2320X	5	283	190	33	40
P320D1	C(CM)-UKP320AD1;HA2320	13 ₆₄	11 ₅ ₃₂	7 ₁₅ ₃₂	77	104
P320D1	C(CM)-UKP320ED1;HE2320X					
P322D1	C(CM)-UKP322D1;H2322X	5	313	200	43	53
P324D1	C(CM)-UKP324D1;H2324X	5	335	215	50	67
P326D1	C(CM)-UKP326D1;H2326	6	375	225	69	86
P328D1	C(CM)-UKP328D1;H2328	6	407	235	84	101

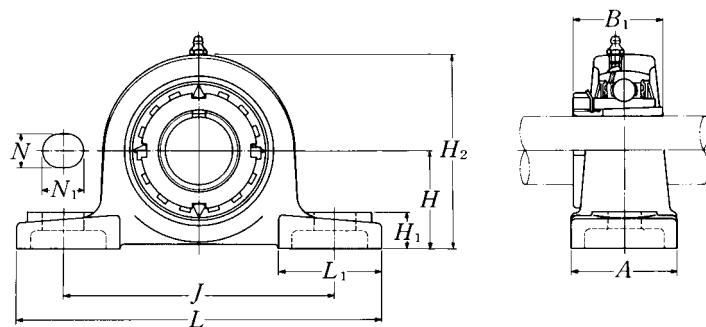

Shaft dia. mm inch	Unit number ^{1) 2) 3)}	Nominal dimensions										Bolt size mm inch
		H	L	J	A	N	N ₁	H ₁	H ₂	B ₁	L ₁	
20 $\frac{3}{4}$	UKPX05D1;H2305X UKPX05D1;HE2305	44.4 $1\frac{3}{4}$	159 $6\frac{1}{4}$	119 $4\frac{11}{16}$	51 2	17 $2\frac{1}{32}$	20 $2\frac{5}{32}$	18 $2\frac{3}{32}$	85 $3\frac{11}{32}$	35 1.378	50 $1\frac{31}{32}$	M14 $\frac{1}{2}$
25 $\frac{7}{8}$ 1	UKPX06D1;H2306X UKPX06D1;HS2306 UKPX06D1;HE2306X	47.6 $1\frac{7}{8}$	175 $6\frac{7}{8}$	127 5	57 $2\frac{1}{4}$	17 $2\frac{1}{32}$	20 $2\frac{5}{32}$	20 $2\frac{5}{32}$	93 $3\frac{21}{32}$	38 1.496	54 $2\frac{1}{8}$	M14 $\frac{1}{2}$
30 $1\frac{1}{8}$	UKPX07D1;H2307X UKPX07D1;HS2307	54 $2\frac{1}{8}$	203 8	144 $5\frac{21}{32}$	57 $2\frac{1}{4}$	17 $2\frac{1}{32}$	20 $2\frac{5}{32}$	21 $1\frac{13}{16}$	105 $4\frac{1}{8}$	43 1.693	60 $2\frac{3}{8}$	M14 $\frac{1}{2}$
35 $1\frac{1}{4}$ $1\frac{3}{8}$	UKPX08D1;H2308X UKPX08D1;HE2308X UKPX08D1;HS2308X	58.7 $2\frac{5}{16}$	222 $8\frac{3}{4}$	156 $6\frac{5}{32}$	67 $2\frac{5}{8}$	20 $2\frac{5}{32}$	23 $2\frac{9}{32}$	26 $1\frac{1}{32}$	111 $4\frac{3}{8}$	46 1.811	65 $2\frac{9}{16}$	M16 $\frac{5}{8}$
40 $1\frac{7}{16}$ $1\frac{1}{2}$ $1\frac{5}{8}$	UKPX09D1;H2309X UKPX09D1;HA2309 UKPX09D1;HE2309X UKPX09D1;HS2309X	58.7 $2\frac{5}{16}$	222 $8\frac{3}{4}$	156 $6\frac{5}{32}$	67 $2\frac{5}{8}$	20 $2\frac{5}{32}$	23 $2\frac{9}{32}$	26 $1\frac{1}{32}$	116 $4\frac{9}{16}$	50 1.969	65 $2\frac{9}{16}$	M16 $\frac{5}{8}$
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UKPX10D1;H2310X UKPX10D1;HS2310 UKPX10D1;HA2310 UKPX10D1;HE2310X	63.5 $2\frac{1}{2}$	241 $9\frac{1}{2}$	171 $6\frac{23}{32}$	73 $2\frac{7}{8}$	20 $2\frac{5}{32}$	23 $2\frac{9}{32}$	27 $1\frac{1}{16}$	126 $4\frac{31}{32}$	55 2.165	70 $2\frac{3}{4}$	M16 $\frac{5}{8}$
50 $1\frac{7}{8}$ $1\frac{15}{16}$ 2	UKPX11D1;H2311X UKPX11D1;HS2311 UKPX11D1;HA2311 UKPX11D1;HE2311XY	69.8 $2\frac{3}{4}$	260 $10\frac{1}{4}$	184 $7\frac{1}{4}$	79 $3\frac{1}{8}$	25 $3\frac{1}{32}$	28 $1\frac{3}{32}$	30 $1\frac{3}{16}$	137 $5\frac{13}{32}$	59 2.323	75 $2\frac{15}{16}$	M20 $\frac{3}{4}$
55 $2\frac{1}{8}$	UKPX12D1;H2312X UKPX12D1;HS2312	76.2 3	286 $11\frac{1}{4}$	203 8	83 $3\frac{9}{32}$	25 $3\frac{1}{32}$	28 $1\frac{3}{32}$	33 $1\frac{5}{16}$	151 $5\frac{15}{16}$	62 2.441	80 $3\frac{5}{32}$	M20 $\frac{3}{4}$
60 $2\frac{3}{16}$ $2\frac{1}{4}$ $2\frac{3}{8}$	UKPX13D1;H2313X UKPX13D1;HA2313 UKPX13D1;HE2313X UKPX13D1;HS2313X	76.2 3	286 $11\frac{1}{4}$	203 8	83 $3\frac{9}{32}$	25 $3\frac{1}{32}$	28 $1\frac{3}{32}$	33 $1\frac{5}{16}$	154 $6\frac{1}{16}$	65 2.559	80 $3\frac{5}{32}$	M20 $\frac{3}{4}$

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".


2) Adapter number with suffix "X" means a narrow slot type adapter sleeve.

In this case the lock washer with the straight inner prong should be used.


3) For HE2311XY, screw thread pitch different from the standard is applied, because of the thin thread section of sleeve.

To distinguish it, a suffix "Y" is added.

Note: Please refer to page 36 for size of grease fitting.

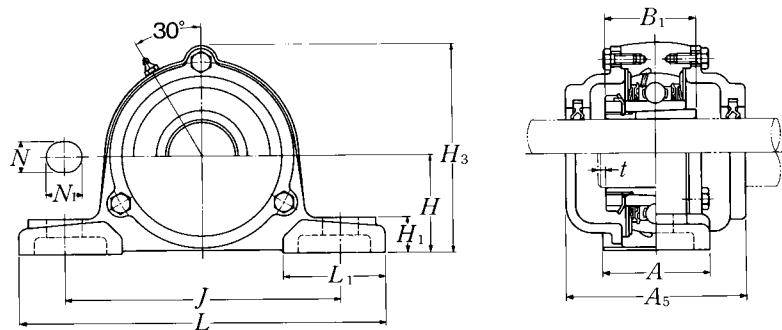**Cast dust cover type**Open end: **C-UKPX...D1**Closed end: **CM-UKPX...D1**

Bearing number ^{2) 3)}	Housing ¹⁾ number	Unit number ^{1) 2) 3)} cast dust cover type	Nominal dimensions			Mass of unit	
			t	mm H ₃	inch A ₅	kg UKPX	lb C(CM)
UKX05D1;H2305X	PX05D1	C(CM)-UKPX05D1;H2305X	2	89	75	1.4	1.8
UKX05D1;HE2305	PX05D1	C(CM)-UKPX05ED1;HE2305	$\frac{5}{64}$	$3\frac{1}{2}$	$2\frac{15}{16}$	3.1	4.0
UKX06D1;H2306X	PX06D1	C(CM)-UKPX06D1;H2306X	2	99	80	1.7	2.2
UKX06D1;HS2306	PX06D1	C(CM)-UKPX06SD1;HS2306	$\frac{5}{64}$	$3\frac{29}{32}$	$3\frac{5}{32}$	3.8	4.9
UKX06D1;HE2306X	PX06D1	C(CM)-UKPX06ED1;HE2306X					
UKX07D1;H2307X	PX07D1	C(CM)-UKPX07D1;H2307X	3	110	90	2.5	3.3
UKX07D1;HS2307	PX07D1	C(CM)-UKPX07SD1;HS2307	$\frac{1}{8}$	$4\frac{11}{32}$	$3\frac{17}{32}$	5.5	7.3
UKX08D1;H2308X	PX08D1	C(CM)-UKPX08D1;H2308X	3	118	95	3.2	4.1
UKX08D1;HE2308X	PX08D1	C(CM)-UKPX08ED1;HE2308X	$\frac{1}{8}$	$4\frac{41}{64}$	$3\frac{3}{4}$	7.1	9.0
UKX08D1;HS2308X	PX08D1	C(CM)-UKPX08SD1;HS2308X					
UKX09D1;H2309X	PX09D1	C(CM)-UKPX09D1;H2309X	3	120	100	3.3	4.3
UKX09D1;HA2309	PX09D1	C(CM)-UKPX09AD1;HA2309					
UKX09D1;HE2309X	PX09D1	C(CM)-UKPX09ED1;HE2309X	$\frac{1}{8}$	$4\frac{23}{32}$	$3\frac{15}{16}$	7.3	9.5
UKX09D1;HS2309X	PX09D1	C(CM)-UKPX09SD1;HS2309X					
UKX10D1;H2310X	PX10D1	C(CM)-UKPX10D1;H2310X	3	130	100	4.2	5.4
UKX10D1;HS2310	PX10D1	C(CM)-UKPX10SD1;HS2310					
UKX10D1;HA2310	PX10D1	C(CM)-UKPX10AD1;HA2310	$\frac{1}{8}$	$5\frac{1}{8}$	$3\frac{15}{16}$	9.3	12
UKX10D1;HE2310X	PX10D1	C(CM)-UKPX10ED1;HE2310X					
UKX11D1;H2311X	PX11D1	C(CM)-UKPX11D1;H2311X	4	144	115	5.3	6.8
UKX11D1;HS2311	PX11D1	C(CM)-UKPX11SD1;HS2311					
UKX11D1;HA2311	PX11D1	C(CM)-UKPX11AD1;HA2311	$\frac{5}{32}$	$5\frac{21}{32}$	$4\frac{17}{32}$	12	15
UKX11D1;HE2311XY	PX11D1	C(CM)-UKPX11ED1;HE2311XY					
UKX12D1;H2312X	PX12D1	C(CM)-UKPX12D1;H2312X	4	155	120	6.8	8.6
UKX12D1;HS2312	PX12D1	C(CM)-UKPX12SD1;HS2312	$\frac{5}{32}$	$6\frac{3}{32}$	$4\frac{23}{32}$	15	19
UKX13D1;H2313X	PX13D1	C(CM)-UKPX13D1;H2313X	4	159	135	6.9	9.2
UKX13D1;HA2313	PX13D1	C(CM)-UKPX13AD1;HA2313					
UKX13D1;HE2313X	PX13D1	C(CM)-UKPX13ED1;HE2313X	$\frac{5}{32}$	$\frac{1}{4}$	$5\frac{5}{16}$	15	20
UKX13D1;HS2313X	PX13D1	C(CM)-UKPX13SD1;HS2313X					

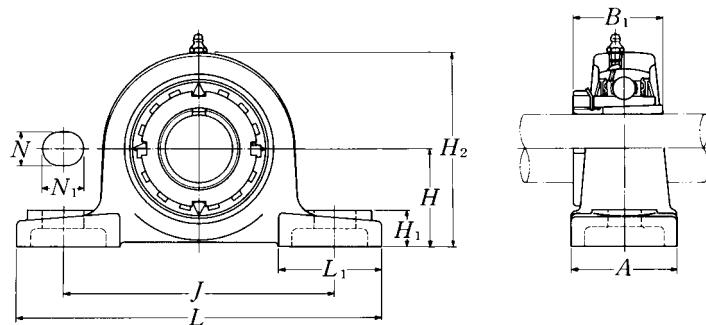

Shaft dia. mm inch	Unit number 1) 2) 3) UKPX15D1;H2315X UKPX15D1;HA2315 UKPX15D1;HE2315X	Nominal dimensions										Bolt size mm inch	
		mm					inch						
		H	L	J	A	N	N ₁	H ₁	H ₂	B ₁	L ₁		
65 2 ⁷ / ₁₆ 2 ¹ / ₂	UKPX15D1;H2315X UKPX15D1;HA2315 UKPX15D1;HE2315X	88.9 3 ¹ / ₂	330	229	89	27	30	35	175	73	95	M22 7/8	
70 2 ¹¹ / ₁₆ 2 ³ / ₄	UKPX16D1;H2316X UKPX16D1;HA2316 UKPX16D1;HE2316X	101.6 4	381	283	102	27	30	40	194	78	110	M22 7/8	
75 2 ¹⁵ / ₁₆ 3	UKPX17D1;H2317X UKPX17D1;HA2317X UKPX17D1;HE2317X	101.6 4	381	283	102	27	30	40	200	82	110	M22 7/8	
80 3 ³ / ₁₆	UKPX18D1;H2318X UKPX18D1;HA2318X	101.6 4	381	283	111	27	30	40	206	86	110	M22 7/8	
90	UKPX20D1;H2320X	127	432	337	121	33	36	45	244	97	125	M27	

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".


2) Adapter number with suffix "X" means a narrow slot type adapter sleeve.

In this case the lock washer with the straight inner prong should be used.


3) For HE2311XY, screw thread pitch different from the standard is applied, because of the thin thread section of sleeve.

To distinguish it, a suffix "Y" is added.

Note: Please refer to page 36 for size of grease fitting.

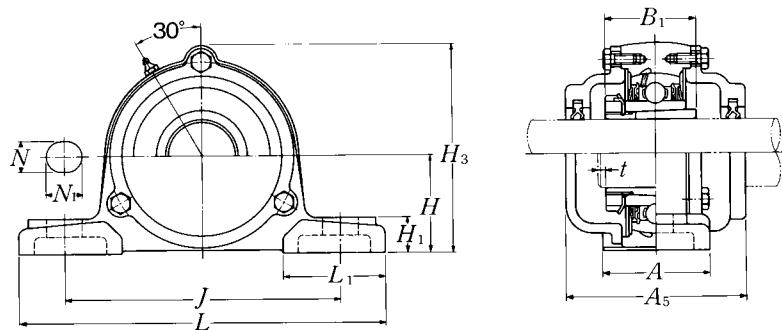**Cast dust cover type**Open end: **C-UKPX…D1**Closed end: **CM-UKPX…D1**

Bearing number ^{2) 3)}	Housing ¹⁾ number	Unit number ^{1) 2) 3)} cast dust cover type	Nominal dimensions			Mass of unit	
			t	mm H ₃	inch A ₅	kg UKPX	lb C(CM)
UKX15D1;H2315X	PX15D1	C(CM)-UKPX15D1;H2315X	4	181	145	10	13
UKX15D1;HA2315	PX15D1	C(CM)-UKPX15AD1;HA2315	5/32	7 1/8	5 23/32	22	29
UKX15D1;HE2315X	PX15D1	C(CM)-UKPX15ED1;HE2315X					
UKX16D1;H2316X	PX16D1	C(CM)-UKPX16D1;H2316X	4	198	155	14	17
UKX16D1;HA2316	PX16D1	C(CM)-UKPX16AD1;HA2316	5/32	7 25/32	6 3/32	31	37
UKX16D1;HE2316X	PX16D1	C(CM)-UKPX16ED1;HE2316X					
UKX17D1;H2317X	PX17D1	C(CM)-UKPX17D1;H2317X	5	204	165	15	18
UKX17D1;HA2317X	PX17D1	C(CM)-UKPX17AD1;HA2317X	13/64	8 1/32	6 1/2	33	40
UKX17D1;HE2317X	PX17D1	C(CM)-UKPX17ED1;HE2317X					
UKX18D1;H2318X	PX18D1	C(CM)-UKPX18D1;H2318X	5	208	180	16	20
UKX18D1;HA2318X	PX18D1	C(CM)-UKPX18AD1;HA2318X	13/64	8 3/16	7 3/32	35	44
UKX20D1;H2320X	PX20D1	C(CM)-UKPX20D1;H2320X	5	244	195	24	28

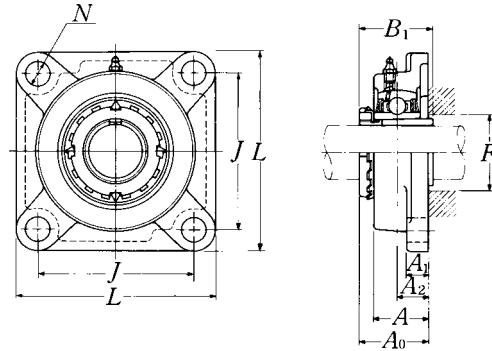

Shaft dia. mm inch	Unit number ^{1) 2) 3)}	Nominal dimensions									Bolt size mm inch	Bearing number ^{2) 3)}
		L	J	A ₂	A ₁	A	N	A ₀	B ₁	F min.		
20 $\frac{3}{4}$	UKF205D1;H2305X UKF205D1;HE2305	95 $3\frac{3}{4}$	70 $2\frac{3}{4}$	16 $\frac{5}{8}$	13 $\frac{1}{2}$	27 $1\frac{1}{16}$	12 $1\frac{15}{32}$	35.5 $1\frac{25}{64}$	35 1.378	30 $1\frac{3}{16}$	M10 $\frac{3}{8}$	UK205D1;H2305X UK205D1;HE2305
25 $\frac{7}{8}$ 1	UKF206D1;H2306X UKF206D1;HS2306 UKF206D1;HE2306X	108 $4\frac{1}{4}$	83 $3\frac{17}{64}$	18 $\frac{45}{64}$	13 $\frac{1}{2}$	31 $1\frac{1}{32}$	12 $1\frac{15}{32}$	39 $1\frac{1}{32}$	38 1.496	36 $1\frac{13}{32}$	M10 $\frac{3}{8}$	UK206D1;H2306X UK206D1;HS2306 UK206D1;HE2306X
30 $1\frac{1}{8}$	UKF207D1;H2307X UKF207D1;HS2307	117 $4\frac{19}{32}$	92 $3\frac{5}{8}$	19 $\frac{3}{4}$	15 $1\frac{1}{32}$	34 $1\frac{1}{32}$	14 $3\frac{5}{64}$	42.5 $1\frac{43}{64}$	43 1.693	40 $1\frac{9}{16}$	M12 $\frac{7}{16}$	UK207D1;H2307X UK207D1;HS2307
35 $1\frac{1}{4}$ $1\frac{3}{8}$	UKF208D1;H2308X UKF208D1;HE2308X UKF208D1;HS2308X	130 $5\frac{1}{8}$	102 $4\frac{1}{64}$	21 $5\frac{3}{64}$	15 $1\frac{13}{32}$	36 $1\frac{1}{32}$	16 $\frac{5}{8}$	46.5 $1\frac{53}{64}$	46 1.811	46 $1\frac{13}{16}$	M14 $\frac{1}{2}$	UK208D1;H2308X UK208D1;HE2308X UK208D1;HS2308X
40 $1\frac{7}{16}$ $1\frac{1}{2}$ $1\frac{5}{8}$	UKF209D1;H2309X UKF209D1;HA2309 UKF209D1;HE2309X UKF209D1;HS2309X	137 $5\frac{13}{32}$	105 $4\frac{9}{64}$	22 $5\frac{5}{64}$	16 $\frac{5}{8}$	38 $1\frac{1}{2}$	16 $\frac{5}{8}$	48.5 $1\frac{29}{32}$	50 1.969	52 $2\frac{1}{16}$	M14 $\frac{1}{2}$	UK209D1;H2309X UK209D1;HA2309 UK209D1;HE2309X UK209D1;HS2309X
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UKF210D1;H2310X UKF210D1;HS2310 UKF210D1;HA2310 UKF210D1;HE2310X	143 $5\frac{5}{8}$	111 $4\frac{3}{8}$	22 $5\frac{5}{64}$	16 $\frac{5}{8}$	40 $1\frac{9}{16}$	16 $\frac{5}{8}$	50 $1\frac{31}{32}$	55 2.165	57 $2\frac{1}{4}$	M14 $\frac{1}{2}$	UK210D1;H2310X UK210D1;HS2310 UK210D1;HA2310 UK210D1;HE2310X
50 $1\frac{7}{8}$ $1\frac{15}{16}$ 2	UKF211D1;H2311X UKF211D1;HS2311 UKF211D1;HA2311 UKF211D1;HE2311XY	162 $6\frac{3}{8}$	130 $5\frac{1}{8}$	25 $6\frac{3}{64}$	18 $2\frac{3}{32}$	43 $1\frac{11}{16}$	19 $\frac{3}{4}$	54.5 $2\frac{9}{64}$	59 2.323	64 $2\frac{17}{32}$	M16 $\frac{5}{8}$	UK211D1;H2311X UK211D1;HS2311 UK211D1;HA2311 UK211D1;HE2311XY
55 $2\frac{1}{8}$	UKF212D1;H2312X UKF212D1;HS2312	175 $6\frac{7}{8}$	143 $5\frac{5}{8}$	29 $1\frac{9}{64}$	18 $2\frac{3}{32}$	48 $1\frac{7}{8}$	19 $\frac{3}{4}$	61 $2\frac{13}{32}$	62 2.441	69 $2\frac{23}{32}$	M16 $\frac{5}{8}$	UK212D1;H2312X UK212D1;HS2312
60 $2\frac{3}{16}$ $2\frac{1}{4}$ $2\frac{3}{8}$	UKF213D1;H2313X UKF213D1;HA2313 UKF213D1;HE2313X UKF213D1;HS2313X	187 $7\frac{3}{8}$	149 $5\frac{55}{64}$	30 $1\frac{3}{16}$	22 $\frac{7}{8}$	50 $1\frac{31}{32}$	19 $\frac{3}{4}$	64 $2\frac{33}{64}$	65 2.559	74 $2\frac{29}{32}$	M16 $\frac{5}{8}$	UK213D1;H2313X UK213D1;HA2313 UK213D1;HE2313X UK213D1;HS2313X

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".





2) Adapter number with suffix "X" means a narrow slot type adapter sleeve.

In this case the lock washer with the straight inner prong should be used.

3) For HE2311XY, screw thread pitch different from the standard is applied, because of the thin thread section of sleeve.

To distinguish it, a suffix "Y" is added.

4) If the inch series housing units with dust cover are ordered with a closed end, the suffixes E, S or A are not included.

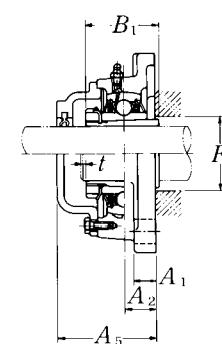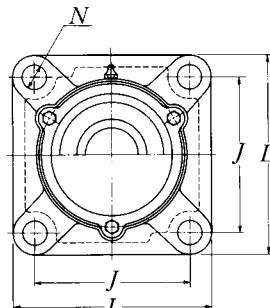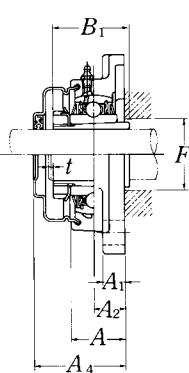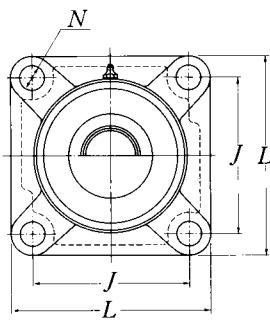

Pressed steel dust cover type


Open end: **S-UKF···D1**Closed end: **SM-UKF···D1**

Cast dust cover type

Open end: **C-UKF···D1**Closed end: **CM-UKF···D1**

Housing ¹⁾ number	Unit number ^{1) 2) 3) 4)} pressed steel dust cover type	Unit number ^{1) 2) 3) 4)} cast dust cover type	Nominal dimensions			Mass of unit		
			t max.	A ₄	A ₅	kg	lb	
						UKF	S(SM)	C(CM)
F205D1	S(SM)-UKF205D1;H2305X	C(CM)-UKF205D1;H2305X	2	44.5	51	0.8	0.8	1.0
F205D1	S(SM)-UKF205ED1;HE2305	C(CM)-UKF205ED1;HE2305	5/64	1 3/4	2	1.8	1.8	2.2
F206D1	S(SM)-UKF206D1;H2306X	C(CM)-UKF206D1;H2306X	2	49	56	1.1	1.1	1.3
F206D1	S(SM)-UKF206SD1;HS2306	C(CM)-UKF206SD1;HS2306	5/64	1 15/16	2 7/32	2.4	2.4	2.9
F206D1	S(SM)-UKF206ED1;HE2306X	C(CM)-UKF206ED1;HE2306X						
F207D1	S(SM)-UKF207D1;H2307X	C(CM)-UKF207D1;H2307X	3	55	59	1.6	1.6	1.9
F207D1	S(SM)-UKF207SD1;HS2307	C(CM)-UKF207SD1;HS2307	1/8	2 5/32	2 5/16	3.3	3.5	4.2
F208D1	S(SM)-UKF208D1;H2308X	C(CM)-UKF208D1;H2308X	3	62	66	1.8	1.9	2.4
F208D1	S(SM)-UKF208ED1;HE2308X	C(CM)-UKF208ED1;HE2308X	1/8	2 7/16	2 19/32	4.0	4.2	5.3
F208D1	S(SM)-UKF208SD1;HS2308X	C(CM)-UKF208SD1;HS2308X						
F209D1	S(SM)-UKF209D1;H2309X	C(CM)-UKF209D1;H2309X	3	63	70	2.3	2.3	2.8
F209D1	S(SM)-UKF209AD1;HA2309	C(CM)-UKF209AD1;HA2309						
F209D1	S(SM)-UKF209ED1;HE2309X	C(CM)-UKF209ED1;HE2309X	1/8	2 15/32	2 3/4	5.1	5.1	6.2
F209D1	S(SM)-UKF209SD1;HS2309X	C(CM)-UKF209SD1;HS2309X						
F210D1	S(SM)-UKF210D1;H2310X	C(CM)-UKF210D1;H2310X	3	65.5	72	2.6	2.7	3.2
F210D1	S(SM)-UKF210SD1;HS2310	C(CM)-UKF210SD1;HS2310	1/8	2 19/32	2 27/32	5.7	6.0	7.1
F210D1	S(SM)-UKF210AD1;HA2310	C(CM)-UKF210AD1;HA2310						
F210D1	S(SM)-UKF210ED1;HE2310X	C(CM)-UKF210ED1;HE2310X						
F211D1	S(SM)-UKF211D1;H2311X	C(CM)-UKF211D1;H2311X	4	71	75	3.5	3.6	4.3
F211D1	S(SM)-UKF211SD1;HS2311	C(CM)-UKF211SD1;HS2311						
F211D1	S(SM)-UKF211AD1;HA2311	C(CM)-UKF211AD1;HA2311	5/32	2 25/32	2 15/16	7.7	7.9	9.5
F211D1	S(SM)-UKF211ED1;HE2311XY	C(CM)-UKF211ED1;HE2311XY						
F212D1	S(SM)-UKF212D1;H2312X	C(CM)-UKF212D1;H2312X	4	80	86	4.0	4.2	5.0
F212D1	S(SM)-UKF212SD1;HS2312	C(CM)-UKF212SD1;HS2312	5/32	3 5/32	3 3/8	8.8	9.3	11
F213D1	S(SM)-UKF213D1;H2313X	C(CM)-UKF213D1;H2313X	4	83.5	90	5.6	5.8	6.7
F213D1	S(SM)-UKF213AD1;HA2313	C(CM)-UKF213AD1;HA2313						
F213D1	S(SM)-UKF213ED1;HE2313X	C(CM)-UKF213ED1;HE2313X	5/32	3 5/16	3 17/32	12	13	15
F213D1	S(SM)-UKF213SD1;HS2313X	C(CM)-UKF213SD1;HS2313X						

Square flanged units cast housing
Adapter type

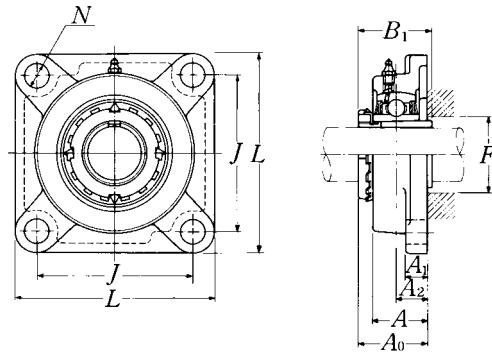

Shaft dia. mm inch	Unit number ^{1) 2) 3)}	Nominal dimensions									Bolt size mm inch	Bearing number ^{2) 3)}
		L	J	A ₂	A ₁	A	N	A ₀	B ₁	F min.		
65 2 ⁷ / ₁₆ 2 ¹ / ₂	UKF215D1;H2315X	200	159	34	22	56	19	71	73	84	M16	UK215D1;H2315X
	UKF215D1;HA2315	7 ⁷ / ₈	6 ¹⁷ / ₆₄	1 ¹¹ / ₃₂	7/8	2 ⁷ / ₃₂	3/4	2 ⁵¹ / ₆₄	2.874	3 ⁵ / ₁₆	5/8	UK215D1;HA2315
	UKF215D1;HE2315X											UK215D1;HE2315X
70 2 ¹¹ / ₁₆ 2 ³ / ₄	UKF216D1;H2316X	208	165	34	22	58	23	73.5	78	90	M20	UK216D1;H2316X
	UKF216D1;HA2316	8 ³ / ₁₆	6 ¹ / ₂	1 ¹¹ / ₃₂	7/8	2 ⁹ / ₃₂	29/ ₃₂	2 ⁵⁷ / ₆₄	3.071	3 ¹⁷ / ₃₂	3/4	UK216D1;HA2316
	UKF216D1;HE2316X											UK216D1;HE2316X
75 2 ¹⁵ / ₁₆ 3	UKF217D1;H2317X	220	175	36	24	63	23	77	82	95	M20	UK217D1;H2317X
	UKF217D1;HA2317X	8 ²¹ / ₃₂	6 ⁵⁷ / ₆₄	1 ²⁷ / ₆₄	15/ ₁₆	2 ¹⁵ / ₃₂	29/ ₃₂	3 ¹ / ₃₂	3.228	3 ³ / ₄	3/4	UK217D1;HA2317X
	UKF217D1;HE2317X											UK217D1;HE2317X
80 3 ³ / ₁₆	UKF218D1;H2318X	235	187	40	24	68	23	81.5	86	102	M20	UK218D1;H2318X
	UKF218D1;HA2318X	9 ¹ / ₄	7 ²³ / ₆₄	1 ³⁷ / ₆₄	15/ ₁₆	2 ¹¹ / ₁₆	29/ ₃₂	3 ¹³ / ₆₄	3.386	4 ¹ / ₃₂	3/4	UK218D1;HA2318X

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

2) Adapter number with suffix "X" means a narrow slot type adapter sleeve.

In this case the lock washer with the straight inner prong should be used.


3) For HE2311XY, screw thread pitch different from the standard is applied, because of the thin thread section of sleeve.

To distinguish it, a suffix "Y" is added.


4) If the inch series housing units with dust cover are ordered with a closed end, the suffixes E, S or A are not included.

Example: SM-UKF205D1; HE2305



Note: Please refer to page 36 for size of grease fitting.

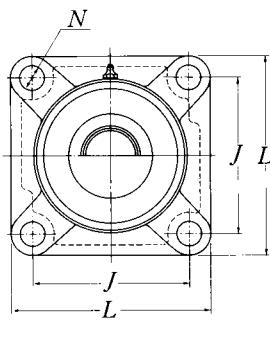


Pressed steel dust cover type

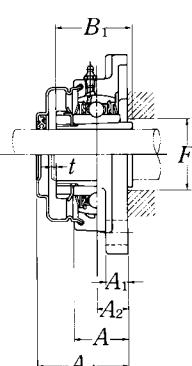Open end: **S-UKF···D1**Closed end: **SM-UKF···D1**

Cast dust cover type

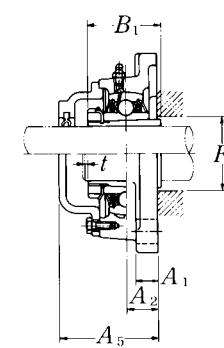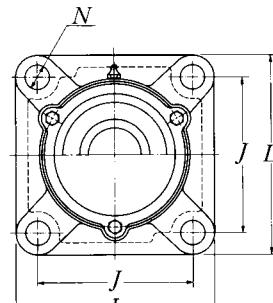Open end: **C-UKF···D1**Closed end: **CM-UKF···D1**

Housing ¹⁾ number	Unit number ^{1) 2) 3) 4)} pressed steel dust cover type	Unit number ^{1) 2) 3) 4)} cast dust cover type	Nominal dimensions		Mass of unit		
			mm max. <i>t</i>	inch <i>A</i> ₄	kg UKF	lb S(SM)	lb C(CM)
F215D1	—	C(CM)-UKF215D1;H2315X	4	—	102	6.8	—
F215D1	—	C(CM)-UKF215AD1;HA2315	5/32	—	4 1/32	15	—
F215D1	—	C(CM)-UKF215ED1;HE2315X					18
F216D1	—	C(CM)-UKF216D1;H2316X	4	—	106	8.3	—
F216D1	—	C(CM)-UKF216AD1;HA2316	5/32	—	4 3/16	18	—
F216D1	—	C(CM)-UKF216ED1;HE2316X					22
F217D1	—	C(CM)-UKF217D1;H2317X	5	—	114	10	—
F217D1	—	C(CM)-UKF217AD1;HA2317X	13/64	—	4 1/2	22	—
F217D1	—	C(CM)-UKF217ED1;HE2317X					29
F218D1	—	C(CM)-UKF218D1;H2318X	5	—	122	12	—
F218D1	—	C(CM)-UKF218AD1;HA2318X	13/64	—	4 13/16	26	—
							31

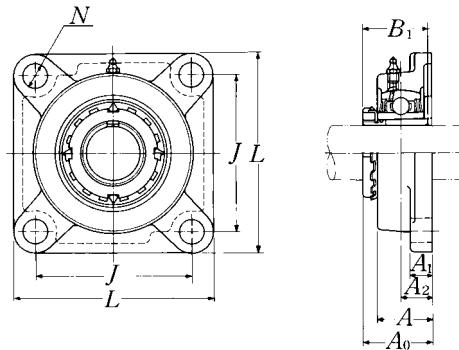

Shaft dia. mm inch	Unit number ^{1) 2) 3)}	Nominal dimensions								Bolt size mm inch	Bearing number ^{2) 3)}
		L	J	A ₂	A ₁	A	N	A ₀	B ₁		
20 $\frac{3}{4}$	UKF305D1;H2305X UKF305D1;HE2305	110 $4\frac{11}{32}$	80 $3\frac{5}{32}$	16 $\frac{5}{8}$	13 $\frac{1}{2}$	29 $1\frac{5}{32}$	16 $\frac{5}{8}$	37 $1\frac{29}{64}$	35 1.378	M14 $\frac{1}{2}$	UK305D1;H2305X UK305D1;HE2305
25 $\frac{7}{8}$ 1	UKF306D1;H2306X UKF306D1;HS2306 UKF306D1;HE2306X	125 $4\frac{29}{32}$	95 $3\frac{47}{64}$	18 $\frac{45}{64}$	15 $1\frac{19}{32}$	32 $1\frac{1}{4}$	16 $\frac{5}{8}$	40.5 $1\frac{19}{32}$	38 1.496	M14 $\frac{1}{2}$	UK306D1;H2306X UK306D1;HS2306 UK306D1;HE2306X
30 $1\frac{1}{8}$	UKF307D1;H2307X UKF307D1;HS2307	135 $5\frac{5}{16}$	100 $3\frac{15}{16}$	20 $2\frac{5}{32}$	16 $\frac{5}{8}$	36 $1\frac{13}{32}$	19 $\frac{3}{4}$	45.5 $1\frac{51}{64}$	43 1.693	M16 $\frac{5}{8}$	UK307D1;H2307X UK307D1;HS2307
35 $1\frac{1}{4}$ $1\frac{3}{8}$	UKF308D1;H2308X UKF308D1;HE2308X UKF308D1;HS2308X	150 $5\frac{29}{32}$	112 $4\frac{13}{32}$	23 $2\frac{29}{32}$	17 $2\frac{1}{32}$	40 $1\frac{9}{16}$	19 $\frac{3}{4}$	50 $1\frac{31}{32}$	46 1.811	M16 $\frac{5}{8}$	UK308D1;H2308X UK308D1;HE2308X UK308D1;HS2308X
40 $1\frac{7}{16}$ $1\frac{1}{2}$ $1\frac{5}{8}$	UKF309D1;H2309X UKF309D1;HA2309 UKF309D1;HE2309X UKF309D1;HS2309X	160 $6\frac{5}{16}$	125 $4\frac{59}{64}$	25 $6\frac{3}{64}$	18 $2\frac{23}{32}$	44 $1\frac{23}{32}$	19 $\frac{3}{4}$	54.5 $2\frac{9}{64}$	50 1.969	M16 $\frac{5}{8}$	UK309D1;H2309X UK309D1;HA2309 UK309D1;HE2309X UK309D1;HS2309X
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UKF310D1;H2310X UKF310D1;HS2310 UKF310D1;HA2310 UKF310D1;HE2310X	175 $6\frac{7}{8}$	132 $5\frac{13}{64}$	28 $1\frac{7}{64}$	19 $\frac{3}{4}$	48 $1\frac{7}{8}$	23 $2\frac{29}{32}$	60.5 $2\frac{3}{8}$	55 2.165	M20 $\frac{3}{4}$	UK310D1;H2310X UK310D1;HS2310 UK310D1;HA2310 UK310D1;HE2310X
50 $1\frac{7}{8}$ $1\frac{15}{16}$ 2	UKF311D1;H2311X UKF311D1;HS2311 UKF311D1;HA2311 UKF311D1;HE2311XY	185 $7\frac{9}{32}$	140 $5\frac{33}{64}$	30 $1\frac{3}{16}$	20 $2\frac{25}{32}$	52 $2\frac{1}{16}$	23 $2\frac{29}{32}$	64 $2\frac{33}{64}$	59 2.323	M20 $\frac{3}{4}$	UK311D1;H2311X UK311D1;HS2311 UK311D1;HA2311 UK311D1;HE2311XY
55 $2\frac{1}{8}$	UKF312D1;H2312X UKF312D1;HS2312	195 $7\frac{11}{16}$	150 $5\frac{29}{32}$	33 $1\frac{19}{64}$	22 $\frac{7}{8}$	56 $2\frac{7}{32}$	23 $2\frac{29}{32}$	69.5 $2\frac{47}{64}$	62 2.441	M20 $\frac{3}{4}$	UK312D1;H2312X UK312D1;HS2312
60 $2\frac{3}{16}$ $2\frac{1}{4}$ $2\frac{3}{8}$	UKF313D1;H2313X UKF313D1;HA2313 UKF313D1;HE2313X UKF313D1;HS2313X	208 $8\frac{3}{16}$	166 $6\frac{17}{32}$	33 $1\frac{19}{64}$	22 $\frac{7}{8}$	58 $2\frac{9}{32}$	23 $2\frac{29}{32}$	71.5 $2\frac{13}{16}$	65 2.559	M20 $\frac{3}{4}$	UK313D1;H2313X UK313D1;HA2313 UK313D1;HE2313X UK313D1;HS2313X

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

2) Adapter number with suffix "X" means a narrow slot type adapter sleeve.

In this case the lock washer with the straight inner prong should be used.


3) For HE2311XY, screw thread pitch different from the standard is applied, because of the thin thread section of sleeve.

To distinguish it, a suffix "Y" is added.

4) If the inch series housing units with dust cover are ordered with a closed end, the suffixes E, S or A are not included.

sale@technobearing.ru UKF305D1; HE2305

Note: Please refer to page 36 for size of grease fitting.

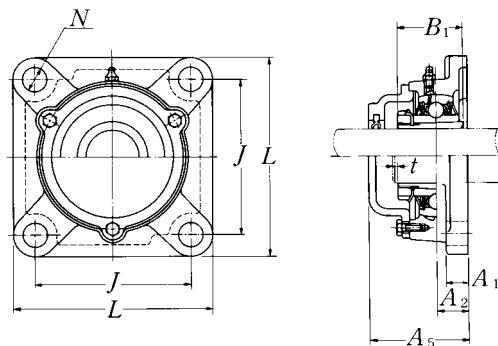


Cast dust cover type

Open end: C-UKF...D1

Closed end: CM-UKF...D1

Housing 1) number	Unit number 1) 2) 3) 4) cast dust cover type	Nominal dimensions		Mass of unit	
		mm max. <i>t</i>	inch <i>A₅</i>	kg UKF	lb C(CM)
F305D1	C(CM)-UKF305D1;H2305X	2	56	1.1	1.5
F305D1	C(CM)-UKF305ED1;HE2305	5/64	2 7/32	2.4	3.3
F306D1	C(CM)-UKF306D1;H2306X	2	60	1.7	2.1
F306D1	C(CM)-UKF306SD1;HS2306	5/64	2 3/8	3.8	4.6
F306D1	C(CM)-UKF306ED1;HE2306X				
F307D1	C(CM)-UKF307D1;H2307X	3	68	2.1	2.7
F307D1	C(CM)-UKF307SD1;HS2307	1/8	2 11/16	4.6	6.0
F308D1	C(CM)-UKF308D1;H2308X	3	76	2.8	3.5
F308D1	C(CM)-UKF308ED1;HE2308X	1/8	3	6.2	7.7
F308D1	C(CM)-UKF308SD1;HS2308X				
F309D1	C(CM)-UKF309D1;H2309X	3	80	3.4	4.4
F309D1	C(CM)-UKF309AD1;HA2309				
F309D1	C(CM)-UKF309ED1;HE2309X	1/8	3 5/32	7.5	9.7
F309D1	C(CM)-UKF309SD1;HS2309X				
F310D1	C(CM)-UKF310D1;H2310X	3	88	4.5	5.9
F310D1	C(CM)-UKF310SD1;HS2310	1/8	3 15/32	9.9	13
F310D1	C(CM)-UKF310AD1;HA2310				
F310D1	C(CM)-UKF310ED1;HE2310X				
F311D1	C(CM)-UKF311D1;H2311X	4	92	5.3	6.8
F311D1	C(CM)-UKF311SD1;HS2311				
F311D1	C(CM)-UKF311AD1;HA2311	5/32	3 5/8	12	15
F311D1	C(CM)-UKF311ED1;HE2311XY				
F312D1	C(CM)-UKF312D1;H2312X	4	100	6.3	7.9
F312D1	C(CM)-UKF312SD1;HS2312	5/32	3 15/16	14	17
F313D1	C(CM)-UKF313D1;H2313X	4	103	7.8	9.6
F313D1	C(CM)-UKF313AD1;HA2313				
F313D1	C(CM)-UKF313ED1;HE2313X	5/32	4 1/16	17	21
F313D1	C(CM)-UKF313SD1;HS2313X				

Square flanged units cast housing
Adapter type

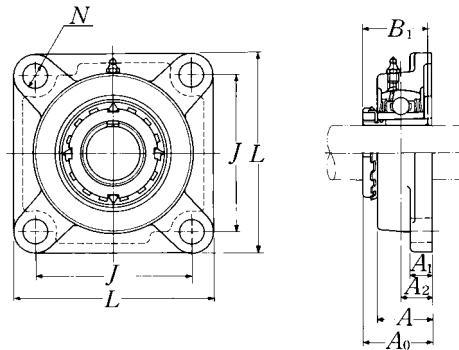

Shaft dia. mm inch	Unit number ^{1) 2) 3)}	Nominal dimensions								Bolt size mm inch	Bearing number ^{2) 3)}
		L	J	A ₂	A ₁	A	N	A ₀	B ₁		
65 2 ⁷ / ₁₆ 2 ¹ / ₂	UKF315D1;H2315X	236	184	39	25	66	25	81.5	73	M22	UK315D1;H2315X
	UKF315D1;HA2315	9 ⁹ / ₃₂	7 ¹ / ₄	1 ¹⁷ / ₃₂	3 ¹ / ₃₂	2 ¹⁹ / ₃₂	63/ ₆₄	3 ¹³ / ₆₄	2.874	7/8	UK315D1;HA2315
	UKF315D1;HE2315X										UK315D1;HE2315X
70 2 ¹¹ / ₁₆ 2 ³ / ₄	UKF316D1;H2316X	250	196	38	27	68	31	84	78	M27	UK316D1;H2316X
	UKF316D1;HA2316	9 ²⁷ / ₃₂	7 ²³ / ₃₂	1 ¹ / ₂	1 ¹ / ₁₆	2 ¹¹ / ₁₆	1 ¹ / ₃₂	3 ⁵ / ₁₆	3.071	1	UK316D1;HA2316
	UKF316D1;HE2316X										UK316D1;HE2316X
75 2 ¹⁵ / ₁₆ 3	UKF317D1;H2317X	260	204	44	27	74	31	92	82	M27	UK317D1;H2317X
	UKF317D1;HA2317X	10 ¹ / ₄	8 ¹ / ₃₂	1 ⁴⁷ / ₆₄	1 ¹ / ₁₆	2 ²⁹ / ₃₂	1 ¹ / ₃₂	3 ⁵ / ₈	3.228	1	UK317D1;HA2317X
	UKF317D1;HE2317X										UK317D1;HE2317X
80 3 ³ / ₁₆	UKF318D1;H2318X	280	216	44	30	76	35	94	86	M30	UK318D1;H2318X
	UKF318D1;HA2318X	11 ¹ / ₃₂	8 ¹ / ₂	1 ⁴⁷ / ₆₄	1 ³ / ₁₆	3	1 ³ / ₈	3 ⁴⁵ / ₆₄	3.386	1 ¹ / ₈	UK318D1;HA2318X
85 3 ¹ / ₄	UKF319D1;H2319X	290	228	59	30	94	35	111.5	90	M30	UK319D1;H2319X
	UKF319D1;HE2319X	11 ¹³ / ₃₂	8 ³¹ / ₃₂	2 ²¹ / ₆₄	1 ³ / ₁₆	3 ¹¹ / ₁₆	1 ³ / ₈	4 ²⁵ / ₆₄	3.543	1 ¹ / ₈	UK319D1;HE2319X
90 3 ⁷ / ₁₆ 3 ¹ / ₂	UKF320D1;H2320X	310	242	59	32	94	38	115.5	97	M33	UK320D1;H2320X
	UKF320D1;HA2320	12 ⁷ / ₃₂	9 ¹⁷ / ₃₂	2 ²¹ / ₆₄	1 ¹ / ₄	3 ¹¹ / ₁₆	1 ¹ / ₂	4 ³⁵ / ₆₄	3.819	1 ¹ / ₄	UK320D1;HA2320
	UKF320D1;HE2320X										UK320D1;HE2320X
100	UKF322D1;H2322X	340	266	60	35	96	41	121	105	M36	UK322D1;H2322X
110	UKF324D1;H2324X	370	290	65	40	110	41	130	112	M36	UK324D1;H2324X
115	UKF326D1;H2326	410	320	65	45	115	41	133	121	M36	UK326D1;H2326
125	UKF328D1;H2328	450	350	75	55	125	41	146.5	131	M36	UK328D1;H2328

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

2) Adapter number with suffix "X" means a narrow slot type adapter sleeve.

In this case the lock washer with the straight inner prong should be used.


3) For HE2311XY, screw thread pitch different from the standard is applied, because of the thin thread section of sleeve.

To distinguish it, a suffix "Y" is added.

4) If the inch series housing units with dust cover are ordered with a closed end, the suffixes E, S or A are not included.

Example: CM-UKF305D1; HE2305

Note: Please refer to page 36 for size of grease fitting.

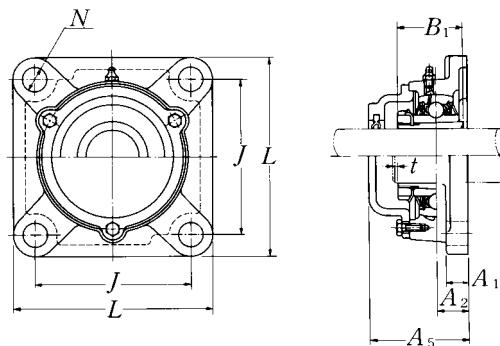


Cast dust cover type

Open end: C-UKF...D1

Closed end: CM-UKF...D1

Housing number	Unit number ^{1) 2) 3) 4)} cast dust cover type	Nominal dimensions		Mass of unit	
		mm max. <i>t</i>	inch <i>A</i> ₅	kg UKF	lb C(CM)
F315D1	C(CM)-UKF315D1;H2315X	4	114	11	13
F315D1	C(CM)-UKF315AD1;HA2315	5/32	4 1/2	24	29
F315D1	C(CM)-UKF315ED1;HE2315X				
F316D1	C(CM)-UKF316D1;H2316X	4	116	14	16
F316D1	C(CM)-UKF316AD1;HA2316	5/32	4 9/16	31	35
F316D1	C(CM)-UKF316ED1;HE2316X				
F317D1	C(CM)-UKF317D1;H2317X	5	129	15	19
F317D1	C(CM)-UKF317AD1;HA2317X	13/64	5 3/32	33	42
F317D1	C(CM)-UKF317ED1;HE2317X				
F318D1	C(CM)-UKF318D1;H2318X	5	129	19	23
F318D1	C(CM)-UKF318AD1;HA2318X	13/64	5 3/32	42	51
F319D1	C(CM)-UKF319D1;H2319X	5	149	22	26
F319D1	C(CM)-UKF319ED1;HE2319X	13/64	5 7/8	49	57
F320D1	C(CM)-UKF320D1;H2320X	5	154	27	32
F320D1	C(CM)-UKF320AD1;HA2320	13/64	6 1/16	60	71
F320D1	C(CM)-UKF320ED1;HE2320X				
F322D1	C(CM)-UKF322D1;H2322X	5	160	35	41
F324D1	C(CM)-UKF324D1;H2324X	5	172	48	56
F326D1	C(CM)-UKF326D1;H2326	6	178	63	75
F328D1	C(CM)-UKF328D1;H2328	6	192	90	101

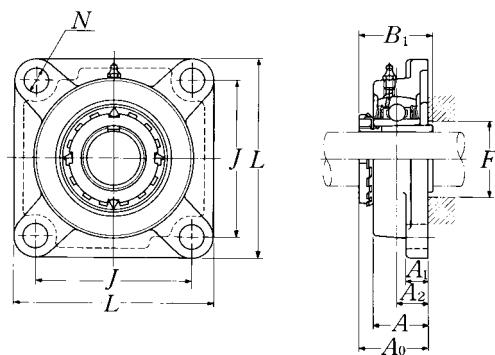

Shaft dia. mm inch	Unit number ^{1) 2) 3)}	Nominal dimensions									Bolt size mm inch	Bearing number ^{2) 3)}
		L	J	A ₂	A ₁	A	N	A ₀	B ₁	F min.		
20 $\frac{3}{4}$	UKFX05D1;H2305X UKFX05D1;HE2305	108 $4\frac{1}{4}$	83 $3\frac{17}{64}$	18 $\frac{45}{64}$	13 $\frac{1}{2}$	30 $1\frac{3}{16}$	12 $1\frac{15}{32}$	39 $1\frac{17}{32}$	35 1.378	30 $1\frac{3}{16}$	M10 $\frac{3}{8}$	UKX05D1;H2305X UKX05D1;HE2305
25 $\frac{7}{8}$ 1	UKFX06D1;H2306X UKFX06D1;HS2306 UKFX06D1;HE2306X	117 $4\frac{19}{32}$	92 $3\frac{5}{8}$	19 $\frac{3}{4}$	14 $\frac{9}{16}$	34 $1\frac{1}{32}$	16 $\frac{5}{8}$	41.5 $1\frac{4}{64}$	38 1.496	36 $1\frac{13}{32}$	M14 $\frac{1}{2}$	UKX06D1;H2306X UKX06D1;HS2306 UKX06D1;HE2306X
30 $1\frac{1}{8}$	UKFX07D1;H2307X UKFX07D1;HS2307	130 $5\frac{1}{8}$	102 $4\frac{1}{64}$	21 $5\frac{3}{64}$	14 $\frac{9}{16}$	38 $1\frac{1}{2}$	16 $\frac{5}{8}$	45.5 $1\frac{51}{64}$	43 1.693	40 $1\frac{9}{16}$	M14 $\frac{1}{2}$	UKX07D1;H2307X UKX07D1;HS2307
35 $1\frac{1}{4}$ $1\frac{3}{8}$	UKFX08D1;H2308X UKFX08D1;HE2308X UKFX08D1;HS2308X	137 $5\frac{13}{32}$	105 $4\frac{9}{64}$	22 $5\frac{5}{64}$	14 $\frac{9}{16}$	40 $1\frac{9}{16}$	19 $\frac{3}{4}$	47.5 $1\frac{7}{8}$	46 1.811	46 $1\frac{13}{16}$	M16 $\frac{5}{8}$	UKX08D1;H2308X UKX08D1;HE2308X UKX08D1;HS2308X
40 $1\frac{7}{16}$ $1\frac{1}{2}$ $1\frac{5}{8}$	UKFX09D1;H2309X UKFX09D1;HA2309 UKFX09D1;HE2309X UKFX09D1;HS2309X	143 $5\frac{5}{8}$	111 $4\frac{3}{8}$	23 $2\frac{9}{32}$	14 $\frac{9}{16}$	40 $1\frac{9}{16}$	19 $\frac{3}{4}$	50 $1\frac{31}{32}$	50 1.969	52 $2\frac{1}{16}$	M16 $\frac{5}{8}$	UKX09D1;H2309X UKX09D1;HA2309 UKX09D1;HE2309X UKX09D1;HS2309X
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UKFX10D1;H2310X UKFX10D1;HS2310 UKFX10D1;HA2310 UKFX10D1;HE2310X	162 $6\frac{3}{8}$	130 $5\frac{1}{8}$	26 $1\frac{1}{32}$	20 $2\frac{5}{32}$	44 $1\frac{23}{32}$	19 $\frac{3}{4}$	55.5 $2\frac{3}{16}$	55 2.165	57 $2\frac{1}{4}$	M16 $\frac{5}{8}$	UKX10D1;H2310X UKX10D1;HS2310 UKX10D1;HA2310 UKX10D1;HE2310X
50 $1\frac{7}{8}$ $1\frac{15}{16}$ 2	UKFX11D1;H2311X UKFX11D1;HS2311 UKFX11D1;HA2311 UKFX11D1;HE2311XY	175 $6\frac{7}{8}$	143 $5\frac{5}{8}$	29 $1\frac{9}{64}$	20 $2\frac{5}{32}$	49 $1\frac{15}{16}$	19 $\frac{3}{4}$	60 $2\frac{23}{64}$	59 2.323	64 $2\frac{17}{32}$	M16 $\frac{5}{8}$	UKX11D1;H2311X UKX11D1;HS2311 UKX11D1;HA2311 UKX11D1;HE2311XY
55 $2\frac{1}{8}$	UKFX12D1;H2312X UKFX12D1;HS2312	187 $7\frac{3}{8}$	149 $5\frac{55}{64}$	34 $1\frac{11}{32}$	21 $1\frac{1}{16}$	59 $2\frac{5}{16}$	19 $\frac{3}{4}$	67 $2\frac{41}{64}$	62 2.441	69 $2\frac{23}{32}$	M16 $\frac{5}{8}$	UKX12D1;H2312X UKX12D1;HS2312
60 $2\frac{3}{16}$ $2\frac{1}{4}$ $2\frac{3}{8}$	UKFX13D1;H2313X UKFX13D1;HA2313 UKFX13D1;HE2313X UKFX13D1;HS2313X	187 $7\frac{3}{8}$	149 $5\frac{55}{64}$	34 $1\frac{11}{32}$	21 $1\frac{1}{16}$	59 $2\frac{5}{16}$	19 $\frac{3}{4}$	69 $2\frac{23}{32}$	65 2.559	74 $2\frac{29}{32}$	M16 $\frac{5}{8}$	UKX13D1;H2313X UKX13D1;HA2313 UKX13D1;HE2313X UKX13D1;HS2313X

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".


2) Adapter number with suffix "X" means a narrow slot type adapter sleeve.

In this case the lock washer with the straight inner prong should be used.

3) For HE2311XY, screw thread pitch different from the standard is applied, because of the thin thread section of sleeve.


To distinguish it, a suffix "Y" is added.

4) If the inch series housing units with dust cover are ordered with a closed end, the suffixes E, S or A are not included.

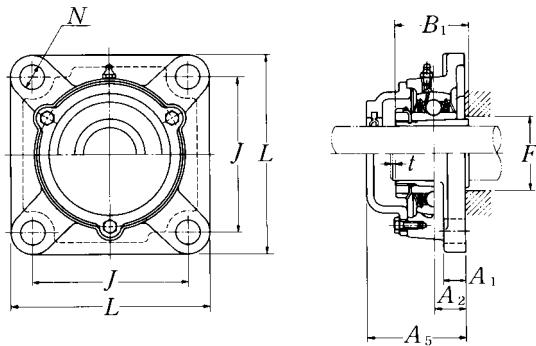**Cast dust cover type**Open end: **C-UKFX···D1**Closed end: **CM-UKFX···D1**

Housing number	Unit number ^{1) 2) 3) 4)} cast dust cover type	Nominal dimensions		Mass of unit	
		mm <i>t</i>	inch <i>A₅</i>	kg UKFX	lb C(CM)
FX05D1	C(CM)-UKFX05D1;H2305X	2	56	1.1	1.3
FX05D1	C(CM)-UKFX05ED1;HE2305	5/64	2 7/32	2.4	2.9
FX06D1	C(CM)-UKFX06D1;H2306X	2	59	1.6	1.8
FX06D1	C(CM)-UKFX06SD1;HS2306	5/64	2 5/16	3.5	4.0
FX06D1	C(CM)-UKFX06ED1;HE2306X				
FX07D1	C(CM)-UKFX07D1;H2307X	3	66	2.1	2.5
FX07D1	C(CM)-UKFX07SD1;HS2307	1/8	2 19/32	4.6	5.5
FX08D1	C(CM)-UKFX08D1;H2308X	3	70	2.5	2.9
FX08D1	C(CM)-UKFX08ED1;HE2308X	1/8	2 3/4	5.5	6.4
FX08D1	C(CM)-UKFX08SD1;HS2308X				
FX09D1	C(CM)-UKFX09D1;H2309X	3	73	2.5	3.0
FX09D1	C(CM)-UKFX09AD1;HA2309				
FX09D1	C(CM)-UKFX09ED1;HE2309X	1/8	2 7/8	5.5	6.6
FX09D1	C(CM)-UKFX09SD1;HS2309X				
FX10D1	C(CM)-UKFX10D1;H2310X	3	76	3.8	4.4
FX10D1	C(CM)-UKFX10SD1;HS2310				
FX10D1	C(CM)-UKFX10AD1;HA2310	1/8	3	8.4	9.7
FX10D1	C(CM)-UKFX10ED1;HE2310X				
FX11D1	C(CM)-UKFX11D1;H2311X	4	86	4.7	5.4
FX11D1	C(CM)-UKFX11SD1;HS2311				
FX11D1	C(CM)-UKFX11AD1;HA2311	5/32	3 3/8	10	12
FX11D1	C(CM)-UKFX11ED1;HE2311XY				
FX12D1	C(CM)-UKFX12D1;H2312X	4	94	6.4	7.2
FX12D1	C(CM)-UKFX12SD1;HS2312	5/32	3 11/16	14	16
FX13D1	C(CM)-UKFX13D1;H2313X	4	101	6.4	7.6
FX13D1	C(CM)-UKFX13AD1;HA2313				
FX13D1	C(CM)-UKFX13ED1;HE2313X	5/32	3 31/32	14	17
FX13D1	C(CM)-UKFX13SD1;HS2313X				

Square flanged units cast housing
Adapter type

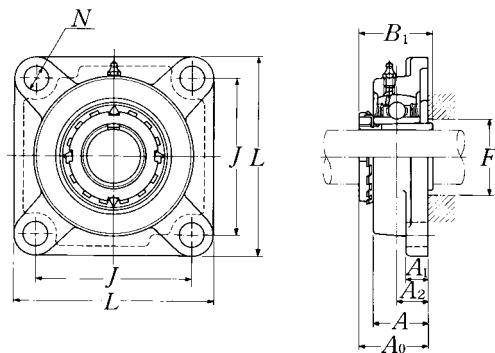

Shaft dia. mm inch	Unit number ^{1) 2) 3)}	Nominal dimensions									Bolt size mm inch	Bearing number ^{2) 3)}
		L	J	A ₂	A ₁	A	N	A ₀	B ₁	F min.		
65 2 ⁷ / ₁₆ 2 ¹ / ₂	UKFX15D1;H2315X	197	152	40	24	68	23	77.5	73	84	M20	UKX15D1;H2315X
	UKFX15D1;HA2315	7 ³ / ₄	5 ⁶³ / ₆₄	1 ³⁷ / ₆₄	15 ¹ / ₁₆	2 ¹¹ / ₁₆	29 ⁹ / ₃₂	3 ³ / ₆₄	2.874	3 ⁵ / ₁₆	3/4	UKX15D1;HA2315
	UKFX15D1;HE2315X											UKX15D1;HE2315X
70 2 ¹¹ / ₁₆ 2 ³ / ₄	UKFX16D1;H2316X	214	171	40	24	70	23	80	78	90	M20	UKX16D1;H2316X
	UKFX16D1;HA2316	8 ⁷ / ₁₆	6 ⁴⁷ / ₆₄	1 ³⁷ / ₆₄	15 ¹ / ₁₆	2 ³ / ₄	29 ⁹ / ₃₂	3 ⁵ / ₃₂	3.071	3 ¹⁷ / ₃₂	3/4	UKX16D1;HA2316
	UKFX16D1;HE2316X											UKX16D1;HE2316X
75 2 ¹⁵ / ₁₆ 3	UKFX17D1;H2317X	214	171	40	24	70	23	81.5	82	95	M20	UKX17D1;H2317X
	UKFX17D1;HA2317X	8 ⁷ / ₁₆	6 ⁴⁷ / ₆₄	1 ³⁷ / ₆₄	15 ¹ / ₁₆	2 ³ / ₄	29 ⁹ / ₃₂	3 ¹³ / ₆₄	3.228	3 ³ / ₄	3/4	UKX17D1;HA2317X
	UKFX17D1;HE2317X											UKX17D1;HE2317X
80 3 ³ / ₁₆	UKFX18D1;H2318X	214	171	45	24	76	23	87.5	86	102	M20	UKX18D1;H2318X
	UKFX18D1;HA2318X	8 ⁷ / ₁₆	6 ⁴⁷ / ₆₄	1 ⁴⁹ / ₆₄	15 ¹ / ₁₆	3	29 ⁹ / ₃₂	3 ⁷ / ₁₆	3.386	4 ¹ / ₃₂	3/4	UKX18D1;HA2318X
90	UKFX20D1;H2320X	268	211	59	31	97	31	107.5	97	112	M27	UKX20D1;H2320X

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

2) Adapter number with suffix "X" means a narrow slot type adapter sleeve.

In this case the lock washer with the straight inner prong should be used.


3) For HE2311XY, screw thread pitch different from the standard is applied, because of the thin thread section of sleeve.

To distinguish it, a suffix "Y" is added.


4) If the inch series housing units with dust cover are ordered with a closed end, the suffixes E, S or A are not included.

Example: CM-UKFX05D1; HE2305

Note: Please refer to page 36 for size of grease fitting.

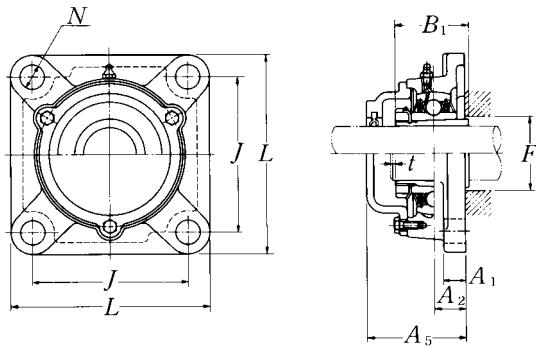**Cast dust cover type**Open end: **C-UKFX···D1**Closed end: **CM-UKFX···D1**

Housing number	Unit number ^{1) 2) 3) 4)} cast dust cover type	Nominal dimensions		Mass of unit	
		mm <i>t</i>	inch <i>A₅</i>	kg UKFX	lb C(CM)
FX15D1	C(CM)-UKFX15D1;H2315X	4	112	8.7	10
FX15D1	C(CM)-UKFX15AD1;HA2315	$\frac{5}{32}$	$4\frac{13}{32}$	19	22
FX15D1	C(CM)-UKFX15ED1;HE2315X				
FX16D1	C(CM)-UKFX16D1;H2316X	4	118	11	12
FX16D1	C(CM)-UKFX16AD1;HA2316	$\frac{5}{32}$	$4\frac{21}{32}$	24	26
FX16D1	C(CM)-UKFX16ED1;HE2316X				
FX17D1	C(CM)-UKFX17D1;H2317X	5	122	12	14
FX17D1	C(CM)-UKFX17AD1;HA2317X	$\frac{13}{64}$	$4\frac{13}{16}$	26	31
FX17D1	C(CM)-UKFX17ED1;HE2317X				
FX18D1	C(CM)-UKFX18D1;H2318X	5	135	12	14
FX18D1	C(CM)-UKFX18AD1;HA2318X	$\frac{13}{64}$	$5\frac{5}{16}$	26	31
FX20D1	C(CM)-UKFX20D1;H2320X	5	146.5	20	22

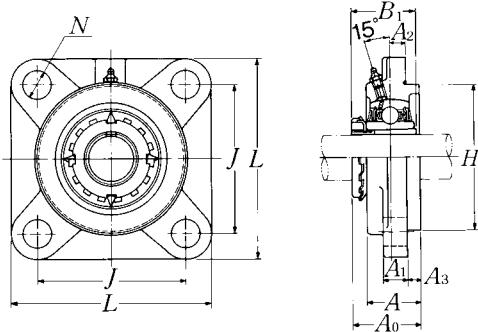Square flanged units cast housing w/spigot joint**Adapter type**

Shaft dia. mm inch	Unit number ^{1) 2) 3)}	Nominal dimensions										Bolt size mm inch	Bearing number ^{2) 3)}
		L	J	A ₂	N	A ₃	A ₁	A	H ₃	A ₀	B ₁		
20 $\frac{3}{4}$	UKFS305D1;H2305X UKFS305D1;HE2305	110 $4\frac{11}{32}$	80 $3\frac{5}{32}$	9 $2\frac{3}{64}$	16 $\frac{5}{8}$	7 $\frac{9}{32}$	13 $\frac{1}{2}$	29 $1\frac{9}{64}$	80 3.1496	37 $1\frac{29}{64}$	35 1.378	M14 $\frac{1}{2}$	UK305D1;H2305X UK305D1;HE2305
25 $\frac{7}{8}$ 1	UKFS306D1;H2306X UKFS306D1;HS2306 UKFS306D1;HE2306X	125 $4\frac{29}{32}$	95 $3\frac{4}{64}$	10 $2\frac{5}{64}$	16 $\frac{5}{8}$	8 $\frac{5}{16}$	15 $1\frac{9}{32}$	32 $1\frac{17}{64}$	90 3.5433	40.5 $1\frac{19}{32}$	38 1.496	M14 $\frac{1}{2}$	UK306D1;H2306X UK306D1;HS2306 UK306D1;HE2306X
30 $1\frac{1}{8}$	UKFS307D1;H2307X UKFS307D1;HS2307	135 $5\frac{5}{16}$	100 $3\frac{15}{16}$	11 $\frac{7}{16}$	19 $\frac{3}{4}$	9 $\frac{23}{64}$	16 $\frac{5}{8}$	36 $1\frac{13}{32}$	100 3.9370	45.5 $1\frac{51}{64}$	43 1.693	M16 $\frac{5}{8}$	UK307D1;H2307X UK307D1;HS2307
35 $1\frac{1}{4}$ $1\frac{3}{8}$	UKFS308D1;H2308X UKFS308D1;HE2308X UKFS308D1;HS2308X	150 $5\frac{29}{32}$	112 $4\frac{13}{32}$	13 $3\frac{33}{64}$	19 $\frac{3}{4}$	10 $\frac{25}{64}$	17 $2\frac{1}{32}$	40 $1\frac{9}{16}$	115 4.5276	50 $1\frac{31}{32}$	46 1.811	M16 $\frac{5}{8}$	UK308D1;H2308X UK308D1;HE2308X UK308D1;HS2308X
40 $1\frac{7}{16}$ $1\frac{1}{2}$ $1\frac{5}{8}$	UKFS309D1;H2309X UKFS309D1;HA2309 UKFS309D1;HE2309X UKFS309D1;HS2309X	160 $6\frac{5}{16}$	125 $4\frac{59}{64}$	14 $3\frac{35}{64}$	19 $\frac{3}{4}$	11 $\frac{7}{16}$	18 $2\frac{23}{32}$	44 $1\frac{47}{64}$	125 4.9213	54.5 $2\frac{9}{64}$	50 1.969	M16 $\frac{5}{8}$	UK309D1;H2309X UK309D1;HA2309 UK309D1;HE2309X UK309D1;HS2309X
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UKFS310D1;H2310X UKFS310D1;HS2310 UKFS310D1;HA2310 UKFS310D1;HE2310X	175 $6\frac{7}{8}$	132 $5\frac{13}{64}$	16 $\frac{5}{8}$	23 $\frac{29}{32}$	12 $\frac{15}{32}$	19 $\frac{3}{4}$	48 $1\frac{57}{64}$	140 5.5118	60.5 $2\frac{3}{8}$	55 2.165	M20 $\frac{3}{4}$	UK310D1;H2310X UK310D1;HS2310 UK310D1;HA2310 UK310D1;HE2310X
50 $1\frac{7}{8}$ $1\frac{15}{16}$ 2	UKFS311D1;H2311X UKFS311D1;HS2311 UKFS311D1;HA2311 UKFS311D1;HE2311XY	185 $7\frac{9}{32}$	140 $5\frac{33}{64}$	17 $4\frac{43}{64}$	23 $2\frac{29}{32}$	13 $3\frac{33}{64}$	20 $2\frac{25}{32}$	52 $2\frac{3}{64}$	150 5.9055	64 $2\frac{33}{64}$	59 2.323	M20 $\frac{3}{4}$	UK311D1;H2311X UK311D1;HS2311 UK311D1;HA2311 UK311D1;HE2311XY
55 $2\frac{1}{8}$	UKFS312D1;H2312X UKFS312D1;HS2312	195 $7\frac{11}{16}$	150 $5\frac{29}{32}$	19 $\frac{3}{4}$	23 $\frac{29}{32}$	14 $\frac{35}{64}$	22 $\frac{7}{8}$	56 $2\frac{13}{64}$	160 6.2992	69.5 $2\frac{17}{64}$	62 2.441	M20 $\frac{3}{4}$	UK312D1;H2312X UK312D1;HS2312
60 $2\frac{3}{16}$ $2\frac{1}{4}$ $2\frac{3}{8}$	UKFS313D1;H2313X UKFS313D1;HA2313 UKFS313D1;HE2313X UKFS313D1;HS2313X	208 $8\frac{3}{16}$	166 $6\frac{17}{32}$	15 $1\frac{19}{32}$	23 $2\frac{29}{32}$	18 $4\frac{45}{64}$	22 $\frac{7}{8}$	58 $2\frac{9}{32}$	175 6.8898	71.5 $2\frac{13}{16}$	65 2.559	M20 $\frac{3}{4}$	UK313D1;H2313X UK313D1;HA2313 UK313D1;HE2313X UK313D1;HS2313X

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".


2) Adapter number with suffix "X" means a narrow slot type adapter sleeve.

In this case the lock washer with the straight inner prong should be used.


3) For HE2311XY, screw thread pitch different from the standard is applied, because of the thin thread section of sleeve.

To distinguish it, a suffix "Y" is added.

4) If the inch series housing units with dust cover are ordered with a closed end, the suffixes E, S or A are not included.

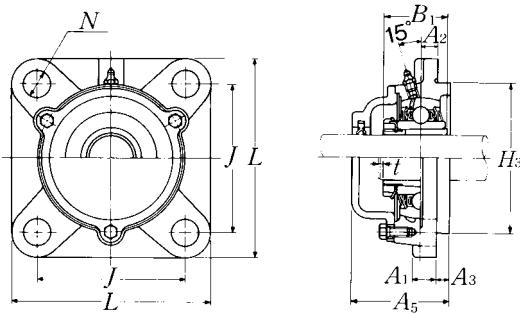**Cast dust cover type**Open end: **C-UKFS…D1**Closed end: **CM-UKFS…D1**

Housing 1) number	Unit number 1) 2) 3) 4) cast dust cover type	Nominal dimensions		Mass of unit	
		mm max. <i>t</i>	inch <i>A</i> ₅	kg UKFS	lb C(CM)
FS305D1	C(CM)-UKFS305D1;H2305X	2	56	1.2	1.5
FS305D1	C(CM)-UKFS305ED1;HE2305	5/64	2 ¹³ / ₆₄	2.7	3.3
FS306D1	C(CM)-UKFS306D1;H2306X	2	60	1.8	2.2
FS306D1	C(CM)-UKFS306SD1;HS2306	5/64	2 ²³ / ₆₄	4.0	4.9
FS306D1	C(CM)-UKFS306ED1;HE2306X				
FS307D1	C(CM)-UKFS307D1;H2307X	3	67	2.3	2.9
FS307D1	C(CM)-UKFS307SD1;HS2307	1/8	2 ⁴¹ / ₆₄	5.1	6.4
FS308D1	C(CM)-UKFS308D1;H2308X	3	76	3.2	3.7
FS308D1	C(CM)-UKFS308ED1;HE2308X	1/8	2 ⁶³ / ₆₄	7.1	8.2
FS308D1	C(CM)-UKFS308SD1;HS2308X				
FS309D1	C(CM)-UKFS309D1;H2309X	3	80	3.8	4.7
FS309D1	C(CM)-UKFS309AD1;HA2309				
FS309D1	C(CM)-UKFS309ED1;HE2309X	1/8	3 ⁵ / ₃₂	8.4	10
FS309D1	C(CM)-UKFS309SD1;HS2309X				
FS310D1	C(CM)-UKFS310D1;H2310X	3	88	5.1	6.3
FS310D1	C(CM)-UKFS310SD1;HS2310	1/8	3 ¹⁵ / ₃₂	11	14
FS310D1	C(CM)-UKFS310AD1;HA2310				
FS310D1	C(CM)-UKFS310ED1;HE2310X				
FS311D1	C(CM)-UKFS311D1;H2311X	4	93	5.9	7.3
FS311D1	C(CM)-UKFS311SD1;HS2311				
FS311D1	C(CM)-UKFS311AD1;HA2311	5/32	3 ²¹ / ₃₂	13	16
FS311D1	C(CM)-UKFS311ED1;HE2311XY				
FS312D1	C(CM)-UKFS312D1;H2312X	4	100	7.0	8.4
FS312D1	C(CM)-UKFS312SD1;HS2312	5/32	3 ¹⁵ / ₁₆	15	19
FS313D1	C(CM)-UKFS313D1;H2313X	4	103	8.4	10
FS313D1	C(CM)-UKFS313AD1;HA2313				
FS313D1	C(CM)-UKFS313ED1;HE2313X	5/32	4 ¹ / ₁₆	19	22
FS313D1	C(CM)-UKFS313SD1;HS2313X				

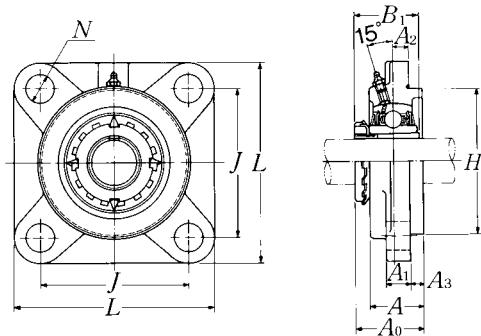Square flanged units cast housing w/spigot joint**Adapter type**

Shaft dia. mm inch	Unit number ^{1) 2) 3)}	Nominal dimensions										Bolt size mm inch	Bearing number ^{2) 3)}
		L	J	A ₂	N	A ₃	A ₁	A	H ₃	A ₀	B ₁		
65 $2\frac{7}{16}$ $2\frac{1}{2}$	UKFS315D1;H2315X	236	184	21	25	18	25	66	200	81.5	73	M22	UK315D1;H2315X
	UKFS315D1;HA2315	$9\frac{9}{32}$	$7\frac{1}{4}$	$53\frac{3}{64}$	$63\frac{3}{64}$	$45\frac{1}{64}$	$31\frac{1}{32}$	$2\frac{19}{32}$	7.8740	$3\frac{13}{64}$	2.874	$\frac{7}{8}$	UK315D1;HA2315
	UKFS315D1;HE2315X												UK315D1;HE2315X
70 $2\frac{11}{16}$ $2\frac{3}{4}$	UKFS316D1;H2316X	250	196	18	31	20	27	68	210	84	78	M27	UK316D1;H2316X
	UKFS316D1;HA2316	$9\frac{27}{32}$	$7\frac{23}{32}$	$45\frac{1}{64}$	$1\frac{1}{32}$	$25\frac{1}{32}$	$1\frac{1}{16}$	$2\frac{43}{64}$	8.2677	$3\frac{5}{16}$	3.071	1	UK316D1;HA2316
	UKFS316D1;HE2316X												UK316D1;HE2316X
75 $2\frac{15}{16}$ 3	UKFS317D1;H2317X	260	204	24	31	20	27	74	220	92	82	M27	UK317D1;H2317X
	UKFS317D1;HA2317X	$10\frac{1}{4}$	$8\frac{1}{32}$	$15\frac{1}{16}$	$1\frac{1}{32}$	$25\frac{1}{32}$	$1\frac{1}{16}$	$2\frac{29}{32}$	8.6614	$3\frac{5}{8}$	3.228	1	UK317D1;HA2317X
	UKFS317D1;HE2317X												UK317D1;HE2317X
80 $3\frac{3}{16}$	UKFS318D1;H2318X	280	216	24	35	20	30	76	240	94	86	M30	UK318D1;H2318X
	UKFS318D1;HA2318X	$11\frac{1}{32}$	$8\frac{1}{2}$	$15\frac{1}{16}$	$1\frac{3}{8}$	$25\frac{1}{32}$	$1\frac{3}{16}$	$2\frac{63}{64}$	9.4488	$3\frac{45}{64}$	3.386	$1\frac{1}{8}$	UK318D1;HA2318X
85 $3\frac{1}{4}$	UKFS319D1;H2319X	290	228	39	35	20	30	94	250	111.5	90	M30	UK319D1;H2319X
	UKFS319D1;HE2319X	$11\frac{13}{32}$	$8\frac{31}{32}$	$1\frac{17}{32}$	$1\frac{3}{8}$	$25\frac{1}{32}$	$1\frac{3}{16}$	$3\frac{45}{64}$	9.8425	$4\frac{25}{64}$	3.543	$1\frac{1}{8}$	UK319D1;HE2319X
90 $3\frac{7}{16}$ $3\frac{1}{2}$	UKFS320D1;H2320X	310	242	39	38	20	32	94	260	115.5	97	M33	UK320D1;H2320X
	UKFS320D1;HA2320	$12\frac{7}{32}$	$9\frac{17}{32}$	$1\frac{17}{32}$	$1\frac{1}{2}$	$25\frac{1}{32}$	$1\frac{1}{4}$	$3\frac{45}{64}$	10.2362	$4\frac{35}{64}$	3.819	$1\frac{1}{4}$	UK320D1;HA2320
	UKFS320D1;HE2320X												UK320D1;HE2320X
100	UKFS322D1;H2322X	340	266	35	41	25	35	96	300	121	105	M36	UK322D1;H2322X
110	UKFS324D1;H2324X	370	290	35	41	30	40	110	330	130	112	M36	UK324D1;H2324X
115	UKFS326D1;H2326	410	320	35	41	30	45	115	360	133	121	M36	UK326D1;H2326
125	UKFS328D1;H2328	450	350	45	41	30	55	125	400	146.5	131	M36	UK328D1;H2328

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

2) Adapter number with suffix "X" means a narrow slot type adapter sleeve.

In this case the lock washer with the straight inner prong should be used.


3) For HE2311XY, screw thread pitch different from the standard is applied, because of the thin thread section of sleeve.

To distinguish it, a suffix "Y" is added.


4) If the inch series housing units with dust cover are ordered with a closed end, the suffixes E, S or A are not included.

Example: CM-UKFS305D1; HE2305


Note: Please refer to page 36 for size of grease fitting.

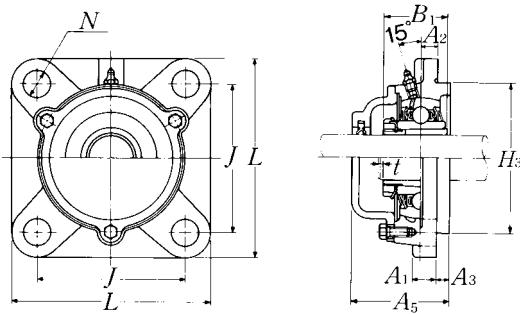**Cast dust cover type**Open end: **C-UKFS…D1**Closed end: **CM-UKFS…D1**


Housing number	Unit number ^{1) 2) 3) 4)} cast dust cover type	Nominal dimensions		Mass of unit	
		mm max. <i>t</i>	inch <i>A₅</i>	kg UKFS	lb C(CM)
FS315D1	C(CM)-UKFS315D1;H2315X	4	114	12	14
FS315D1	C(CM)-UKFS315AD1;HA2315	$\frac{5}{32}$	$4\frac{3}{16}$	26	31
FS315D1	C(CM)-UKFS315ED1;HE2315X				
FS316D1	C(CM)-UKFS316D1;H2316X	4	116	15	17
FS316D1	C(CM)-UKFS316AD1;HA2316	$\frac{5}{32}$	$4\frac{9}{16}$	33	37
FS316D1	C(CM)-UKFS316ED1;HE2316X				
FS317D1	C(CM)-UKFS317D1;H2317X	5	129	17	20
FS317D1	C(CM)-UKFS317AD1;HA2317X	$\frac{13}{64}$	$5\frac{5}{64}$	37	44
FS317D1	C(CM)-UKFS317ED1;HE2317X				
FS318D1	C(CM)-UKFS318D1;H2318X	5	129	21	24
FS318D1	C(CM)-UKFS318AD1;HA2318X	$\frac{13}{64}$	$5\frac{5}{64}$	46	53
FS319D1	C(CM)-UKFS319D1;H2319X	5	149	24	29
FS319D1	C(CM)-UKFS319ED1;HE2319X	$\frac{13}{64}$	$5\frac{55}{64}$	53	64
FS320D1	C(CM)-UKFS320D1;H2320X	5	154	29	34
FS320D1	C(CM)-UKFS320AD1;HA2320	$\frac{13}{64}$	$6\frac{1}{16}$	64	75
FS320D1	C(CM)-UKFS320ED1;HE2320X				
FS322D1	C(CM)-UKFS322D1;H2322X	5	160	38	46
FS324D1	C(CM)-UKFS324D1;H2324X	5	172	51	59
FS326D1	C(CM)-UKFS326D1;H2326	6	178	69	79
FS328D1	C(CM)-UKFS328D1;H2328	6	192	98	110

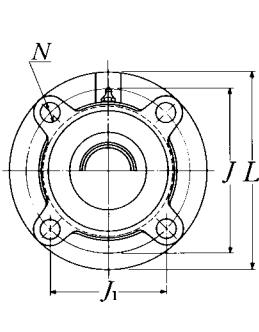

Pressed steel dust cover type
Open end: **S-UKFC…D1**
Closed end: **SM-UKFC…D1**

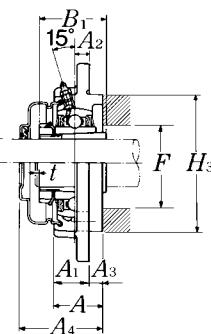

Cast dust cover type
Open end: **C-UKFC…D1**
Closed end: **CM-UKFC…D1**

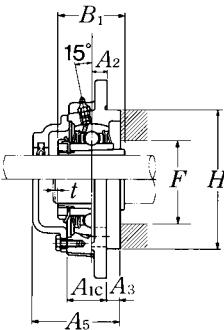


Housing ¹⁾ number	Unit number ^{1) 2) 3) 4)} pressed steel dust cover type	Unit number ^{1) 2) 3) 4)} cast dust cover type	Nominal dimensions			Mass of unit		
			t max.	A ₄	inch A ₅	kg UKFC	lb S(SM)	lb C(CM)
FC205D1	S(SM)-UKFC205D1;H2305X	C(CM)-UKFC205D1;H2305X	2	44.5	51	1.0	1.1	1.2
FC205D1	S(SM)-UKFC205ED1;HE2305	C(CM)-UKFC205ED1;HE2305	$\frac{5}{64}$	$1\frac{3}{4}$	2	2.2	2.4	2.7
FC206D1	S(SM)-UKFC206D1;H2306X	C(CM)-UKFC206D1;H2306X	2	49	56	1.3	1.4	1.7
FC206D1	S(SM)-UKFC206SD1;HS2306	C(CM)-UKFC206SD1;HS2306	$\frac{5}{64}$	$1\frac{5}{64}$	$2\frac{13}{16}$	2.9	3.1	3.8
FC206D1	S(SM)-UKFC206ED1;HE2306X	C(CM)-UKFC206ED1;HE2306X						
FC207D1	S(SM)-UKFC207D1;H2307X	C(CM)-UKFC207D1;H2307X	3	55	59	1.7	1.8	2.0
FC207D1	S(SM)-UKFC207SD1;HS2307	C(CM)-UKFC207SD1;HS2307	$\frac{1}{8}$	$2\frac{11}{64}$	$2\frac{21}{64}$	3.7	4.0	4.4
FC208D1	S(SM)-UKFC208D1;H2308X	C(CM)-UKFC208D1;H2308X	3	62	66	2.1	2.2	2.6
FC208D1	S(SM)-UKFC208ED1;HE2308X	C(CM)-UKFC208ED1;HE2308X	$\frac{1}{8}$	$2\frac{7}{16}$	$2\frac{19}{32}$	4.6	4.9	5.7
FC208D1	S(SM)-UKFC208SD1;HS2308X	C(CM)-UKFC208SD1;HS2308X						
FC209D1	S(SM)-UKFC209D1;H2309X	C(CM)-UKFC209D1;H2309X	3	63	70	2.8	2.9	3.4
FC209D1	S(SM)-UKFC209AD1;HA2309	C(CM)-UKFC209AD1;HA2309						
FC209D1	S(SM)-UKFC209ED1;HE2309X	C(CM)-UKFC209ED1;HE2309X	$\frac{1}{8}$	$2\frac{31}{64}$	$2\frac{3}{4}$	6.2	6.4	7.5
FC209D1	S(SM)-UKFC209SD1;HS2309X	C(CM)-UKFC209SD1;HS2309X						
FC210D1	S(SM)-UKFC210D1;H2310X	C(CM)-UKFC210D1;H2310X	3	65.5	72	3.1	3.3	4.8
FC210D1	S(SM)-UKFC210SD1;HS2310	C(CM)-UKFC210SD1;HS2310	$\frac{1}{8}$	$2\frac{37}{64}$	$2\frac{53}{64}$	6.8	7.3	11
FC210D1	S(SM)-UKFC210AD1;HA2310	C(CM)-UKFC210AD1;HA2310						
FC210D1	S(SM)-UKFC210ED1;HE2310X	C(CM)-UKFC210ED1;HE2310X						
FC211D1	S(SM)-UKFC211D1;H2311X	C(CM)-UKFC211D1;H2311X	4	71	75	4.2	4.4	5.1
FC211D1	S(SM)-UKFC211SD1;HS2311	C(CM)-UKFC211SD1;HS2311						
FC211D1	S(SM)-UKFC211AD1;HA2311	C(CM)-UKFC211AD1;HA2311	$\frac{5}{32}$	$2\frac{51}{64}$	$2\frac{61}{64}$	9.3	9.7	11
FC211D1	S(SM)-UKFC211ED1;HE2311XY	C(CM)-UKFC211ED1;HE2311XY						
FC212D1	S(SM)-UKFC212D1;H2312X	C(CM)-UKFC212D1;H2312X	4	80	86	5.0	5.2	6.1
FC212D1	S(SM)-UKFC212SD1;HS2312	C(CM)-UKFC212SD1;HS2312	$\frac{5}{32}$	$3\frac{5}{32}$	$3\frac{25}{64}$	11	11	13
FC213D1	S(SM)-UKFC213D1;H2313X	C(CM)-UKFC213D1;H2313X	4	83.5	90	6.0	6.1	7.1
FC213D1	S(SM)-UKFC213AD1;HA2313	C(CM)-UKFC213AD1;HA2313						
FC213D1	S(SM)-UKFC213ED1;HE2313X	C(CM)-UKFC213ED1;HE2313X	$\frac{5}{32}$	$3\frac{9}{32}$	$3\frac{35}{64}$	13	13	16
FC213D1	S(SM)-UKFC213SD1;HS2313X	C(CM)-UKFC213SD1;HS2313X						

sale@technobearing.ru

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

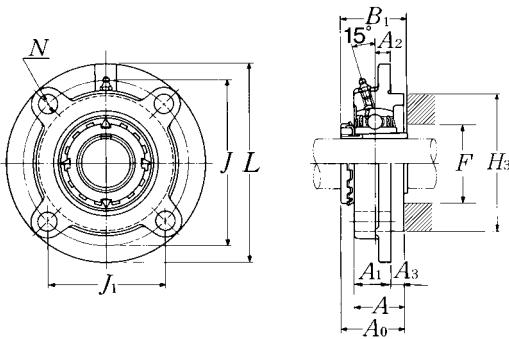Round flanged units cast housing w/spigot joint**Adapter type**

Shaft dia. mm inch	Unit number ^{1) 2) 3)}	Nominal dimensions												Bolt size mm inch	Bearing ^{2) 3)} number	
		L	J	(J ₁)	A ₂	N	A ₃	A ₁	A _{1C}	A	H ₃	A ₀	B ₁			
65 2 7/16 2 1/2	UKFC215D1;H2315X	220	184	130.1	18	19	16	40	43	56	160	71	73	84	M16	UK215D1;H2315X
	UKFC215D1;HA2315	8 21/32	7 1/4	5 1/8	45/64	3/4	5/8	1 9/16	1 11/16	2 13/64	6.2992	2 51/64	2.874	3 5/16	5/8	UK215D1;HA2315
	UKFC215D1;HE2315X														UK215D1;HE2315X	
70 2 11/16 2 3/4	UKFC216D1;H2316X	240	200	141.4	18	23	16	42	43	58	170	73.5	78	90	M20	UK216D1;H2316X
	UKFC216D1;HA2316	9 7/16	7 7/8	5 5/16	45/64	29/32	5/8	1 21/32	1 11/16	2 9/32	6.6929	2 57/64	3.071	3 17/32	3/4	UK216D1;HA2316
	UKFC216D1;HE2316X														UK216D1;HE2316X	
75 2 15/16 3	UKFC217D1;H2317X	250	208	147.1	18	23	18	45	45.5	63	180	77	82	95	M20	UK217D1;H2317X
	UKFC217D1;HA2317X	9 27/32	8 3/16	5 51/64	45/64	29/32	45/64	1 25/32	1 51/64	2 31/64	7.0866	3 1/32	3.228	3 3/4	3/4	UK217D1;HA2317X
	UKFC217D1;HE2317X														UK217D1;HE2317X	
80 3 3/16	UKFC218D1;H2318X	265	220	155.6	22	23	18	50	50	68	190	81.5	86	102	M20	UK218D1;H2318X
	UKFC218D1;HA2318X	10 7/16	8 21/32	6 1/8	55/64	29/32	45/64	1 31/32	1 31/32	2 43/64	7.4803	3 13/64	3.386	4 1/32	3/4	UK218D1;HA2318X

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

2) Adapter number with suffix "X" means a narrow slot type adapter sleeve.

In this case the lock washer with the straight inner prong should be used.


3) For HE2311XY, screw thread pitch different from the standard is applied, because of the thin thread section of sleeve.

To distinguish it, a suffix "Y" is added.


4) If the inch series housing units with dust cover are ordered with a closed end, the suffixes E, S or A are not included.

Example: SM-UKFC205D1; HE2305



Note: Please refer to page 36 for size of grease fitting.

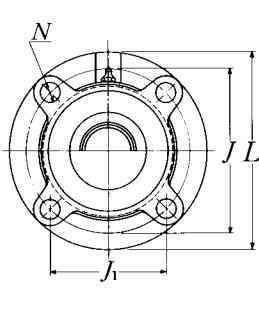

Pressed steel dust cover type
Open end: **S-UKFC···D1**
Closed end: **SM-UKFC···D1**

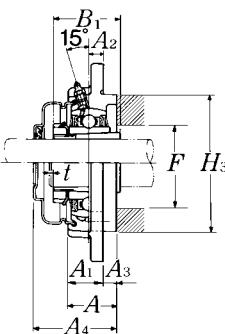


Cast dust cover type
Open end: **C-UKFC···D1**
Closed end: **CM-UKFC···D1**

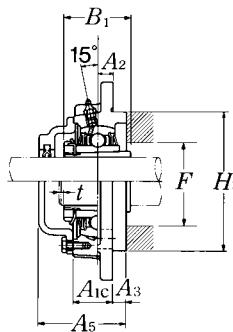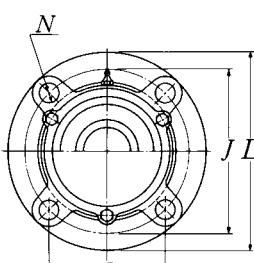

Housing ¹⁾ number	Unit number ^{1) 2) 3) 4)} pressed steel dust cover type	Unit number ^{1) 2) 3) 4)} cast dust cover type	Nominal dimensions		Mass of unit		
			mm max.	inch A ₄	A ₅	kg UKFC	lb S(SM)
FC215D1	—	C(CM)-UKFC215D1;H2315X	4	—	102	7.7	—
FC215D1	—	C(CM)-UKFC215AD1;HA2315	5/32	—	4 1/64	17	—
FC215D1	—	C(CM)-UKFC215ED1;HE2315X					21
FC216D1	—	C(CM)-UKFC216D1;H2316X	4	—	106	9.5	—
FC216D1	—	C(CM)-UKFC216AD1;HA2316	5/32	—	4 11/64	21	—
FC216D1	—	C(CM)-UKFC216D1;HE2316X					24
FC217D1	—	C(CM)-UKFC217D1;H2317X	5	—	114	11	—
FC217D1	—	C(CM)-UKFC217AD1;HA2317X	13/64	—	4 31/64	24	—
FC217D1	—	C(CM)-UKFC217ED1;HE2317X					29
FC218D1	—	C(CM)-UKFC218D1;H2318X	5	—	122	13	—
FC218D1	—	C(CM)-UKFC218AD1;HA2318X	13/64	—	4 51/64	29	—
							33

Bearing number ^{2) 3)}	Housing ¹⁾ number	Mass of unit kg lb
UKX05D1;H2305X	FCX05D1	1.2
UKX05D1;HE2305	FCX05D1	2.7
UKX06D1;H2306X	FCX06D1	1.5
UKX06D1;HS2306	FCX06D1	3.3
UKX06D1;HE2306X	FCX06D1	
UKX07D1;H2307X	FCX07D1	1.9
UKX07D1;HS2307	FCX07D1	4.2
UKX08D1;H2308X	FCX08D1	2.2
UKX08D1;HE2308X	FCX08D1	4.9
UKX08D1;HS2308X	FCX08D1	
UKX09D1;H2309X	FCX09D1	2.7
UKX09D1;HA2309	FCX09D1	
UKX09D1;HE2309X	FCX09D1	6.0
UKX09D1;HS2309X	FCX09D1	
UKX10D1;H2310X	FCX10D1	3.1
UKX10D1;HS2310	FCX10D1	
UKX10D1;HA2310	FCX10D1	6.8
UKX10D1;HE2310X	FCX10D1	
UKX11D1;H2311X	FCX11D1	4.2
UKX11D1;HS2311	FCX11D1	
UKX11D1;HA2311	FCX11D1	9.3
UKX11D1;HE2311XY	FCX11D1	
UKX12D1;H2312X	FCX12D1	5.5
UKX12D1;HS2312	FCX12D1	12
UKX13D1;H2313X	FCX13D1	5.4
UKX13D1;HA2313	FCX13D1	
UKX13D1;HE2313X	FCX13D1	12
UKX15D1;HS2313X	FCX13D1	

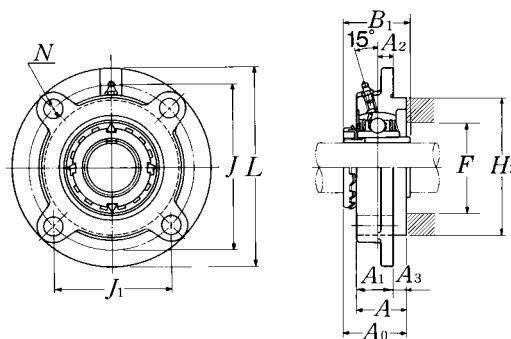

Shaft dia. mm inch	Unit number ^{1) 2) 3)}	Nominal dimensions												Bolt size mm inch
		L	J	(J1)	A2	N	A3	A1	A	H3	A0	B1	F min.	
65 $2\frac{7}{16}$ $2\frac{1}{2}$	UKFCX15D1;H2315X	222	190	134.4	12	19	22	35	57	164	71.5	73	84	M16
	UKFCX15D1;HA2315	$8\frac{3}{4}$	$7\frac{3}{16}$	$5\frac{9}{32}$	$15\frac{1}{32}$	$\frac{3}{4}$	$55\frac{5}{64}$	$1\frac{3}{8}$	$2\frac{1}{4}$	6.4567	$2\frac{13}{16}$	2.874	$3\frac{5}{16}$	$\frac{5}{8}$
	UKFCX15D1;HE2315X													
70 $2\frac{11}{16}$ $2\frac{3}{4}$	UKFCX16D1;H2316X	260	219	154.9	10	23	25	36	61	186	75	78	90	M20
	UKFCX16D1;HA2316	$10\frac{1}{4}$	$8\frac{5}{8}$	$6\frac{3}{32}$	$25\frac{5}{64}$	$29\frac{1}{32}$	$63\frac{1}{64}$	$1\frac{13}{32}$	$2\frac{13}{32}$	7.3228	$2\frac{61}{64}$	3.071	$3\frac{17}{32}$	$\frac{3}{4}$
	UKFCX16D1;HE2316X													
75 $2\frac{15}{16}$ 3	UKFCX17D1;H2317X	260	219	154.9	10	23	25	36	61	186	76.5	82	95	M20
	UKFCX17D1;HA2317X	$10\frac{1}{4}$	$8\frac{5}{8}$	$6\frac{3}{32}$	$25\frac{5}{64}$	$29\frac{1}{32}$	$63\frac{1}{64}$	$1\frac{13}{32}$	$2\frac{13}{32}$	7.3228	$3\frac{1}{64}$	3.228	$3\frac{3}{4}$	$\frac{3}{4}$
	UKFCX17D1;HE2317X													
80 $3\frac{3}{16}$	UKFCX18D1;H2318X	260	219	154.9	12	23	28	43	71	186	82.5	86	102	M20
	UKFCX18D1;HA2318X	$10\frac{1}{4}$	$8\frac{5}{8}$	$6\frac{3}{32}$	$15\frac{1}{32}$	$29\frac{1}{32}$	$1\frac{1}{64}$	$1\frac{11}{16}$	$2\frac{51}{64}$	7.3228	$3\frac{1}{4}$	3.386	$4\frac{1}{32}$	$\frac{3}{4}$
90	UKFCX20D1;H2320X	276	238	168.3	22	23	28	66	94	206	99	97	112	M20

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

2) Adapter number with suffix "X" means a narrow slot type adapter sleeve.


In this case the lock washer with the straight inner prong should be used.

3) For HE2311XY, screw thread pitch different from the standard is applied, because of the thin thread section of sleeve.

To distinguish it, a suffix "Y" is added.

Note: Please refer to page 36 for size of grease fitting.

Bearing number ^{2) 3)}	Housing ¹⁾ number	Mass of unit kg lb
UKX15D1;H2315X	FCX15D1	8.2
UKX15D1;HA2315	FCX15D1	18
UKX15D1;HE2315X	FCX15D1	
UKX16D1;H2316X	FCX16D1	12
UKX16D1;HA2316	FCX16D1	26
UKX16D1;HE2316X	FCX16D1	
UKX17D1;H2317X	FCX17D1	12
UKX17D1;HA2317X	FCX17D1	26
UKX17D1;HE2317X	FCX17D1	
UKX18D1;H2318X	FCX18D1	12
UKX18D1;HA2318X	FCX18D1	26
UKFX20D1;H2320X	FCX20D1	18

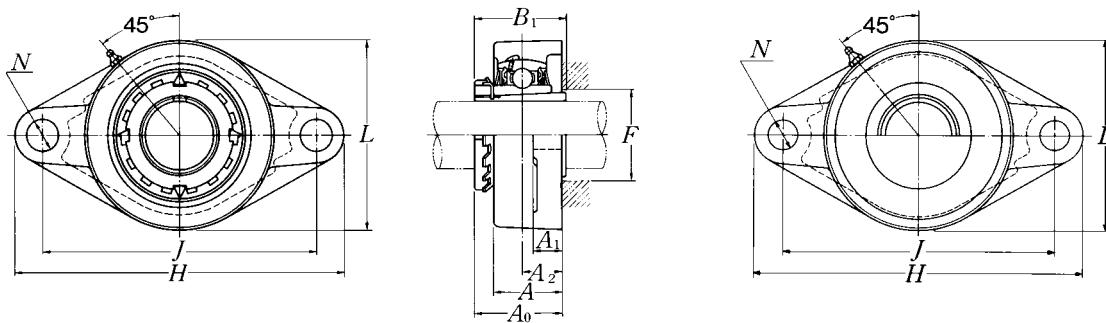

Pressed steel dust cover type

Open end: S-UKFL...D1

Closed end: SM-UKFL...D1

Shaft dia. mm inch	Unit number ^{1) 2) 3)}	Nominal dimensions										Bolt size mm inch	Bearing number ^{2) 3)}
		H	J	A ₂	A ₁	A	N	L	A ₀	B ₁	F min.		
20 $\frac{3}{4}$	UKFL205D1;H2305X UKFL205D1;HE2305	130 $5\frac{1}{8}$	99 $3\frac{57}{64}$	16 $\frac{5}{8}$	13 $\frac{1}{2}$	27 $1\frac{1}{16}$	16 $\frac{5}{8}$	68 $2\frac{11}{16}$	35.5 $1\frac{25}{64}$	35 1.378	30 $1\frac{3}{16}$	M14 $\frac{1}{2}$	UK205D1;H2305X UK205D1;HE2305
25 $\frac{7}{8}$ 1	UKFL206D1;H2306X UKFL206D1;HS2306 UKFL206D1;HE2306X	148 $5\frac{13}{16}$	117 $4\frac{39}{64}$	18 $45\frac{5}{64}$	13 $\frac{1}{2}$	31 $1\frac{1}{32}$	16 $\frac{5}{8}$	80 $3\frac{5}{32}$	39 $1\frac{17}{32}$	38 1.496	36 $1\frac{13}{32}$	M14 $\frac{1}{2}$	UK206D1;H2306X UK206D1;HS2306 UK206D1;HE2306X
30 $1\frac{1}{8}$	UKFL207D1;H2307X UKFL207D1;HS2307	161 $6\frac{11}{32}$	130 $5\frac{1}{8}$	19 $\frac{3}{4}$	15 $\frac{19}{32}$	34 $1\frac{11}{32}$	16 $\frac{5}{8}$	90 $3\frac{17}{32}$	42.5 $1\frac{43}{64}$	43 1.693	40 $1\frac{9}{16}$	M14 $\frac{1}{2}$	UK207D1;H2307X UK207D1;HS2307
35 $1\frac{1}{4}$ $1\frac{3}{8}$	UKFL208D1;H2308X UKFL208D1;HE2308X UKFL208D1;HS2308X	175 $6\frac{7}{8}$	144 $5\frac{43}{64}$	21 $53\frac{3}{64}$	15 $19\frac{1}{32}$	36 $1\frac{13}{32}$	16 $\frac{5}{8}$	100 $3\frac{15}{16}$	46.5 $1\frac{53}{64}$	46 1.811	46 $1\frac{13}{16}$	M14 $\frac{1}{2}$	UK208D1;H2308X UK208D1;HE2308X UK208D1;HS2308X
40 $1\frac{7}{16}$ $1\frac{1}{2}$ $1\frac{5}{8}$	UKFL209D1;H2309X UKFL209D1;HA2309 UKFL209D1;HE2309X UKFL209D1;HS2309X	188 $7\frac{13}{32}$	148 $5\frac{53}{64}$	22 $55\frac{5}{64}$	16 $\frac{5}{8}$	38 $1\frac{1}{2}$	19 $\frac{3}{4}$	108 $4\frac{1}{4}$	48.5 $1\frac{29}{32}$	50 1.969	52 $2\frac{1}{16}$	M16 $\frac{5}{8}$	UK209D1;H2309X UK209D1;HA2309 UK209D1;HE2309X UK209D1;HS2309X
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UKFL210D1;H2310X UKFL210D1;HS2310 UKFL210D1;HA2310 UKFL210D1;HE2310X	197 $7\frac{3}{4}$	157 $6\frac{3}{16}$	22 $55\frac{5}{64}$	16 $\frac{5}{8}$	40 $1\frac{9}{16}$	19 $\frac{3}{4}$	115 $4\frac{17}{32}$	50 $1\frac{31}{32}$	55 2.165	57 $2\frac{1}{4}$	M16 $\frac{5}{8}$	UK210D1;H2310X UK210D1;HS2310 UK210D1;HA2310 UK210D1;HE2310X
50 $1\frac{7}{8}$ $1\frac{15}{16}$ 2	UKFL211D1;H2311X UKFL211D1;HS2311 UKFL211D1;HA2311 UKFL211D1;HE2311XY	224 $8\frac{13}{16}$	184 $7\frac{1}{4}$	25 $6\frac{3}{64}$	18 $2\frac{3}{32}$	43 $1\frac{11}{16}$	19 $\frac{3}{4}$	130 $5\frac{1}{8}$	54.5 $2\frac{9}{64}$	59 2.323	64 $2\frac{17}{32}$	M16 $\frac{5}{8}$	UK211D1;H2311X UK211D1;HS2311 UK211D1;HA2311 UK211D1;HE2311XY
55 $2\frac{1}{8}$	UKFL212D1;H2312X UKFL212D1;HS2312	250 $9\frac{27}{32}$	202 $7\frac{61}{64}$	29 $1\frac{9}{64}$	18 $2\frac{3}{32}$	48 $1\frac{7}{8}$	23 $\frac{29}{32}$	140 $5\frac{1}{2}$	61 $2\frac{13}{32}$	62 2.441	69 $2\frac{23}{32}$	M20 $\frac{3}{4}$	UK212D1;H2312X UK212D1;HS2312
60 $2\frac{3}{16}$ $2\frac{1}{4}$ $2\frac{3}{8}$	UKFL213D1;H2313X UKFL213D1;HA2313 UKFL213D1;HE2313X UKFL213D1;HS2313X	258 $10\frac{5}{32}$	210 $8\frac{17}{64}$	30 $1\frac{3}{16}$	22 $\frac{7}{8}$	50 $1\frac{31}{32}$	23 $\frac{29}{32}$	155 $6\frac{3}{32}$	64 $2\frac{33}{64}$	65 2.559	74 $2\frac{29}{32}$	M20 $\frac{3}{4}$	UK213D1;H2313X UK213D1;HA2313 UK213D1;HE2313X UK213D1;HS2313X

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".


2) Adapter number with suffix "X" means a narrow slot type adapter sleeve.

In this case the lock washer with the straight inner prong should be used.

3) For HE2311XY, screw thread pitch different from the standard is applied, because of the thin thread section of sleeve.

To distinguish it, a suffix "Y" is added.

4) If the inch series housing units with dust cover are ordered with a closed end, the suffixes E, S or A are not included.

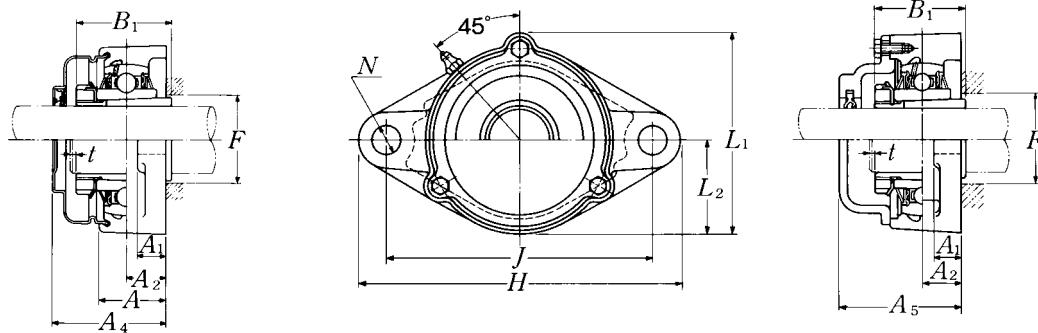
**Cast dust cover type**Open end: **C-UKFL…D1**Closed end: **CM-UKFL…D1**

Housing ¹⁾ number	Unit number ^{1) 2) 3) 4)} pressed steel dust cover type	Unit number ^{1) 2) 3) 4)} cast dust cover type	Nominal dimensions					Mass of unit			
			t max.	A ₄	A ₅	inch	L ₁	L ₂	kg	lb	
									UKFL	S(SM)	C(CM)
FL205D1	S(SM)-UKFL205D1;H2305X	C(CM)-UKFL205D1;H2305X	2	44.5	51	74	34		0.6	0.7	0.8
FL205D1	S(SM)-UKFL205ED1;HE2305	C(CM)-UKFL205ED1;HE2305	$\frac{5}{64}$	$1\frac{3}{4}$	2	$2\frac{29}{32}$	$1\frac{11}{32}$		1.3	1.5	1.8
FL206D1	S(SM)-UKFL206D1;H2306X	C(CM)-UKFL206D1;H2306X	2	49	56	85	40		0.9	1.0	1.2
FL206D1	S(SM)-UKFL206SD1;HS2306	C(CM)-UKFL206SD1;HS2306	$\frac{5}{64}$	$1\frac{15}{16}$	$2\frac{7}{32}$	$3\frac{11}{32}$	$1\frac{9}{16}$		2.0	2.2	2.7
FL206D1	S(SM)-UKFL206ED1;HE2306X	C(CM)-UKFL206ED1;HE2306X									
FL207D1	S(SM)-UKFL207D1;H2307X	C(CM)-UKFL207D1;H2307X	3	55	59	97	45		1.3	1.3	1.6
FL207D1	S(SM)-UKFL207SD1;HS2307	C(CM)-UKFL207SD1;HS2307	$\frac{1}{8}$	$2\frac{5}{32}$	$2\frac{5}{16}$	$3\frac{13}{16}$	$1\frac{25}{32}$		2.9	2.9	3.5
FL208D1	S(SM)-UKFL208D1;H2308X	C(CM)-UKFL208D1;H2308X	3	62	66	106	50		1.6	1.7	2.1
FL208D1	S(SM)-UKFL208ED1;HE2308X	C(CM)-UKFL208ED1;HE2308X	$\frac{1}{8}$	$2\frac{7}{16}$	$2\frac{19}{32}$	$4\frac{3}{16}$	$1\frac{31}{32}$		3.5	3.7	4.6
FL208D1	S(SM)-UKFL208SD1;HS2308X	C(CM)-UKFL208SD1;HS2308X									
FL209D1	S(SM)-UKFL209D1;H2309X	C(CM)-UKFL209D1;H2309X	3	63	70	113	54		2.0	2.1	2.5
FL209D1	S(SM)-UKFL209AD1;HA2309	C(CM)-UKFL209AD1;HA2309									
FL209D1	S(SM)-UKFL209ED1;HE2309X	C(CM)-UKFL209ED1;HE2309X	$\frac{1}{8}$	$2\frac{15}{32}$	$2\frac{3}{4}$	$4\frac{7}{16}$	$2\frac{1}{8}$		4.4	4.6	5.5
FL209D1	S(SM)-UKFL209SD1;HS2309X	C(CM)-UKFL209SD1;HS2309X									
FL210D1	S(SM)-UKFL210D1;H2310X	C(CM)-UKFL210D1;H2310X	3	65.5	72	120	58		2.2	2.4	2.9
FL210D1	S(SM)-UKFL210SD1;HS2310	C(CM)-UKFL210SD1;HS2310	$\frac{1}{8}$	$2\frac{19}{32}$	$2\frac{27}{32}$	$4\frac{23}{32}$	$2\frac{9}{32}$		4.9	5.3	6.4
FL210D1	S(SM)-UKFL210AD1;HA2310	C(CM)-UKFL210AD1;HA2310									
FL210D1	S(SM)-UKFL210ED1;HE2310X	C(CM)-UKFL210ED1;HE2310X									
FL211D1	S(SM)-UKFL211D1;H2311X	C(CM)-UKFL211D1;H2311X	4	71	75	133	65		3.1	3.4	3.7
FL211D1	S(SM)-UKFL211SD1;HS2311	C(CM)-UKFL211SD1;HS2311									
FL211D1	S(SM)-UKFL211AD1;HA2311	C(CM)-UKFL211AD1;HA2311	$\frac{5}{32}$	$2\frac{25}{32}$	$2\frac{15}{16}$	$5\frac{1}{4}$	$2\frac{9}{16}$		6.8	7.5	8.2
FL211D1	S(SM)-UKFL211ED1;HE2311XY	C(CM)-UKFL211ED1;HE2311XY									
FL212D1	S(SM)-UKFL212D1;H2312X	C(CM)-UKFL212D1;H2312X	4	80	86	144	70		3.9	4.2	4.7
FL212D1	S(SM)-UKFL212SD1;HS2312	C(CM)-UKFL212SD1;HS2312	$\frac{5}{32}$	$3\frac{5}{32}$	$3\frac{3}{8}$	$5\frac{21}{32}$	$2\frac{3}{4}$		8.6	9.3	10
FL213D1	S(SM)-UKFL213D1;H2313X	C(CM)-UKFL213D1;H2313X	4	83.5	90	157	78		5.0	5.4	6.0
FL213D1	S(SM)-UKFL213AD1;HA2313	C(CM)-UKFL213AD1;HA2313									
FL213D1	S(SM)-UKFL213ED1;HE2313X	C(CM)-UKFL213ED1;HE2313X	$\frac{5}{32}$	$3\frac{9}{32}$	$3\frac{17}{32}$	$6\frac{3}{16}$	$3\frac{1}{16}$		11	12	13
FL213D1	S(SM)-UKFL213SD1;HS2313X	C(CM)-UKFL213SD1;HS2313X									

sale@technobearing.ru

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

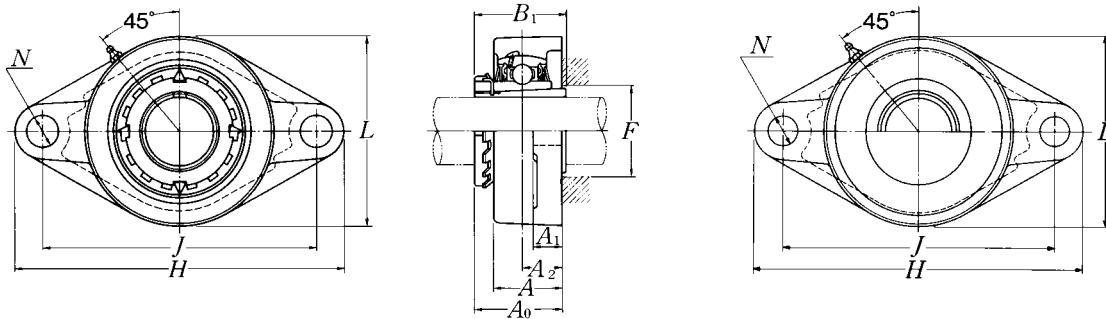Rhombus flanged units cast housing**Adapter type****Pressed steel dust cover type**Open end: **S-UKFL…D1**Closed end: **SM-UKFL…D1**

Shaft dia. mm inch	Unit number ^{1) 2) 3)} UKFL215D1;H2315X UKFL215D1;HA2315 UKFL215D1;HE2315X	Nominal dimensions										Bolt size mm inch	Bearing number ^{2) 3)} UK215D1;H2315X UK215D1;HA2315 UK215D1;HE2315X
		H	J	A ₂	A ₁	A	N	L	A ₀	B ₁	F min.		
65 2$\frac{7}{16}$ 2$\frac{1}{2}$	UKFL215D1;H2315X UKFL215D1;HA2315 UKFL215D1;HE2315X	275	225	34	22	56	23	165	71	73	84	M20	UK215D1;H2315X UK215D1;HA2315 UK215D1;HE2315X
		10 $\frac{13}{16}$	8 $\frac{55}{64}$	1 $\frac{11}{32}$	$\frac{7}{8}$	2 $\frac{7}{32}$	2 $\frac{29}{32}$	6 $\frac{1}{2}$	2 $\frac{51}{64}$	2.874	3 $\frac{5}{16}$	$\frac{3}{4}$	
70 2$\frac{11}{16}$ 2$\frac{3}{4}$	UKFL216D1;H2316X UKFL216D1;HA2316 UKFL216D1;HE2316X	290	233	34	22	58	25	180	73.5	78	90	M22	UK216D1;H2316X UK216D1;HA2316 UK216D1;HE2316X
		11 $\frac{13}{32}$	9 $\frac{11}{64}$	1 $\frac{11}{32}$	$\frac{7}{8}$	2 $\frac{9}{32}$	6 $\frac{3}{64}$	7 $\frac{3}{32}$	2 $\frac{57}{64}$	3.071	3 $\frac{17}{32}$	$\frac{7}{8}$	
75 2$\frac{15}{16}$ 3	UKFL217D1;H2317X UKFL217D1;HA2317X UKFL217D1;HE2317X	305	248	36	24	63	25	190	77	82	95	M22	UK217D1;H2317X UK217D1;HA2317X UK217D1;HE2317X
		12	9 $\frac{49}{64}$	1 $\frac{27}{64}$	1 $\frac{5}{16}$	2 $\frac{15}{32}$	6 $\frac{3}{64}$	7 $\frac{15}{32}$	3 $\frac{1}{32}$	3.228	3 $\frac{3}{4}$	$\frac{7}{8}$	
80 3$\frac{3}{16}$	UKFL218D1;H2318X UKFL218D1;HA2318X	320	265	40	24	68	25	205	81.5	86	102	M22	UK218D1;H2318X UK218D1;HA2318X
		12 $\frac{19}{32}$	10 $\frac{7}{16}$	1 $\frac{37}{64}$	1 $\frac{5}{16}$	2 $\frac{11}{16}$	6 $\frac{3}{64}$	8 $\frac{1}{16}$	3 $\frac{13}{64}$	3.386	4 $\frac{1}{32}$	$\frac{7}{8}$	

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

2) Adapter number with suffix "X" means a narrow slot type adapter sleeve.

In this case the lock washer with the straight inner prong should be used.


3) For HE2311XY, screw thread pitch different from the standard is applied, because of the thin thread section of sleeve.

To distinguish it, a suffix "Y" is added.



4) If the inch series housing units with dust cover are ordered with a closed end, the suffixes E, S or A are not included.

Example: SM-UKFL205D1; HE2305

Note: Please refer to page 36 for size of grease fitting.

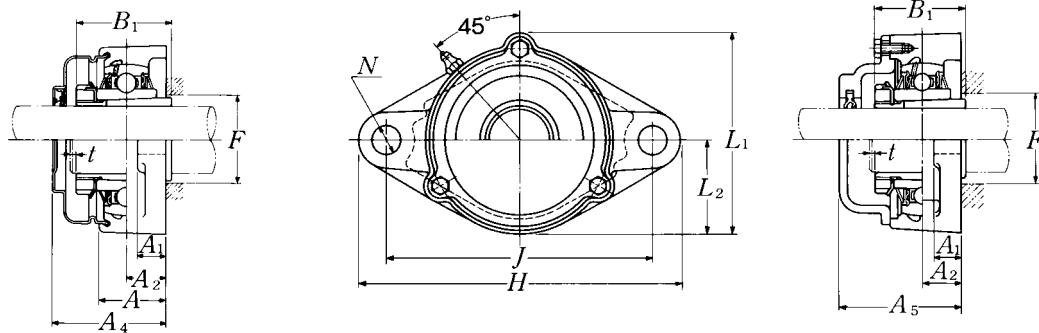**Cast dust cover type**Open end: **C-UKFL…D1**Closed end: **CM-UKFL…D1**

Housing ¹⁾ number	Unit number ^{1) 2) 3) 4)} pressed steel dust cover type	Unit number ^{1) 2) 3) 4)} cast dust cover type	Nominal dimensions				Mass of unit			
			t max.	mm A ₄	inch A ₅	L ₁	L ₂	kg UKFL	lb S(SM)	lb C(CM)
FL215D1	—	C(CM)-UKFL215D1;H2315X	4	—	102	169	82	6.2	—	7.6
FL215D1	—	C(CM)-UKFL215AD1;HA2315	5 $\frac{1}{32}$	—	4 $\frac{1}{32}$	6 $\frac{21}{32}$	3 $\frac{7}{32}$	14	—	17
FL215D1	—	C(CM)-UKFL215ED1;HE2315X								
FL216D1	—	C(CM)-UKFL216D1;H2316X	4	—	106	183	90	7.9	—	9.3
FL216D1	—	C(CM)-UKFL216AD1;HA2316	5 $\frac{1}{32}$	—	4 $\frac{3}{16}$	7 $\frac{7}{32}$	3 $\frac{17}{32}$	17	—	21
FL216D1	—	C(CM)-UKFL216ED1;HE2316X								
FL217D1	—	C(CM)-UKFL217D1;H2317X	5	—	114	192	95	9.2	—	11
FL217D1	—	C(CM)-UKFL217AD1;HA2317X	5 $\frac{13}{64}$	—	4 $\frac{1}{2}$	7 $\frac{9}{16}$	3 $\frac{3}{4}$	20	—	24
FL217D1	—	C(CM)-UKFL217ED1;HE2317X								
FL218D1	—	C(CM)-UKFL218D1;H2318X	5	—	122	205	102	11	—	13
FL218D1	—	C(CM)-UKFL218AD1;HA2318X	5 $\frac{13}{64}$	—	4 $\frac{13}{16}$	8 $\frac{1}{16}$	4 $\frac{1}{32}$	24	—	29

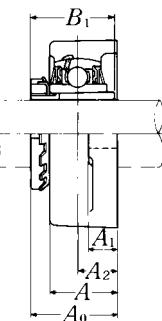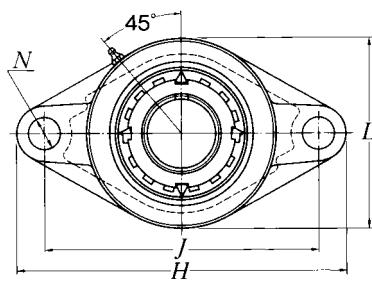

Shaft dia. mm inch	Unit number ^{1) 2) 3)}	Nominal dimensions									Bolt size mm inch	Bearing number ^{2) 3)}
		H	J	A ₂	A ₁	A	N	L	A ₀	B ₁		
20 $\frac{3}{4}$	UKFL305D1;H2305X UKFL305D1;HE2305	150 $5\frac{29}{32}$	113 $4\frac{29}{64}$	16 $\frac{5}{8}$	13 $\frac{1}{2}$	29 $1\frac{5}{32}$	19 $\frac{3}{4}$	80 $3\frac{5}{32}$	37 $1\frac{29}{64}$	35 1.378	M16 $\frac{5}{8}$	UK305D1;H2305X UK305D1;HE2305
25 $\frac{7}{8}$ 1	UKFL306D1;H2306X UKFL306D1;HS2306 UKFL306D1;HE2306X	180 $7\frac{3}{32}$	134 $5\frac{9}{32}$	18 $\frac{45}{64}$	15 $\frac{19}{32}$	32 $1\frac{1}{4}$	23 $\frac{29}{32}$	90 $3\frac{17}{32}$	40.5 $1\frac{19}{32}$	38 1.496	M20 $\frac{3}{4}$	UK306D1;H2306X UK306D1;HS2306 UK306D1;HE2306X
30 $1\frac{1}{8}$	UKFL307D1;H2307X UKFL307D1;HS2307	185 $7\frac{9}{32}$	141 $5\frac{35}{64}$	20 $\frac{25}{32}$	16 $\frac{5}{8}$	36 $1\frac{13}{32}$	23 $\frac{29}{32}$	100 $3\frac{15}{16}$	45.5 $1\frac{51}{64}$	43 1.693	M20 $\frac{3}{4}$	UK307D1;H2307X UK307D1;HS2307
35 $1\frac{1}{4}$ $1\frac{3}{8}$	UKFL308D1;H2308X UKFL308D1;HE2308X UKFL308D1;HS2308X	200 $7\frac{7}{8}$	158 $6\frac{7}{32}$	23 $\frac{29}{32}$	17 $2\frac{1}{32}$	40 $1\frac{1}{16}$	23 $\frac{29}{32}$	112 $4\frac{13}{32}$	50 $1\frac{31}{32}$	46 1.811	M20 $\frac{3}{4}$	UK308D1;H2308X UK308D1;HE2308X UK308D1;HS2308X
40 $1\frac{7}{16}$ $1\frac{1}{2}$ $1\frac{5}{8}$	UKFL309D1;H2309X UKFL309D1;HA2309 UKFL309D1;HE2309X UKFL309D1;HS2309X	230 $9\frac{1}{16}$	177 $6\frac{31}{32}$	25 $6\frac{3}{64}$	18 $2\frac{3}{32}$	44 $1\frac{23}{32}$	25 $6\frac{3}{64}$	125 $4\frac{29}{32}$	54.5 $2\frac{9}{64}$	50 1.969	M22 $\frac{7}{8}$	UK309D1;H2309X UK309D1;HA2309 UK309D1;HE2309X UK309D1;HS2309X
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UKFL310D1;H2310X UKFL310D1;HS2310 UKFL310D1;HA2310 UKFL310D1;HE2310X	240 $9\frac{7}{16}$	187 $7\frac{23}{64}$	28 $1\frac{7}{64}$	19 $\frac{3}{4}$	48 $1\frac{1}{8}$	25 $6\frac{3}{64}$	140 $5\frac{1}{2}$	60.5 $2\frac{3}{8}$	55 2.165	M22 $\frac{7}{8}$	UK310D1;H2310X UK310D1;HS2310 UK310D1;HA2310 UK310D1;HE2310X
50 $1\frac{7}{8}$ $1\frac{15}{16}$ 2	UKFL311D1;H2311X UKFL311D1;HS2311 UKFL311D1;HA2311 UKFL311D1;HE2311XY	250 $9\frac{27}{32}$	198 $7\frac{51}{64}$	30 $1\frac{3}{16}$	20 $2\frac{5}{32}$	52 $2\frac{1}{16}$	25 $6\frac{3}{64}$	150 $5\frac{29}{32}$	64 $2\frac{33}{64}$	59 2.323	M22 $\frac{7}{8}$	UK311D1;H2311X UK311D1;HS2311 UK311D1;HA2311 UK311D1;HE2311XY
55 $2\frac{1}{8}$	UKFL312D1;H2312X UKFL312D1;HS2312	270 $10\frac{5}{8}$	212 $8\frac{11}{32}$	33 $1\frac{19}{64}$	22 $\frac{7}{8}$	56 $2\frac{7}{32}$	31 $1\frac{1}{32}$	160 $6\frac{5}{16}$	69.5 $2\frac{47}{64}$	62 2.441	M27 1	UK312D1;H2312X UK312D1;HS2312
60 $2\frac{3}{16}$ $2\frac{1}{4}$ $2\frac{3}{8}$	UKFL313D1;H2313X UKFL313D1;HA2313 UKFL313D1;HE2313X UKFL313D1;HS2313X	295 $11\frac{5}{8}$	240 $9\frac{29}{64}$	33 $1\frac{19}{64}$	25 $3\frac{1}{32}$	58 $2\frac{9}{32}$	31 $1\frac{7}{32}$	175 $6\frac{7}{8}$	71.5 $2\frac{13}{16}$	65 2.559	M27 1	UK313D1;H2313X UK313D1;HA2313 UK313D1;HE2313X UK313D1;HS2313X

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".


2) Adapter number with suffix "X" means a narrow slot type adapter sleeve.

In this case the lock washer with the straight inner prong should be used.



3) For HE2311XY, screw thread pitch different from the standard is applied, because of the thin thread section of sleeve.

To distinguish it, a suffix "Y" is added.

4) If the inch series housing units with dust cover are ordered with a closed end, the suffixes E, S or A are not included.

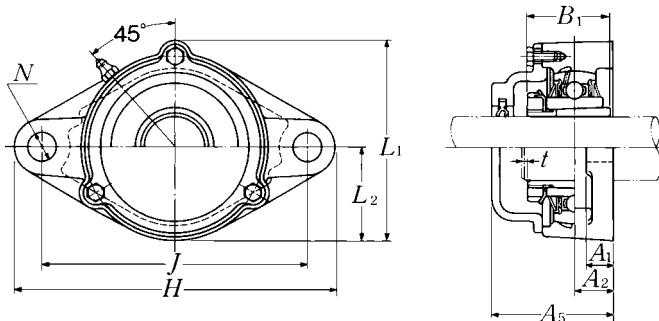**Cast dust cover type**Open end: **C-UKFL...D1**Closed end: **CM-UKFL...D1**

Housing ¹⁾ number	Unit number ^{1) 2) 3) 4)} cast dust cover type	Nominal dimensions				Mass of unit	
		t max.	A ₅	inch	L ₂	kg	lb
FL305D1	C(CM)-UKFL305D1;H2305X	2	56	86	40	1.0	1.3
FL305D1	C(CM)-UKFL305ED1;HE2305	5/64	2 7/32	3 3/8	1 9/16	2.2	2.9
FL306D1	C(CM)-UKFL306D1;H2306X	2	60	101	45	1.5	1.8
FL306D1	C(CM)-UKFL306SD1;HS2306	5/64	2 3/8	3 31/32	1 25/32	3.3	4.0
FL306D1	C(CM)-UKFL306ED1;HE2306X						
FL307D1	C(CM)-UKFL307D1;H2307X	3	68	110	50	1.8	2.2
FL307D1	C(CM)-UKFL307SD1;HS2307	1/8	2 11/16	4 11/32	1 31/32	4.0	4.9
FL308D1	C(CM)-UKFL308D1;H2308X	3	76	122	56	2.2	3.0
FL308D1	C(CM)-UKFL308ED1;HE2308X	1/8	3	4 13/16	2 7/32	4.9	6.6
FL308D1	C(CM)-UKFL308SD1;HS2308X						
FL309D1	C(CM)-UKFL309D1;H2309X	3	80	135	62	3.0	3.9
FL309D1	C(CM)-UKFL309AD1;HA2309						
FL309D1	C(CM)-UKFL309ED1;HE2309X	1/8	3 5/32	5 5/16	2 7/16	6.6	8.6
FL309D1	C(CM)-UKFL309SD1;HS2309X						
FL310D1	C(CM)-UKFL310D1;H2310X	3	88	152	70	4.1	5.1
FL310D1	C(CM)-UKFL310SD1;HS2310	1/8	3 15/32	5 31/32	2 3/4	9.0	11
FL310D1	C(CM)-UKFL310AD1;HA2310						
FL310D1	C(CM)-UKFL310ED1;HE2310X						
FL311D1	C(CM)-UKFL311D1;H2311X	4	92	162	75	4.6	6.0
FL311D1	C(CM)-UKFL311SD1;HS2311						
FL311D1	C(CM)-UKFL311AD1;HA2311	5/32	3 5/8	6 3/8	2 15/16	10	13
FL311D1	C(CM)-UKFL311ED1;HE2311XY						
FL312D1	C(CM)-UKFL312D1;H2312X	4	100	175	80	5.7	7.7
FL312D1	C(CM)-UKFL312SD1;HS2312	5/32	3 15/16	6 7/8	3 5/32	13	17
FL312D1	C(CM)-UKFL312AD1;HA2312						
FL313D1	C(CM)-UKFL313D1;H2313X	4	103	189	88	7.4	9.8
FL313D1	C(CM)-UKFL313AD1;HA2313						
FL313D1	C(CM)-UKFL313ED1;HE2313X	5/32	4 1/16	7 7/16	3 15/32	16	22
FL313D1	C(CM)-UKFL313SD1;HS2313X						

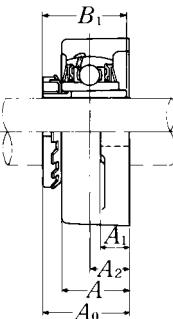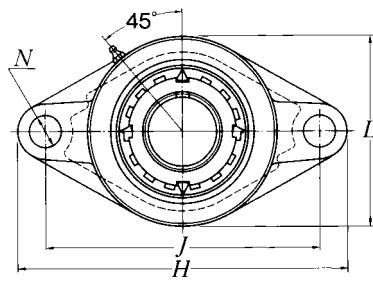Rhombus flanged units cast housing
Adapter type


Shaft dia. mm inch	Unit number ^{1) 2) 3)}	Nominal dimensions									Bolt size mm inch	Bearing number ^{2) 3)}
		mm		inch		H	J	A ₂	A ₁	A	N	L
65 $2\frac{7}{16}$ $2\frac{1}{2}$	UKFL315D1;H2315X	320	260	39	30	66	35	195	81.5	73	M30	UK315D1;H2315X
	UKFL315D1;HA2315	$12\frac{19}{32}$	$10\frac{15}{64}$	$1\frac{17}{32}$	$1\frac{3}{16}$	$2\frac{9}{32}$	$1\frac{3}{8}$	$7\frac{11}{16}$	$3\frac{13}{64}$	2.874	$1\frac{1}{8}$	UK315D1;HA2315
	UKFL315D1;HE2315X											UK315D1;HE2315X
70 $2\frac{11}{16}$ $2\frac{3}{4}$	UKFL316D1;H2316X	355	285	38	32	68	38	210	84	78	M33	UK316D1;H2316X
	UKFL316D1;HA2316	$13\frac{31}{32}$	$11\frac{7}{32}$	$1\frac{1}{2}$	$1\frac{1}{4}$	$2\frac{11}{16}$	$1\frac{1}{2}$	$8\frac{9}{32}$	$3\frac{5}{16}$	3.071	$1\frac{1}{4}$	UK316D1;HA2316
	UKFL316D1;HE2316X											UK316D1;HE2316X
75 $2\frac{15}{16}$ 3	UKFL317D1;H2317X	370	300	44	32	74	38	220	92	82	M33	UK317D1;H2317X
	UKFL317D1;HA2317X	$14\frac{9}{16}$	$11\frac{13}{16}$	$1\frac{47}{64}$	$1\frac{1}{4}$	$2\frac{29}{32}$	$1\frac{1}{2}$	$8\frac{21}{32}$	$3\frac{5}{8}$	3.228	$1\frac{1}{4}$	UK317D1;HA2317X
	UKFL317D1;HE2317X											UK317D1;HE2317X
80 $3\frac{3}{16}$	UKFL318D1;H2318X	385	315	44	36	76	38	235	94	86	M33	UK318D1;H2318X
	UKFL318D1;HA2318X	$15\frac{5}{32}$	$12\frac{13}{32}$	$1\frac{47}{64}$	$1\frac{13}{32}$	3	$1\frac{1}{2}$	$9\frac{1}{4}$	$3\frac{45}{64}$	3.386	$1\frac{1}{4}$	UK318D1;HA2318X
85 $3\frac{1}{4}$	UKFL319D1;H2319X	405	330	59	40	94	41	250	111.5	90	M36	UK319D1;H2319X
	UKFL319D1;HE2319X	$15\frac{15}{16}$	$12\frac{63}{64}$	$2\frac{21}{64}$	$1\frac{9}{16}$	$3\frac{11}{16}$	$1\frac{39}{64}$	$9\frac{27}{32}$	$4\frac{25}{64}$	3.543	$1\frac{3}{8}$	UK319D1;HE2319X
90 $3\frac{7}{16}$ $3\frac{1}{2}$	UKFL320D1;H2320X	440	360	59	40	94	44	270	115.5	97	M39	UK320D1;H2320X
	UKFL320D1;HA2320	$17\frac{5}{16}$	$14\frac{11}{64}$	$2\frac{21}{64}$	$1\frac{9}{16}$	$3\frac{11}{16}$	$1\frac{47}{64}$	$10\frac{5}{8}$	$4\frac{35}{64}$	3.819	$1\frac{1}{2}$	UK320D1;HA2320
	UKFL320D1;HE2320X											UK320D1;HE2320X
100	UKFL322D1;H2322X	470	390	60	42	96	44	300	121	105	M39	UK322D1;H2322X
110	UKFL324D1;H2324X	520	430	65	48	110	47	330	130	112	M42	UK324D1;H2324X
115	UKFL326D1;H2326	550	460	65	50	115	47	360	133	121	M42	UK326D1;H2326
125	UKFL328D1;H2328	600	500	75	60	125	51	400	146.5	131	M45	UK328D1;H2328

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

2) Adapter number with suffix "X" means a narrow slot type adapter sleeve.

In this case the lock washer with the straight inner prong should be used.


3) For HE2311XY, screw thread pitch different from the standard is applied, because of the thin thread section of sleeve.

To distinguish it, a suffix "Y" is added.


4) If the inch series housing units with dust cover are ordered with a closed end, the suffixes E, S or A are not included.

Example: CM-UKFL305D1; HE2305

Note: Please refer to page 36 for size of grease fitting.

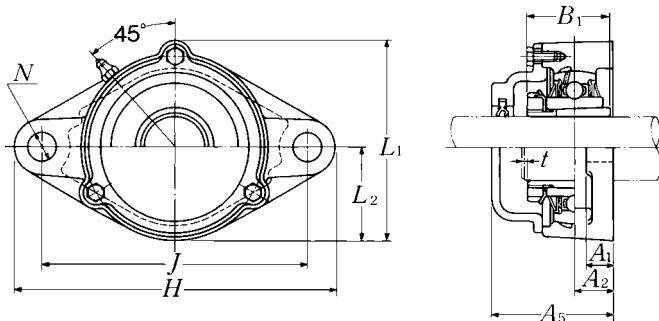**Cast dust cover type**Open end: **C-UKFL...D1**Closed end: **CM-UKFL...D1**

Housing ¹⁾ number	Unit number ^{1) 2) 3) 4)} cast dust cover type	Nominal dimensions				Mass of unit		
		t max.	A ₅	inch	L ₁	L ₂	kg	lb
UKFL	C(CM)							
FL315D1	C(CM)-UKFL315D1;H2315X	4	114	210	98		9.9	13
FL315D1	C(CM)-UKFL315AD1;HA2315	5/32	4 1/2	8 9/32	3 27/32		22	29
FL315D1	C(CM)-UKFL315ED1;HE2315X							
FL316D1	C(CM)-UKFL316D1;H2316X	4	116	222	105		13	17
FL316D1	C(CM)-UKFL316AD1;HA2316	5/32	4 9/16	8 3/4	4 1/8		29	37
FL316D1	C(CM)-UKFL316ED1;HE2316X							
FL317D1	C(CM)-UKFL317D1;H2317X	5	127	234	110		15	18
FL317D1	C(CM)-UKFL317AD1;HA2317X	13/64	5	9 7/32	4 11/32		33	40
FL317D1	C(CM)-UKFL317ED1;HE2317X							
FL318D1	C(CM)-UKFL318D1;H2318X	5	129	247	118		18	22
FL318D1	C(CM)-UKFL318AD1;HA2318X	13/64	5 3/32	9 23/32	4 21/32		40	49
FL318D1	C(CM)-UKFL318ED1;HE2318X							
FL319D1	C(CM)-UKFL319D1;H2319X	5	149	260	125		22	27
FL319D1	C(CM)-UKFL319AD1;HA2319X	13/64	5 7/8	10 1/4	4 29/32		49	60
FL319D1	C(CM)-UKFL319ED1;HE2319X							
FL320D1	C(CM)-UKFL320D1;H2320X	5	154	280	135		26	32
FL320D1	C(CM)-UKFL320AD1;HA2320	13/64	6 1/16	11 1/32	5 5/16		57	71
FL320D1	C(CM)-UKFL320ED1;HE2320X							
FL322D1	C(CM)-UKFL322D1;H2322X	5	160	315	150		34	41
FL324D1	C(CM)-UKFL324D1;H2324X	5	172	342	165		47	52
FL326D1	C(CM)-UKFL326D1;H2326	6	178	376	180		58	65
FL328D1	C(CM)-UKFL328D1;H2328	6	192	410	200		82	90

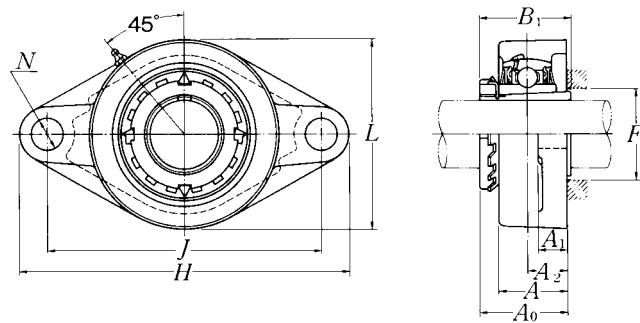Rhombus flanged units cast housing**Adapter type**

Shaft dia. mm inch	Unit number ^{1) 2)}	Nominal dimensions										Bolt size mm inch
		H	J	A ₂	A ₁	mm	inch	N	L	A ₀	B ₁	
20 $\frac{3}{4}$	UKFLX05D1;H2305X UKFLX05D1;HE2305	141 $5\frac{9}{16}$	117 $4\frac{39}{64}$	18 $\frac{45}{64}$	13 $\frac{1}{2}$	30 $1\frac{3}{16}$	12 $1\frac{15}{32}$	83 $3\frac{9}{32}$	39 $1\frac{17}{32}$	35 1.378	30 $1\frac{3}{16}$	M10 $\frac{3}{8}$
25 $\frac{7}{8}$ 1	UKFLX06D1;H2306X UKFLX06D1;HS2306 UKFLX06D1;HE2306X	156 $6\frac{5}{32}$	130 $5\frac{1}{8}$	19 $\frac{3}{4}$	15 $1\frac{19}{32}$	34 $1\frac{11}{32}$	16 $\frac{5}{8}$	95 $3\frac{3}{4}$	41.5 $1\frac{41}{64}$	38 1.496	36 $1\frac{13}{32}$	M14 $\frac{1}{2}$
30 $1\frac{1}{8}$	UKFLX07D1;H2307X UKFLX07D1;HS2307	171 $6\frac{23}{32}$	144 $5\frac{43}{64}$	21 $5\frac{3}{64}$	16 $\frac{5}{8}$	38 $1\frac{1}{2}$	16 $\frac{5}{8}$	105 $4\frac{1}{8}$	45.5 $1\frac{51}{64}$	43 1.693	40 $1\frac{9}{16}$	M14 $\frac{1}{2}$
35 $1\frac{1}{4}$ $1\frac{3}{8}$	UKFLX08D1;H2308X UKFLX08D1;HE2308X UKFLX08D1;HS2308X	179 $7\frac{1}{16}$	148 $5\frac{53}{64}$	22 $5\frac{55}{64}$	16 $\frac{5}{8}$	40 $1\frac{9}{16}$	16 $\frac{5}{8}$	111 $4\frac{3}{8}$	47.5 $1\frac{7}{8}$	46 1.811	46 $1\frac{13}{16}$	M14 $\frac{1}{2}$
40 $1\frac{7}{16}$ $1\frac{1}{2}$ $1\frac{5}{8}$	UKFLX09D1;H2309X UKFLX09D1;HA2309 UKFLX09D1;HE2309X UKFLX09D1;HS2309X	189 $7\frac{7}{16}$	157 $6\frac{3}{16}$	23 $2\frac{29}{32}$	16 $\frac{5}{8}$	40 $1\frac{9}{16}$	16 $\frac{5}{8}$	116 $4\frac{9}{16}$	50 $1\frac{31}{32}$	50 1.969	52 $2\frac{1}{16}$	M14 $\frac{1}{2}$
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UKFLX10D1;H2310X UKFLX10D1;HS2310 UKFLX10D1;HA2310 UKFLX10D1;HE2310X	216 $8\frac{1}{2}$	184 $7\frac{1}{4}$	26 $1\frac{1}{32}$	18 $2\frac{23}{32}$	44 $1\frac{23}{32}$	19 $\frac{3}{4}$	133 $5\frac{1}{4}$	55.5 $2\frac{3}{16}$	55 2.165	57 $2\frac{1}{4}$	M16 $\frac{5}{8}$

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".


2) Adapter number with suffix "X" means a narrow slot type adapter sleeve.

In this case the lock washer with the straight inner prong should be used.

3) If the inch series housing units with dust cover are ordered with a closed end, the suffixes E, S or A are not included.

Example: CM-UKFLX05D1; HE2305

Note: Please refer to page 36 for size of grease fitting.

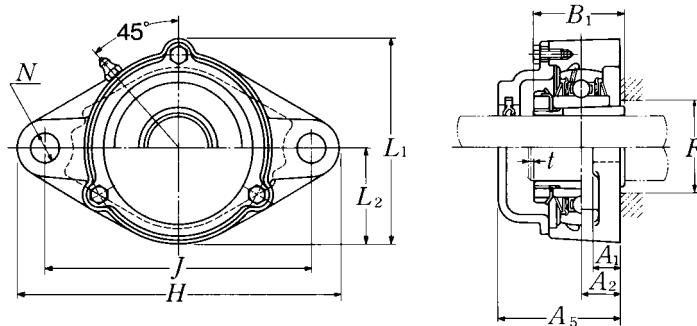


Cast dust cover type
Open end: **C-UKFLX…D1**
Closed end: **CM-UKFLX…D1**

Bearing number ²⁾	Housing ¹⁾ number	Unit number ^{1) 2) 3)} cast dust cover type	Nominal dimensions				Mass of unit	
			t max.	mm A ₅	inch L ₁	L ₂	kg UKFLX	lb C(CM)
UKX05D1;H2305X	FLX05D1	C(CM)-UKFLX05D1;H2305X	2	56	86	41.5	1.0	1.2
UKX05D1;HE2305	FLX05D1	C(CM)-UKFLX05ED1;HE2305	5/64	2 7/32	3 3/8	1 5/8	2.2	2.7
UKX06D1;H2306X	FLX06D1	C(CM)-UKFLX06D1;H2306X	2	59	98.5	49.5	1.4	1.6
UKX06D1;HS2306	FLX06D1	C(CM)-UKFLX06SD1;HS2306	5/64	2 5/16	3 7/8	11 5/16	3.1	3.5
UKX06D1;HE2306X	FLX06D1	C(CM)-UKFLX06ED1;HE2306X						
UKX07D1;H2307X	FLX07D1	C(CM)-UKFLX07D1;H2307X	3	66	108.5	52.5	1.8	2.2
UKX07D1;HS2307	FLX07D1	C(CM)-UKFLX07SD1;HS2307	1/8	2 19/32	4 9/32	2 1/16	4.0	4.9
UKX08D1;H2308X	FLX08D1	C(CM)-UKFLX08D1;H2308X	3	70	114.5	55.5	2.2	2.6
UKX08D1;HE2308X	FLX08D1	C(CM)-UKFLX08ED1;HE2308X	1/8	2 3/4	4 1/2	2 3/16	4.9	5.7
UKX08D1;HS2308X	FLX08D1	C(CM)-UKFLX08SD1;HS2308X						
UKX09D1;H2309X	FLX09D1	C(CM)-UKFLX09D1;H2309X	3	73	119.5	58	2.2	2.7
UKX09D1;HA2309	FLX09D1	C(CM)-UKFLX09AD1;HA2309						
UKX09D1;HE2309X	FLX09D1	C(CM)-UKFLX09ED1;HE2309X	1/8	2 7/8	4 23/32	2 9/32	4.9	6.0
UKX09D1;HS2309X	FLX09D1	C(CM)-UKFLX09SD1;HS2309X						
UKX10D1;H2310X	FLX10D1	C(CM)-UKFLX10D1;H2310X	3	76	133.5	66.5	3.1	3.6
UKX10D1;HS2310	FLX10D1	C(CM)-UKFLX10SD1;HS2310						
UKX10D1;HA2310	FLX10D1	C(CM)-UKFLX10AD1;HA2310	1/8	3	5 1/4	2 5/8	6.8	7.9
UKX10D1;HE2310X	FLX10D1	C(CM)-UKFLX10ED1;HE2310X						

sale@technobearing.ru
Take-up units cast housing
Adapter type

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

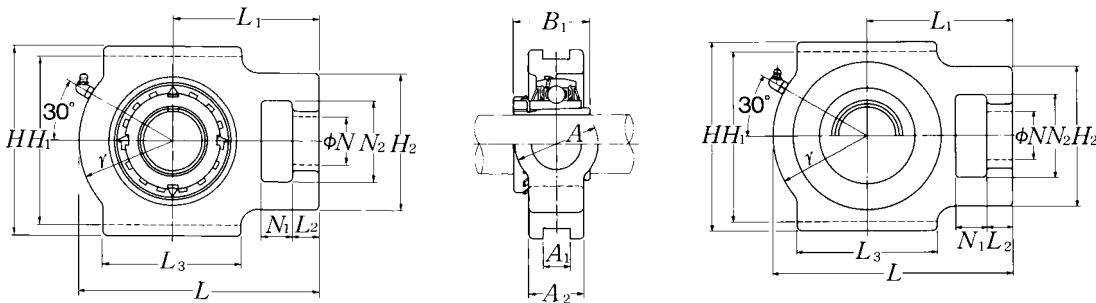**Pressed steel dust cover type**

Open end: S-UKT...D1

Closed end: SM-UKT...D1

Shaft dia. mm inch	Unit number ^{1) 2) 3)}	Nominal dimensions														Bearing number ^{2) 3)}	
		mm							inch								
		N ₁	L ₂	H ₂	N ₂	N	L ₃	A ₁	H ₁	H	L	A ₂	A	r	L ₁	B ₁	
20 $\frac{3}{4}$	UKT205D1;H2305X	16	12	51	32	19	51	12	76	89	97	24	32	35	62	35	UK205D1;H2305X
	UKT205D1;HE2305	$\frac{5}{8}$	$\frac{15}{32}$	2	$1\frac{1}{4}$	$\frac{3}{4}$	2	0.472	$2\frac{63}{64}$	$3\frac{1}{2}$	$3\frac{13}{16}$	$1\frac{15}{16}$	$1\frac{1}{4}$	$1\frac{3}{8}$	$2\frac{7}{16}$	1.378	UK205D1;HE2305
25 $\frac{7}{8}$ 1	UKT206D1;H2306X	16	12	56	37	22	57	12	89	102	113	28	37	43	70	38	UK206D1;H2306X
	UKT206D1;HS2306	$\frac{5}{8}$	$\frac{15}{32}$	$2\frac{7}{32}$	$1\frac{15}{32}$	$\frac{7}{8}$	$2\frac{1}{4}$	0.472	$3\frac{1}{2}$	$4\frac{1}{32}$	$4\frac{7}{16}$	$1\frac{1}{32}$	$1\frac{15}{32}$	$1\frac{11}{16}$	$2\frac{3}{4}$	1.496	UK206D1;HS2306
	UKT206D1;HE2306X																UK206D1;HE2306X
30 $\frac{1}{8}$	UKT207D1;H2307X	16	15	64	37	22	64	12	89	102	129	30	37	51	78	43	UK207D1;H2307X
	UKT207D1;HS2307	$\frac{5}{8}$	$\frac{19}{32}$	$2\frac{17}{32}$	$1\frac{15}{32}$	$\frac{7}{8}$	$2\frac{17}{32}$	0.472	$3\frac{1}{2}$	$4\frac{1}{32}$	$5\frac{3}{32}$	$1\frac{1}{16}$	$1\frac{15}{32}$	2	$3\frac{1}{16}$	1.693	UK207D1;HS2307
35 $\frac{1}{4}$ $\frac{3}{8}$	UKT208D1;H2308X	19	18	83	49	29	83	16	102	114	144	33	49	56	88	46	UK208D1;H2308X
	UKT208D1;HE2308X	$\frac{3}{4}$	$\frac{23}{32}$	$3\frac{9}{32}$	$1\frac{15}{16}$	$1\frac{5}{32}$	$3\frac{9}{32}$	0.630	$4\frac{1}{64}$	$4\frac{1}{2}$	$5\frac{21}{32}$	$1\frac{1}{16}$	$1\frac{15}{16}$	$2\frac{7}{32}$	$3\frac{15}{32}$	1.811	UK208D1;HE2308X
	UKT208D1;HS2308X																UK208D1;HS2308X
40 $\frac{1}{2}$ $\frac{5}{8}$	UKT209D1;H2309X	19	18	83	49	29	83	16	102	117	145	35	49	57	88	50	UK209D1;H2309X
	UKT209D1;HA2309	$\frac{3}{4}$	$\frac{23}{32}$	$3\frac{9}{32}$	$1\frac{15}{16}$	$1\frac{5}{32}$	$3\frac{9}{32}$	0.630	$4\frac{1}{64}$	$4\frac{19}{32}$	$5\frac{23}{32}$	$1\frac{3}{8}$	$1\frac{15}{16}$	$2\frac{1}{4}$	$3\frac{15}{32}$	1.969	UK209D1;HA2309
	UKT209D1;HE2309X																UK209D1;HE2309X
	UKT209D1;HS2309X																UK209D1;HS2309X
45 $\frac{1}{8}$ $\frac{11}{16}$ $\frac{3}{4}$	UKT210D1;H2310X	19	18	83	49	29	86	16	102	117	151	37	49	59	92	55	UK210D1;H2310X
	UKT210D1;HS2310	$\frac{3}{4}$	$\frac{23}{32}$	$3\frac{9}{32}$	$1\frac{15}{16}$	$1\frac{5}{32}$	$3\frac{3}{8}$	0.630	$4\frac{1}{64}$	$4\frac{19}{32}$	$5\frac{15}{16}$	$1\frac{15}{32}$	$1\frac{15}{16}$	$2\frac{5}{16}$	$3\frac{5}{8}$	2.165	UK210D1;HS2310
	UKT210D1;HA2310																UK210D1;HA2310
	UKT210D1;HE2310X																UK210D1;HE2310X
50 $\frac{1}{2}$ $\frac{15}{16}$ 2	UKT211D1;H2311X	25	21	102	64	35	95	22	130	146	171	38	64	65	106	59	UK211D1;H2311X
	UKT211D1;HS2311	$\frac{31}{32}$	$\frac{13}{16}$	$4\frac{1}{32}$	$2\frac{17}{32}$	$1\frac{3}{8}$	$3\frac{3}{4}$	0.866	$5\frac{1}{8}$	$5\frac{3}{4}$	$6\frac{23}{32}$	$1\frac{1}{2}$	$2\frac{17}{32}$	$2\frac{9}{16}$	$4\frac{3}{16}$	2.323	UK211D1;HS2311
	UKT211D1;HA2311																UK211D1;HA2311
	UKT211D1;HE2311XY																UK211D1;HE2311XY
55 $\frac{1}{2}$	UKT212D1;H2312X	32	21	102	64	35	102	22	130	146	194	42	64	75	119	62	UK212D1;H2312X
	UKT212D1;HS2312	$1\frac{1}{4}$	$\frac{13}{16}$	$4\frac{1}{32}$	$2\frac{17}{32}$	$1\frac{3}{8}$	$4\frac{1}{32}$	0.866	$5\frac{1}{8}$	$5\frac{3}{4}$	$7\frac{5}{8}$	$1\frac{1}{2}$	$2\frac{17}{32}$	$2\frac{15}{16}$	$4\frac{11}{16}$	2.441	UK212D1;HS2312
60 $\frac{2}{3}$ $\frac{5}{8}$	UKT213D1;H2313X	32	23	111	70	41	121	26	151	167	224	44	70	87	137	65	UK213D1;H2313X
	UKT213D1;HA2313	$1\frac{1}{4}$	$\frac{29}{32}$	$4\frac{3}{8}$	$2\frac{3}{4}$	$1\frac{5}{8}$	$4\frac{3}{4}$	1.024	$5\frac{15}{16}$	$6\frac{9}{16}$	$8\frac{13}{16}$	$1\frac{23}{32}$	$2\frac{3}{4}$	$3\frac{7}{16}$	$5\frac{13}{32}$	2.559	UK213D1;HA2313
	UKT213D1;HE2313X																UK213D1;HE2313X
	UKT213D1;HS2313X																UK213D1;HS2313X

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".




2) Adapter number with suffix "X" means a narrow slot type adapter sleeve.

In this case the lock washer with the straight inner prong should be used.

3) For HE2311XY, screw thread pitch different from the standard is applied, because of the thin thread section of sleeve.

To distinguish it, a suffix "Y" is added.

Note: Please refer to page 36 for size of grease fitting.

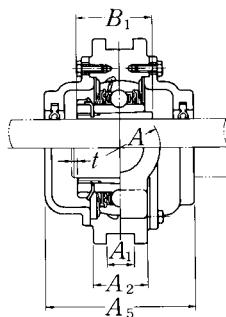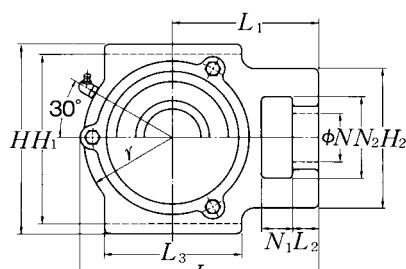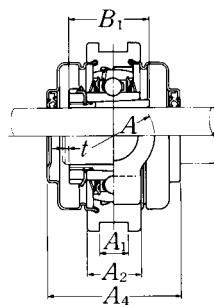
**Cast dust cover type**Open end: **C-UKT…D1**Closed end: **CM-UKT…D1**

Housing ¹⁾ number	Unit number ^{1) 2) 3)} pressed steel dust cover type	Unit number ^{1) 2) 3)} cast dust cover type	Nominal dimensions				Mass of unit		
			t max.	A ₄	L ₄	A ₅	kg	lb	
							UKT	S(SM)	C(CM)
T205D1	S(SM)-UKT205D1;H2305X	C(CM)-UKT205D1;H2305X	2	57	100.5	70	0.9	0.9	1.2
T205D1	S(SM)-UKT205ED1;HE2305	C(CM)-UKT205ED1;HE2305	5/64	2 1/4	3 31/32	2 3/4	2.0	2.0	2.7
T206D1	S(SM)-UKT206D1;H2306X	C(CM)-UKT206D1;H2306X	2	62	113.5	75	1.3	1.4	1.8
T206D1	S(SM)-UKT206SD1;HS2306	C(CM)-UKT206SD1;HS2306	5/64	2 7/16	4 15/32	2 15/16	2.9	3.1	4.0
T206D1	S(SM)-UKT206ED1;HE2306X	C(CM)-UKT206ED1;HE2306X							
T207D1	S(SM)-UKT207D1;H2307X	C(CM)-UKT207D1;H2307X	3	72	129	80	1.7	1.8	2.2
T207D1	S(SM)-UKT207SD1;HS2307	C(CM)-UKT207SD1;HS2307	1/8	2 27/32	5 3/32	3 5/32	3.8	4.0	4.9
T208D1	S(SM)-UKT208D1;H2308X	C(CM)-UKT208D1;H2308X	3	82	144	90	2.5	2.6	3.3
T208D1	S(SM)-UKT208ED1;HE2308X	C(CM)-UKT208ED1;HE2308X	1/8	3 7/32	5 21/32	3 17/32	5.5	5.7	7.3
T208D1	S(SM)-UKT208SD1;HS2308X	C(CM)-UKT208SD1;HS2308X							
T209D1	S(SM)-UKT209D1;H2309X	C(CM)-UKT209D1;H2309X	3	82	145.5	95	2.5	2.6	3.5
T209D1	S(SM)-UKT209AD1;HA2309	C(CM)-UKT209AD1;HA2309							
T209D1	S(SM)-UKT209ED1;HE2309X	C(CM)-UKT209ED1;HE2309X	1/8	3 7/32	5 23/32	3 3/4	5.5	5.7	7.7
T209D1	S(SM)-UKT209SD1;HS2309X	C(CM)-UKT209SD1;HS2309X							
T210D1	S(SM)-UKT210D1;H2310X	C(CM)-UKT210D1;H2310X	3	87	152	100	2.7	2.8	3.8
T210D1	S(SM)-UKT210SD1;HS2310	C(CM)-UKT210SD1;HS2310	1/8	3 7/16	5 31/32	3 15/16	6.0	6.2	8.4
T210D1	S(SM)-UKT210AD1;HA2310	C(CM)-UKT210AD1;HA2310							
T210D1	S(SM)-UKT210ED1;HE2310X	C(CM)-UKT210ED1;HE2310X							
T211D1	S(SM)-UKT211D1;H2311X	C(CM)-UKT211D1;H2311X	4	92	171.5	100	4.1	4.3	5.3
T211D1	S(SM)-UKT211SD1;HS2311	C(CM)-UKT211SD1;HS2311	5/32	3 5/8	6 3/4	3 15/16	9.0	9.5	12
T211D1	S(SM)-UKT211AD1;HA2311	C(CM)-UKT211AD1;HA2311							
T211D1	S(SM)-UKT211ED1;HE2311XY	C(CM)-UKT211ED1;HE2311XY							
T212D1	S(SM)-UKT212D1;H2312X	C(CM)-UKT212D1;H2312X	4	102	194	115	4.9	5.2	6.3
T212D1	S(SM)-UKT212SD1;HS2312	C(CM)-UKT212SD1;HS2312	5/32	4 1/32	7 5/8	4 17/32	11	11	14
T213D1	S(SM)-UKT213D1;H2313X	C(CM)-UKT213D1;H2313X	4	107	224	120	7.1	7.4	8.8
T213D1	S(SM)-UKT213AD1;HA2313	C(CM)-UKT213AD1;HA2313	5/32	4 7/32	8 13/16	4 23/32	16	16	19
T213D1	S(SM)-UKT213ED1;HE2313X	C(CM)-UKT213ED1;HE2313X							
T213D1	S(SM)-UKT213SD1;HS2313X	C(CM)-UKT213SD1;HS2313X							

sale@technobearing.ru
Take-up units cast housing
Adapter type

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

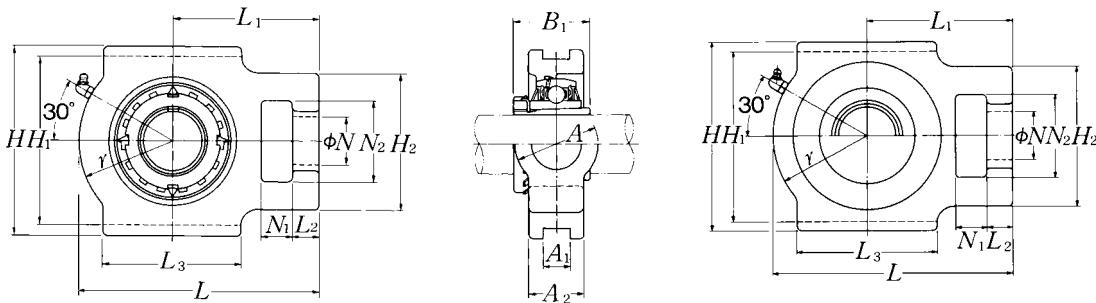

Pressed steel dust cover type

Open end: **S-UKT…D1**

Closed end: **SM-UKT…D1**

Shaft dia. mm inch	Unit number ^{1) 2) 3)}	Nominal dimensions														Bearing number ^{2) 3)}	
		mm							inch								
		N ₁	L ₂	H ₂	N ₂	N	L ₃	A ₁	H ₁	H	L	A ₂	A	r	L ₁	B ₁	
65 2 $\frac{7}{16}$ 2 $\frac{1}{2}$	UKT215D1;H2315X	32	23	111	70	41	121	26	151	167	232	48	70	92	140	73	UK215D1;H2315X
	UKT215D1;HA2315	1 $\frac{1}{4}$ 2 $\frac{29}{32}$	4 $\frac{3}{8}$	2 $\frac{3}{4}$	1 $\frac{5}{8}$	4 $\frac{3}{4}$	1.024	5 $\frac{15}{16}$	6 $\frac{9}{16}$	9 $\frac{1}{8}$	1 $\frac{7}{8}$	2 $\frac{3}{4}$	3 $\frac{5}{8}$	5 $\frac{1}{2}$	2.874	UK215D1;HA2315	
	UKT215D1;HE2315X															UK215D1;HE2315X	
70 2 $\frac{11}{16}$ 2 $\frac{3}{4}$	UKT216D1;H2316X	32	23	111	70	41	121	26	165	184	235	51	70	95	140	78	UK216D1;H2316X
	UKT216D1;HA2316	1 $\frac{1}{4}$ 2 $\frac{29}{32}$	4 $\frac{3}{8}$	2 $\frac{3}{4}$	1 $\frac{5}{8}$	4 $\frac{3}{4}$	1.024	6 $\frac{1}{2}$	7 $\frac{1}{4}$	9 $\frac{1}{4}$	2	2 $\frac{3}{4}$	3 $\frac{3}{4}$	5 $\frac{1}{2}$	3.071	UK216D1;HA2316	
	UKT216D1;HE2316X															UK216D1;HE2316X	
75 2 $\frac{15}{16}$ 3	UKT217D1;H2317X	38	31	124	73	48	157	30	173	198	260	54	73	98	162	82	UK217D1;H2317X
	UKT217D1;HA2317X	1 $\frac{1}{2}$ 1 $\frac{7}{32}$	4 $\frac{7}{8}$	2 $\frac{7}{8}$	1 $\frac{7}{8}$	6 $\frac{3}{16}$	1.181	6 $\frac{13}{16}$	7 $\frac{25}{32}$	10 $\frac{1}{4}$	2 $\frac{1}{8}$	2 $\frac{7}{8}$	3 $\frac{27}{32}$	6 $\frac{3}{8}$	3.228	UK217D1;HA2317X	
	UKT217D1;HE2317X															UK217D1;HE2317X	

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".




2) Adapter number with suffix "X" means a narrow slot type adapter sleeve.

In this case the lock washer with the straight inner prong should be used.


3) For HE2311XY, screw thread pitch different from the standard is applied, because of the thin thread section of sleeve.

To distinguish it, a suffix "Y" is added.

Note: Please refer to page 36 for size of grease fitting.

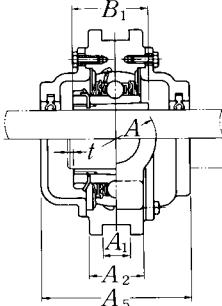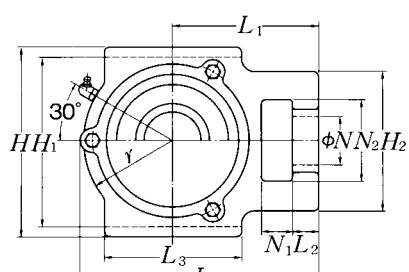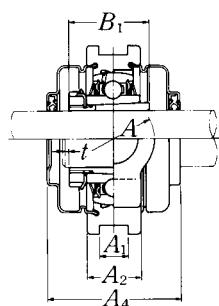**Cast dust cover type**Open end: **C-UKT···D1**Closed end: **CM-UKT···D1**

Housing ¹⁾ number	Unit number ^{1) 2) 3)} pressed steel dust cover type	Unit number ^{1) 2) 3)} cast dust cover type	Nominal dimensions			Mass of unit			
			t max.	A ₄	L ₄	A ₅	kg	lb	
UKT	S(SM)	C(CM)							
T215D1	—	C(CM)-UKT215D1;H2315X	4	—	232	135	7.7	—	10
T215D1	—	C(CM)-UKT215AD1;HA2315	5/32	—	9 1/8	5 5/16	17	—	22
T215D1	—	C(CM)-UKT215ED1;HE2315X							
T216D1	—	C(CM)-UKT216D1;H2316X	4	—	235	145	8.7	—	12
T216D1	—	C(CM)-UKT216AD1;HA2316	5/32	—	9 1/4	5 23/32	19	—	26
T216D1	—	C(CM)-UKT216ED1;HE2316X							
T217D1	—	C(CM)-UKT217D1;H2317X	5	—	260	155	11	—	15
T217D1	—	C(CM)-UKT217AD1;HA2317X	13/64	—	10 1/4	6 3/32	24	—	33
T217D1	—	C(CM)-UKT217ED1;HE2317X							

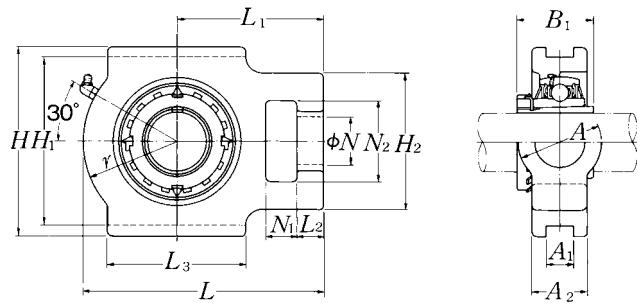

Shaft dia. mm inch	Unit number ^{1) 2) 3)}	Nominal dimensions														
		mm							inch							
		N ₁	L ₂	H ₂	N ₂	N	L ₃	A ₁	H ₁	H	L	A ₂	A	r	L ₁	B ₁
20 $\frac{3}{4}$	UKT305D1;H2305X UKT305D1;HE2305	16 $\frac{5}{8}$	14 $\frac{9}{16}$	62 $2\frac{7}{16}$	36 $1\frac{13}{32}$	26 $1\frac{1}{32}$	65 $2\frac{9}{16}$	12 0.472	80 $3\frac{5}{32}$	89 $3\frac{1}{2}$	122 $4\frac{13}{16}$	26 $1\frac{1}{32}$	36 $1\frac{13}{32}$	46 $1\frac{13}{16}$	76 3	35 1.378
25 $\frac{7}{8}$ 1	UKT306D1;H2306X UKT306D1;HS2306 UKT306D1;HE2306X	18 $2\frac{3}{32}$	16 $\frac{5}{8}$	70 $2\frac{3}{4}$	41 $1\frac{5}{8}$	28 $1\frac{3}{32}$	74 $2\frac{29}{32}$	16 0.630	90 $3\frac{35}{64}$	100 $3\frac{15}{16}$	137 $5\frac{13}{32}$	28 $1\frac{3}{32}$	41 $1\frac{5}{8}$	52 $2\frac{1}{16}$	85 $3\frac{1}{32}$	38 1.496
30 $1\frac{1}{8}$	UKT307D1;H2307X UKT307D1;HS2307	20 $2\frac{5}{32}$	17 $2\frac{15}{16}$	75 $2\frac{1}{16}$	45 $1\frac{25}{32}$	30 $1\frac{3}{16}$	80 $3\frac{5}{32}$	16 0.630	100 $3\frac{15}{16}$	111 $4\frac{3}{8}$	150 $5\frac{29}{32}$	32 $1\frac{1}{4}$	45 $1\frac{25}{32}$	56 $2\frac{7}{32}$	94 $3\frac{1}{16}$	43 1.693
35 $1\frac{1}{4}$ $1\frac{3}{8}$	UKT308D1;H2308X UKT308D1;HE2308X UKT308D1;HS2308X	22 $\frac{7}{8}$	19 $\frac{3}{4}$	83 $3\frac{9}{32}$	50 $1\frac{31}{32}$	32 $1\frac{1}{4}$	89 $3\frac{1}{2}$	18 0.709	112 $4\frac{13}{32}$	124 $4\frac{7}{8}$	162 $6\frac{3}{8}$	34 $1\frac{11}{32}$	50 $1\frac{31}{32}$	62 $2\frac{7}{16}$	100 $3\frac{15}{16}$	46 1.811
40 $1\frac{7}{16}$ $1\frac{1}{2}$ $1\frac{5}{8}$	UKT309D1;H2309X UKT309D1;HA2309 UKT309D1;HE2309X UKT309D1;HS2309X	24 $1\frac{15}{16}$	20 $2\frac{25}{32}$	90 $3\frac{17}{32}$	55 $2\frac{5}{32}$	34 $1\frac{11}{32}$	97 $3\frac{13}{16}$	18 0.709	125 $4\frac{59}{64}$	138 $5\frac{7}{16}$	178 7	38 $1\frac{1}{2}$	55 $2\frac{5}{32}$	68 $2\frac{11}{16}$	110 $4\frac{11}{32}$	50 1.969
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UKT310D1;H2310X UKT310D1;HS2310 UKT310D1;HA2310 UKT310D1;HE2310X	27 $1\frac{1}{16}$	22 $\frac{7}{8}$	98 $3\frac{27}{32}$	61 $2\frac{13}{32}$	37 $1\frac{15}{32}$	106 $4\frac{3}{16}$	20 0.787	140 $5\frac{33}{64}$	151 $5\frac{15}{16}$	192 $7\frac{9}{16}$	40 $1\frac{9}{16}$	61 $2\frac{13}{32}$	74 $2\frac{29}{32}$	118 $4\frac{21}{32}$	55 2.165
50 $1\frac{7}{8}$ $1\frac{15}{16}$ 2	UKT311D1;H2311X UKT311D1;HS2311 UKT311D1;HA2311 UKT311D1;HE2311XY	29 $1\frac{5}{32}$	23 $2\frac{29}{32}$	105 $4\frac{1}{8}$	66 $2\frac{19}{32}$	39 $1\frac{17}{32}$	115 $4\frac{17}{32}$	22 0.866	150 $5\frac{29}{32}$	163 $6\frac{13}{32}$	207 $8\frac{5}{32}$	44 $1\frac{23}{32}$	66 $2\frac{19}{32}$	80 $3\frac{5}{32}$	127 5	59 2.323
55 $2\frac{1}{8}$	UKT312D1;H2312X UKT312D1;HS2312	31 $1\frac{7}{32}$	25 $3\frac{1}{32}$	113 $4\frac{7}{16}$	71 $2\frac{25}{32}$	41 $1\frac{5}{8}$	123 $4\frac{27}{32}$	22 0.866	160 $6\frac{19}{64}$	178 7	220 $8\frac{21}{32}$	46 $1\frac{13}{16}$	71 $2\frac{25}{32}$	85 $3\frac{11}{32}$	135 $5\frac{5}{16}$	62 2.441
60 $2\frac{3}{16}$ $2\frac{1}{4}$ $2\frac{3}{8}$	UKT313D1;H2313X UKT313D1;HA2313 UKT313D1;HE2313X UKT313D1;HS2313X	32 $1\frac{1}{4}$	27 $1\frac{1}{16}$	116 $4\frac{9}{16}$	70 $2\frac{3}{4}$	43 $1\frac{11}{16}$	134 $5\frac{9}{32}$	26 1.024	170 $6\frac{11}{16}$	190 $7\frac{15}{32}$	238 $9\frac{3}{8}$	50 $1\frac{31}{32}$	80 $3\frac{5}{32}$	92 $3\frac{5}{8}$	146 $5\frac{3}{4}$	65 2.559

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".


2) Adapter number with suffix "X" means a narrow slot type adapter sleeve.

In this case the lock washer with the straight inner prong should be used.


3) For HE2311XY, screw thread pitch different from the standard is applied, because of the thin thread section of sleeve.

To distinguish it, a suffix "Y" is added.

Note: Please refer to page 36 for size of grease fitting.

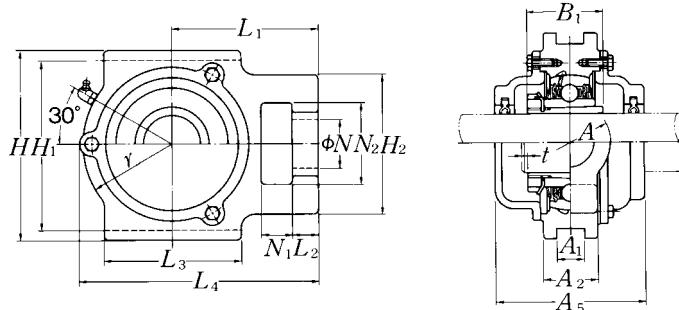**Cast dust cover type**Open end: **C-UKT…D1**Closed end: **CM-UKT…D1**

Bearing number ^{2) 3)}	Housing ¹⁾ number	Unit number ^{1) 2) 3)} cast dust cover type	Nominal dimensions			Mass of unit	
			t max.	mm inch	A ₅	kg UKT	lb C(CM)
UK305D1;H2305X	T305D1	C(CM)-UKT305D1;H2305X	2 5/64	122 4 13/16	80 3 5/32	1.4	1.9
UK305D1;HE2305	T305D1	C(CM)-UKT305ED1;HE2305				3.1	4.2
UK306D1;H2306X	T306D1	C(CM)-UKT306D1;H2306X	2	139	85	1.8	2.5
UK306D1;HS2306	T306D1	C(CM)-UKT306SD1;HS2306	5/64	5 31/32	3 11/32	4.0	5.5
UK306D1;HE2306X	T306D1	C(CM)-UKT306ED1;HE2306X					
UK307D1;H2307X	T307D1	C(CM)-UKT307D1;H2307X	3 1/8	152 5 31/32	95 3 3/4	2.4	3.3
UK307D1;HS2307	T307D1	C(CM)-UKT307SD1;HS2307				5.3	7.3
UK308D1;H2308X	T308D1	C(CM)-UKT308D1;H2308X	3 1/8	164 6 15/32	105 4 1/8	3.0	4.3
UK308D1;HE2308X	T308D1	C(CM)-UKT308ED1;HE2308X				6.6	9.5
UK308D1;HS2308X	T308D1	C(CM)-UKT308SD1;HS2308X					
UK309D1;H2309X	T309D1	C(CM)-UKT309D1;H2309X	3	181	110	4.0	5.6
UK309D1;HA2309	T309D1	C(CM)-UKT309AD1;HA2309					
UK309D1;HE2309X	T309D1	C(CM)-UKT309ED1;HE2309X	1/8	7 1/8	4 11/32	8.8	12
UK309D1;HS2309X	T309D1	C(CM)-UKT309SD1;HS2309X					
UK310D1;H2310X	T310D1	C(CM)-UKT310D1;H2310X	3	197	120	5.1	7.1
UK310D1;HS2310	T310D1	C(CM)-UKT310SD1;HS2310					
UK310D1;HA2310	T310D1	C(CM)-UKT310AD1;HA2310	1/8	7 3/4	4 23/32	11	16
UK310D1;HE2310X	T310D1	C(CM)-UKT310ED1;HE2310X					
UK311D1;H2311X	T311D1	C(CM)-UKT311D1;H2311X	4	211	125	6.3	8.6
UK311D1;HS2311	T311D1	C(CM)-UKT311SD1;HS2311					
UK311D1;HA2311	T311D1	C(CM)-UKT311AD1;HA2311	5/32	8 5/16	4 29/32	14	19
UK311D1;HE2311XY	T311D1	C(CM)-UKT311ED1;HE2311XY					
UK312D1;H2312X	T312D1	C(CM)-UKT312D1;H2312X	4 5/32	227 8 15/16	135 5 5/16	7.6	10
UK312D1;HS2312	T312D1	C(CM)-UKT312SD1;HS2312				17	22
UK313D1;H2313X	T313D1	C(CM)-UKT313D1;H2313X	4	244	140	9.2	12
UK313D1;HA2313	T313D1	C(CM)-UKT313AD1;HA2313					
UK313D1;HE2313X	T313D1	C(CM)-UKT313ED1;HE2313X	5/32	9 19/32	5 1/2	20	26
UK313D1;HS2313X	T313D1	C(CM)-UKT313SD1;HS2313X					

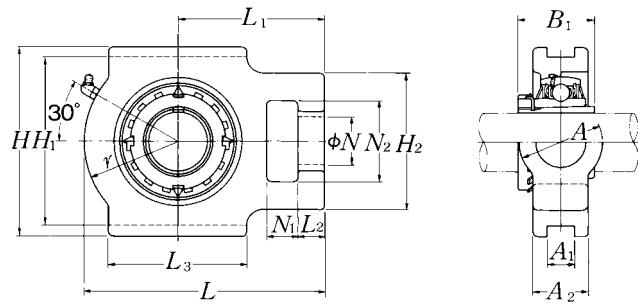

Shaft dia. mm inch	Unit number ^{1) 2) 3)}	Nominal dimensions														
		mm							inch							
		N ₁	L ₂	H ₂	N ₂	N	L ₃	A ₁	H ₁	H	L	A ₂	A	r	L ₁	B ₁
65 $2\frac{7}{16}$ $2\frac{1}{2}$	UKT315D1;H2315X	36	27	132	85	46	150	26	192	216	262	55	90	102	160	73
	UKT315D1;HA2315	$1\frac{13}{32}$	$1\frac{1}{16}$	$5\frac{3}{16}$	$3\frac{11}{32}$	$1\frac{13}{16}$	$5\frac{29}{32}$	1.024	$7\frac{9}{16}$	$8\frac{1}{2}$	$10\frac{5}{16}$	$2\frac{5}{32}$	$3\frac{17}{32}$	$4\frac{1}{32}$	$6\frac{5}{16}$	2.874
	UKT315D1;HE2315X															
70 $2\frac{11}{16}$ $2\frac{3}{4}$	UKT316D1;H2316X	42	30	150	98	53	160	30	204	230	282	60	102	108	174	78
	UKT316D1;HA2316	$1\frac{21}{32}$	$1\frac{3}{16}$	$5\frac{29}{32}$	$3\frac{27}{32}$	$2\frac{3}{32}$	$6\frac{5}{16}$	1.181	$8\frac{1}{32}$	$9\frac{1}{16}$	$11\frac{3}{32}$	$2\frac{3}{8}$	$4\frac{1}{32}$	$4\frac{1}{4}$	$6\frac{27}{32}$	3.071
	UKT316D1;HE2316X															
75 $2\frac{15}{16}$ 3	UKT317D1;H2317X	42	32	152	98	53	170	32	214	240	298	64	102	115	183	82
	UKT317D1;HA2317X	$1\frac{21}{32}$	$1\frac{1}{4}$	$5\frac{31}{32}$	$3\frac{27}{32}$	$2\frac{3}{32}$	$6\frac{11}{16}$	1.260	$8\frac{27}{64}$	$9\frac{7}{16}$	$11\frac{23}{32}$	$2\frac{17}{32}$	$4\frac{1}{32}$	$4\frac{17}{32}$	$7\frac{7}{32}$	3.228
	UKT317D1;HE2317X															
80 $3\frac{3}{16}$	UKT318D1;H2318X	46	32	160	106	57	175	32	228	255	312	66	110	120	192	86
	UKT318D1;HA2318X	$1\frac{13}{16}$	$1\frac{1}{4}$	$6\frac{5}{16}$	$4\frac{3}{16}$	$2\frac{1}{4}$	$6\frac{7}{8}$	1.260	$8\frac{31}{32}$	$10\frac{1}{32}$	$12\frac{9}{32}$	$2\frac{19}{32}$	$4\frac{11}{32}$	$4\frac{23}{32}$	$7\frac{9}{16}$	3.386
85 $3\frac{1}{4}$	UKT319D1;H2319X	46	33	165	106	57	180	35	240	270	322	72	110	125	197	90
	UKT319D1;HE2319X	$1\frac{13}{16}$	$1\frac{5}{16}$	$6\frac{1}{2}$	$4\frac{3}{16}$	$2\frac{1}{4}$	$7\frac{3}{32}$	1.378	$9\frac{29}{64}$	$10\frac{5}{8}$	$12\frac{11}{16}$	$2\frac{27}{32}$	$4\frac{11}{32}$	$4\frac{29}{32}$	$7\frac{3}{4}$	3.543
90 $3\frac{7}{16}$ $3\frac{1}{2}$	UKT320D1;H2320X	48	34	175	115	59	200	35	260	290	345	75	120	135	210	97
	UKT320D1;HA2320	$1\frac{7}{8}$	$1\frac{11}{32}$	$6\frac{7}{8}$	$4\frac{17}{32}$	$2\frac{5}{16}$	$7\frac{7}{8}$	1.378	$10\frac{15}{64}$	$11\frac{13}{32}$	$13\frac{19}{32}$	$2\frac{15}{16}$	$4\frac{23}{32}$	$5\frac{5}{16}$	$8\frac{9}{32}$	3.819
	UKT320D1;HE2320X															
100	UKT322D1;H2322X	52	40	185	125	65	215	38	285	320	385	80	130	150	235	105
110	UKT324D1;H2324X	60	44	210	140	70	230	45	320	355	432	90	140	165	267	112
115	UKT326D1;H2326	65	47	220	150	75	240	50	350	385	465	100	150	180	285	121
125	UKT328D1;H2328	70	52	230	160	80	255	50	380	415	515	100	155	200	315	131

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".


2) Adapter number with suffix "X" means a narrow slot type adapter sleeve.

In this case the lock washer with the straight inner prong should be used.


3) For HE2311XY, screw thread pitch different from the standard is applied, because of the thin thread section of sleeve.

To distinguish it, a suffix "Y" is added.

Note: Please refer to page 36 for size of grease fitting.

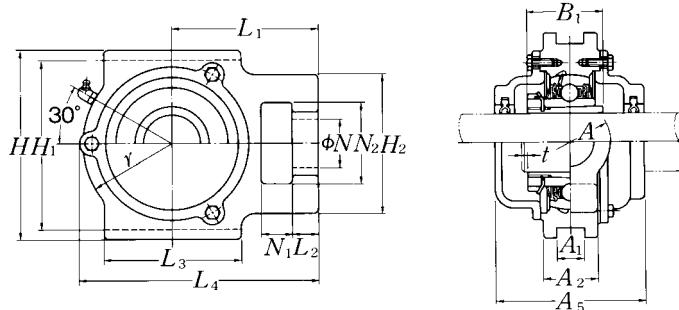**Cast dust cover type**Open end: **C-UKT…D1**Closed end: **CM-UKT…D1**

Bearing number ^{2) 3)}	Housing ¹⁾ number	Unit number ^{1) 2) 3)} cast dust cover type	Nominal dimensions			Mass of unit	
			t max.	mm L ₄	inch A ₅	kg UKT	lb C(CM)
UK315D1;H2315X	T315D1	C(CM)-UKT315D1;H2315X	4	268	150	13	17
UK315D1;HA2315	T315D1	C(CM)-UKT315AD1;HA2315	5/32	10 ⁹ / ₁₆	5 ²⁹ / ₃₂	29	37
UK315D1;HE2315X	T315D1	C(CM)-UKT315ED1;HE2315X					
UK316D1;H2316X	T316D1	C(CM)-UKT316D1;H2316X	4	287	155	16	21
UK316D1;HA2316	T316D1	C(CM)-UKT316AD1;HA2316	5/32	11 ⁵ / ₁₆	6 ³ / ₃₂	35	46
UK316D1;HE2316X	T316D1	C(CM)-UKT316ED1;HE2316X					
UK317D1;H2317X	T317D1	C(CM)-UKT317D1;H2317X	5	303	170	19	25
UK317D1;HA2317X	T317D1	C(CM)-UKT317AD1;HA2317X	13/64	11 ¹⁵ / ₁₆	6 ¹¹ / ₁₆	42	55
UK317D1;HE2317X	T317D1	C(CM)-UKT317ED1;HE2317X					
UK318D1;H2318X	T318D1	C(CM)-UKT318D1;H2318X	5	317	170	21	28
UK318D1;HA2318X	T318D1	C(CM)-UKT318AD1;HA2318X	13/64	12 ¹⁵ / ₃₂	6 ¹¹ / ₁₆	46	62
UK319D1;H2319X	T319D1	C(CM)-UKT319D1;H2319X	5	327	180	25	32
UK319D1;HE2319X	T319D1	C(CM)-UKT319ED1;HE2319X	13/64	12 ⁷ / ₈	7 ³ / ₃₂	55	71
UK320D1;H2320X	T320D1	C(CM)-UKT320D1;H2320X	5	350	190	30	39
UK320D1;HA2320	T320D1	C(CM)-UKT320AD1;HA2320	13/64	13 ²⁵ / ₃₂	7 ¹⁵ / ₃₂	66	86
UK320D1;HE2320X	T320D1	C(CM)-UKT320ED1;HE2320X					
UK322D1;H2322X	T322D1	C(CM)-UKT322D1;H2322X	5	395	200	40	51
UK324D1;H2324X	T324D1	C(CM)-UKT324D1;H2324X	5	439	215	43	69
UK326D1;H2326	T326D1	C(CM)-UKT326D1;H2326	6	476	225	69	85
UK328D1;H2328	T328D1	C(CM)-UKT328D1;H2328	6	519	235	88	107

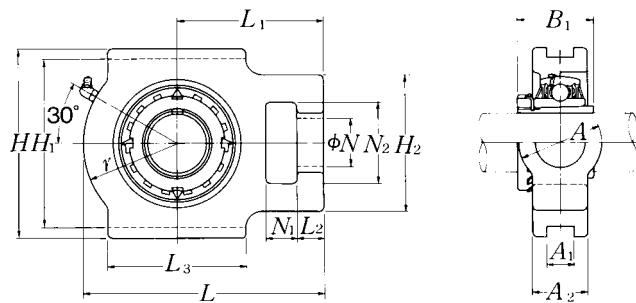

Shaft dia. mm inch	Unit number ^{1) 2) 3)}	Nominal dimensions														
		mm							inch							
		N ₁	L ₂	H ₂	N ₂	N	L ₃	A ₁	H ₁	H	L	A ₂	A	r	L ₁	B ₁
20 $\frac{3}{4}$	UKTX05D1;H2305X UKTX05D1;HE2305	16 $\frac{5}{8}$	12 $\frac{15}{32}$	56 $2\frac{7}{32}$	37 $1\frac{15}{32}$	22 $\frac{7}{8}$	57 $2\frac{1}{4}$	12 0.472	89 $3\frac{1}{2}$	102 $4\frac{1}{32}$	113 $4\frac{7}{16}$	28 $1\frac{3}{32}$	37 $1\frac{15}{32}$	43 $1\frac{11}{16}$	70 $2\frac{3}{4}$	35 1.378
25 $\frac{7}{8}$ 1	UKTX06D1;H2306X UKTX06D1;HS2306 UKTX06D1;HE2306X	16 $\frac{5}{8}$	15 $1\frac{9}{32}$	64 $2\frac{17}{32}$	37 $1\frac{15}{32}$	22 $\frac{7}{8}$	64 $2\frac{17}{32}$	12 0.472	89 $3\frac{1}{2}$	102 $4\frac{1}{32}$	129 $5\frac{3}{32}$	30 $1\frac{3}{16}$	37 $1\frac{15}{32}$	51 2	78 $3\frac{1}{16}$	38 1.496
30 $1\frac{1}{8}$	UKTX07D1;H2307X UKTX07D1;HS2307	19 $\frac{3}{4}$	17 $2\frac{1}{32}$	83 $3\frac{9}{32}$	49 $1\frac{15}{16}$	29 $1\frac{5}{32}$	83 $3\frac{9}{32}$	16 0.630	102 $4\frac{1}{64}$	114 $4\frac{1}{2}$	144 $5\frac{21}{32}$	36 $1\frac{13}{32}$	49 $1\frac{15}{16}$	56 $2\frac{7}{32}$	88 $3\frac{15}{32}$	43 1.693
35 $1\frac{1}{4}$ $1\frac{3}{8}$	UKTX08D1;H2308X UKTX08D1;HE2308X UKTX08D1;HS2308X	19 $\frac{3}{4}$	17 $2\frac{1}{32}$	83 $3\frac{9}{32}$	49 $1\frac{15}{16}$	29 $1\frac{5}{32}$	83 $3\frac{9}{32}$	16 0.630	102 $4\frac{1}{64}$	117 $4\frac{19}{32}$	144 $5\frac{21}{32}$	36 $1\frac{13}{32}$	49 $1\frac{15}{16}$	57 $2\frac{1}{4}$	87 $3\frac{7}{16}$	46 1.811
40 $1\frac{7}{16}$ $1\frac{1}{2}$ $1\frac{5}{8}$	UKTX09D1;H2309X UKTX09D1;HA2309 UKTX09D1;HE2309X UKTX09D1;HS2309X	19 $\frac{3}{4}$	18 $2\frac{23}{32}$	83 $3\frac{9}{32}$	49 $1\frac{15}{16}$	29 $1\frac{5}{32}$	86 $3\frac{3}{8}$	16 0.630	102 $4\frac{1}{64}$	117 $4\frac{19}{32}$	151 $5\frac{15}{16}$	38 $1\frac{1}{2}$	49 $1\frac{15}{16}$	59 $2\frac{5}{16}$	92 $3\frac{5}{8}$	50 1.969
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UKTX10D1;H2310X UKTX10D1;HS2310 UKTX10D1;HA2310 UKTX10D1;HE2310X	25 $3\frac{1}{32}$	21 $1\frac{13}{16}$	102 $4\frac{1}{32}$	64 $2\frac{17}{32}$	35 $1\frac{3}{8}$	95 $3\frac{3}{4}$	22 0.866	130 $5\frac{1}{8}$	146 $5\frac{3}{4}$	171 $6\frac{23}{32}$	42 $1\frac{21}{32}$	64 $2\frac{17}{32}$	65 $2\frac{9}{16}$	106 $4\frac{3}{16}$	55 2.165
50 $1\frac{7}{8}$ $1\frac{15}{16}$ 2	UKTX11D1;H2311X UKTX11D1;HS2311 UKTX11D1;HA2311 UKTX11D1;HE2311XY	32 $1\frac{1}{4}$	21 $1\frac{13}{16}$	102 $4\frac{1}{32}$	64 $2\frac{17}{32}$	35 $1\frac{3}{8}$	102 $4\frac{1}{32}$	22 0.866	130 $5\frac{1}{8}$	146 $5\frac{3}{4}$	194 $7\frac{5}{8}$	44 $1\frac{23}{32}$	64 $2\frac{17}{32}$	75 $2\frac{15}{16}$	119 $4\frac{11}{16}$	59 2.323
55 $2\frac{1}{8}$	UKTX12D1;H2312X UKTX12D1;HS2312	32 $1\frac{1}{4}$	23 $2\frac{9}{32}$	111 $4\frac{3}{8}$	70 $2\frac{3}{4}$	41 $1\frac{5}{8}$	121 $4\frac{3}{4}$	26 1.024	151 $5\frac{15}{16}$	167 $6\frac{9}{16}$	224 $8\frac{13}{16}$	48 $1\frac{7}{8}$	70 $2\frac{3}{4}$	87 $3\frac{7}{16}$	137 $5\frac{13}{32}$	62 2.441
60 $2\frac{3}{16}$ $2\frac{1}{4}$ $2\frac{3}{8}$	UKTX13D1;H2313X UKTX13D1;HA2313 UKTX13D1;HE2313X UKTX13D1;HS2313X	32 $1\frac{1}{4}$	23 $2\frac{9}{32}$	111 $4\frac{3}{8}$	70 $2\frac{3}{4}$	41 $1\frac{5}{8}$	121 $4\frac{3}{4}$	26 1.024	151 $5\frac{15}{16}$	167 $6\frac{9}{16}$	224 $8\frac{13}{16}$	48 $1\frac{7}{8}$	70 $2\frac{3}{4}$	87 $3\frac{7}{16}$	137 $5\frac{13}{32}$	65 2.559

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".


2) Adapter number with suffix "X" means a narrow slot type adapter sleeve.

In this case the lock washer with the straight inner prong should be used.


3) For HE2311XY, screw thread pitch different from the standard is applied, because of the thin thread section of sleeve.

To distinguish it, a suffix "Y" is added.

Note: Please refer to page 36 for size of grease fitting.

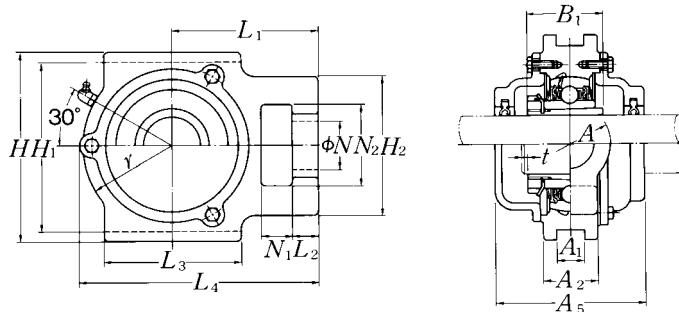**Cast dust cover type**Open end: **C-UKTX...D1**Closed end: **CM-UKTX...D1**

Bearing number ^{2) 3)}	Housing ¹⁾ number	Unit number ^{1) 2) 3)} cast dust cover type	Nominal dimensions			Mass of unit	
			mm	inch		kg	lb
			<i>t</i>	<i>L</i> ₄	<i>A</i> ₅	UKTX	C(CM)
UKX05D1;H2305X	TX05D1	C(CM)-UKTX05D1;H2305X	2	113.5	75	1.3	1.8
UKX05D1;HE2305	TX05D1	C(CM)-UKTX05ED1;HE2305	$\frac{5}{64}$	$4\frac{15}{32}$	$2\frac{15}{16}$	2.9	4.0
UKX06D1;H2306X	TX06D1	C(CM)-UKTX06D1;H2306X	2	129	80	1.7	2.2
UKX06D1;HS2306	TX06D1	C(CM)-UKTX06SD1;HS2306	$\frac{5}{64}$	$5\frac{3}{32}$	$3\frac{5}{32}$	3.8	4.9
UKX06D1;HE2306X	TX06D1	C(CM)-UKTX06ED1;HE2306X					
UKX07D1;H2307X	TX07D1	C(CM)-UKTX07D1;H2307X	3	144	90	2.7	3.5
UKX07D1;HS2307	TX07D1	C(CM)-UKTX07SD1;HS2307	$\frac{1}{8}$	$5\frac{21}{32}$	$3\frac{17}{32}$	6.0	7.7
UKX08D1;H2308X	TX08D1	C(CM)-UKTX08D1;H2308X	3	144.5	95	2.8	3.7
UKX08D1;HE2308X	TX08D1	C(CM)-UKTX08ED1;HE2308X	$\frac{1}{8}$	$5\frac{11}{16}$	$3\frac{3}{4}$	6.2	8.2
UKX08D1;HS2308X	TX08D1	C(CM)-UKTX08SD1;HS2308X					
UKX09D1;H2309X	TX09D1	C(CM)-UKTX09D1;H2309X	3	152	100	2.7	3.8
UKX09D1;HA2309	TX09D1	C(CM)-UKTX09AD1;HA2309	$\frac{1}{8}$	$5\frac{31}{32}$	$3\frac{15}{16}$	6.0	8.4
UKX09D1;HE2309X	TX09D1	C(CM)-UKTX09ED1;HE2309X					
UKX09D1;HS2309X	TX09D1	C(CM)-UKTX09SD1;HS2309X					
UKX10D1;H2310X	TX10D1	C(CM)-UKTX10D1;H2310X	3	171.5	100	4.3	5.5
UKX10D1;HS2310	TX10D1	C(CM)-UKTX10SD1;HS2310	$\frac{1}{8}$	$6\frac{3}{4}$	$3\frac{15}{16}$	9.5	12
UKX10D1;HA2310	TX10D1	C(CM)-UKTX10AD1;HA2310					
UKX10D1;HE2310X	TX10D1	C(CM)-UKTX10ED1;HE2310X					
UKX11D1;H2311X	TX11D1	C(CM)-UKTX11D1;H2311X	4	194	115	5.1	6.6
UKX11D1;HS2311	TX11D1	C(CM)-UKTX11SD1;HS2311	$\frac{5}{32}$	$7\frac{5}{8}$	$4\frac{17}{32}$	11	15
UKX11D1;HA2311	TX11D1	C(CM)-UKTX11AD1;HA2311					
UKX11D1;HE2311XY	TX11D1	C(CM)-UKTX11ED1;HE2311XY					
UKX12D1;H2312X	TX12D1	C(CM)-UKTX12D1;H2312X	4	224	120	7.2	9.0
UKX12D1;HS2312	TX12D1	C(CM)-UKTX12SD1;HS2312	$\frac{5}{32}$	$8\frac{13}{16}$	$4\frac{23}{32}$	16	20
UKX13D1;H2313X	TX13D1	C(CM)-UKTX13D1;H2313X	4	224	135	7.2	9.5
UKX13D1;HA2313	TX13D1	C(CM)-UKTX13AD1;HA2313	$\frac{5}{32}$	$8\frac{13}{16}$	$5\frac{5}{16}$	16	21
UKX13D1;HE2313X	TX13D1	C(CM)-UKTX13ED1;HE2313X					
UKX13D1;HS2313X	TX13D1	C(CM)-UKTX13SD1;HS2313X					

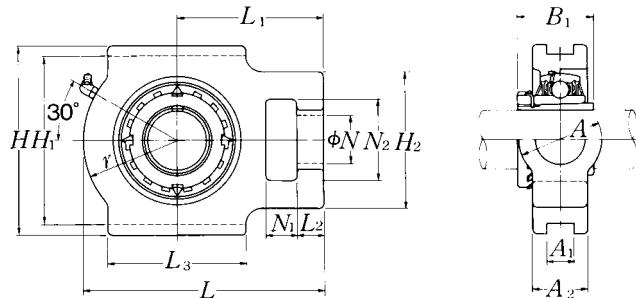

Shaft dia. mm inch	Unit number ^{1) 2) 3)}	Nominal dimensions														
		mm							inch							
		N ₁	L ₂	H ₂	N ₂	N	L ₃	A ₁	H ₁	H	L	A ₂	A	r	L ₁	B ₁
65 $2\frac{7}{16}$ $2\frac{1}{2}$	UKTX15D1;H2315X	32	23	111	70	41	121	28	165	184	235	48	70	95	140	73
	UKTX15D1;HA2315	$1\frac{1}{4}$	$2\frac{9}{32}$	$4\frac{3}{8}$	$2\frac{3}{4}$	$1\frac{5}{8}$	$4\frac{3}{4}$	1.102	$6\frac{1}{2}$	$7\frac{1}{4}$	$9\frac{1}{4}$	$1\frac{7}{8}$	$2\frac{3}{4}$	$3\frac{3}{4}$	$5\frac{1}{2}$	2.874
	UKTX15D1;HE2315X															
70 $2\frac{11}{16}$ $2\frac{3}{4}$	UKTX16D1;H2316X	38	30	124	73	48	157	28	173	198	260	54	73	98	162	78
	UKTX16D1;HA2316	$1\frac{1}{2}$	$1\frac{3}{16}$	$4\frac{7}{8}$	$2\frac{7}{8}$	$1\frac{7}{8}$	$6\frac{3}{16}$	1.102	$6\frac{13}{16}$	$7\frac{25}{32}$	$10\frac{1}{4}$	$2\frac{1}{8}$	$2\frac{7}{8}$	$3\frac{27}{32}$	$6\frac{3}{8}$	3.071
	UKTX16D1;HE2316X															
75 $2\frac{15}{16}$ 3	UKTX17D1;H2317X	38	30	124	73	48	157	28	173	198	260	54	73	98	162	82
	UKTX17D1;HA2317X	$1\frac{1}{2}$	$1\frac{3}{16}$	$4\frac{7}{8}$	$2\frac{7}{8}$	$1\frac{7}{8}$	$6\frac{3}{16}$	1.102	$6\frac{13}{16}$	$7\frac{25}{32}$	$10\frac{1}{4}$	$2\frac{1}{8}$	$2\frac{7}{8}$	$3\frac{27}{32}$	$6\frac{3}{8}$	3.228
	UKTX17D1;HE2317X															

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".


2) Adapter number with suffix "X" means a narrow slot type adapter sleeve.

In this case the lock washer with the straight inner prong should be used.


3) For HE2311XY, screw thread pitch different from the standard is applied, because of the thin thread section of sleeve.

To distinguish it, a suffix "Y" is added.

Note: Please refer to page 36 for size of grease fitting.

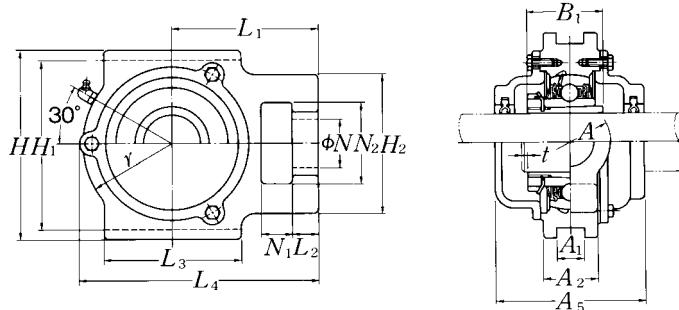**Cast dust cover type**Open end: **C-UKTX…D1**Closed end: **CM-UKTX…D1**

Bearing number ^{2) 3)}	Housing ¹⁾ number	Unit number ^{1) 2) 3)} cast dust cover type	Nominal dimensions			Mass of unit	
			mm	inch		kg	lb
			t	L ₄	A ₅	UKTX	C(CM)
UKX15D1;H2315X	TX15D1	C(CM)-UKTX15D1;H2315X	4	235	145	8.5	11
UKX15D1;HA2315	TX15D1	C(CM)-UKTX15AD1;HA2315	$\frac{5}{32}$	9 $\frac{1}{4}$	5 $\frac{23}{32}$	19	24
UKX15D1;HE2315X	TX15D1	C(CM)-UKTX15ED1;HE2315X					
UKX16D1;H2316X	TX16D1	C(CM)-UKTX16D1;H2316X	4	260	155	11	14
UKX16D1;HA2316	TX16D1	C(CM)-UKTX16AD1;HA2316	$\frac{5}{32}$	10 $\frac{1}{4}$	6 $\frac{3}{32}$	24	31
UKX16D1;HE2316X	TX16D1	C(CM)-UKTX16ED1;HE2316X					
UKX17D1;H2317X	TX17D1	C(CM)-UKTX17D1;H2317X	5	262	165	11	15
UKX17D1;HA2317X	TX17D1	C(CM)-UKTX17AD1;HA2317X	$\frac{13}{64}$	10 $\frac{5}{16}$	6 $\frac{1}{2}$	24	33
UKX17D1;HE2317X	TX17D1	C(CM)-UKTX17ED1;HE2317X					

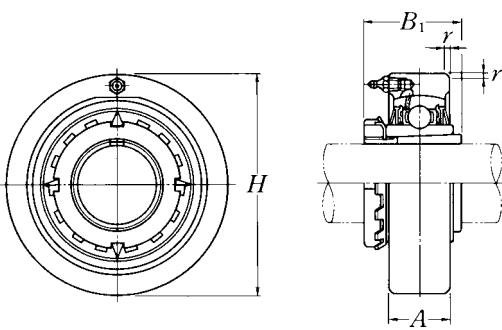

Shaft dia. mm inch	Unit number ^{1) 2) 3)}	Nominal dimensions				Bearing number ^{2) 3)}	Housing number	Mass of unit kg lb
		H	A	r	B ₁			
20 $\frac{3}{4}$	UKC205D1;H2305X	80	22	2	35	UK205D1;H2305X	C205D1	0.7
	UKC205D1;HE2305	3.1496	$\frac{55}{64}$	0.079	1.378	UK205D1;HE2305	C205D1	1.5
25 $\frac{7}{8}$ 1	UKC206D1;H2306X	85	27	2	38	UK206D1;H2306X	C206D1	0.9
	UKC206D1;HS2306	3.3465	$1\frac{1}{16}$	0.079	1.496	UK206D1;HS2306	C206D1	2.0
	UKC206D1;HE2306X					UK206D1;HE2306X	C206D1	
30 $1\frac{1}{8}$	UKC207D1;H2307X	90	28	2	43	UK207D1;H2307X	C207D1	1.0
	UKC207D1;HS2307	3.5433	$1\frac{7}{64}$	0.079	1.693	UK207D1;HS2307	C207D1	2.2
35 $1\frac{1}{4}$ $1\frac{3}{8}$	UKC208D1;H2308X	100	30	2.5	46	UK208D1;H2308X	C208D1	1.3
	UKC208D1;HE2308X	3.9370	$1\frac{3}{16}$	0.098	1.811	UK208D1;HE2308X	C208D1	2.9
	UKC208D1;HS2308X					UKC208D1;HS2308X	C208D1	
40 $1\frac{7}{16}$ $1\frac{1}{2}$ $1\frac{5}{8}$	UKC209D1;H2309X	110	31	2.5	50	UK209D1;H2309X	C209D1	1.6
	UKC209D1;HA2309					UK209D1;HA2309	C209D1	
	UKC209D1;HE2309X	4.3307	$1\frac{7}{32}$	0.098	1.969	UK209D1;HE2309X	C209D1	3.5
	UKC209D1;HS2309X					UK209D1;HS2309X	C209D1	
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UKC210D1;H2310X	120	33	2.5	55	UK210D1;H2310X	C210D1	2.1
	UKC210D1;HS2310					UK210D1;HS2310	C210D1	
	UKC210D1;HA2310	4.7244	$1\frac{19}{64}$	0.098	2.165	UK210D1;HA2310	C210D1	4.6
	UKC210D1;HE2310X					UK210D1;HE2310X	C210D1	
50 $1\frac{7}{8}$ $1\frac{15}{16}$ 2	UKC211D1;H2311X	125	35	2.5	59	UK211D1;H2311X	C211D1	2.3
	UKC211D1;HS2311					UK211D1;HS2311	C211D1	
	UKC211D1;HA2311	4.9213	$1\frac{3}{8}$	0.098	2.323	UK211D1;HA2311	C211D1	5.1
	UKC211D1;HE2311XY					UK211D1;HE2311XY	C211D1	
55 $2\frac{1}{8}$	UKC212D1;H2312X	130	38	2.5	62	UK212D1;H2312X	C212D1	2.6
	UKC212D1;HS2312	5.1181	$1\frac{1}{2}$	0.098	2.441	UK212D1;HS2312	C212D1	5.7
60 $2\frac{3}{16}$ $2\frac{1}{4}$ $2\frac{3}{8}$	UKC213D1;H2313X	140	40	3	65	UK213D1;H2313X	C213D1	3.2
	UKC213D1;HA2313					UK213D1;HA2313	C213D1	
	UKC213D1;HE2313X	5.5118	$1\frac{7}{64}$	0.118	2.559	UK213D1;HE2313X	C213D1	7.1
	UKC213D1;HS2313X					UK213D1;HS2313X	C213D1	

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".


2) Adapter number with suffix "X" means a narrow slot type adapter sleeve.

In this case the lock washer with the straight inner prong should be used.

3) For HE2311XY, screw thread pitch different from the standard is applied, because of the thin thread section of sleeve.

To distinguish it, a suffix "Y" is added.

Note: Please refer to page 36 for size of grease fitting.

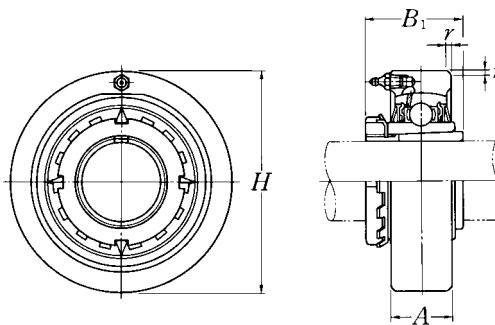

Shaft dia. mm inch	Unit number ^{1) 2) 3)}	Nominal dimensions				Bearing number ^{2) 3)}	Housing ¹⁾ number	Mass of unit kg lb
		mm H	inch A	mm r	inch B1			
20 ¾	UKC305D1;H2305X	90	26	2.5	35	UK305D1;H2305X	C305D1	1.0
	UKC305D1;HE2305	3.5433	1 1/32	0.098	1.378	UK305D1;HE2305	C305D1	2.2
25 7/8 1	UKC306D1;H2306X	100	28	2.5	38	UK306D1;H2306X	C306D1	1.3
	UKC306D1;HS2306	3.9370	1 7/64	0.098	1.496	UK306D1;HS2306	C306D1	2.9
	UKC306D1;HE2306X					UK306D1;HE2306X	C306D1	
30 1 1/8	UKC307D1;H2307X	110	32	3	43	UK307D1;H2307X	C307D1	1.8
	UKC307D1;HS2307	4.3307	1 17/64	0.118	1.693	UK307D1;HS2307	C307D1	4.0
35 1 1/4 1 3/8	UKC308D1;H2308X	120	34	3	46	UK308D1;H2308X	C308D1	2.2
	UKC308D1;HE2308X	4.7244	1 11/32	0.118	1.811	UK308D1;HE2308X	C308D1	4.9
	UKC308D1;HS2308X					UK308D1;HS2308X	C308D1	
40 1 7/16 1 1/2 1 5/8	UKC309D1;H2309X	130	38	3.5	50	UK309D1;H2309X	C309D1	2.7
	UKC309D1;HA2309					UK309D1;HA2309	C309D1	
	UKC309D1;HE2309X	5.1181	1 1/2	0.138	1.969	UK309D1;HE2309X	C309D1	6.0
	UKC309D1;HS2309X					UK309D1;HS2309X	C309D1	
45 1 5/8 1 11/16 1 3/4	UKC310D1;H2310X	140	40	3.5	55	UK310D1;H2310X	C310D1	3.4
	UKC310D1;HS2310					UK310D1;HS2310	C310D1	
	UKC310D1;HA2310	5.5118	1 37/64	0.138	2.165	UK310D1;HA2310	C310D1	7.5
	UKC310D1;HE2310X					UK310D1;HE2310X	C310D1	
50 1 7/8 1 15/16 2	UKC311D1;H2311X	150	44	3.5	59	UK311D1;H2311X	C311D1	4.0
	UKC311D1;HS2311					UK311D1;HS2311	C311D1	
	UKC311D1;HA2311	5.9055	1 47/64	0.138	2.323	UK311D1;HA2311	C311D1	8.8
	UKC311D1;HE2311XY					UK311D1;HE2311XY	C311D1	
55 2 1/8	UKC312D1;H2312X	160	46	3.5	62	UK312D1;H2312X	C312D1	4.8
	UKC312D1;HS2312	6.2992	1 13/16	0.138	2.441	UK312D1;HS2312	C312D1	11
60 2 3/16 2 1/4 2 3/8	UKC313D1;H2313X	170	50	3.5	65	UK313D1;H2313X	C313D1	5.6
	UKC313D1;HA2313					UK313D1;HA2313	C313D1	
	UKC313D1;HE2313X	6.6929	1 31/32	0.138	2.559	UK313D1;HE2313X	C313D1	12
	UKC313D1;HS2313X					UK313D1;HS2313X	C313D1	

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".


2) Adapter number with suffix "X" means a narrow slot type adapter sleeve.

In this case the lock washer with the straight inner prong should be used.

3) For HE2311XY, screw thread pitch different from the standard is applied, because of the thin thread section of sleeve.

To distinguish it, a suffix "Y" is added.

Note: Please refer to page 36 for size of grease fitting.

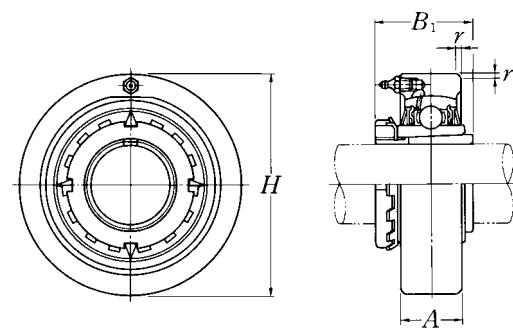

Shaft dia. mm inch	Unit number ^{1) 2) 3)}	Nominal dimensions				Bearing number ^{2) 3)}	Housing number	Mass of unit kg lb
		H	A	r	B ₁			
65 $2\frac{7}{16}$ $2\frac{1}{2}$	UKC315D1;H2315X	190	55	4	73	UK315D1;H2315X	C315D1	7.9
	UKC315D1;HA2315	7.4803	$2\frac{11}{16}$	0.157	2.874	UK315D1;HA2315	C315D1	17
	UKC315D1;HE2315X					UK315D1;HE2315X	C315D1	
70 $2\frac{11}{16}$ $2\frac{3}{4}$	UKC316D1;H2316X	200	60	4	78	UK316D1;H2316X	C316D1	9.4
	UKC316D1;HA2316	7.8740	$2\frac{23}{64}$	0.157	3.071	UK316D1;HA2316	C316D1	20
	UKC316D1;HE2316X					UK316D1;HE2316X	C316D1	
75 $2\frac{15}{16}$ 3	UKC317D1;H2317X	215	64	4	82	UK317D1;H2317X	C317D1	11
	UKC317D1;HA2317X	8.4646	$2\frac{33}{64}$	0.157	3.228	UK317D1;HA2317X	C317D1	24
	UKC317D1;HE2317X					UK317D1;HE2317X	C317D1	
80 $3\frac{3}{16}$	UKC318D1;H2318X	225	66	4	86	UK318D1;H2318X	C318D1	13
	UKC318D1;HA2318X	8.8583	$2\frac{19}{32}$	0.157	3.386	UK318D1;HA2318X	C318D1	29
85 $3\frac{1}{4}$	UKC319D1;H2319X	240	72	4	90	UK319D1;H2319X	C319D1	16
	UKC319D1;HE2319X	9.4488	$2\frac{53}{64}$	0.157	3.543	UK319D1;HE2319X	C319D1	35
90 $3\frac{7}{16}$ $3\frac{1}{2}$	UKC320D1;H2320X	260	75	4	97	UK320D1;H2320X	C320D1	20
	UKC320D1;HA2320	10.2362	$2\frac{61}{64}$	0.157	3.819	UK320D1;HA2320	C320D1	44
	UKC320D1;HE2320X					UK320D1;HE2320X	C320D1	
100	UKC322D1;H2322X	300	80	5	105	UK322D1;H2322X	C322D1	29
110	UKC324D1;H2324X	320	90	5	112	UK324D1;H2324X	C324D1	35
115	UKC326D1;H2326	340	100	5	121	UK326D1;H2326	C326D1	43
125	UKC328D1;H2328	360	100	5	131	UK328D1;H2328	C328D1	50

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".


2) Adapter number with suffix "X" means a narrow slot type adapter sleeve.

In this case the lock washer with the straight inner prong should be used.

3) For HE2311XY, screw thread pitch different from the standard is applied, because of the thin thread section of sleeve.

To distinguish it, a suffix "Y" is added.

Note: Please refer to page 36 for size of grease fitting.

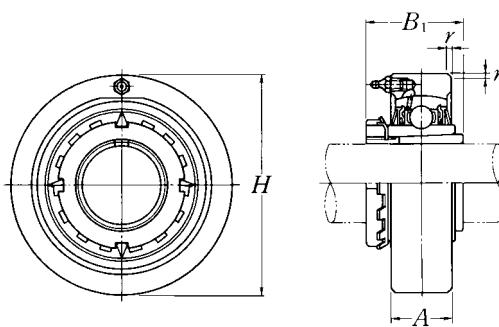**Cartridge units cast housing
Adapter type**


Shaft dia. mm inch	Unit number ^{1) 2) 3)}	Nominal dimensions				Bearing number ^{2) 3)}	Housing ¹⁾ number	Mass of unit kg lb
		H	A	r	B ₁			
20 3/4	UKCX05D1;H2305X	90	27	2	35	UKX05D1;H2305X	CX05D1	1.1
	UKCX05D1;HE2305	3.5433	1 1/16	0.079	1.378	UKX05D1;HE2305	CX05D1	2.4
25 7/8 1	UKCX06D1;H2306X	100	30	2.5	38	UKX06D1;H2306X	CX06D1	1.4
	UKCX06D1;HS2306	3.9370	1 3/16	0.098	1.496	UKX06D1;HS2306	CX06D1	3.1
	UKCX06D1;HE2306X					UKX06D1;HE2306X	CX06D1	
30 1 1/8	UKCX07D1;H2307X	110	34	2.5	43	UKX07D1;H2307X	CX07D1	1.8
	UKCX07D1;HS2307	4.3307	11 1/32	0.098	1.693	UKX07D1;HS2307	CX07D1	4.0
35 1 1/4 1 3/8	UKCX08D1;H2308X	120	38	2.5	46	UKX08D1;H2308X	CX08D1	2.5
	UKCX08D1;HE2308X	4.7244	1 1/2	0.098	1.811	UKX08D1;HE2308X	CX08D1	5.5
	UKCX08D1;HS2308X					UKX08D1;HS2308X	CX08D1	
40 1 7/16 1 1/2 1 5/8	UKCX09D1;H2309X	120	38	2.5	50	UKX09D1;H2309X	CX09D1	2.2
	UKCX09D1;HA2309					UKX09D1;HA2309	CX09D1	
	UKCX09D1;HE2309X	4.7244	1 1/2	0.098	1.969	UKX09D1;HE2309X	CX09D1	4.9
	UKCX09D1;HS2309X					UKX09D1;HS2309X	CX09D1	
45 1 5/8 1 11/16 1 3/4	UKCX10D1;H2310X	130	40	2.5	55	UKX10D1;H2310X	CX10D1	2.7
	UKCX10D1;HS2310					UKX10D1;HS2310	CX10D1	
	UKCX10D1;HA2310	5.1181	137/64	0.098	2.165	UKX10D1;HA2310	CX10D1	6.0
	UKCX10D1;HE2310X					UKX10D1;HE2310X	CX10D1	
50 1 7/8 1 15/16 2	UKCX11D1;H2311X	150	42	3	59	UKX11D1;H2311X	CX11D1	4.0
	UKCX11D1;HS2311					UKX11D1;HS2311	CX11D1	
	UKCX11D1;HA2311	5.9055	12 1/32	0.118	2.323	UKX11D1;HA2311	CX11D1	8.8
	UKCX11D1;HE2311XY					UKX11D1;HE2311X	CX11D1	
55 2 1/8	UKCX12D1;H2312X	160	44	3	62	UKX12D1;H2312X	CX12D1	3.9
	UKCX12D1;HS2312	6.2992	147/64	0.118	2.441	UKX12D1;HS2312	CX12D1	8.6

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".


2) Adapter number with suffix "X" means a narrow slot type adapter sleeve.

In this case the lock washer with the straight inner prong should be used.

3) For HE2311XY, screw thread pitch different from the standard is applied, because of the thin thread section of sleeve.

To distinguish it, a suffix "Y" is added.

Note: Please refer to page 36 for size of grease fitting.

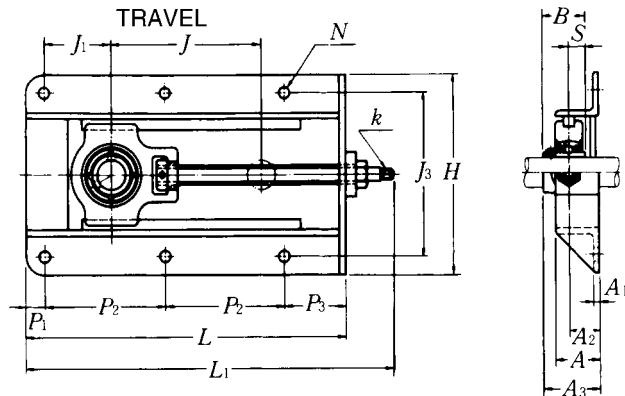


Shaft dia. mm	Unit ¹⁾ number	Nominal dimensions																	
		L	H	J	J ₁	J ₃	A ₁	A ₂	A	P ₁	P ₂	P ₃	N	L ₁	A ₃	B	S	k square	
12	UCT201-15	317	199	150	69	154	6	30	50	19	117	64	12	370	48.3	31	12.7	9	
15	UCT202-15	317	199	150	69	154	6	30	50	19	117	64	12	370	48.3	31	12.7	9	
17	UCT203-15	317	199	150	69	154	6	30	50	19	117	64	12	370	48.3	31	12.7	9	
20	UCT204-15	317	199	150	69	154	6	30	50	19	117	64	12	370	48.3	31	12.7	9	
25	UCT205-15	317	199	150	68	154	6	30	50	19	117	64	12	370	49.8	34.1	14.3	9	
30	UCT206-15	337	212	150	73	166	6	32	50	19	127	64	12	393	54.2	38.1	15.9	10	
35	UCT207-23	429	212	230	80	166	6	32	50	19	173	64	12	485	57.4	42.9	17.5	10	
40	UCT208-30	520	233	300	88	192	6	32	50	22	217	64	12	596	62.2	49.2	19	15	
45	UCT209-30	520	233	300	88	192	6	32	50	22	217	64	12	596	62.2	49.2	19	15	
50	UCT210-30	524	233	300	92	192	6	35	50	22	219	64	15	599	67.6	51.6	19	15	
55	UCT211-30	542	285	300	93	240	8	38	65	22	230	60	15	630	71.4	55.6	22.2	17	
60	UCT212-30	568	285	300	103	240	8	38	65	22	243	60	15	657	77.7	65.1	25.4	17	
65	UCT213-30	606	306	300	125	260	8	43	65	22	260	64	15	705	82.7	65.1	25.4	23	

Remarks: 1) If relubricatable type is needed, please order with suffix "D1".

2) The Stretcher Unit is designed to only take a horizontal radial load, in line with the adjustment direction. Axial loads or vertical radial loads can deform or break the housing.

Bolt size	Max. load ²⁾ recommended N	Bearing number	Basic load ratings		Mass of unit kg
			dynamic C_r	static C_{or}	
M10	7 650	UC201D1	12 800	6 650	5.0
M10	7 650	UC202D1	12 800	6 650	5.0
M10	7 650	UC203D1	12 800	6 650	5.0
M10	7 650	UC204D1	12 800	6 650	5.0
M10	7 850	UC205D1	14 000	7 850	5.0
M10	9 810	UC206D1	19 500	11 300	5.7
M10	12 750	UC207D1	25 700	15 300	6.8
M10	15 690	UC208D1	29 100	17 800	11
M10	15 690	UC209D1	32 500	20 400	11
M12	16 670	UC210D1	35 000	23 200	11
M12	19 610	UC211D1	43 500	29 200	18
M12	21 570	UC212D1	52 500	36 000	20
M12	23 530	UC213D1	57 500	40 000	23

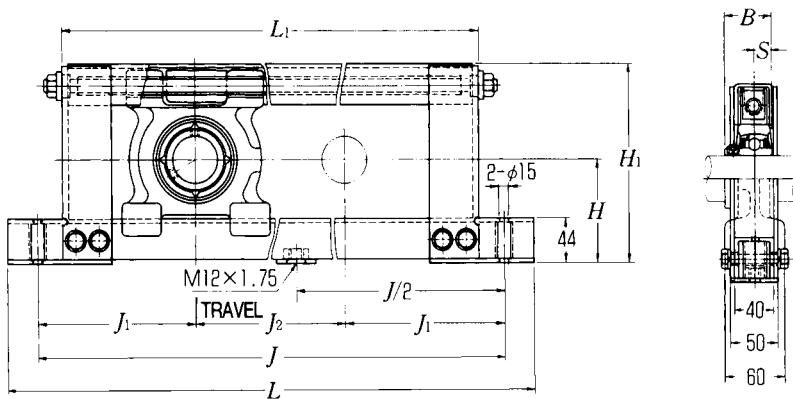


Shaft dia. mm	Unit ¹⁾ number	Nominal dimensions								Bolt size	Max. load ²⁾ recommended N	Bearing number	Basic load ratings		Mass of unit kg	
		H	L	J	J ₂	L ₁	J ₁	H ₁	B				dynamic C _r	static C _{or}		
20	UCL204-10	77	430	370	100	320	135	146	31	12.7	M12	1 960	UC204D1	12 800	6 650	6.3
	UCL204-20	77	530	470	200	420	135	146	31	12.7	M12	1 960	UC204D1	12 800	6 650	7.0
	UCL204-30	77	630	570	300	520	135	146	31	12.7	M12	1 960	UC204D1	12 800	6 650	7.7
	UCL204-40	77	730	670	400	620	135	146	31	12.7	M12	1 960	UC204D1	12 800	6 650	8.4
25	UCL205-10	82	440	380	100	330	140	156	34.1	14.3	M12	2 250	UC205D1	14 000	7 850	6.8
	UCL205-20	82	540	480	200	430	140	156	34.1	14.3	M12	2 250	UC205D1	14 000	7 850	7.5
	UCL205-30	82	640	580	300	530	140	156	34.1	14.3	M12	2 250	UC205D1	14 000	7 850	8.2
	UCL205-40	82	740	680	400	630	140	156	34.1	14.3	M12	2 250	UC205D1	14 000	7 850	8.9
30	UCL206-10	87	450	390	100	340	145	166	38.1	15.9	M12	3 230	UC206D1	19 500	11 300	7.3
	UCL206-20	87	550	490	200	440	145	166	38.1	15.9	M12	3 230	UC206D1	19 500	11 300	8.0
	UCL206-30	87	650	590	300	540	145	166	38.1	15.9	M12	3 230	UC206D1	19 500	11 300	8.7
	UCL206-40	87	750	690	400	640	145	166	38.1	15.9	M12	3 230	UC206D1	19 500	11 300	9.4
35	UCL207-10	92	460	400	100	350	150	176	42.9	17.5	M12	4 210	UC207D1	25 700	15 300	7.8
	UCL207-20	92	560	500	200	450	150	176	42.9	17.5	M12	4 210	UC207D1	25 700	15 300	8.5
	UCL207-30	92	660	600	300	550	150	176	42.9	17.5	M12	4 210	UC207D1	25 700	15 300	9.2
	UCL207-40	92	760	700	400	650	150	176	42.9	17.5	M12	4 210	UC207D1	25 700	15 300	9.9
40	UCL208-10	97	470	410	100	360	155	186	49.2	19	M12	4 500	UC208D1	29 100	17 800	8.3
	UCL208-20	97	570	510	200	460	155	186	49.2	19	M12	4 500	UC208D1	29 100	17 800	9.0
	UCL208-30	97	670	610	300	560	155	186	49.2	19	M12	4 500	UC208D1	29 100	17 800	9.7
	UCL208-40	97	770	710	400	660	155	186	49.2	19	M12	4 500	UC208D1	29 100	17 800	10
45	UCL209-10	100	480	420	100	370	160	192	49.2	19	M12	4 500	UC209D1	32 500	20 400	8.7
	UCL209-20	100	580	520	200	470	160	192	49.2	19	M12	4 500	UC209D1	32 500	20 400	9.4
	UCL209-30	100	680	620	300	570	160	192	49.2	19	M12	4 500	UC209D1	32 500	20 400	10
	UCL209-40	100	780	720	400	670	160	192	49.2	19	M12	4 500	UC209D1	32 500	20 400	11

Remarks: 1) If relubricatable type is needed, please order with suffix "D1".

2) The Stretcher Unit is designed to only take a horizontal radial load, in line with the adjustment direction. Axial loads or vertical radial loads can deform or break the housing.


sale@technobearing.ru
Type M stretcher units®
Set screw type

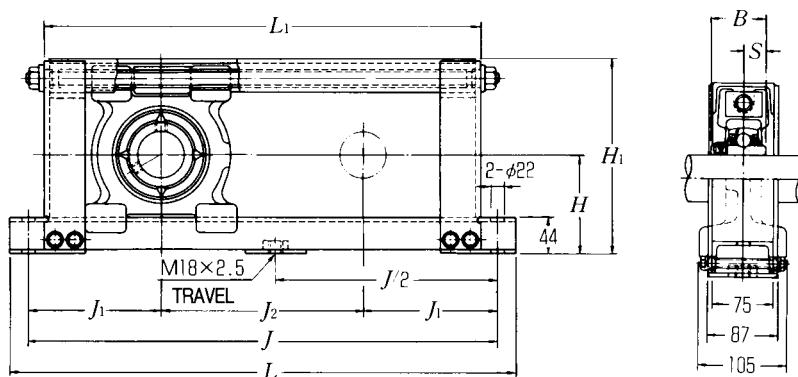

Shaft dia. mm	Unit ¹⁾ number	Nominal dimensions									Bolt size	Max. load ²⁾ recommended N	Bearing number	Basic load ratings		Mass of unit kg
		H	L	J	J ₂	mm L ₁	J ₁	H ₁	B	S				dynamic C _r	static C _{or}	
40	UCM208-50	97	870	810	500	760	155	190	49.2	19	M18	5 190	UC208D1	29 100	17 800	20
	UCM208-60	97	970	910	600	860	155	190	49.2	19	M18	5 190	UC208D1	29 100	17 800	22
	UCM208-70	97 1 070	1 010	700	960	155	190	49.2	19	M18	5 190	UC208D1	29 100	17 800	23	
	UCM208-80	97 1 170	1 110	800	1 060	155	190	49.2	19	M18	5 190	UC208D1	29 100	17 800	24	
	UCM208-90	97 1 270	1 210	900	1 160	155	190	49.2	19	M18	5 190	UC208D1	29 100	17 800	30	
45	UCM209-50	102	880	820	500	770	160	200	49.2	19	M18	5 880	UC209D1	32 500	20 400	21
	UCM209-60	102	980	920	600	870	160	200	49.2	19	M18	5 880	UC209D1	32 500	20 400	23
	UCM209-70	102 1 080	1 020	700	970	160	200	49.2	19	M18	5 880	UC209D1	32 500	20 400	24	
	UCM209-80	102 1 180	1 120	800	1 070	160	200	49.2	19	M18	5 880	UC209D1	32 500	20 400	30	
	UCM209-90	102 1 280	1 220	900	1 170	160	200	49.2	19	M18	5 880	UC209D1	32 500	20 400	32	
50	UCM210-50	107	890	830	500	780	165	210	51.6	19	M18	6 460	UC210D1	35 000	23 200	23
	UCM210-60	107	990	930	600	880	165	210	51.6	19	M18	6 460	UC210D1	35 000	23 200	24
	UCM210-70	107 1 090	1 030	700	980	165	210	51.6	19	M18	6 460	UC210D1	35 000	23 200	30	
	UCM210-80	107 1 190	1 130	800	1 080	165	210	51.6	19	M18	6 460	UC210D1	35 000	23 200	32	
	UCM210-90	107 1 290	1 230	900	1 180	165	210	51.6	19	M18	6 460	UC210D1	35 000	23 200	33	
55	UCM211-50	115	910	850	500	800	175	230	55.6	22.2	M18	6 460	UC211D1	43 500	29 200	25
	UCM211-60	115 1 010	950	600	900	175	230	55.6	22.2	M18	6 460	UC211D1	43 500	29 200	27	
	UCM211-70	115 1 110	1 050	700	1 000	175	230	55.6	22.2	M18	6 460	UC211D1	43 500	29 200	32	
	UCM211-80	115 1 210	1 150	800	1 100	175	230	55.6	22.2	M18	6 460	UC211D1	43 500	29 200	34	
	UCM211-90	115 1 310	1 250	900	1 200	175	230	55.6	22.2	M18	6 460	UC211D1	43 500	29 200	36	
60	UCM212-50	120	920	860	500	810	180	240	65.1	25.4	M18	6 460	UC212D1	52 500	36 000	28
	UCM212-60	120 1 020	960	600	910	180	240	65.1	25.4	M18	6 460	UC212D1	52 500	36 000	29	
	UCM212-70	120 1 120	1 060	700	1 010	180	240	65.1	25.4	M18	6 460	UC212D1	52 500	36 000	35	
	UCM212-80	120 1 220	1 160	800	1 110	180	240	65.1	25.4	M18	6 460	UC212D1	52 500	36 000	36	
	UCM212-90	120 1 320	1 260	900	1 210	180	240	65.1	25.4	M18	6 460	UC212D1	52 500	36 000	38	
65	UCM213-50	125	940	880	500	830	190	250	65.1	25.4	M18	6 460	UC213D1	57 500	40 000	30
	UCM213-60	125 1 040	980	600	930	190	250	65.1	25.4	M18	6 460	UC213D1	57 500	40 000	31	
	UCM213-70	125 1 140	1 080	700	1 030	190	250	65.1	25.4	M18	6 460	UC213D1	57 500	40 000	36	
	UCM213-80	125 1 240	1 180	800	1 130	190	250	65.1	25.4	M18	6 460	UC213D1	57 500	40 000	38	
	UCM213-90	125 1 340	1 280	900	1 230	190	250	65.1	25.4	M18	6 460	UC213D1	57 500	40 000	40	

Remarks: 1) If relubricatable type is needed, please order with suffix "D1".


2) The Stretcher Unit is designed to only take a horizontal radial load, in line with the adjustment direction. Axial loads or vertical radial loads can deform or break the housing.

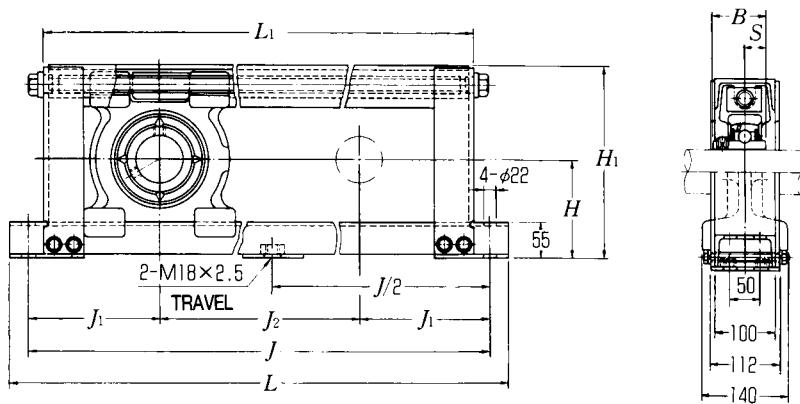

Shaft dia. mm	Unit ¹⁾ number	Nominal dimensions mm								Bolt size	Max. load ²⁾ recommended N	Bearing number	Basic load ratings N		Mass of unit kg	
		H	L	J	J ₂	L ₁	J ₁	H ₁	B				dynamic C _r	static C _{or}		
65	UCM313-50	145	940	880	500	830	190	285	75	30	M18	16 260	UC313D1	92 500	60 000	47
	UCM313-60	145	1 040	980	600	930	190	285	75	30	M18	16 260	UC313D1	92 500	60 000	50
	UCM313-70	145	1 140	1 080	700	1 030	190	285	75	30	M18	16 260	UC313D1	92 500	60 000	53
	UCM313-80	145	1 240	1 180	800	1 130	190	285	75	30	M18	16 260	UC313D1	92 500	60 000	55
	UCM313-90	145	1 340	1 280	900	1 230	190	285	75	30	M18	16 260	UC313D1	92 500	60 000	58
70	UCM314-50	150	960	900	500	850	200	295	78	33	M18	19 600	UC314D1	104 000	68 000	49
	UCM314-60	150	1 060	1 000	600	950	200	295	78	33	M18	19 600	UC314D1	104 000	68 000	52
	UCM314-70	150	1 160	1 100	700	1 050	200	295	78	33	M18	19 600	UC314D1	104 000	68 000	55
	UCM314-80	150	1 260	1 200	800	1 150	200	295	78	33	M18	19 600	UC314D1	104 000	68 000	58
	UCM314-90	150	1 360	1 300	900	1 250	200	295	78	33	M18	19 600	UC314D1	104 000	68 000	61
75	UCM315-50	155	980	920	500	870	210	305	82	32	M18	19 600	UC315D1	113 000	77 000	52
	UCM315-60	155	1 080	1 020	600	970	210	305	82	32	M18	19 600	UC315D1	113 000	77 000	55
	UCM315-70	155	1 180	1 120	700	1 070	210	305	82	32	M18	19 600	UC315D1	113 000	77 000	58
	UCM315-80	155	1 280	1 220	800	1 170	210	305	82	32	M18	19 600	UC315D1	113 000	77 000	60
	UCM315-90	155	1 380	1 320	900	1 270	210	305	82	32	M18	19 600	UC315D1	113 000	77 000	63
80	UCM316-50	160	1 000	940	500	890	220	315	86	34	M18	19 600	UC316D1	123 000	86 500	54
	UCM316-60	160	1 100	1 040	600	990	220	315	86	34	M18	19 600	UC316D1	123 000	86 500	57
	UCM316-70	160	1 200	1 140	700	1 090	220	315	86	34	M18	19 600	UC316D1	123 000	86 500	60
	UCM316-80	160	1 300	1 240	800	1 190	220	315	86	34	M18	19 600	UC316D1	123 000	86 500	63
	UCM316-90	160	1 400	1 340	900	1 290	220	315	86	34	M18	19 600	UC316D1	123 000	86 500	66
85	UCM317-50	165	1 020	960	500	910	230	325	96	40	M18	19 600	UC317D1	133 000	97 000	60
	UCM317-60	165	1 120	1 060	600	1 010	230	325	96	40	M18	19 600	UC317D1	133 000	97 000	63
	UCM317-70	165	1 220	1 160	700	1 110	230	325	96	40	M18	19 600	UC317D1	133 000	97 000	65
	UCM317-80	165	1 320	1 260	800	1 210	230	325	96	40	M18	19 600	UC317D1	133 000	97 000	68
	UCM317-90	165	1 420	1 360	900	1 310	230	325	96	40	M18	19 600	UC317D1	133 000	97 000	71
90	UCM318-50	170	1 050	990	500	940	245	335	96	40	M18	19 600	UC318D1	143 000	107 000	65
	UCM318-60	170	1 150	1 090	600	1 040	245	335	96	40	M18	19 600	UC318D1	143 000	107 000	68
	UCM318-70	170	1 250	1 190	700	1 140	245	335	96	40	M18	19 600	UC318D1	143 000	107 000	71
	UCM318-80	170	1 350	1 290	800	1 240	245	335	96	40	M18	19 600	UC318D1	143 000	107 000	74
	UCM318-90	170	1 450	1 390	900	1 340	245	335	96	40	M18	19 600	UC318D1	143 000	107 000	77

Remarks: 1) If relubricatable type is needed, please order with suffix "D1".


2) The Stretcher Unit is designed to only take a horizontal radial load, in line with the adjustment direction. Axial loads or vertical radial loads can deform or break the housing.

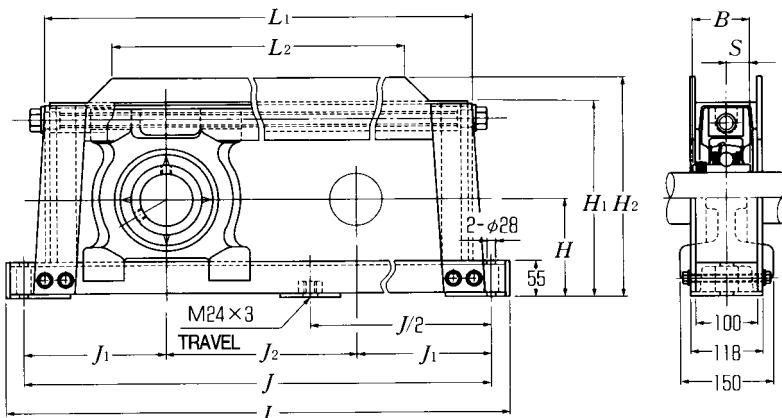

Shaft dia. mm	Unit ¹⁾ number	Nominal dimensions mm										Bolt size	Max. load ⁽²⁾ recommended N	Bearing number	Basic load ratings N		Mass of unit kg	
		H	L	J	J ₂	L ₁	L ₂	J ₁	H ₁	H ₂	B				dynamic C _r	static C _{or}		
95	UCM319-50	185	1 180	1 100	500	1 021	775	300	377	400	103	41	M24	19 600	UC319D1	153 000	119 000	105
	UCM319-60	185	1 280	1 200	600	1 121	875	300	377	400	103	41	M24	19 600	UC319D1	153 000	119 000	109
	UCM319-70	185	1 380	1 300	700	1 221	975	300	377	400	103	41	M24	19 600	UC319D1	153 000	119 000	112
	UCM319-80	185	1 480	1 400	800	1 321	1 075	300	377	400	103	41	M24	19 600	UC319D1	153 000	119 000	116
	UCM319-90	185	1 580	1 500	900	1 421	1 175	300	377	400	103	41	M24	19 600	UC319D1	153 000	119 000	120
100	UCM320-50	200	1 220	1 140	500	1 063	809	320	403	430	108	42	M24	19 600	UC320D1	173 000	141 000	111
	UCM320-60	200	1 320	1 240	600	1 163	909	320	403	430	108	42	M24	19 600	UC320D1	173 000	141 000	116
	UCM320-70	200	1 420	1 340	700	1 263	1 009	320	403	430	108	42	M24	19 600	UC320D1	173 000	141 000	120
	UCM320-80	200	1 520	1 440	800	1 363	1 109	320	403	430	108	42	M24	19 600	UC320D1	173 000	141 000	124
	UCM320-90	200	1 620	1 540	900	1 463	1 209	320	403	430	108	42	M24	19 600	UC320D1	173 000	141 000	129

Remarks: 1) If relubricatable type is needed, please order with suffix "D1".

2) The Stretcher Unit is designed to only take a horizontal radial load, in line with the adjustment direction. Axial loads or vertical radial loads can deform or break the housing.

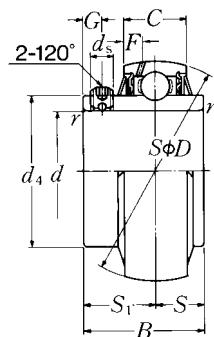

Shaft dia. mm inch	Bearing number	Nominal dimensions												
		d	D	B	C	r _s min.	mm	inch	S	S ₁	G	ds	d ₄	F
12 1/2	UC201D1	12	47	31	17	0.6	12.7	18.3	4.5	M5 × 0.8	29.6	4.7		
	UC201-008D1	0.5000	1.8504	1.2205	0.6693	0.024	0.500	0.720	0.177	No.10-32UNF	1.1654	0.185		
15 9/16 5/8	UC202D1	15	47	31	17	0.6	12.7	18.3	4.5	M5 × 0.8	29.6	4.7		
	UC202-009D1	0.5625	1.8504	1.2205	0.6693	0.024	0.500	0.720	0.177	No.10-32UNF	1.1654	0.185		
	UC202-010D1	0.6250												
17 11/16	UC203D1	17	47	31	17	0.6	12.7	18.3	4.5	M5 × 0.8	29.6	4.7		
	UC203-011D1	0.6875	1.8504	1.2205	0.6693	0.024	0.500	0.720	0.177	No.10-32UNF	1.1654	0.185		
20 3/4	UC204D1	20	47	31	17	1	12.7	18.3	4.5	M5 × 0.8	29.6	4.7		
	UC204-012D1	0.7500	1.8504	1.2205	0.6693	0.039	0.500	0.720	0.177	No.10-32UNF	1.1654	0.185		
25 13/16 7/8 15/16 1	UC205D1	25	52	34.1	17	1	14.3	19.8	5	M5 × 0.8	33.9	4.5		
	UC205-013D1	0.8125												
	UC205-014D1	0.8750	2.0472	1.3425	0.6693	0.039	0.563	0.780	0.197	No.10-32UNF	1.3346	0.177		
	UC205-015D1	0.9375												
	UC205-100D1	1.0000												
30 1 1/16 1 1/8 1 3/16 1 1/4	UC206D1	30	62	38.1	19	1	15.9	22.2	5	M6 × 0.75	40.8	4.6		
	UC206-101D1	1.0625												
	UC206-102D1	1.1250	2.4409	1.5000	0.7480	0.039	0.626	0.874	0.197	1/4-28UNF	1.6063	0.181		
	UC206-103D1	1.1875												
	UC206-104D1	1.2500												
35 1 1/4 1 5/16 1 3/8 1 7/16	UC207D1	35	72	42.9	20	1.5	17.5	25.4	6	M6 × 0.75	46.8	4.6		
	UC207-104D1	1.2500												
	UC207-105D1	1.3125	2.8346	1.6890	0.7874	0.059	0.689	1.000	0.236	1/4-28UNF	1.8425	0.181		
	UC207-106D1	1.3750												
	UC207-107D1	1.4375												
40 1 1/2 1 9/16	UC208D1	40	80	49.2	21	1.5	19	30.2	8	M8 × 1	53	4.5		
	UC208-108D1	1.5000	3.1496	1.9370	0.8268	0.059	0.748	1.189	0.315	5/16-24UNF	2.0866	0.177		
	UC208-109D1	1.5625												
45 1 5/8 1 11/16 1 3/4	UC209D1	45	85	49.2	22	1.5	19	30.2	8	M8 × 1	57.5	4.9		
	UC209-110D1	1.6250												
	UC209-111D1	1.6875	3.3465	1.9370	0.8661	0.059	0.748	1.189	0.315	5/16-24UNF	2.2638	0.193		
	UC209-112D1	1.7500												


Remarks: 1) For inch series bearings, the f_0 factor for calculating equivalent radial load is the same as the metric series.

sale@technobearing.ru

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)


Basic load ratings		Factor ¹⁾	Mass
N dynamic <i>C_r</i>	lbf static <i>C_{or}</i>		kg lb
12 800	6 650	13.2	0.21
2 890	1 500		0.46
12 800	6 650		0.20
2 890	1 500	13.2	0.44
			0.42
12 800	6 650	13.2	0.18
2 890	1 500		0.39
12 800	6 650	13.2	0.17
2 890	1 500		0.39
14 000	7 850		0.20
3 150	1 770	13.9	0.53
			0.51
			0.46
			0.44
19 500	11 300		0.32
4 400	2 540	13.8	0.82
			0.77
			0.73
			0.66
25 700	15 300		0.46
5 750	3 450	13.8	1.21
			1.15
			1.08
			1.01
29 100	17 800		0.64
6 550	4 000	14.0	1.52
			1.46
32 500	20 400		0.68
7 350	4 600	14.1	1.76
			1.68
			1.57

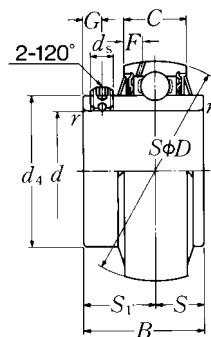

Shaft dia. mm inch	Bearing number	Nominal dimensions											
		d	D	B	C	r _s min.	mm	inch	S	S ₁	G	ds	d ₄
50 $1\frac{13}{16}$	UC210D1	50	90	51.6	24	1.5	19	32.6	9	M8 × 1		62.4	5.9
$1\frac{7}{8}$	UC210-113D1	1.8125											
$1\frac{15}{16}$	UC210-114D1	1.8750	3.5433	2.0315	0.9449	0.059	0.748	1.283	0.354	$\frac{5}{16}$ -24UNF	2.4567	0.232	
2	UC210-115D1	1.9375											
	UC210-200D1	2.0000											
55 2	UC211D1	55	100	55.6	25	2	22.2	33.4	9	M8 × 1		69	6.0
$2\frac{1}{16}$	UC211-200D1	2.0000											
$2\frac{1}{8}$	UC211-201D1	2.0625	3.9370	2.1890	0.9843	0.079	0.874	1.315	0.354	$\frac{5}{16}$ -24UNF	2.7165	0.236	
$2\frac{3}{16}$	UC211-202D1	2.1250											
	UC211-203D1	2.1875											
60 $2\frac{1}{4}$	UC212D1	60	110	65.1	27	2	25.4	39.7	10	M10 × 1.25		77	6.2
$2\frac{5}{16}$	UC212-204D1	2.2500											
$2\frac{3}{8}$	UC212-205D1	2.3125	4.3307	2.5630	1.0630	0.079	1.000	1.563	0.394	$\frac{3}{8}$ -24UNF	3.0315	0.244	
$2\frac{7}{16}$	UC212-206D1	2.3750											
	UC212-207D1	2.4375											
65 $2\frac{1}{2}$	UC213D1	65	120	65.1	32	2	25.4	39.7	10	M10 × 1.25		82.5	8.7
$2\frac{9}{16}$	UC213-208D1	2.5000	4.7244	2.5630	1.2598	0.079	1.000	1.563	0.394	$\frac{3}{8}$ -24UNF	3.2480	0.343	
	UC213-209D1	2.5625											
70 $2\frac{5}{8}$	UC214D1	70	125	74.6	33	2	30.2	44.4	12	M10 × 1.25		87	8.8
$2\frac{11}{16}$	UC214-210D1	2.6250											
$2\frac{3}{4}$	UC214-211D1	2.6875	4.9213	2.9370	1.2992	0.079	1.189	1.748	0.472	$\frac{3}{8}$ -24UNF	3.4252	0.346	
	UC214-212D1	2.7500											
75 $2\frac{13}{16}$	UC215D1	75	130	77.8	34	2	33.3	44.5	12	M10 × 1.25		93	9.0
$2\frac{7}{8}$	UC215-213D1	2.8125											
$2\frac{15}{16}$	UC215-214D1	2.8750	5.1181	3.0630	1.3386	0.079	1.311	1.752	0.472	$\frac{3}{8}$ -24UNF	3.6614	0.354	
3	UC215-215D1	2.9375											
	UC215-300D1	3.0000											
80 $3\frac{1}{16}$	UC216D1	80	140	82.6	35	2.5	33.3	49.3	12	M10 × 1.25		98.1	9.5
$3\frac{1}{8}$	UC216-301D1	3.0625											
$3\frac{3}{16}$	UC216-302D1	3.1250	5.5118	3.2520	1.3780	0.098	1.311	1.941	0.472	$\frac{3}{8}$ -24UNF	3.8622	0.374	
	UC216-303D1	3.1875											

Remarks: 1) For inch series bearings, the f_0 factor for calculating equivalent radial load is the same as the metric series.


Basic load ratings		Factor ¹⁾	Mass
N dynamic <i>C_r</i>	lbf static <i>C_{or}</i>	<i>f₀</i>	kg lb
35 000	23 200		0.78 2.03
7 900	5 200	14.4	1.92 1.81 1.69
43 500	29 200	1.04	2.71
9 750	6 550	14.3	2.60 2.46 2.34
52 500	36 000	1.46	3.66
11 800	8 150	14.3	3.50 3.33 3.17
57 500	40 000	1.86	
12 900	9 000	14.4	4.26 4.09
62 000	44 000	2.10	5.09
14 000	9 900	14.5	4.87 4.65
66 000	49 500	2.34	5.73
14 900	11 100	14.7	5.49 5.25 4.98
72 500	53 000	2.78	6.57
16 300	11 900	14.6	6.28 6.00

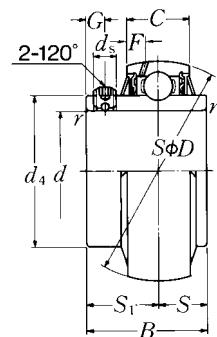

Shaft dia. mm inch	Bearing number	Nominal dimensions											
		d	D	B	C	r_s min.	mm	S	inch	S_1	G	ds	d_4
85	UC217D1	85	150	85.7	36	2.5	34.1	51.6	12	M12 × 1.5	106.4	10.1	
3 1/4	UC217-304D1	3.2500											
3 5/16	UC217-305D1	3.3125	5.9055	3.3740	1.4173	0.098	1.343	2.031	0.472	1/2-20UNF	4.1890	0.398	
3 7/16	UC217-307D1	3.4375											
90	UC218D1	90	160	96	37	2.5	39.7	56.3	12	M12 × 1.5	111.6	9.8	
3 1/2	UC218-308D1	3.5000	6.2992	3.7795	1.4570	0.098	1.563	2.217	0.472	1/2-20UNF	4.3937	0.386	

Remarks: 1) For inch series bearings, the f_0 factor for calculating equivalent radial load is the same as the metric series.


Basic load ratings		Factor ¹⁾	Mass
N dynamic <i>C_r</i>	lbf static <i>C_{or}</i>	<i>f₀</i>	kg lb
83 500	64 000		3.54
18 700	14 300	14.7	7.92
			7.60
			6.97
96 000	71 500	4.40	
21 600	16 100	14.5	9.88

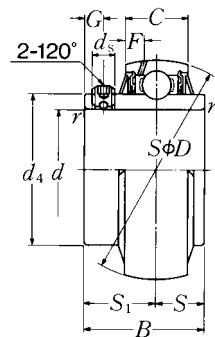

Shaft dia. mm inch	Bearing number	Nominal dimensions										
		d	D	B	C	r _s min.	mm	inch	S ₁	G	ds	d ₄
25 13/16 7/8 15/16 1	UC305D1	25	62	38	20	1.5	15	23	6	M6 × 0.75	36.8	5.0
	UC305-013D1	0.8125										
	UC305-014D1	0.8750	2.4409	1.4961	0.7874	0.059	0.591	0.906	0.236	1/4-28UNF	1.4488	0.197
	UC305-015D1	0.9375										
	UC305-100D1	1.0000										
30 1 1/16 1 1/8 1 3/16	UC306D1	30	72	43	23	1.5	17	26	6	M6 × 0.75	44.9	5.9
	UC306-101D1	1.0625										
	UC306-102D1	1.1250	2.8346	1.6929	0.9055	0.059	0.669	1.024	0.236	1/4-28UNF	1.7677	0.232
	UC306-103D1	1.1875										
35 1 1/4 1 5/16 1 3/8 1 7/16	UC307D1	35	80	48	25	2	19	29	8	M8 × 1	49.4	6.8
	UC307-104D1	1.2500										
	UC307-105D1	1.3125	3.1496	1.8898	0.9843	0.079	0.748	1.142	0.315	5/16-24UNF	1.9449	0.268
	UC307-106D1	1.3750										
	UC307-107D1	1.4375										
40 1 1/2 1 9/16	UC308D1	40	90	52	27	2	19	33	10	M10 × 1.25	56	7.4
	UC308-108D1	1.5000	3.5433	2.0472	1.0630	0.079	0.748	1.299	0.394	3/8-24UNF	2.2047	0.291
	UC308-109D1	1.5625										
45 1 5/8 1 11/16 1 3/4	UC309D1	45	100	57	29	2	22	35	10	M10 × 1.25	63.5	7.4
	UC309-110D1	1.6250										
	UC309-111D1	1.6875	3.9370	2.2441	1.1417	0.079	0.866	1.378	0.394	3/8-24UNF	2.5000	0.291
	UC309-112D1	1.7500										
50 1 13/16 1 7/8 1 15/16	UC310D1	50	110	61	32	2.5	22	39	12	M12 × 1.5	70.6	8.1
	UC310-113D1	1.8125										
	UC310-114D1	1.8750	4.3307	2.4016	1.2598	0.098	0.866	1.535	0.472	1/2-20UNF	2.7795	0.319
	UC310-115D1	1.9375										
55 2 2 1/16 2 1/8 2 3/16	UC311D1	55	120	66	34	2.5	25	41	12	M12 × 1.5	76.6	8.5
	UC311-200D1	2.0000										
	UC311-201D1	2.0625	4.7244	2.5984	1.3386	0.098	0.984	1.614	0.472	1/2-20UNF	3.0157	0.335
	UC311-202D1	2.1250										
	UC311-203D1	2.1875										

Remarks: 1) For inch series bearings, the f_0 factor for calculating equivalent radial load is the same as the metric series.


Basic load ratings		Factor ¹⁾	Mass
N dynamic <i>C_r</i>	lbf static <i>C_{or}</i>	<i>f₀</i>	kg lb
21 200	10 900		0.35 0.88
4 750	2 460	12.6	0.84 0.79 0.77
26 700	15 000	0.56	
6 000	3 400	13.3	1.34 1.28 1.23
33 500	19 100	0.70	
7 500	4 300	13.1	1.70 1.63 1.57 1.50
40 500	24 000	0.96	
9 150	5 400	13.2	2.23 2.14
53 000	32 000	1.28	
11 900	7 200	13.1	3.06 2.98 2.87
62 000	38 500	1.68	
13 900	8 600	13.2	3.95 3.84 3.70
71 500	45 000	2.08	
16 100	10 100	13.2	4.96 4.81 4.67 4.50

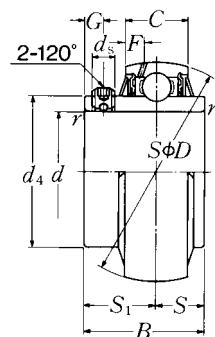

Shaft dia. mm inch	Bearing number	Nominal dimensions										
		d	D	B	C	r _s min.	mm	inch	S ₁	G	d _s	d ₄
60 $2\frac{1}{4}$ $2\frac{5}{16}$ $2\frac{3}{8}$ $2\frac{7}{16}$	UC312D1	60	130	71	36	2.5	26	45	12	M12 × 1.5	82.7	9.0
	UC312-204D1	2.2500										
	UC312-205D1	2.3125	5.1181	2.7953	1.4173	0.098	1.024	1.772	0.472	$\frac{1}{2}$ -20UNF	3.2559	0.354
	UC312-206D1	2.3750										
	UC312-207D1	2.4375										
65 $2\frac{1}{2}$ $2\frac{9}{16}$	UC313D1	65	140	75	39	2.5	30	45	12	M12 × 1.5	88.2	10.1
	UC313-208D1	2.5000	5.5118	2.9528	1.5354	0.098	1.181	1.772	0.472	$\frac{1}{2}$ -20UNF	3.4724	0.398
	UC313-209D1	2.5625										
70 $2\frac{5}{8}$ $2\frac{11}{16}$ $2\frac{3}{4}$	UC314D1	70	150	78	41	2.5	33	45	12	M12 × 1.5	94.8	10.5
	UC314-210D1	2.6250										
	UC314-211D1	2.6875	5.9055	3.0709	1.6142	0.098	1.299	1.772	0.472	$\frac{1}{2}$ -20UNF	3.7323	0.413
	UC314-212D1	2.7500										
75 $2\frac{13}{16}$ $2\frac{7}{8}$ $2\frac{15}{16}$ 3	UC315D1	75	160	82	43	2.5	32	50	14	M14 × 1.5	101.3	11.0
	UC315-213D1	2.8125										
	UC315-214D1	2.8750	6.2992	3.2283	1.6929	0.098	1.260	1.969	0.551	$\frac{9}{16}$ -18UNF	3.9882	0.433
	UC315-215D1	2.9375										
	UC315-300D1	3.0000										
80 $3\frac{1}{16}$ $3\frac{1}{8}$ $3\frac{3}{16}$	UC316D1	80	170	86	45	2.5	34	52	14	M14 × 1.5	107.9	11.4
	UC316-301D1	3.0625										
	UC316-302D1	3.1250	6.6929	3.3858	1.7717	0.098	1.339	2.047	0.551	$\frac{9}{16}$ -18UNF	4.2480	0.449
	UC316-303D1	3.1875										
85 $3\frac{1}{4}$ $3\frac{5}{16}$ $3\frac{7}{16}$	UC317D1	85	180	96	47	3	40	56	16	M16 × 1.5	114.4	12.0
	UC317-304D1	3.2500										
	UC317-305D1	3.3125	7.0866	3.7795	1.8504	0.118	1.575	2.205	0.630	$\frac{5}{8}$ -18UNF	4.5039	0.472
	UC317-307D1	3.4375										
90 $3\frac{7}{16}$ $3\frac{1}{2}$	UC318D1	90	190	96	49	3	40	56	16	M16 × 1.5	120.9	12.3
	UC318-307D1	3.4375	7.4803	3.7795	1.9291	0.118	1.575	2.205	0.630	$\frac{5}{8}$ -18UNF	4.7598	0.484
	UC318-308D1	3.5000										

Remarks: 1) For inch series bearings, the f_0 factor for calculating equivalent radial load is the same as the metric series.


Basic load ratings		Factor ¹⁾	Mass
N dynamic <i>C_r</i>	lbf static <i>C_{or}</i>		kg lb
82 000	52 000		2.60
			6.06
18 400	11 700	13.2	5.89
			5.68
			5.51
92 500	60 000		3.25
20 800	13 400	13.2	7.36
			7.14
104 000	68 000		3.86
23 400	15 300	13.2	9.06
			8.82
			8.60
113 000	77 000		4.70
25 500	17 400	13.2	11.0
			10.7
			10.5
			10.2
123 000	86 500		5.60
27 600	19 500	13.3	12.6
			12.3
			12.1
133 000	97 000		6.70
29 800	21 800	13.3	15.2
			14.9
			14.2
143 000	107 000		7.60
32 000	24 100	13.3	17.3
			16.9

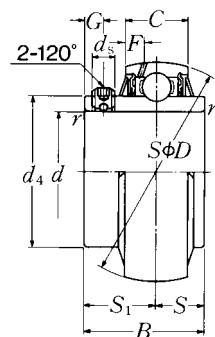

Shaft dia. mm inch	Bearing number	Nominal dimensions											
		d	D	B	C	r _s min.	mm	inch	S ₁	G	d _s	d ₄	F
95 <i>3</i> ⁵ / ₈	UC319D1	95	200	103	51	3	41	62	16	M16 × 1.5	127.5	12.8	
	UC319-310D1	3.6250											
3 ¹¹ / ₁₆	UC319-311D1	3.6875	7.8740	4.0551	2.0079	0.118	1.614	2.441	0.630	5/8-18UNF	5.0197	0.504	
3 ³ / ₄	UC319-312D1	3.7500											
100 <i>3</i> ¹³ / ₁₆	UC320D1	100	215	108	55	3	42	66	18	M18 × 1.5	135.6	13.5	
	UC320-313D1	3.8125											
3 ⁷ / ₈	UC320-314D1	3.8750	8.4646	4.2520	2.1654	0.118	1.654	2.598	0.709	5/8-18UNF	5.3386	0.531	
3 ¹⁵ / ₁₆	UC320-315D1	3.9375											
4	UC320-400D1	4.0000											
105	UC321D1	105	225	112	57	3	44	68	18	M18 × 1.5	142.1	13.9	
110	UC322D1	110	240	117	59	3	46	71	18	M18 × 1.5	151.7	13.9	
120	UC324D1	120	260	126	63	3	51	75	18	M18 × 1.5	165.2	16.0	
130	UC326D1	130	280	135	67	4	54	81	20	M20 × 1.5	178.3	16.9	
140	UC328D1	140	300	145	71	4	59	86	20	M20 × 1.5	190.4	17.7	

Remarks: 1) For inch series bearings, the f_0 factor for calculating equivalent radial load is the same as the metric series.


Basic load ratings		Factor ¹⁾	Mass
N dynamic <i>C_r</i>	lbf static <i>C_{or}</i>		kg lb
153 000	119 000		8.70
34 500	26 600	13.3	19.9
			19.5
			19.1
173 000	141 000		10.8
39 000	31 500	13.2	24.7
			24.2
			23.8
			23.4
184 000	153 000	13.2	12.2
205 000	179 000	13.1	14.3
207 000	185 000	13.5	18.5
229 000	214 000	13.6	23.0
253 000	246 000	13.6	28.5

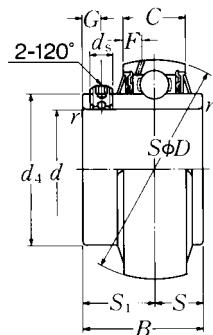

Shaft dia. mm inch	Bearing number	Nominal dimensions											
		d	D	B	C	r _s min.	mm	inch	S	S ₁	G	ds	d ₄
25 13/16 7/8 15/16 1	UCX05D1	25	62	38.1	19	1	15.9	22.2	5	M6 × 0.75	40.8	4.6	
	UCX05-013D1	0.8125											
	UCX05-014D1	0.8750	2.4409	1.5000	0.7480	0.039	0.626	0.874	0.197	1/4-28UNF	1.6063	0.181	
	UCX05-015D1	0.9375											
	UCX05-100D1	1.0000											
30 1 1/16 1 1/8 1 3/16	UCX06D1	30	72	42.9	20	1	17.5	25.4	6	M8 × 1	46.8	4.6	
	UCX06-101D1	1.0625											
	UCX06-102D1	1.1250	2.8346	1.6890	0.7874	0.039	0.689	1.000	0.236	5/16-24UNF	1.8425	0.181	
	UCX06-103D1	1.1875											
35 1 5/16 1 3/8 1 7/16	UCX07D1	35	80	49.2	21	1.5	19	30.2	8	M8 × 1	53	4.5	
	UCX07-105D1	1.3125											
	UCX07-106D1	1.3750	3.1496	1.9370	0.8268	0.059	0.748	1.189	0.315	5/16-24UNF	2.0866	0.177	
	UCX07-107D1	1.4375											
40 1 1/2 1 9/16	UCX08D1	40	85	49.2	22	1.5	19	30.2	8	M8 × 1	57.5	4.9	
	UCX08-108D1	1.5000	3.3465	1.9370	0.8661	0.059	0.748	1.189	0.315	5/16-24UNF	2.2638	0.193	
	UCX08-109D1	1.5625											
45 1 5/8 1 11/16 1 3/4	UCX09D1	45	90	51.6	24	1.5	19	32.6	9	M10 × 1.25	62.4	5.9	
	UCX09-110D1	1.6250											
	UCX09-111D1	1.6875	3.5433	2.0315	0.9449	0.059	0.748	1.283	0.354	3/8-24UNF	2.4567	0.232	
	UCX09-112D1	1.7500											
50 1 7/8 1 15/16	UCX10D1	50	100	55.6	25	1.5	22.2	33.4	9	M10 × 1.25	69	6.0	
	UCX10-114D1	1.8750	3.9370	2.1890	0.9843	0.059	0.874	1.315	0.354	3/8-24UNF	2.7165	0.236	
	UCX10-115D1	1.9375											
55 2 1/16 2 1/8 2 3/16	UCX11D1	55	110	65.1	27	2	25.4	39.7	10	M10 × 1.25	77	6.2	
	UCX11-201D1	2.0625											
	UCX11-202D1	2.1250	4.3307	2.5630	1.0630	0.079	1.000	1.563	0.394	3/8-24UNF	3.0315	0.244	
	UCX11-203D1	2.1875											
60 2 3/8 2 7/16	UCX12D1	60	120	65.1	32	2	25.4	39.7	10	M10 × 1.25	82.5	8.7	
	UCX12-206D1	2.3750	4.7244	2.5630	1.2598	0.079	1.000	1.563	0.394	3/8-24UNF	3.2480	0.343	
	UCX12-207D1	2.4375											

Remarks: 1) For inch series bearings, the f_0 factor for calculating equivalent radial load is the same as the metric series.

Basic load ratings		Factor ¹⁾	Mass
N dynamic <i>C_r</i>	lbf static <i>C_{or}</i>	<i>f₀</i>	kg lb
19 500	11 300		0.39 0.97
4 400	2 540	13.8	0.93 0.88 0.84
25 700	15 300	0.68	
5 750	3 450	13.8	1.61 1.54 1.50
29 100	17 800	0.74	
6 550	4 000	14.0	1.87 1.81 1.74
32 500	20 400	0.80	
7 350	4 600	14.1	2.16 2.07
35 000	23 200	0.94	
7 900	5 200	14.4	2.43 2.34 2.25
43 500	29 200	1.22	
9 750	6 550	14.3	3.15 3.04
52 500	36 000	1.72	
11 800	8 150	14.3	4.43 4.30 4.12
57 500	40 000	2.10	
12 900	9 000	14.4	4.96 4.81

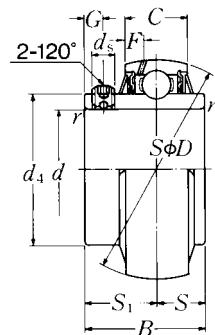


Remarks: 1) For inch series bearings, the f_0 factor for calculating equivalent radial load is the same as the metric series.

Basic load ratings		Factor ¹⁾	Mass
N dynamic <i>C_r</i>	lbf static <i>C_{or}</i>		kg lb
62 000	44 000		2.45
14 000	9 900	14.5	5.60 5.38
66 000	49 500		2.47
14 900	11 100	14.7	5.93 5.69 5.47
72 500	53 000		3.11
16 300	11 900	14.6	7.43 7.19 6.92 6.66
83 500	64 000		3.96
18 700	14 300	14.7	8.75 8.47 8.18
96 000	71 500		4.72
21 600	16 100	14.5	10.8 10.1
109 000	82 000		5.50
24 500	18 400	14.4	13.3 12.4
133 000	105 000		8.06
29 900	23 500	14.4	18.8 18.4 19.7 19.2

sale@technobearing.ru

www.technobearing.ru


8 (800) 700-72-07 (бесплатно)

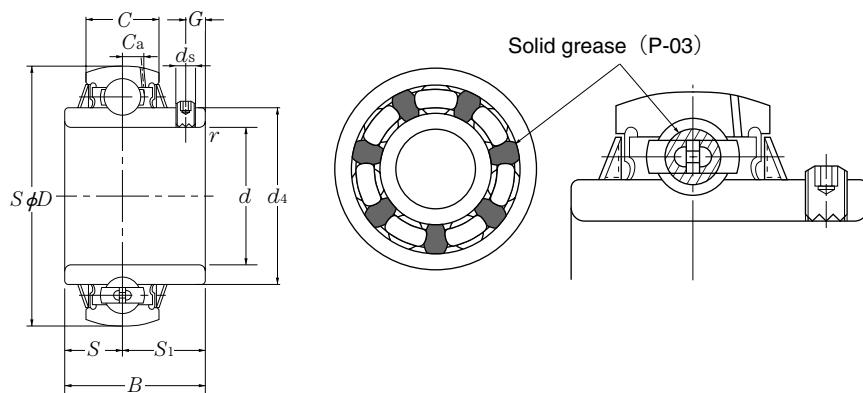Stainless ball bearing with solid grease**Set screw type**

Shaft dia. mm	Bearing number	Nominal dimensions										
		d	D	B	C	r _s min.	S	S ₁	G	ds	C _a	d ₄
20	F-UC204D1/LP03	20	47	31	17	1	12.7	18.3	4.5	M5 × 0.8	3.8	29.6
25	F-UC205D1/LP03	25	52	34.1	17	1	14.3	19.8	5	M5 × 0.8	4	33.9
30	F-UC206D1/LP03	30	62	38.1	19	1	15.9	22.2	5	M6 × 0.75	4.9	40.8
35	F-UC207D1/LP03	35	72	42.9	20	1.5	17.5	25.4	6	M6 × 0.75	5.4	46.8
40	F-UC208D1/LP03	40	80	49.2	21	1.5	19	30.2	8	M8 × 1	6	53
45	F-UC209D1/LP03	45	85	49.2	22	1.5	19	30.2	8	M8 × 1	6.1	57.5
50	F-UC210D1/LP03	50	90	51.6	24	1.5	19	32.6	9	M8 × 1	6.1	62.4

Remarks: 1) The basic dynamic load rating C_r of the bearing is different from a bearing made with standard bearing steel.

Basic load ratings		Factor	Mass
dynamic C_r	N static C_{or}	f_0	kg
9 900	6 650	13.2	0.17
10 800	7 850	13.9	0.20
15 000	11 300	13.8	0.30
19 700	15 300	13.8	0.40
22 400	17 800	14.0	0.60
25 200	20 400	14.1	0.68
27 000	23 200	14.4	0.78

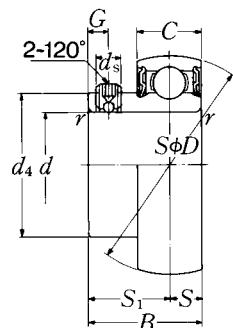


Shaft dia. mm inch	Bearing number ¹⁾	Nominal dimensions									
		d	D	B	C	mm r_s min.	inch S	S1	G	ds	d4
12 1/2	AS201 AS201-008	12 0.5000	40 1.5748	22 0.8661	12 0.4724	0.6 0.024	6 0.236	16 0.630	4.2 0.165	M5 × 0.8 No.10-32UNF	24.3 0.957
15 9/16 5/8	AS202 AS202-009 AS202-010	15 0.5625 0.6250	40 1.5748	22 0.8661	12 0.4724	0.6 0.024	6 0.236	16 0.630	4.2 0.165	M5 × 0.8 No.10-32UNF	24.3 0.957
17 11/16	AS203 AS203-011	17 0.6875	40 1.5748	22 0.8661	12 0.4724	0.6 0.024	6 0.236	16 0.630	4.2 0.165	M5 × 0.8 No.10-32UNF	24.3 0.957
20 3/4	AS204 AS204-012	20 0.7500	47 1.8504	25 0.9843	14 0.5512	1 0.039	7 0.276	18 0.709	4.2 0.165	M5 × 0.8 No.10-32UNF	29.6 1.165
25 13/16 7/8 15/16 1	AS205 AS205-013 AS205-014 AS205-015 AS205-100	25 0.8125 0.8750 0.9375 1.0000	52 2.0472	27 1.0630	15 0.5906	1 0.039	7.5 0.295	19.5 0.768	5 0.197	M5 × 0.8 No.10-32UNF	33.9 1.335
30 1 1/16 1 1/8 1 3/16 1 1/4	AS206 AS206-101 AS206-102 AS206-103 AS206-104	30 1.0625 1.1250 1.1875 1.2500	62 2.4409	29 1.1417	16 0.6299	1 0.039	8 0.315	21 0.827	5 0.197	M6 × 0.75 1/4-28UNF	40.8 1.606
35 1 1/4 1 5/16 1 3/8 1 7/16	AS207 AS207-104 AS207-105 AS207-106 AS207-107	35 1.2500 1.3125 1.3750 1.4375	72 2.8346	34 1.3386	17 0.6693	1.5 0.059	8.5 0.335	25.5 1.004	6 0.236	M6 × 0.75 1/4-28UNF	46.8 1.843
40 1 1/2 1 9/16	AS208 AS208-108 AS208-109	40 1.5000 1.5625	80 3.1496	38 1.4961	18 0.7087	1.5 0.059	9 0.354	29 1.142	8 0.315	M8 × 1 5/16-24UNF	53 2.087

Remarks: 1) If relubricatable type is needed, please order with suffix "D1".

2) For inch series bearings, the f_0 factor for calculating equivalent radial load is the same as the metric series.

Basic load ratings		Factor ²⁾	Mass
N dynamic <i>C_r</i>	lbf static <i>C_{or}</i>	<i>f₀</i>	kg lb
9 600	4 600	12.8	0.10
2 160	1 030		0.22
9 600	4 600		0.09
2 160	1 030	12.8	0.21
			0.20
9 600	4 600	12.8	0.08
2 160	1 030		0.18
12 800	6 650	13.2	0.13
2 890	1 500		0.29
14 000	7 850		0.16
			0.42
3 150	1 770	13.9	0.40
			0.38
			0.35
19 500	11 300		0.25
			0.61
4 400	2 540	13.8	0.59
			0.57
			0.55
25 700	15 300		0.38
			1.06
5 750	3 450	13.8	0.93
			0.81
			0.69
29 100	17 800		0.51
6 550	4 000	14.0	1.15
			1.06

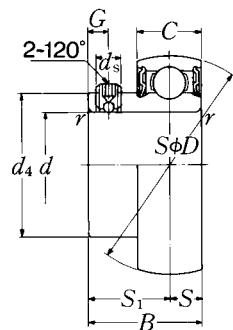


Shaft dia. mm inch	Bearing number ¹⁾	Nominal dimensions									
		d	D	B	C	mm r_s min.	inch S	S ₁	G	ds	d ₄
45 1 5/8 1 11/16 1 3/4	AS209	45	85	40	19	1.5	9.5	30.5	8	M8 X 1	57.5
	AS209-110	1.6250									
	AS209-111	1.6875	3.3465	1.5748	0.7480	0.059	0.374	1.201	0.315	5/16-24UNF	2.2638
	AS209-112	1.7500									
50 1 13/16 1 7/8 1 15/16 2	AS210	50	90	42	20	1.5	10	32	9	M8X1	62.4
	AS210-113	1.8125									
	AS210-114	1.8750	3.5433	1.6535	0.7874	0.059	0.394	1.260	0.354	5/16-24UNF	2.4567
	AS210-115	1.9375									
	AS210-200	2.0000									

Remarks: 1) If relubricatable type is needed, please order with suffix "D1".

2) For inch series bearings, the f_0 factor for calculating equivalent radial load is the same as the metric series.

Basic load ratings		Factor ²⁾	Mass
N dynamic C_r	lbf static C_{or}		kg lb
32 500	20 400		0.55 1.39
7 350	4 600	14.1	1.32 1.23
35 000	23 200		0.65 1.65
7 900	5 200	14.4	1.57 1.48 1.39

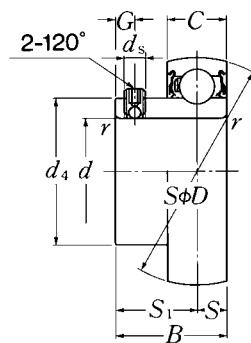


Shaft dia. mm inch	Bearing number ¹⁾	Nominal dimensions									
		d	D	B	C	mm r _s min.	inch S	S ₁	G	ds	d ₄
12 $\frac{1}{2}$	AR201 AR201-008	12 0.5000	40 1.5748	22.5 0.8858	13 0.5118	0.6 0.024	6.5 0.256	16 0.630	5 0.197	M6 \times 0.75 $\frac{1}{4}$ -28UNF	24.4 0.9606
15 $\frac{9}{16}$ $\frac{5}{8}$	AR202 AR202-009 AR202-010	15 0.5625 0.6250	40 1.5748	22.5 0.8858	13 0.5118	0.6 0.024	6.5 0.256	16 0.630	5 0.197	M6 \times 0.75 $\frac{1}{4}$ -28UNF	24.4 0.9606
17 $\frac{11}{16}$	AR203 AR203-011	17 0.6875	40 1.5748	22.5 0.8858	13 0.5118	0.6 0.024	6.5 0.256	16 0.630	5 0.197	M6 \times 0.75 $\frac{1}{4}$ -28UNF	24.4 0.9606
20 $\frac{3}{4}$	AR204 AR204-012	20 0.7500	47 1.8504	25.5 1.0039	15 0.5906	1 0.039	7.5 0.295	18 0.709	5 0.197	M6 \times 0.75 $\frac{1}{4}$ -28UNF	29.6 1.1654
25 $\frac{13}{16}$ $\frac{7}{8}$ $\frac{15}{16}$ 1	AR205 AR205-013 AR205-014 AR205-015 AR205-100	25 0.8125 0.8750 0.9375 1.0000	52 2.0472	27 1.0630	15 0.5906	1 0.039	7.5 0.295	19.5 0.768	5 0.197	M6 \times 0.75 $\frac{1}{4}$ -28UNF	33.9 1.3346
30 $1\frac{1}{16}$ $1\frac{1}{8}$ $1\frac{3}{16}$ $1\frac{1}{4}$	AR206 AR206-101 AR206-102 AR206-103 AR206-104	30 1.0625 1.1250 1.1875 1.2500	62 2.4409	30 1.1811	18 0.7087	1 0.039	9 0.354	21 0.827	5 0.197	M6 \times 0.75 $\frac{1}{4}$ -28UNF	40.8 1.6063
35 $1\frac{1}{4}$ $1\frac{5}{16}$ $1\frac{3}{8}$ $1\frac{7}{16}$	AR207 AR207-104 AR207-105 AR207-106 AR207-107	35 1.2500 1.3125 1.3750 1.4375	72 2.8346	35 1.3780	19 0.7480	1.5 0.059	9.5 0.374	25.5 1.004	6 0.236	M6 \times 0.75 $\frac{1}{4}$ -28UNF	46.8 1.8425
40 $1\frac{1}{2}$ $1\frac{9}{16}$	AR208 AR208-108 AR208-109	40 1.5000 1.5625	80 3.1496	40 1.5748	22 0.8661	1.5 0.059	11 0.433	29 1.142	8 0.315	M8 \times 1 $\frac{5}{16}$ -24UNF	53 2.0866

Remarks: 1) If relubricatable type is needed, please order with suffix "D1".

2) For inch series bearings, the f_0 factor for calculating equivalent radial load is the same as the metric series.

Basic load ratings		Factor ²⁾ f_0	Mass	
N dynamic C_r	lbf static C_{or}		kg	lb
9 600	4 600	12.8	0.11	
2 160	1 030		0.24	
9 600	4 600		0.10	
2 160	1 030	12.8	0.23	
			0.22	
9 600	4 600	12.8	0.09	
2 160	1 030		0.20	
12 800	6 650	13.2	0.14	
2 890	1 500		0.31	
14 000	7 850		0.17	
3 150	1 770	13.9	0.44	
			0.42	
			0.40	
			0.37	
19 500	11 300		0.26	
4 400	2 540	13.8	0.63	
			0.61	
			0.59	
			0.57	
25 700	15 300		0.39	
5 750	3 450	13.8	1.10	
			0.97	
			0.85	
			0.73	
29 100	17 800		0.54	
6 550	4 000	14.0	1.24	
			1.15	

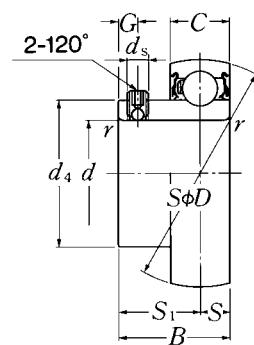


Shaft dia. mm inch	Bearing number ¹⁾	Nominal dimensions									
		d	D	B	C	mm r _s min.	inch S	S ₁	G	ds	d ₄
45 1 5/8 1 11/16 1 3/4	AR209	45	85	41.5	22	1.5	11	30.5	8	M8X1	57.5
	AR209-110	1.6250									
	AR209-111	1.6875	3.3465	1.6339	0.8661	0.059	0.433	1.201	0.315	5/16-24UNF	2.2638
	AR209-112	1.7500									
50 1 13/16 1 7/8 1 15/16 2	AR210	50	90	43	22	1.5	11	32	9	M8X1	62.4
	AR210-113	1.8125									
	AR210-114	1.8750	3.5433	1.6929	0.8661	0.059	0.433	1.260	0.354	5/16-24UNF	2.4567
	AR210-115	1.9375	2.0000								
	AR210-200										

Remarks: 1) If relubricatable type is needed, please order with suffix "D1".

2) For inch series bearings, the f_0 factor for calculating equivalent radial load is the same as the metric series.


Basic load ratings		Factor ²⁾	Mass
N dynamic C_r	lbf static C_{or}		kg lb
32 500	20 400		0.61
7 350	4 600	14.1	1.54 1.46 1.39
35 000	23 200		0.70 1.76
7 900	5 200	14.4	1.68 1.59 1.50

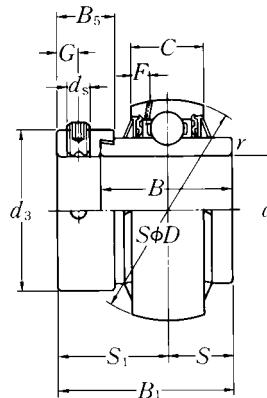

Shaft dia. mm inch	Bearing number	Nominal dimensions											
		d	D	B ₁	B	C	mm r _s min.	inch S	S ₁	G	ds	d ₃	
20 ¾	UEL204D1W3	20	47	43.7	34.2	17	1	17.1	26.6	4.8	M6 × 0.75	33	
	UEL204-012D1W3	0.7500	1.8504	1.720	1.3465	0.6693	0.039	0.673	1.047	0.189	¼-28UNF	1.299	
25 13/16 7/8 15/16	UEL205D1W3	25	52	44.4	34.9	17	1	17.45	26.9	4.8	M6 × 0.75	38	
	UEL205-013D1W3	0.8125											
	UEL205-014D1W3	0.8750											
	UEL205-015D1W3	0.9375											
1	UEL205-100D1W3	1.0000											
30 1 1/16 1 1/8 1 3/16 1 1/4	UEL206D1W3	30	62	48.4	36.5	19	1	18.25	30.1	6	M8 × 1	44.5	
	UEL206-101D1W3	1.0625											
	UEL206-102D1W3	1.1250											
	UEL206-103D1W3	1.1875											
	UEL206-104D1W3	1.2500											
35 1 1/4 1 5/16 1 3/8 1 7/16	UEL207D1W3	35	72	51.1	37.6	20	1.5	18.8	32.3	6.8	M10 × 1.25	55.5	
	UEL207-104D1W3	1.2500											
	UEL207-105D1W3	1.3125											
	UEL207-106D1W3	1.3750											
	UEL207-107D1W3	1.4375											
40 1 1/2 1 9/16	UEL208D1W3	40	80	56.3	42.8	21	1.5	21.4	34.9	6.8	M10 × 1.25	60	
	UEL208-108D1W3	1.5000											
	UEL208-109D1W3	1.5625											
45 1 5/8 1 11/16 1 3/4	UEL209D1W3	45	85	56.3	42.8	22	1.5	21.4	34.9	6.8	M10 × 1.25	63.5	
	UEL209-110D1W3	1.6250											
	UEL209-111D1W3	1.6875											
	UEL209-112D1W3	1.7500											
50 1 13/16 1 7/8 1 15/16 2	UEL210D1W3	50	90	62.7	49.2	24	1.5	24.6	38.1	6.8	M10 × 1.25	69.5	
	UEL210-113D1W3	1.8125											
	UEL210-114D1W3	1.8750											
	UEL210-115D1W3	1.9375											
	UEL210-200D1W3	2.0000											

Remarks: 1) For inch series bearings, the f_0 factor for calculating equivalent radial load is the same as the metric series.


Nominal dimensions		Basic load ratings		Factor ¹⁾	Mass
mm <i>B₅</i>	inch <i>F</i>	N dynamic <i>C_r</i>	lbf static <i>C_{or}</i>	<i>f₀</i>	kg lb
13.5 0.531	4.7 0.185	12 800 2 890	6 650 1 500	13.2	0.23 0.45
13.5 0.531	4.5 0.177	14 000 3 150	7 850 1 770	13.9	0.27 0.61 0.58 0.55 0.51
15.9 0.626	4.6 0.181	19 500 4 400	11 300 2 540	13.8	0.45 0.94 0.89 0.84 0.80
17.5 0.689	4.6 0.181	25 700 5 750	15 300 3 450	13.8	0.60 1.45 1.40 1.35 1.28
18.3 0.720	4.5 0.177	29 100 6 550	17 800 4 000	14.0	0.78 1.90 1.82
18.3 0.720	4.9 0.193	32 500 7 350	20 400 4 600	14.1	0.80 2.05 1.97 1.88
18.3 0.720	5.9 0.232	35 000 7 900	23 200 5 200	14.4	0.96 2.46 2.36 2.25 2.09

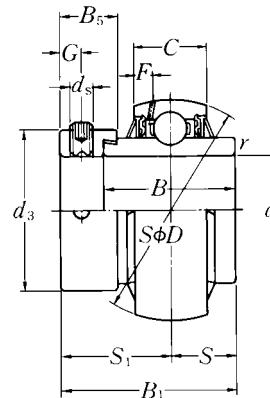

Shaft dia. mm inch	Bearing number	Nominal dimensions												
		d	D	B ₁	B	C	mm min.	inch r _s	S	S ₁	G	ds	d ₃	
55 2	UEL211D1W3	55	100	71.4	55.5	25	2	27.75	43.6	8	M10 × 1.25	76		
2 1/16	UEL211-200D1W3	2.0000												
2 1/8	UEL211-201D1W3	2.0625												
2 3/16	UEL211-202D1W3	3.9370		2.811	2.1850	0.9843	0.079	1.093	1.717	0.315	3/8-24UNF	2.992		
2 1/2	UEL211-203D1W3	2.1250												
2 7/16		2.1875												
60 2 1/4	UEL212D1W3	60	110	77.8	61.9	27	2	30.95	46.8	8	M10 × 1.25	84		
2 5/16	UEL212-204D1W3	2.2500												
2 3/8	UEL212-205D1W3	2.3125												
2 7/16	UEL212-206D1W3	4.3307		3.063	2.4370	1.0630	0.079	1.219	1.843	0.315	3/8-24UNF	3.307		
2 1/2	UEL212-207D1W3	2.3750												
2 9/16		2.4375												
65 2 1/2	UEL213D1W3	65	120	85.7	68.3	32	2	34.15	51.55	8.7	M10 × 1.25	97		
2 9/16	UEL213-208D1W3	2.5000												
2 11/16	UEL213-209D1W3	2.5625		4.7244	3.374	2.6890	1.2598	0.079	1.344	2.030	0.343	3/8-24UNF	3.819	
70 2 5/8	UEL214D1W3	70	125	85.7	68.3	33	2	34.15	51.55	8.7	M10 × 1.25	97		
2 11/16	UEL214-210D1W3	2.6250												
2 3/4	UEL214-211D1W3	2.6875												
2 15/16	UEL214-212D1W3	4.9213		3.374	2.6890	1.2992	0.079	1.344	2.030	0.343	3/8-24UNF	3.819		
75 2 13/16	UEL215D1W3	75	130	92	74.6	34	2	37.3	54.7	8.7	M10 × 1.25	102		
2 7/8	UEL215-213D1W3	2.8125												
2 15/16	UEL215-214D1W3	2.8750												
3	UEL215-215D1W3	5.1181		3.622	2.9370	1.3386	0.079	1.469	2.154	0.343	3/8-24UNF	4.016		
	UEL215-300D1W3	2.9375												
		3.0000												

Remarks: 1) For inch series bearings, the f_0 factor for calculating equivalent radial load is the same as the metric series.


Nominal dimensions		Basic load ratings		Factor ¹⁾	Mass
mm <i>B₅</i>	inch <i>F</i>	N dynamic <i>C_r</i>	lbf static <i>C_{or}</i>	<i>f₀</i>	kg lb
20.7	6.0	43 500	29 200		1.32
					3.28
0.815	0.236	9 750	6 550	14.3	3.12
					3.02
					2.90
22.3	6.2	52 500	36 000		1.79
					4.38
0.878	0.244	11 800	8 150	14.3	4.22
					4.05
					3.88
23.8	8.7	57 500	40 000		2.54
0.937	0.343	12 900	9 000	14.4	5.47
					5.30
23.8	8.8	62 000	44 000		2.47
0.937	0.346	14 000	9 900	14.5	5.67
					5.45
					5.18
23.8	9.0	66 000	49 500		2.68
0.937	0.354	14 900	11 100	14.7	6.39
					6.15
					5.91
					5.60

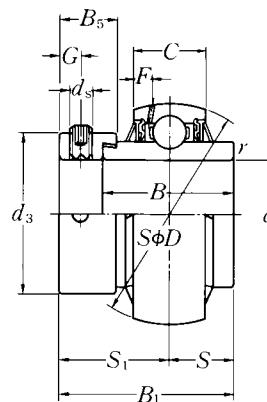

Shaft dia. mm inch	Bearing number	Nominal dimensions											
		d	D	B ₁	B	C	mm r _s min.	inch S	S ₁	G	ds	d ₃	
25 13/16 7/8 15/16 1	UEL305D1W3	25	62	46.8	34.9	20	1.5	16.7	30.1	6	M8 × 1	42.8	
	UEL305-013D1W3	0.8125											
	UEL305-014D1W3	0.8750	2.4409	1.843	1.3740	0.7874	0.059	0.657	1.185	0.236	5/16-24UNF	1.685	
	UEL305-015D1W3	0.9375											
	UEL305-100D1W3	1.0000											
30 1 1/16 1 1/8 1 3/16	UEL306D1W3	30	72	50	36.5	23	1.5	17.5	32.5	6.7	M8 × 1	50	
	UEL306-101D1W3	1.0625											
	UEL306-102D1W3	1.1250	2.8346	1.969	1.4370	0.9055	0.059	0.689	1.280	0.264	5/16-24UNF	1.969	
	UEL306-103D1W3	1.1875											
35 1 1/4 1 5/16 1 3/8 1 7/16	UEL307D1W3	35	80	51.6	38.1	25	2	18.3	33.3	6.7	M8 × 1	55	
	UEL307-104D1W3	1.2500											
	UEL307-105D1W3	1.3125	3.1496	2.031	1.5000	0.9843	0.079	0.720	1.311	0.264	5/16-24UNF	2.165	
	UEL307-106D1W3	1.3750											
	UEL307-107D1W3	1.4375											
40 1 1/2 1 3/16	UEL308D1W3	40	90	57.1	41.3	27	2	19.8	37.3	8	M10 × 1.25	63.5	
	UEL308-108D1W3	1.5000	3.5433	2.248	1.6260	1.0630	0.079	0.780	1.469	0.315	5/8-24UNF	2.500	
	UEL308-109D1W3	1.5625											
45 1 5/8 1 11/16 1 3/4	UEL309D1W3	45	100	58.7	42.9	29	2	19.8	38.9	8	M10 × 1.25	70	
	UEL309-110D1W3	1.6250											
	UEL309-111D1W3	1.6875	3.9370	2.311	1.6890	1.1417	0.079	0.780	1.531	0.315	5/8-24UNF	2.756	
	UEL309-112D1W3	1.7500											
50 1 13/16 1 7/8 1 15/16	UEL310D1W3	50	110	66.6	49.2	32	2.5	24.6	42	8.7	M10 × 1.25	76.2	
	UEL310-113D1W3	1.8125											
	UEL310-114D1W3	1.8750	4.3307	2.622	1.9370	1.2598	0.098	0.969	1.654	0.343	5/8-24UNF	3.000	
	UEL310-115D1W3	1.9375											
55 2 2 1/16 2 1/8 2 3/16	UEL311D1W3	55	120	73	55.6	34	2.5	27.8	45.2	8.7	M10 × 1.25	83	
	UEL311-200D1W3	2.0000											
	UEL311-201D1W3	2.0625	4.7244	2.874	2.1890	1.3386	0.098	1.094	1.780	0.343	5/8-24UNF	3.268	
	UEL311-202D1W3	2.1250											
	UEL311-203D1W3	2.1875											

Remarks: 1) For inch series bearings, the f_0 factor for calculating equivalent radial load is the same as the metric series.


Nominal dimensions		Basic load ratings		Factor ¹⁾	Mass
mm <i>B₅</i>	inch <i>F</i>	N dynamic <i>C_r</i>	lbf static <i>C_{or}</i>	<i>f₀</i>	kg lb
15.9	5.0	21 200	10 900		0.43 1.09
0.626	0.197	4 750	2 460	12.6	1.05 1.01 0.96
17.5	5.9	26 700	15 000		0.69 1.57
0.689	0.232	6 000	3 400	13.3	1.51 1.45
17.5	6.8	33 500	19 100		0.78 1.92
0.689	0.268	7 500	4 300	13.1	1.84 1.77 1.69
20.6	7.4	40 500	24 000		1.10 2.58
0.811	0.291	9 150	5 400	13.2	2.49
20.6	7.4	53 000	32 000		1.40 3.36
0.811	0.291	11 900	7 200	13.1	3.26 3.15
22.2	8.1	62 000	38 500		1.84 4.40
0.874	0.319	13 900	8 600	13.2	4.29 4.15
22.2	8.5	71 500	45 000		2.36 5.58
0.874	0.335	16 100	10 100	13.2	5.39 5.25 5.08

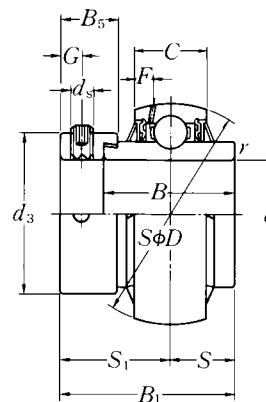

Shaft dia. mm inch	Bearing number	Nominal dimensions											
		d	D	B ₁	B	C	mm r _s min.	inch S	S ₁	G	ds	d ₃	
60 2 1/4 2 5/16 2 3/8 2 7/16	UEL312D1W3	60	130	79.4	61.9	36	2.5	30.95	48.45	8.7	M10 × 1.25	89	
	UEL312-204D1W3	2.2500											
	UEL312-205D1W3	2.3125											
	UEL312-206D1W3	5.1181	3.126	2.4370	1.4173	0.098	1.219	1.907	0.343	3/8-24UNF	3.504		
	UEL312-207D1W3	2.3750											
		2.4375											
65 2 1/2 2 9/16	UEL313D1W3	65	140	85.7	65.1	39	2.5	32.55	53.15	10.3	M12 × 1.5	97	
	UEL313-208D1W3	2.5000											
	UEL313-209D1W3	2.5625	5.5118	3.374	2.5630	1.5354	0.098	1.281	2.093	0.406	1/2-20UNF	3.819	
70 2 5/8 2 11/16 2 3/4	UEL314D1W3	70	150	92.1	68.3	41	2.5	34.15	57.95	10.3	M12 × 1.5	102	
	UEL314-210D1W3	2.6250											
	UEL314-211D1W3	2.6875	5.9055	3.626	2.6890	1.6142	0.098	1.344	2.281	0.406	1/2-20UNF	4.016	
	UEL314-212D1W3	2.7500											
75 2 13/16 2 7/8 2 15/16 3	UEL315D1W3	75	160	100	74.6	43	2.5	37.3	62.7	12.7	M16 × 1.5	113	
	UEL315-213D1W3	2.8125											
	UEL315-214D1W3	2.8750	6.2992	3.937	2.9370	1.6929	0.098	1.469	2.469	0.500	5/8-18UNF	4.449	
	UEL315-215D1W3	2.9375											
	UEL315-300D1W3	3.0000											
80 3 1/16 3 1/8 3 3/16	UEL316D1W3	80	170	106.4	81	45	2.5	40.5	65.9	12.7	M16 × 1.5	119	
	UEL316-301D1W3	3.0625											
	UEL316-302D1W3	3.1250	6.6929	4.189	3.1890	1.7717	0.098	1.594	2.594	0.500	5/8-18UNF	4.685	
	UEL316-303D1W3	3.1875											
85 3 1/4 3 5/16 3 7/16	UEL317D1W3	85	180	109.5	84.1	47	3	42.05	67.45	12.7	M16 × 1.5	127	
	UEL317-304D1W3	3.2500											
	UEL317-305D1W3	3.3125	7.0866	4.311	3.3110	1.8504	0.118	1.656	2.656	0.500	5/8-18UNF	5.000	
	UEL317-307D1W3	3.4375											
90 3 7/16 3 1/2	UEL318D1W3	90	190	115.9	87.3	49	3	43.65	72.25	14.3	M20 × 1.5	133	
	UEL318-307D1W3	3.4375	7.4803	4.563	3.4370	1.9291	0.118	1.719	2.844	0.563	3/4-16UNF	5.236	
	UEL318-308D1W3	3.5000											
95 3 5/8 3 11/16 3 3/4	UEL319D1W3	95	200	122.3	93.7	51	3	38.9	83.4	14.3	M20 × 1.5	140	
	UEL319-310D1W3	3.6250											
	UEL319-311D1W3	3.6875	7.8740	4.815	3.6890	2.0079	0.118	1.531	3.283	0.563	3/4-16UNF	5.512	
	UEL319-312D1W3	3.7500											

For metric ball bearings, the f_0 factor for calculating equivalent static load is the same as the metric series. 8 (800) 700-72-07 (бесплатно)


Nominal dimensions		Basic load ratings		Factor ¹⁾	Mass
mm <i>B₅</i>	inch <i>F</i>	N dynamic <i>C_r</i>	lbf static <i>C_{or}</i>	<i>f₀</i>	kg lb
23.9	9.0	82 000	52 000		2.94 6.80
0.941	0.354	18 400	11 700	13.2	6.65 6.48 6.19
27	10.1	92 500	60 000		3.67
1.063	0.398	20 800	13 400	13.2	8.49 8.27
30.2	10.5	104 000	68 000		4.40 10.4
1.189	0.413	23 400	15 300	13.2	10.2 9.96
31.8	11.0	113 000	77 000		5.34 13.2
1.252	0.433	25 500	17 400	13.2	12.9 12.7 12.5
31.8	11.4	123 000	86 500		6.70 14.9
1.252	0.449	27 600	19 500	13.3	14.8 14.6
31.8	12.0	133 000	97 000		8.00 18.0
1.252	0.472	29 800	21 800	13.3	17.7 17.0
36.5	12.3	143 000	107 000		9.10 20.7
1.437	0.484	32 000	24 100	13.3	20.2
36.5	12.8	153 000	119 000		10.4 23.4
1.437	0.504	34 500	26 600	13.3	23.0 22.6

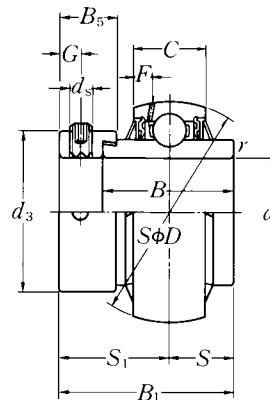

Shaft dia. mm inch	Bearing number	Nominal dimensions											
		d	D	B ₁	B	C	mm min.	inch r _s min.	S	S ₁	G	ds	d ₃
100	UEL320D1W3	100	215	128.6	100	55	3	50	78.6	14.3	M20 × 1.5	146	
3 13/16	UEL320-313D1W3	3.8125											
3 7/8	UEL320-314D1W3	3.8750											
3 15/16	UEL320-315D1W3	3.9375											
4	UEL320-400D1W3	4.0000											
105	UEL321D1W3	105	225	139.7	104.8	57	3	48.4	91.3	17.5	M20 × 1.5	157	
110	UEL322D1W3	110	240	141.3	106.4	59	3	49.2	92.1	17.5	M20 × 1.5	168	

Remarks: 1) For inch series bearings, the f_0 factor for calculating equivalent radial load is the same as the metric series.

Nominal dimensions		Basic load ratings		Factor ¹⁾	Mass	
mm <i>B₅</i>	inch <i>F</i>	N dynamic <i>C_r</i>	lbf static <i>C_{or}</i>	<i>f₀</i>	kg	lb
36.5	13.5	173 000	141 000		13.0	
					28.5	
1.437	0.531	39 000	31 500	13.2	28.0	
					27.6	
					27.0	
42.8	13.9	184 000	153 000	13.2	14.6	
42.8	13.9	205 000	179 000	13.1	17.2	

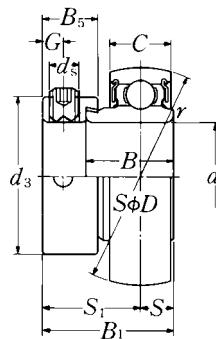


Shaft dia. mm inch	Bearing number ¹⁾	Nominal dimensions											
		d	D	B ₁	B	C	mm in.	r _s min.	S	S ₁	G	ds	d ₃
12 $\frac{1}{2}$	AEL201W3	12	40	28.6	19	12	0.6	6.5	22.1	4.8	M6 × 0.75	29	
	AEL201-008W3	0.5000	1.5748	1.126	0.7480	0.4724	0.024	0.256	0.870	0.189	$\frac{1}{4}$ -28UNF	1.142	
15 $\frac{9}{16}$ $\frac{5}{8}$	AEL202W3	15	40	28.6	19	12	0.6	6.5	22.1	4.8	M6 × 0.75	29	
	AEL202-009W3	0.5625	1.5748	1.126	0.7480	0.4724	0.024	0.256	0.870	0.189	$\frac{1}{4}$ -28UNF	1.142	
	AEL202-010W3	0.6250											
17 $\frac{11}{16}$	AEL203W3	17	40	28.6	19	12	0.6	6.5	22.1	4.8	M6 × 0.75	29	
	AEL203-011W3	0.6875	1.5748	1.126	0.7480	0.4724	0.024	0.256	0.870	0.189	$\frac{1}{4}$ -28UNF	1.142	
20 $\frac{3}{4}$	AEL204W3	20	47	31	21.5	14	1	7.5	23.5	4.8	M6 × 0.75	33	
	AEL204-012W3	0.7500	1.8504	1.220	0.8465	0.5512	0.039	0.295	0.925	0.189	$\frac{1}{4}$ -28UNF	1.299	
25 $\frac{13}{16}$ $\frac{7}{8}$ $\frac{15}{16}$	AEL205W3	25	52	31	21.5	15	1	7.5	23.5	4.8	M6 × 0.75	38	
	AEL205-013W3	0.8125											
	AEL205-014W3	0.8750	2.0472	1.220	0.8465	0.5906	0.039	0.295	0.925	0.189	$\frac{1}{4}$ -28UNF	1.496	
	AEL205-015W3	0.9375											
1	AEL205-100W3	1.0000											
30 $1\frac{1}{16}$	AEL206W3	30	62	35.7	23.8	16	1	9	26.7	6	M8 × 1	44.5	
	AEL206-101W3	1.0625											
$1\frac{1}{8}$	AEL206-102W3	1.1250	2.4409	1.406	0.9370	0.6299	0.039	0.354	1.051	0.236	$\frac{5}{16}$ -24UNF	1.752	
$1\frac{3}{16}$	AEL206-103W3	1.1875											
$1\frac{1}{4}$	AEL206-104W3	1.2500											
35 $1\frac{1}{4}$	AEL207W3	35	72	38.9	25.4	17	1.5	9.5	29.4	6.8	M10 × 1.25	55.5	
	AEL207-104W3	1.2500											
$1\frac{5}{16}$	AEL207-105W3	1.3125	2.8346	1.531	1.0000	0.6693	0.059	0.374	1.157	0.268	$\frac{3}{8}$ -24UNF	2.185	
$1\frac{3}{8}$	AEL207-106W3	1.3750											
$1\frac{7}{16}$	AEL207-107W3	1.4375											
40 $1\frac{1}{2}$	AEL208W3	40	80	43.7	30.2	18	1.5	11	32.7	6.8	M10 × 1.25	60	
	AEL208-108W3	1.5000	3.1496	1.720	1.1890	0.7087	0.059	0.433	1.287	0.268	$\frac{3}{8}$ -24UNF	2.362	
	AEL208-109W3	1.5625											
45 $1\frac{5}{8}$	AEL209W3	45	85	43.7	30.2	19	1.5	11	32.7	6.8	M10 × 1.25	63.5	
	AEL209-110W3	1.6250											
$1\frac{11}{16}$	AEL209-111W3	1.6875	3.3465	1.720	1.1890	0.7480	0.059	0.433	1.287	0.268	$\frac{3}{8}$ -24UNF	2.500	
$1\frac{3}{4}$	AEL209-112W3	1.7500											

Remarks: 1) If relubricatable type is needed, please order with suffix "D1".

sale@technobearing.ru www.technobearing.ru 8 (800) 700-72-07 (бесплатно)

Nominal dimensions mm inch <i>B₅</i>	Basic load ratings		Factor²⁾ <i>f₀</i>	Mass kg lb
	N dynamic <i>C_r</i>	lbf static <i>C_{or}</i>		
13.6 0.535	9 600 2 160	4 600 1 030	12.8	0.12 0.26
13.6 0.535	9 600 2 160	4 600 1 030	12.8	0.11 0.26 0.24
13.6 0.535	9 600 2 160	4 600 1 030	12.8	0.11 0.23
13.5 0.531	12 800 2 890	6 650 1 500	13.2	0.17 0.35
13.5 0.531	14 000 3 150	7 850 1 770	13.9	0.22 0.51 0.48 0.45 0.42
15.9 0.626	19 500 4 400	11 300 2 540	13.8	0.31 0.74 0.73 0.66 0.61
17.5 0.689	25 700 5 750	15 300 3 450	13.8	0.50 1.15 1.10 1.04 0.98
18.3 0.720	29 100 6 550	17 800 4 000	14.0	0.66 1.41 1.34
18.3 0.720	32 500 7 350	20 400 4 600	14.1	0.72 1.79 1.70 1.61

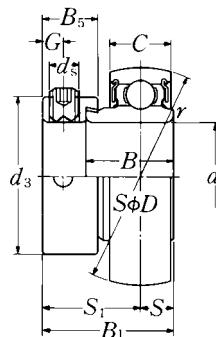


Shaft dia. mm inch	Bearing number ¹⁾	Nominal dimensions											
		d	D	B ₁	B	C	mm r _s min.	inch S	S ₁	G	ds	d ₃	
50	AEL210W3	50	90	43.7	30.2	20	1.5	11	32.7	6.8	M10 × 1.25	69.5	
1 13/16	AEL210-113W3	1.8125											
1 7/8	AEL210-114W3	1.8750											
1 15/16	AEL210-115W3	1.9375	3.5433	1.720	1.1890	0.7874	0.059	0.433	1.287	0.268	3/8-24UNF	2.736	
2	AEL210-200W3	2.0000											
55	AEL211W3	55	100	48.4	32.5	21	2	12	36.4	8	M10 × 1.25	76	
2	AEL211-200W3	2.0000											
2 1/16	AEL211-201W3	2.0625	3.9370	1.906	1.2795	0.8268	0.079	0.472	1.433	0.315	3/8-24UNF	2.992	
2 1/8	AEL211-202W3	2.1250											
2 3/16	AEL211-203W3	2.1875											
60	AEL212W3	60	110	53.1	37.2	22	2	13.5	39.6	8	M10 × 1.25	84	
2 1/4	AEL212-204W3	2.2500											
2 5/16	AEL212-205W3	2.3125	4.3307	2.091	1.4646	0.8661	0.079	0.531	1.559	0.315	3/8-24UNF	3.307	
2 3/8	AEL212-206W3	2.3750											
2 7/16	AEL212-207W3	2.4375											

Remarks: 1) If relubricatable type is needed, please order with suffix "D1".

2) For inch series bearings, the f_0 factor for calculating equivalent radial load is the same as the metric series.

Nominal dimensions mm inch <i>B₅</i>	Basic load ratings		Factor²⁾ <i>f₀</i>	Mass	
	N dynamic <i>C_r</i>	lbf static <i>C_{or}</i>		kg	lb
18.3	35 000	23 200		0.72	
				1.81	
0.720	7 900	5 200	14.4	1.72	
				1.63	
				1.54	
20.7	43 500	29 200		0.98	
				2.45	
0.815	9 750	6 550	14.3	2.34	
				2.23	
				2.12	
22.3	52 500	36 000		1.31	
				3.13	
0.878	11 800	8 150	14.3	3.00	
				2.87	
				2.71	

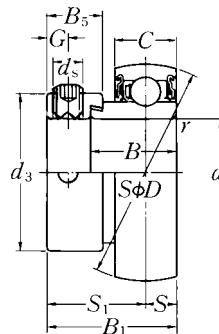

Shaft dia. mm inch	Bearing number ¹⁾	Nominal dimensions											
		d	D	B ₁	B	C	mm r _s min.	inch S	S ₁	G	d _s	d ₃	
12 1/2	JEL201W3	12	40	28.6	19	13	0.6	6.5	22.1	4.8	M6 × 0.75	29	
	JEL201-008W3	0.5000	1.5748	1.126	0.7480	0.5118	0.024	0.256	0.870	0.189	1/4-28UNF	1.142	
15 9/16 5/8	JEL202W3	15	40	28.6	19	13	0.6	6.5	22.1	4.8	M6 × 0.75	29	
	JEL202-009W3	0.5625	1.5748	1.126	0.7480	0.5118	0.024	0.256	0.870	0.189	1/4-28UNF	1.142	
	JEL202-010W3	0.6250											
17 11/16	JEL203W3	17	40	28.6	19	13	0.6	6.5	22.1	4.8	M6 × 0.75	29	
	JEL203-011W3	0.6875	1.5748	1.126	0.7480	0.5118	0.024	0.256	0.870	0.189	1/4-28UNF	1.142	
20 3/4	JEL204W3	20	47	31	21.5	15	1	7.5	23.5	4.8	M6 × 0.75	33	
	JEL204-012W3	0.7500	1.8504	1.220	0.8465	0.5906	0.039	0.295	0.925	0.189	1/4-28UNF	1.299	
25 13/16 7/8 15/16 1	JEL205W3	25	52	31	21.5	15	1	7.5	23.5	4.8	M6 × 0.75	38	
	JEL205-013W3	0.8125											
	JEL205-014W3	0.8750	2.0472	1.220	0.8465	0.5906	0.039	0.295	0.925	0.189	1/4-28UNF	1.496	
	JEL205-015W3	0.9375											
	JEL205-100W3	1.0000											
30 1 1/16 1 1/8 1 3/16 1 1/4	JEL206W3	30	62	35.7	23.8	18	1	9	26.7	6	M8 × 1	44.5	
	JEL206-101W3	1.0625											
	JEL206-102W3	1.1250	2.4409	1.406	0.9370	0.7087	0.039	0.354	1.051	0.236	5/16-24UNF	1.752	
	JEL206-103W3	1.1875											
	JEL206-104W3	1.2500											
35 1 1/4 1 5/16 1 3/8 1 7/16	JEL207W3	35	72	38.9	25.4	19	1.5	9.5	29.4	6.8	M10 × 1.25	55.5	
	JEL207-104W3	1.2500											
	JEL207-105W3	1.3125	2.8346	1.531	1.0000	0.7480	0.059	0.374	1.157	0.268	3/8-24UNF	2.185	
	JEL207-106W3	1.3750											
	JEL207-107W3	1.4375											
40 1 1/2 1 9/16	JEL208W3	40	80	43.7	30.2	22	1.5	11	32.7	6.8	M10 × 1.25	60	
	JEL208-108W3	1.5000	3.1496	1.720	1.1890	0.8661	0.059	0.433	1.287	0.268	3/8-24UNF	2.362	
	JEL208-109W3	1.5625											
45 1 5/8 1 11/16 1 3/4	JEL209W3	45	85	43.7	30.2	22	1.5	11	32.7	6.8	M10 × 1.25	63.5	
	JEL209-110W3	1.6250											
	JEL209-111W3	1.6875	3.3465	1.720	1.1890	0.8661	0.059	0.433	1.287	0.268	3/8-24UNF	2.500	
	JEL209-112W3	1.7500											


Remarks: 1) If relubricatable type is needed, please order with suffix "D1".

sale@technobearing.ru

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

Nominal dimensions mm inch <i>B₅</i>	Basic load ratings		Factor²⁾ <i>f₀</i>	Mass	
	N dynamic <i>C_r</i>	lbf static <i>C_{or}</i>		kg	lb
13.6 0.535	9 600 2 160	4 600 1 030	12.8	0.12 0.25	
13.6 0.535	9 600 2 160	4 600 1 030	12.8	0.10 0.24 0.22	
13.6 0.535	9 600 2 160	4 600 1 030	12.8	0.09 0.20	
13.5 0.531	12 800 2 890	6 650 1 500	13.2	0.16 0.37	
13.5 0.531	14 000 3 150	7 850 1 770	13.9	0.19 0.50 0.47 0.44 0.41	
15.9 0.626	19 500 4 400	11 300 2 540	13.8	0.33 0.78 0.73 0.69 0.64	
17.5 0.689	25 700 5 750	15 300 3 450	13.8	0.50 1.22 1.16 1.11 1.05	
18.3 0.720	29 100 6 550	17 800 4 000	14.0	0.65 1.53 1.46	
18.3 0.720	32 500 7 350	20 400 4 600	14.1	0.76 1.87 1.79 1.72	

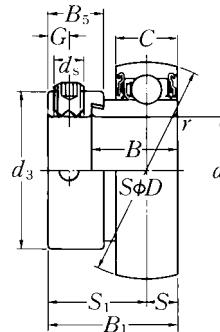


Shaft dia. mm inch	Bearing number ¹⁾	Nominal dimensions											
		d	D	B ₁	B	C	mm r _s min.	inch S	S ₁	G	d _s	d ₃	
50	JEL210W3	50	90	43.7	30.2	22	1.5	11	32.7	6.8	M10X1.25	69.5	
1 13/16	JEL210-113W3	1.8125											
1 7/8	JEL210-114W3	1.8750											
1 15/16	JEL210-115W3	1.9375											
2	JEL210-200W3	2.0000											
55	JEL211W3	55	100	48.4	32.5	24	2	12	36.4	8	M10X1.25	76	
2	JEL211-200W3	2.0000											
2 1/16	JEL211-201W3	2.0625											
2 1/8	JEL211-202W3	2.1250											
2 3/16	JEL211-203W3	2.1875											
60	JEL212W3	60	110	53.1	37.2	27	2	13.5	39.6	8	M10X1.25	84	
2 1/4	JEL212-204W3	2.2500											
2 5/16	JEL212-205W3	2.3125											
2 3/8	JEL212-206W3	2.3750											
2 7/16	JEL212-207W3	2.4375											

Remarks: 1) If relubricatable type is needed, please order with suffix "D1".

2) For inch series bearings, the f_0 factor for calculating equivalent radial load is the same as the metric series.

Nominal dimensions mm inch <i>B₅</i>	Basic load ratings		Factor²⁾ <i>f₀</i>	Mass	
	N dynamic <i>C_r</i>	lbf static <i>C_{or}</i>		kg	lb
18.3	35 000	23 200		0.84	
				2.09	
0.720	7 900	5 200	14.4	2.01	
				1.92	
				1.81	
20.7	43 500	29 200		1.13	
				2.78	
0.815	9 750	6 550	14.3	2.67	
				2.56	
				2.45	
22.3	52 500	36 000		1.48	
				3.51	
0.878	11 800	8 150	14.3	3.37	
				3.24	
				3.09	

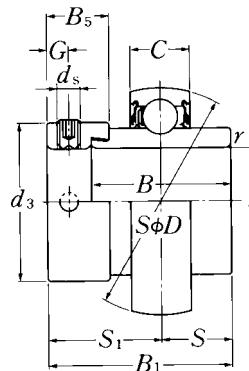


Shaft dia. mm inch	Bearing number ¹⁾	Nominal dimensions											
		d	D	B ₁	B	C	mm min.	inch S	S ₁	G	ds	d ₃	
20 $\frac{3}{4}$	REL204W3	20	47	43.7	34.2	15	1	17.1	26.6	4.8	M6 \times 0.75	33.0	
	REL204-012W3	0.7500	1.8504	1.720	1.3465	0.5906	0.039	0.673	1.047	0.189	$\frac{1}{4}$ -28UNF	1.299	
25 $\frac{13}{16}$ $\frac{7}{8}$ $\frac{15}{16}$	REL205W3	25	52	44.4	34.9	15	1	17.45	26.9	4.8	M6 \times 0.75	38.0	
	REL205-013W3	0.8125											
	REL205-014W3	0.8750											
	REL205-015W3	0.9375											
1	REL205-100W3	1.0000											
30 $1\frac{1}{16}$ $1\frac{1}{8}$ $1\frac{3}{16}$ $1\frac{1}{4}$	REL206W3	30	62	48.4	36.5	18	1	18.25	30.1	6	M8 \times 1	44.5	
	REL206-101W3	1.0625											
	REL206-102W3	1.1250											
	REL206-103W3	1.1875											
	REL206-104W3	1.2500											
35 $1\frac{1}{4}$ $1\frac{5}{16}$ $1\frac{3}{8}$ $1\frac{7}{16}$	REL207W3	35	72	51.1	37.6	19	1.5	18.8	32.3	6.8	M10 \times 1.25	55.5	
	REL207-104W3	1.2500											
	REL207-105W3	1.3125											
	REL207-106W3	1.3750											
	REL207-107W3	1.4375											
40 $1\frac{1}{2}$ $1\frac{9}{16}$	REL208W3	40	80	56.3	42.8	22	1.5	21.4	34.9	6.8	M10 \times 1.25	60.0	
	REL208-108W3	1.5000											
	REL208-109W3	1.5625											
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	REL209W3	45	85	56.3	42.8	22	1.5	21.4	34.9	6.8	M10 \times 1.25	63.5	
	REL209-110W3	1.6250											
	REL209-111W3	1.6875											
	REL209-112W3	1.7500											
50 $1\frac{13}{16}$ $1\frac{7}{8}$ $1\frac{15}{16}$	REL210W3	50	90	62.7	49.2	22	1.5	24.6	38.1	6.8	M10 \times 1.25	69.5	
	REL210-113W3	1.8125											
	REL210-114W3	1.8750											
	REL210-115W3	1.9375											
2	REL210-200W3	2.0000											

Remarks: 1) If relubricatable type is needed, please order with suffix "D1".

2) For inch series bearings, the f_0 factor for calculating equivalent radial load is the same as the metric series.

Nominal dimensions mm inch <i>B₅</i>	Basic load ratings		Factor²⁾ <i>f₀</i>	Mass	
	N dynamic <i>C_r</i>	lbf static <i>C_{or}</i>		kg	lb
13.5 0.531	12 800 2 890	6 650 1 500	13.2	0.22 0.43	
13.5 0.531	14 000 3 150	7 850 1 770	13.9	0.26 0.59 0.56 0.53 0.49	
15.9 0.626	19 500 4 400	11 300 2 540	13.8	0.39 0.92 0.87 0.82 0.78	
17.5 0.689	25 700 5 750	15 300 3 450	13.8	0.59 1.41 1.36 1.31 1.24	
18.3 0.720	29 100 6 550	17 800 4 000	14.0	0.76 1.88 1.80	
18.3 0.720	32 500 7 350	20 400 4 600	14.1	0.78 2.01 1.93 1.84	
18.3 0.720	35 000 7 900	23 200 5 200	14.4	0.96 2.42 2.32 2.21 2.05	

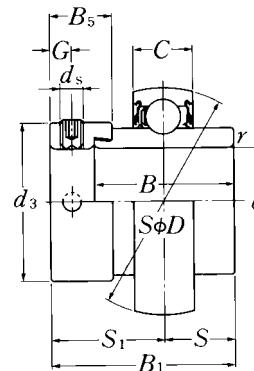


Shaft dia. mm inch	Bearing number ¹⁾	Nominal dimensions											
		d	D	B ₁	B	C	mm min.	inch S	S ₁	G	ds	d ₃	
55 2	REL211W3	55	100	71.4	55.5	24	2	27.75	43.6	8	M10 × 1.25	76	
2 2 ¹ / ₁₆	REL211-200W3	2.0000											
2 ¹ / ₁₆ 2 ¹ / ₈	REL211-201W3	2.0625	3.9370	2.811	2.1850	0.9449	0.079	1.093	1.717	0.315	3/8-24UNF	2.992	
2 ³ / ₁₆	REL211-202W3	2.1250											
2 ³ / ₁₆	REL211-203W3	2.1875											
60 2 ¹ / ₄	REL212W3	60	110	77.8	61.9	27	2	30.95	46.8	8	M10 × 1.25	84	
2 ⁵ / ₁₆	REL212-204W3	2.2500											
2 ⁵ / ₁₆ 2 ³ / ₈	REL212-205W3	2.3125	4.3307	3.063	2.4370	1.0630	0.079	1.219	1.843	0.315	3/8-24UNF	3.307	
2 ⁷ / ₁₆	REL212-206W3	2.3750											
2 ⁷ / ₁₆	REL212-207W3	2.4375											


Remarks: 1) If relubricatable type is needed, please order with suffix "D1".

2) For inch series bearings, the f_0 factor for calculating equivalent radial load is the same as the metric series.

Nominal dimensions mm inch <i>B₅</i>	Basic load ratings		Factor²⁾ <i>f₀</i>	Mass	
	N dynamic <i>C_r</i>	lbf static <i>C_{or}</i>		kg	lb
20.7	43 500	29 200		1.28	
				3.21	
0.815	9 750	6 550	14.3	3.05	
				2.95	
				2.83	
22.3	52 500	36 000		1.83	
				4.29	
0.878	11 800	8 150	14.3	4.13	
				3.96	
				3.79	

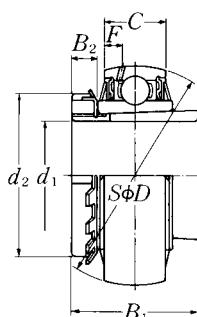

UK2···D1;H,HA, HE,HS

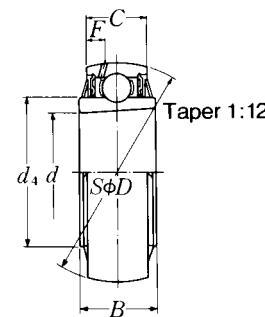

UK2···D1

Shaft dia. mm inch	Bearing number ^{1) 2)}	Nominal dimensions									
		mm					inch				
d	D	B	C	d ₄	d ₁	B ₁	B ₂	d ₂	F		
20 $\frac{3}{4}$	UK205D1;H2305X UK205D1;HE2305	25 0.9843	52 2.0472	23 0.9055	17 0.6693	33.9 1.335	20 $\frac{3}{4}$	35 1.378	8 0.315	38 1.496	4.5 0.177
25 $\frac{7}{8}$ 1	UK206D1;H2306X UK206D1;HS2306 UK206D1;HE2306X	30 1.1811	62 2.4409	26 1.0236	19 0.7480	40.8 1.606	25 $\frac{7}{8}$ 1	38 1.496	8 0.315	45 1.772	4.6 0.181
30 $\frac{1}{8}$	UK207D1;H2307X UK207D1;HS2307	35 1.3780	72 2.8346	29 1.1417	20 0.7874	46.8 1.843	30 $\frac{1}{8}$	43 1.693	9 0.354	52 2.047	4.6 0.181
35 $\frac{1}{4}$ $\frac{13}{8}$	UK208D1;H2308X UK208D1;HE2308X UK208D1;HS2308X	40 1.5748	80 3.1496	31 1.2205	21 0.8268	53 2.087	35 $\frac{1}{4}$ $\frac{13}{8}$	46 1.811	10 0.394	58 2.283	4.5 0.177
40 $\frac{17}{16}$ $\frac{1}{2}$ $\frac{5}{8}$	UK209D1;H2309X UK209D1;HA2309 UK209D1;HE2309X UK209D1;HS2309X	45 1.7717	85 3.3465	31 1.2205	22 0.8661	57.5 2.264	40 $\frac{17}{16}$ $\frac{1}{2}$ $\frac{5}{8}$	50 1.969	11 0.433	65 2.559	4.9 0.193
45 $\frac{5}{8}$ $\frac{11}{16}$ $\frac{3}{4}$	UK210D1;H2310X UK210D1;HS2310 UK210D1;HA2310 UK210D1;HE2310X	50 1.9685	90 3.5433	32 1.2598	24 0.9449	62.4 2.457	45 $\frac{5}{8}$ $\frac{11}{16}$ $\frac{3}{4}$	55 2.165	12 0.472	70 2.756	5.9 0.232
50 $\frac{1}{8}$ $\frac{15}{16}$ 2	UK211D1;H2311X UK211D1;HS2311 UK211D1;HA2311 UK211D1;HE2311XY	55 2.1654	100 3.9370	35 1.3780	25 0.9843	69 2.717	50 $\frac{15}{16}$ 2	59 2.323	12 0.472	75 2.953	6.0 0.236
55 $\frac{2}{8}$	UK212D1;H2312X UK212D1;HS2312	60 2.3622	110 4.3307	38 1.4961	27 1.0630	77 3.031	55 $2\frac{1}{8}$	62 2.441	13 0.512	80 3.150	6.2 0.244
60 $\frac{23}{16}$ $\frac{21}{4}$ $\frac{23}{8}$	UK213D1;H2313X UK213D1;HA2313 UK213D1;HE2313X UK213D1;HS2313X	65 2.5591	120 4.7244	40 1.5748	32 1.2598	82.5 3.248	60 $2\frac{3}{16}$ $2\frac{1}{4}$ $2\frac{3}{8}$	65 2.559	14 0.551	85 3.346	8.7 0.343

Remarks: 1) Adapter number with suffix "X" means a narrow slot type adapter sleeve.


In this case the lock washer with the straight inner prong should be used.

2) For HE2311XY, screw thread pitch different from the standard is applied, because of the thin thread section of sleeve.

To distinguish it, a suffix "Y" is added.

3) For inch series bearings, the f_0 factor for calculating equivalent radial load is the same as the metric series.

Basic load ratings		Factor ³⁾	Mass
N dynamic <i>C_r</i>	lbf static <i>C_{or}</i>		kg lb
14 000	7 850	13.9	0.23
3 150	1 770		0.57
19 500	11 300		0.36
4 400	2 540	13.8	0.86
			0.78
25 700	15 300	13.8	0.55
5 750	3 450		1.30
29 100	17 800		0.74
6 550	4 000	14.0	1.77
			1.63
32 500	20 400		0.80
7 350	4 600	14.1	2.01
			1.93
			1.76
35 000	23 200		0.94
7 900	5 200	14.4	2.38
			2.28
			2.18
43 500	29 200		1.22
9 750	6 550	14.3	2.96
			2.84
			2.70
52 500	36 000		1.54
11 800	8 150	14.3	3.60
57 500	40 000		2.00
12 900	9 000	14.4	4.86
			4.70
			4.38

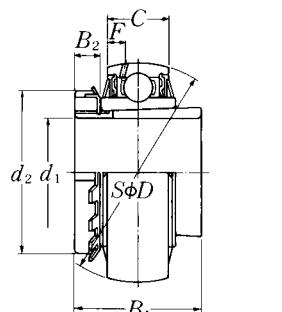

UK2···D1;H,HA, HE,HS

UK2···D1

Shaft dia. mm inch	Bearing number ^{1) 2)}	Nominal dimensions									
		mm					inch				
65 2 ⁷ / ₁₆ 2 ¹ / ₂	UK215D1;H2315X	75	130	44	34	93	65	73	15	98	9.0
	UK215D1;HA2315	2.9528	5.1181	1.7323	1.3386	3.661	2 ⁷ / ₁₆ 2 ¹ / ₂	2.874	0.591	3.858	0.354
	UK215D1;HE2315X										
70 2 ¹¹ / ₁₆ 2 ³ / ₄	UK216D1;H2316X	80	140	45	35	98.1	70	78	17	105	9.5
	UK216D1;HA2316	3.1496	5.5118	1.7717	1.3780	3.862	2 ¹¹ / ₁₆ 2 ³ / ₄	3.071	0.669	4.134	0.374
	UK216D1;HE2316X										
75 2 ¹⁵ / ₁₆ 3	UK217D1;H2317X	85	150	46	36	106.4	75	82	18	110	10.1
	UK217D1;HA2317X	3.3465	5.9055	1.8110	1.4173	4.189	2 ¹⁵ / ₁₆ 3	3.228	0.709	4.331	0.398
	UK217D1;HE2317X										
80 3 ³ / ₁₆	UK218D1;H2318X	90	160	47	37	111.6	80	86	18	120	9.8
	UK218D1;HA2318X	3.5433	6.2992	1.8504	1.4567	4.394	3 ³ / ₁₆	3.386	0.709	4.724	0.386

Remarks: 1) Adapter number with suffix "X" means a narrow slot type adapter sleeve.


In this case the lock washer with the straight inner prong should be used.

2) For HE2311XY, screw thread pitch different from the standard is applied, because of the thin thread section of sleeve.

To distinguish it, a suffix "Y" is added.

3) For inch series bearings, the f_0 factor for calculating equivalent radial load is the same as the metric series.

Basic load ratings		Factor ³⁾	Mass
N dynamic <i>C_r</i>	lbf static <i>C_{or}</i>		kg lb
66 000	49 500		2.56
14 900	11 100	14.7	6.04 5.84
72 500	53 000		3.23
16 300	11 900	14.6	7.38 7.14
83 500	64 000		3.93
18 700	14 300	14.7	8.73 8.46
96 000	71 500	14.5	4.51
21 600	16 100		11.0

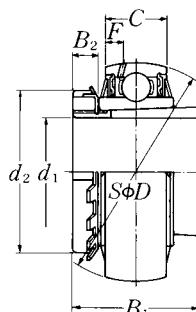

UK3···D1;H, HA, HE, HS

UK3···D1

Shaft dia. mm inch	Bearing number ^{1) 2)}	Nominal dimensions									
		mm					inch				
d	D	B	C	d ₄	d ₁	B ₁	B ₂	d ₂	F		
20 $\frac{3}{4}$	UK305D1;H2305X UK305D1;HE2305	25 0.9843	62 2.4409	26 1.0236	20 0.7874	36.8 1.449	20 $\frac{3}{4}$	35 1.378	8 0.315	38 1.496	5.0 0.197
25 $\frac{7}{8}$ 1	UK306D1;H2306X UK306D1;HS2306 UK306D1;HE2306X	30 1.1811	72 2.8346	29 1.1417	23 0.9055	44.9 1.768	25 $\frac{7}{8}$ 1	38 1.496	8 0.315	45 1.772	5.9 0.232
30 $1\frac{1}{8}$	UK307D1;H2307X UK307D1;HS2307	35 1.3780	80 3.1496	33 1.2992	25 0.9843	49.4 1.945	30 $1\frac{1}{8}$	43 1.693	9 0.354	52 2.047	6.8 0.268
35 $1\frac{1}{4}$ $1\frac{3}{8}$	UK308D1;H2308X UK308D1;HE2308X UK308D1;HS2308X	40 1.5748	90 3.5433	34 1.3386	27 1.0630	56 2.205	35 $1\frac{1}{4}$ $1\frac{3}{8}$	46 1.811	10 0.394	58 2.283	7.4 0.291
40 $1\frac{7}{16}$ $1\frac{1}{2}$ $1\frac{5}{8}$	UK309D1;H2309X UK309D1;HA2309 UK309D1;HE2309X UK309D1;HS2309X	45 1.7717	100 3.9370	37 1.4567	29 1.1417	63.5 2.500	40 $1\frac{7}{16}$ $1\frac{1}{2}$ $1\frac{5}{8}$	50 1.969	11 0.433	65 2.559	7.4 0.291
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UK310D1;H2310X UK310D1;HS2310 UK310D1;HA2310 UK310D1;HE2310X	50 1.9685	110 4.3307	41 1.6142	32 1.2598	70.6 2.780	45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	55 2.165	12 0.472	70 2.756	8.1 0.319
50 $1\frac{7}{8}$ $1\frac{15}{16}$ 2	UK311D1;H2311X UK311D1;HS2311 UK311D1;HA2311 UK311D1;HE2311XY	55 2.1654	120 4.7244	44 1.7323	34 1.3386	76.6 3.016	50 $1\frac{7}{8}$ $1\frac{15}{16}$ 2	59 2.323	12 0.472	75 2.953	8.5 0.335
55 $2\frac{1}{8}$	UK312D1;H2312X UK312D1;HS2312	60 2.3622	130 5.1181	47 1.8504	36 1.4173	82.7 3.256	55 $2\frac{1}{8}$	62 2.441	13 0.512	80 3.150	9.0 0.354
60 $2\frac{3}{16}$ $2\frac{1}{4}$ $2\frac{3}{8}$	UK313D1;H2313X UK313D1;HA2313 UK313D1;HE2313X UK313D1;HS2313X	65 2.5591	140 5.5118	49 1.9291	39 1.5354	88.2 3.472	60 $2\frac{3}{16}$ $2\frac{1}{4}$ $2\frac{3}{8}$	65 2.559	14 0.551	85 3.346	10.1 0.398

Remarks: 1) Adapter number with suffix "X" means a narrow slot type adapter sleeve.


In this case the lock washer with the straight inner prong should be used.

2) For HE2311XY, screw thread pitch different from the standard is applied, because of the thin thread section of sleeve.


To distinguish it, a suffix "Y" is added.

3) For inch series bearings, the f_0 factor for calculating equivalent radial load is the same as the metric series.

Basic load ratings		Factor ³⁾	Mass
N dynamic <i>C_r</i>	lbf static <i>C_{or}</i>		kg lb
21 200	10 900	12.6	0.36
4 750	2 460		0.81
26 700	15 000		0.59
6 000	3 400	13.3	1.37 1.29
33 500	19 100	13.1	0.75
7 500	4 300		1.70
40 500	24 000		1.00
9 150	5 400	13.2	2.38 2.25
53 000	32 000		1.28
11 900	7 200	13.1	3.22 3.14 2.97
62 000	38 500		1.72
13 900	8 600	13.2	3.95 3.85 3.74
71 500	45 000		2.06
16 100	10 100	13.2	4.73 4.60 4.46
82 000	52 000		2.58
18 400	11 700	13.2	5.67
92 500	60 000		3.08
20 800	13 400	13.2	7.24 7.08 6.76

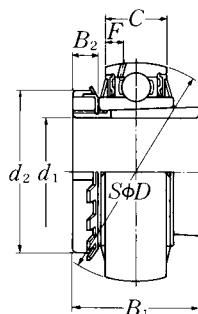

UK3...D1;H, HA, HE, HS

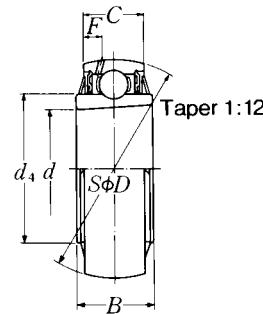

UK3...D1

Shaft dia. mm inch	Bearing number ^{1) 2)}	Nominal dimensions									
		mm					inch				
65 2 7/16 2 1/2	UK315D1;H2315X	75	160	55	43	101.3	65	73	15	98	11.0
	UK315D1;HA2315	2.9528	6.2992	2.1654	1.6929	3.988	2 7/16 2 1/2	2.874	0.591	3.858	0.433
	UK315D1;HE2315X										
70 2 11/16 2 3/4	UK316D1;H2316X	80	170	58	45	107.9	70	78	17	105	11.4
	UK316D1;HA2316	3.1496	6.6929	2.2835	1.7717	4.248	2 11/16 2 3/4	3.071	0.669	4.134	0.449
	UK316D1;HE2316X										
75 2 15/16 3	UK317D1;H2317X	85	180	60	47	114.4	75	82	18	110	12.0
	UK317D1;HA2317X	3.3465	7.0866	2.3622	1.8504	4.504	2 15/16 3	3.228	0.709	4.331	0.472
	UK317D1;HE2317X										
80 3 3/16	UK318D1;H2318X	90	190	64	49	120.9	80	86	18	120	12.3
	UK318D1;HA2318X	3.5433	7.4803	2.5197	1.9291	4.760	3 3/16	3.386	0.709	4.724	0.484
85 3 1/4	UK319D1;H2319X	95	200	67	51	127.5	85	90	19	125	12.8
	UK319D1;HE2319X	3.7402	7.8740	2.6378	2.0079	5.020	3 1/4	3.543	0.748	4.921	0.504
90 3 7/16 3 1/2	UK320D1;H2320X	100	215	73	55	135.6	90	97	20	130	13.5
	UK320D1;HA2320	3.9370	8.4646	2.8740	2.1654	5.339	3 7/16 3 1/2	3.819	0.787	5.118	0.531
	UK320D1;HE2320X										
100	UK322D1;H2322X	110	240	80	59	151.7	100	105	21	145	13.9
110	UK324D1;H2324X	120	260	86	63	165.2	110	112	22	155	16.0
115	UK326D1;H2326	130	280	90	67	178.3	115	121	23	165	16.9
125	UK328D1;H2328	140	300	95	71	190.4	125	131	24	180	17.7

Remarks: 1) Adapter number with suffix "X" means a narrow slot type adapter sleeve.


In this case the lock washer with the straight inner prong should be used.

2) For HE2311XY, screw thread pitch different from the standard is applied, because of the thin thread section of sleeve.

To distinguish it, a suffix "Y" is added.

3) For inch series bearings, the f_0 factor for calculating equivalent radial load is the same as the metric series.

Basic load ratings		Factor ³⁾	Mass
N dynamic <i>C_r</i>	lbf static <i>C_{or}</i>		kg lb
113 000	77 000		4.75
25 500	17 400	13.2	11.1 10.9
123 000	86 500		5.75
27 600	19 500	13.3	12.9 12.7
133 000	97 000		6.72
29 800	21 800	13.3	14.9 14.6
143 000	107 000	13.3	7.75
32 000	24 100		17.2
153 000	119 000	13.3	9.02
34 500	26 600		20.4
173 000	141 000		11.0
39 000	31 500	13.2	24.7 25.1
205 000	179 000	13.1	14.9
207 000	185 000	13.5	18.0
229 000	214 000	13.6	23.3
253 000	246 000	13.6	28.6

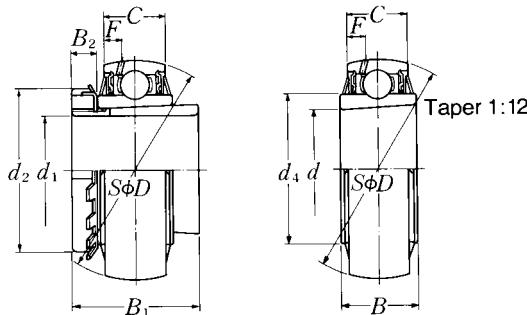

UKX···D1;H, HA, HE, HS

UKX···D1

Shaft dia. mm inch	Bearing number ^{1) 2)}	Nominal dimensions									
		mm					inch				
d	D	B	C	d ₄	d ₁	B ₁	B ₂	d ₂	F		
20 $\frac{3}{4}$	UKX05D1;H2305X UKX05D1;HE2305	25 0.9843	62 2.4409	26 1.0236	19 0.7480	40.8 1.606	20 $\frac{3}{4}$	35 1.378	8 0.315	38 1.496	4.6 0.181
25 $\frac{7}{8}$ 1	UKX06D1;H2306X UKX06D1;HS2306 UKX06D1;HE2306X	30 1.1811	72 2.8346	29 1.1417	20 0.7874	46.8 1.843	25 $\frac{7}{8}$ 1	38 1.496	8 0.315	45 1.772	4.6 0.181
30 $\frac{1}{8}$	UKX07D1;H2307X UKX07D1;HS2307	35 1.3780	80 3.1496	31 1.2205	21 0.8268	53 2.087	30 $\frac{1}{8}$	43 1.693	9 0.354	52 2.047	4.5 0.177
35 $\frac{1}{4}$ $\frac{13}{8}$	UKX08D1;H2308X UKX08D1;HE2308X UKX08D1;HS2308X	40 1.5748	85 3.3465	31 1.2205	22 0.8661	57.5 2.264	35 $\frac{1}{4}$ $\frac{13}{8}$	46 1.811	10 0.394	58 2.283	4.9 0.193
40 $\frac{17}{16}$ $\frac{1}{2}$ $\frac{5}{8}$	UKX09D1;H2309X UKX09D1;HA2309 UKX09D1;HE2309X UKX09D1;HS2309X	45 1.7717	90 3.5433	32 1.2598	24 0.9449	62.4 2.457	40 $\frac{1}{2}$ $\frac{5}{8}$	50 1.969	11 0.433	65 2.559	5.9 0.232
45 $\frac{15}{16}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UKX10D1;H2310X UKX10D1;HS2310 UKX10D1;HA2310 UKX10D1;HE2310X	50 1.9685	100 3.9370	35 1.3780	25 0.9843	69 2.717	45 $1\frac{11}{16}$ $1\frac{3}{4}$	55 2.165	12 0.472	70 2.756	6.0 0.236
50 $\frac{17}{8}$ $1\frac{15}{16}$ 2	UKX11D1;H2311X UKX11D1;HS2311 UKX11D1;HA2311 UKX11D1;HE2311XY	55 2.1654	110 4.3307	38 1.4961	27 1.0630	77 3.031	50 $1\frac{15}{16}$ 2	59 2.323	12 0.472	75 2.953	6.2 0.244
55 $2\frac{1}{8}$	UKX12D1;H2312X UKX12D1;HS2312	60 2.3622	120 4.7244	40 1.5748	32 1.2598	82.5 3.248	55 $2\frac{1}{8}$	62 2.441	13 0.512	80 3.150	8.7 0.343
60 $2\frac{3}{16}$ $2\frac{1}{4}$ $2\frac{3}{8}$	UKX13D1;H2313X UKX13D1;HA2313 UKX13D1;HE2313X UKX13D1;HS2313X	65 2.5591	125 4.9213	42 1.6535	33 1.2992	87 3.425	60 $2\frac{1}{4}$ $2\frac{3}{8}$	65 2.559	14 0.551	85 3.346	8.8 0.346

Remarks: 1) Adapter number with suffix "X" means a narrow slot type adapter sleeve.


In this case the lock washer with the straight inner prong should be used.

2) For HE2311XY, screw thread pitch different from the standard is applied, because of the thin thread section of sleeve.

To distinguish it, a suffix "Y" is added.

3) For inch series bearings, the f_0 factor for calculating equivalent radial load is the same as the metric series.

Basic load ratings		Factor ³⁾	Mass
N dynamic <i>C_r</i>	lbf static <i>C_{or}</i>		kg lb
19 500	11 300	13.8	0.38
4 400	2 540		0.85
25 700	15 300		0.53
5 750	3 450	13.8	1.24
			1.16
29 100	17 800	14.0	0.75
6 550	4 000		1.70
32 500	20 400		0.85
7 350	4 600	14.1	2.01
			1.88
35 000	23 200		0.97
7 900	5 200	14.4	2.32
			2.24
			2.07
43 500	29 200		1.26
9 750	6 550	14.3	3.09
			2.99
			2.88
52 500	36 000		1.62
11 800	8 150	14.3	3.84
			3.72
			3.58
57 500	40 000	14.4	2.07
12 900	9 000		4.66
62 000	44 000		2.19
14 000	9 900	14.5	5.28
			5.12
			4.79

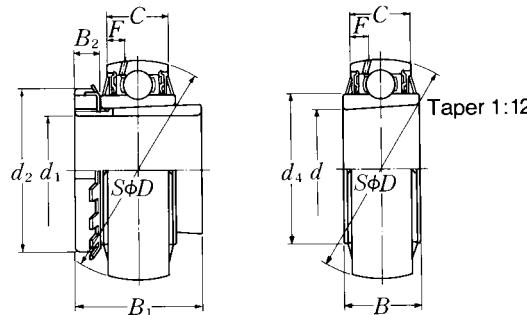

UKX···D1;H, HA, HE, HS

UKX···D1

Shaft dia. mm inch	Bearing number ^{1) 2)}	Nominal dimensions									
		mm					inch				
65 2 ⁷ / ₁₆ 2 ¹ / ₂	UKX15D1;H2315X	75	140	45	35	98.1	65	73	15	98	9.5
	UKX15D1;HA2315	2.9528	5.5118	1.7717	1.3780	3.862	2 ⁷ / ₁₆ 2 ¹ / ₂	2.874	0.591	3.858	0.374
	UKX15D1;HE2315X	70	150	46	36	106.4	70	78	17	105	10.1
70 2 ¹¹ / ₁₆ 2 ³ / ₄	UKX16D1;H2316X	3.1496	5.9055	1.8110	1.4173	4.189	2 ¹¹ / ₁₆ 2 ³ / ₄	3.071	0.669	4.134	0.398
	UKX16D1;HA2316	75	160	47	37	111.6	75	82	18	110	9.8
	UKX16D1;HE2316X	3.3465	6.2992	1.8504	1.4567	4.394	2 ¹⁵ / ₁₆ 3	3.228	0.709	4.331	0.386
80 3 ³ / ₁₆	UKX18D1;H2318X	90	170	49	39	118.2	80	86	18	120	10.5
	UKX18D1;HA2318X	3.5433	6.6929	1.9291	1.5354	4.654	3 ³ / ₁₆	3.386	0.709	4.724	0.413
90	UKX20D1;H2320X	100	190	57	44	131.3	90	97	20	130	11.3

Remarks: 1) Adapter number with suffix "X" means a narrow slot type adapter sleeve.


In this case the lock washer with the straight inner prong should be used.

2) For HE2311XY, screw thread pitch different from the standard is applied, because of the thin thread section of sleeve.

To distinguish it, a suffix "Y" is added.

3) For inch series bearings, the f_0 factor for calculating equivalent radial load is the same as the metric series.

Basic load ratings		Factor ³⁾	Mass
N dynamic <i>C_r</i>	lbf static <i>C_{or}</i>		kg lb
72 500	53 000		3.25
16 300	11 900	14.6	7.47 7.27
83 500	64 000		3.87
18 700	14 300	14.7	8.79 8.56
96 000	71 500		4.53
21 600	16 100	14.5	10.6 10.3
109 000	82 000		5.17
24 500	18 400	14.4	11.2
133 000	105 000	14.4	7.39

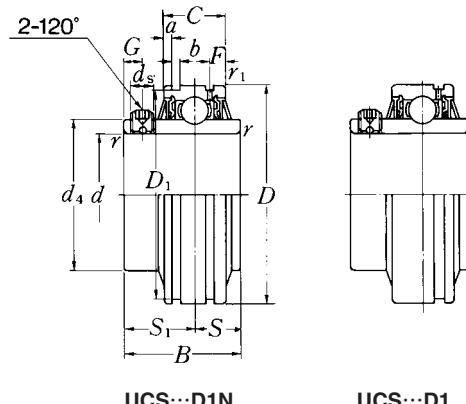

UCS...D1N

UCS...D1


Shaft dia. mm inch	Bearing number ¹⁾	Nominal dimensions									
		d	D	B	C	mm r_s min.	inch r_{1s} min.	S	S_1	G	ds
12 $\frac{1}{2}$	UCS201LD1N	12	47	31	17	0.6	0.6	12.7	18.3	4.5	M5 × 0.8
	UCS201-008LD1N	0.5000	1.8504	1.2205	0.6693	0.024	0.024	0.500	0.720	0.177	No.10-32UNF
15 $\frac{9}{16}$ $\frac{5}{8}$	UCS202LD1N	15	47	31	17	0.6	0.6	12.7	18.3	4.5	M5 × 0.8
	UCS202-009LD1N	0.5625	1.8504	1.2205	0.6693	0.024	0.024	0.500	0.720	0.177	No.10-32UNF
	UCS202-010LD1N	0.6250									
17 $\frac{11}{16}$	UCS203LD1N	17	47	31	17	0.6	0.6	12.7	18.3	4.5	M5 × 0.8
	UCS203-011LD1N	0.6875	1.8504	1.2205	0.6693	0.024	0.024	0.500	0.720	0.177	No.10-32UNF
20 $\frac{3}{4}$	UCS204LD1N	20	47	31	17	1	0.6	12.7	18.3	4.5	M5 × 0.8
	UCS204-012LD1N	0.7500	1.8504	1.2205	0.6693	0.039	0.024	0.500	0.720	0.177	No.10-32UNF
25 $\frac{13}{16}$ $\frac{7}{8}$ $\frac{15}{16}$ 1	UCS205LD1N	25	52	34.1	17	1	0.6	14.3	19.8	5	M5 × 0.8
	UCS205-013LD1N	0.8125									
	UCS205-014LD1N	0.8750	2.0472	1.3425	0.6693	0.039	0.024	0.563	0.780	0.197	No.10-32UNF
	UCS205-015LD1N	0.9375									
	UCS205-100LD1N	1.0000									
30 $\frac{1}{16}$ $\frac{1}{8}$ $\frac{1}{16}$ $\frac{1}{4}$	UCS206LD1N	30	62	38.1	19	1	1	15.9	22.2	5	M6 × 0.75
	UCS206-101LD1N	1.0625									
	UCS206-102LD1N	1.1250	2.4409	1.5000	0.7480	0.039	0.039	0.626	0.874	0.197	$\frac{1}{4}$ -28UNF
	UCS206-103LD1N	1.1875									
	UCS206-104LD1N	1.2500									
35 $\frac{1}{4}$ $\frac{15}{16}$ $\frac{3}{8}$ $\frac{17}{16}$	UCS207LD1N	35	72	42.9	20	1.5	1.5	17.5	25.4	6	M6 × 0.75
	UCS207-104LD1N	1.2500									
	UCS207-105LD1N	1.3125	2.8346	1.6890	0.7874	0.059	0.059	0.689	1.000	0.236	$\frac{1}{4}$ -28UNF
	UCS207-106LD1N	1.3750									
	UCS207-107LD1N	1.4375									
40 $\frac{1}{2}$ $\frac{9}{16}$	UCS208LD1N	40	80	49.2	21	1.5	1.5	19	30.2	8	M8 × 1
	UCS208-108LD1N	1.5000	3.1496	1.9370	0.8268	0.059	0.059	0.748	1.189	0.315	$\frac{5}{16}$ -24UNF
	UCS208-109LD1N	1.5625									
45 $\frac{5}{8}$ $\frac{11}{16}$ $\frac{3}{4}$	UCS209LD1N	45	85	49.2	22	1.5	1.5	19	30.2	8	M8 × 1
	UCS209-110LD1N	1.6250									
	UCS209-111LD1N	1.6875	3.3465	1.9370	0.8661	0.059	0.059	0.748	1.189	0.315	$\frac{5}{16}$ -24UNF
	UCS209-112LD1N	1.7500									

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

sale@technobearing.ru For inch series bearings, the f_0 factor for calculating equivalent static load is the same as the metric series.

www.technobearing.ru 8 (800) 700-72-07 (бесплатно)

Nominal dimensions						Basic load ratings		Factor ²⁾	Mass	
<i>d</i> ₄	<i>D</i> ₁	mm	inch	<i>a</i>	<i>b</i>	<i>F</i>	N dynamic <i>C</i> _r	lbf static <i>C</i> _{or}	<i>f</i> ₀	kg lb
29.6 1.1654	44.6 1.756	3.1 0.122	1.5 0.059	4 0.157			12 800 2 890	6 650 1 500	13.2	0.21 0.46
29.6 1.1654	44.6 1.756	3.1 0.122	1.5 0.059	4 0.157			12 800 2 890	6 650 1 500	13.2	0.20 0.44 0.42
29.6 1.1654	44.6 1.756	3.1 0.122	1.5 0.059	4 0.157			12 800 2 890	6 650 1 500	13.2	0.18 0.39
29.6 1.1654	44.6 1.756	3.1 0.122	1.5 0.059	4 0.157			12 800 2 890	6 650 1 500	13.2	0.17 0.39
33.9 1.3346	49.73 1.958	3.2 0.126	1.5 0.059	4.1 0.161			14 000 3 150	7 850 1 770	13.9	0.20 0.53 0.51 0.46 0.44
40.8 1.6063	59.61 2.374	3.2 0.126	2.05 0.081	4.2 0.165			19 500 4 400	11 300 2 540	13.8	0.34 0.82 0.77 0.73 0.66
46.8 1.8425	68.81 2.709	3.3 0.130	2.05 0.081	5 0.197			25 700 5 750	15 300 3 450		0.48 1.21 1.15 1.08 1.01
53 2.0866	76.81 3.024	3.4 0.134	2.05 0.081	5 0.197			29 100 6 550	17 800 4 000	14.0	0.64 1.52 1.46
57.5 2.2638	81.81 3.221	3.5 0.138	2.05 0.081	5.1 0.201			32 500 7 350	20 400 4 600	14.1	0.70 1.76 1.68 1.57

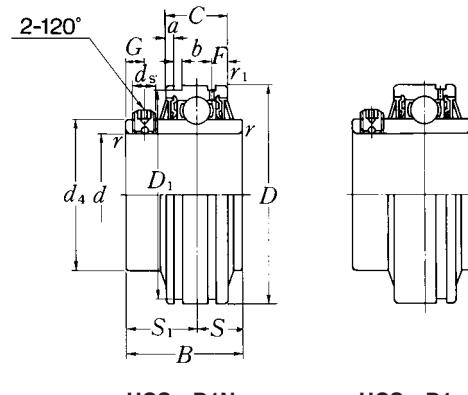

UCS...D1N


UCS...D1

Shaft dia. mm inch	Bearing number ¹⁾	Nominal dimensions									
		d	D	B	C	mm r _s min.	inch r _{1s} min.	S	S ₁	G	ds
50 1 ¹³ / ₁₆ 1 ⁷ / ₈ 1 ¹⁵ / ₁₆ 2	UCS210LD1N	50	90	51.6	24	1.5	1.5	19	32.6	9	M8 × 1
	UCS210-113LD1N	1.8125									
	UCS210-114LD1N	1.8750		3.5433	2.0315	0.9449	0.059	0.059	0.748	1.283	0.354
	UCS210-115LD1N	1.9375									
	UCS210-200LD1N	2.0000									
55 2 2 ¹ / ₁₆ 2 ¹ / ₈ 2 ³ / ₁₆	UCS211LD1N	55	100	55.6	25	2	2	22.2	33.4	9	M8 × 1
	UCS211-200LD1N	2.0000									
	UCS211-201LD1N	2.0625		3.9370	2.1890	0.9843	0.079	0.079	0.874	1.315	0.354
	UCS211-202LD1N	2.1250									
	UCS211-203LD1N	2.1875									
60 2 ¹ / ₄ 2 ⁵ / ₁₆ 2 ³ / ₈ 2 ⁷ / ₁₆	UCS212LD1N	60	110	65.1	27	2	2	25.4	39.7	10	M10 × 1.25
	UCS212-204LD1N	2.2500									
	UCS212-205LD1N	2.3125		4.3307	2.5630	1.0630	0.079	0.079	1.000	1.563	0.394
	UCS212-206LD1N	2.3750									
	UCS212-207LD1N	2.4375									
65 2 ¹ / ₂ 2 ⁹ / ₁₆	UCS213D1	65	120	65.1	32	2	2	25.4	39.7	10	M10 × 1.25
	UCS213-208D1	2.5000	4.7244	2.5630	1.2598	0.079	0.079	1.000	1.563	0.394	3/8-24UNF
	UCS213-209D1	2.5625									
70	UCS214D1	70	125	74.6	33	2	2	30.2	44.4	12	M10 × 1.25
75	UCS215D1	75	130	77.8	34	2	2	33.3	44.5	12	M10 × 1.25
80	UCS216D1	80	140	82.6	35	2.5	2.5	33.3	49.3	12	M10 × 1.25
85	UCS217D1	85	150	85.7	36	2.5	2.5	34.1	51.6	12	M12 × 1.5
90	UCS218D1	90	160	96	37	2.5	2.5	39.7	56.3	12	M12 × 1.5

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

2) For inch series bearings, the f_0 factor for calculating equivalent radial load is the same as the metric series.

Nominal dimensions						Basic load ratings		Factor ²⁾	Mass		
<i>d</i> ₄	<i>D</i> ₁	mm	inch	<i>a</i>	<i>b</i>	<i>F</i>	N dynamic <i>C</i> _r	lbf static <i>C</i> _{or}	<i>f</i> ₀	kg	lb
62.4	86.79	3.7	2.85	5.6			35 000	23 200		0.78	
2.4567	3.417	0.146	0.112	0.220			7 900	5 200	14.4	2.03	
										1.92	
										1.81	
										1.69	
69	96.80	4.4	2.85	5.9			43 500	29 200		1.06	
2.7165	3.811	0.173	0.112	0.232			9 750	6 550	14.3	2.71	
										2.60	
										2.46	
										2.34	
77	106.81	4.4	2.85	6			52 500	36 000		1.48	
3.0315	4.205	0.173	0.112	0.236			11 800	8 150	14.3	3.78	
										3.62	
										3.45	
										3.29	
82.5	—	—	—	6.8			57 500	40 000		1.88	
3.2480	—	—	—	0.268			12 900	9 000	14.4	4.41	
										4.24	
87	—	—	—	7			62 000	44 000	14.5	2.17	
93	—	—	—	7			66 000	49 500	14.7	2.43	
98.1	—	—	—	7.5			72 500	53 000	14.6	2.89	
106.4	—	—	—	7.5			83 500	64 000	14.7	3.47	
111.6	—	—	—	7			96 000	71 500	14.5	4.24	

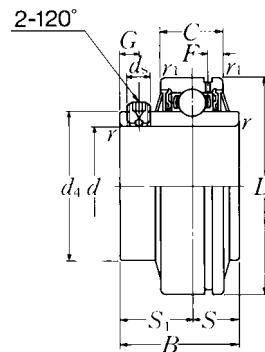


Shaft dia. mm inch	Bearing number ¹⁾	Nominal dimensions									
		d	D	B	C	mm r_s min.	inch r_{ls} min.	S	S ₁	G	ds
25 $\frac{13}{16}$ $\frac{7}{8}$ $\frac{15}{16}$ 1	UCS305D1	25	62	38	20	1.5	0.6	15	23	6	M6 × 0.75
	UCS305-013D1	0.8125									
	UCS305-014D1	0.8750	2.4409	1.4961	0.7874	0.059	0.024	0.591	0.906	0.236	$\frac{1}{4}$ -28UNF
	UCS305-015D1	0.9375									
	UCS305-100D1	1.0000									
30 $1\frac{1}{16}$ $1\frac{1}{8}$ $1\frac{3}{16}$	UCS306D1	30	72	43	23	1.5	1	17	26	6	M6 × 0.75
	UCS306-101D1	1.0625									
	UCS306-102D1	1.1250	2.8346	1.6929	0.9055	0.059	0.039	0.669	1.024	0.236	$\frac{1}{4}$ -28UNF
	UCS306-103D1	1.1875									
35 $1\frac{1}{4}$ $1\frac{5}{16}$ $1\frac{3}{8}$ $1\frac{7}{16}$	UCS307D1	35	80	48	25	2	1	19	29	8	M8 × 1
	UCS307-104D1	1.2500									
	UCS307-105D1	1.3125	3.1496	1.8898	0.9843	0.079	0.039	0.748	1.142	0.315	$\frac{5}{16}$ -24UNF
	UCS307-106D1	1.3750									
	UCS307-107D1	1.4375									
40 $1\frac{1}{2}$ $1\frac{9}{16}$	UCS308D1	40	90	52	27	2	1	19	33	10	M10 × 1.25
	UCS308-108D1	1.5000	3.5433	2.0472	1.0630	0.079	0.039	0.748	1.299	0.394	$\frac{3}{8}$ -24UNF
	UCS308-109D1	1.5625									
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UCS309D1	45	100	57	29	2	1	22	35	10	M10 × 1.25
	UCS309-110D1	1.6250									
	UCS309-111D1	1.6875	3.9370	2.2441	1.1417	0.079	0.039	0.866	1.378	0.394	$\frac{3}{8}$ -24UNF
	UCS309-112D1	1.7500									
50 $1\frac{13}{16}$ $1\frac{7}{8}$ $1\frac{15}{16}$	UCS310D1	50	110	61	32	2.5	1.5	22	39	12	M12 × 1.5
	UCS310-113D1	1.8125									
	UCS310-114D1	1.8750	4.3307	2.4016	1.2598	0.098	0.059	0.866	1.535	0.472	$\frac{1}{2}$ -20UNF
	UCS310-115D1	1.9375									
55 2 $2\frac{1}{16}$ $2\frac{1}{8}$ $2\frac{3}{16}$	UCS311D1	55	120	66	34	2.5	1.5	25	41	12	M12 × 1.5
	UCS311-200D1	2.0000									
	UCS311-201D1	2.0625	4.7244	2.5984	1.3386	0.098	0.059	0.984	1.614	0.472	$\frac{1}{2}$ -20UNF
	UCS311-202D1	2.1250									
	UCS311-203D1	2.1875									

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

2) For inch series bearings, the f_0 factor for calculating equivalent radial load is the same as the metric series.

Nominal dimensions		Basic load ratings		Factor ²⁾	Mass
mm <i>B₅</i>	inch <i>F</i>	N dynamic <i>C_r</i>	lbf static <i>C_{or}</i>	<i>f₀</i>	kg lb
36.8	4.3	21 200	10 900		0.37 0.94
1.4488	0.169	4 750	2 460	12.6	0.90 0.83 0.81
44.9	5.1	26 700	15 000		0.58 1.39
1.7677	0.201	6 000	3 400	13.3	1.33 1.28
49.4	5.3	33 500	19 100		0.74 1.77
1.9449	0.209	7 500	4 300	13.1	1.70 1.64 1.57
56	5.6	40 500	24 000		1.00 2.32
2.2047	0.220	9 150	5 400	13.2	2.23
63.5	5.8	53 000	32 000		1.33 3.17
2.5000	0.228	11 900	7 200	13.1	3.09 2.98
70.6	6.3	62 000	38 500		1.72 4.10
2.7795	0.248	13 900	8 600	13.2	3.99 3.85
76.6	6.5	71 500	45 000		2.15 5.14
3.0157	0.256	16 100	10 100	13.2	4.99 4.85 4.68

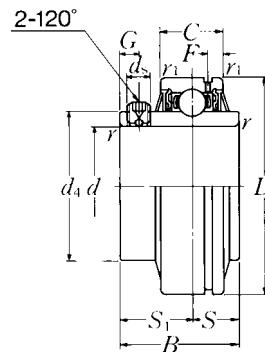


Shaft dia. mm inch	Bearing number ¹⁾	Nominal dimensions									
		d	D	B	C	mm r _s min.	inch r _s min.	S	S ₁	G	ds
60 $2\frac{1}{4}$ $2\frac{5}{16}$ $2\frac{3}{8}$ $2\frac{7}{16}$	UCS312D1	60	130	71	36	2.5	1.5	26	45	12	M12 × 1.5
	UCS312-204D1	2.2500									
	UCS312-205D1	2.3125	5.1181	2.7953	1.4173	0.098	0.059	1.024	1.772	0.472	$\frac{1}{2}$ -20UNF
	UCS312-206D1	2.3750									
	UCS312-207D1	2.4375									
65 $2\frac{1}{2}$ $2\frac{9}{16}$	UCS313D1	65	140	75	39	2.5	2	30	45	12	M12 × 1.5
	UCS313-208D1	2.5000	5.5118	2.9528	1.5354	0.098	0.079	1.181	1.772	0.472	$\frac{1}{2}$ -20UNF
	UCS313-209D1	2.5625									
70 $2\frac{5}{8}$ $2\frac{11}{16}$ $2\frac{3}{4}$	UCS314D1	70	150	78	41	2.5	2	33	45	12	M12 × 1.5
	UCS314-210D1	2.6250									
	UCS314-211D1	2.6875	5.9055	3.0709	1.6142	0.098	0.079	1.299	1.772	0.472	$\frac{1}{2}$ -20UNF
	UCS314-212D1	2.7500									
75 $2\frac{13}{16}$ $2\frac{7}{8}$ $2\frac{15}{16}$ 3	UCS315D1	75	160	82	43	2.5	2	32	50	14	M14 × 1.5
	UCS315-213D1	2.8125									
	UCS315-214D1	2.8750	6.2992	3.2283	1.6929	0.098	0.079	1.260	1.969	0.551	$\frac{5}{16}$ -18UNF
	UCS315-215D1	2.9375									
	UCS315-300D1	3.0000									
80 $3\frac{1}{16}$ $3\frac{1}{8}$ $3\frac{3}{16}$	UCS316D1	80	170	86	45	2.5	2	34	52	14	M14 × 1.5
	UCS316-301D1	3.0625									
	UCS316-302D1	3.1250	6.6929	3.3858	1.7717	0.098	0.079	1.339	2.047	0.551	$\frac{5}{16}$ -18UNF
	UCS316-303D1	3.1875									
85 $3\frac{1}{4}$ $3\frac{5}{16}$ $3\frac{7}{16}$	UCS317D1	85	180	96	47	3	2.5	40	56	16	M16 × 1.5
	UCS317-304D1	3.2500									
	UCS317-305D1	3.3125	7.0866	3.7795	1.8504	0.118	0.098	1.575	2.205	0.630	$\frac{5}{8}$ -18UNF
	UCS317-307D1	3.4375									
90 $3\frac{7}{16}$ $3\frac{1}{2}$	UCS318D1	90	190	96	49	3	2.5	40	56	16	M16 × 1.5
	UCS318-307D1	3.4375	7.4803	3.7795	1.9291	0.118	0.098	1.575	2.205	0.630	$\frac{5}{8}$ -18UNF
	UCS318-308D1	3.5000									

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

2) For inch series bearings, the f_0 factor for calculating equivalent radial load is the same as the metric series.

Nominal dimensions		Basic load ratings		Factor ²⁾	Mass
mm <i>B₅</i>	inch <i>F</i>	N dynamic <i>C_r</i>	lbf static <i>C_{or}</i>	<i>f₀</i>	kg lb
82.7	6.7	82 000	52 000		2.70
					6.27
3.2559	0.264	18 400	11 700	13.2	6.10
					5.89
					5.72
88.2	7.5	92 500	60 000	3.37	
3.4724	0.295	20 800	13 400	13.2	7.63
					7.41
94.8	7.5	104 000	68 000	4.03	
3.7323	0.295	23 400	15 300	13.2	9.37
					9.13
					8.91
101.3	7.7	113 000	77 000	4.88	
3.9882	0.303	25 500	17 400	13.2	11.4
					11.1
					10.9
					10.6
107.9	7.8	123 000	86 500	5.74	
4.2480	0.307	27 600	19 500	13.3	13.0
					12.7
					12.5
114.4	8.2	133 000	97 000	6.88	
4.5039	0.323	29 800	21 800	13.3	15.7
					15.4
					14.7
120.9	8.5	143 000	107 000	7.80	
4.7598	0.335	32 000	24 100	13.3	17.8
					17.4

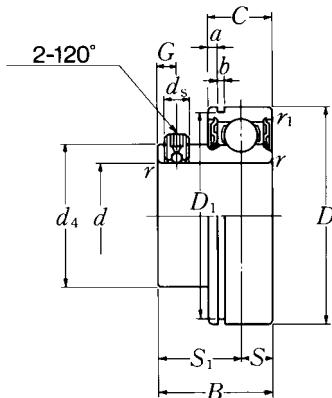


Shaft dia. mm inch	Bearing number ¹⁾	Nominal dimensions											
		d	D	B	C	r _s min.	r _{1s} min.	mm	inch	S	S ₁	G	ds
12 1/2	ASS201N ASS201-008N	12 0.5000	40 1.5748	22 0.8661	12 0.4724	0.6 0.024	0.6 0.024	6 0.236	16 0.630	4.2 0.165	M5 × 0.8 No.10-32UNF		24.3 0.957
15 9/16 5/8	ASS202N ASS202-009N ASS202-010N	15 0.5625 0.6250	40 1.5748	22 0.8661	12 0.4724	0.6 0.024	0.6 0.024	6 0.236	16 0.630	4.2 0.165	M5 × 0.8 No.10-32UNF		24.3 0.957
17 11/16	ASS203N ASS203-011N	17 0.6875	40 1.5748	22 0.8661	12 0.4724	0.6 0.024	0.6 0.024	6 0.236	16 0.630	4.2 0.165	M5 × 0.8 No.10-32UNF		24.3 0.957
20 3/4	ASS204N ASS204-012N	20 0.7500	47 1.8504	25 0.9843	14 0.5512	1 0.039	0.6 0.024	7 0.276	18 0.709	4.2 0.165	M5 × 0.8 No.10-32UNF		29.6 1.165
25 13/16 7/8 15/16 1	ASS205N ASS205-013N ASS205-014N ASS205-015N ASS205-100N	25 0.8125 0.8750 0.9375 1.0000	52 2.0472	27 1.0630	15 0.5906	1 0.039	0.6 0.024	7.5 0.295	19.5 0.768	5 0.197	M5 × 0.8 No.10-32UNF		33.9 1.335
30 1 1/16 1 1/8 1 3/16 1 1/4	ASS206N ASS206-101N ASS206-102N ASS206-103N ASS206-104N	30 1.0625 1.1250 1.1875 1.2500	62 2.4409	29 1.1417	16 0.6299	1 0.039	0.6 0.024	8 0.315	21 0.827	5 0.197	M6 × 0.75 1/4-28UNF		40.8 1.606
35 1 1/4 1 5/16 1 3/8 1 7/16	ASS207N ASS207-104N ASS207-105N ASS207-106N ASS207-107N	35 1.2500 1.3125 1.3750 1.4375	72 2.8346	34 1.3386	17 0.6693	1.5 0.059	0.6 0.024	8.5 0.335	25.5 1.004	6 0.236	M6 × 0.75 1/4-28UNF		46.8 1.843
40 1 1/2 1 9/16	ASS208N ASS208-108N ASS208-109N	40 1.5000 1.5625	80 3.1496	38 1.4961	18 0.7087	1.5 0.059	0.6 0.024	9 0.354	29 1.142	8 0.315	M8 × 1 5/16-24UNF		53 2.087

Remarks: 1) If relubricatable type is needed, please order with suffix "D1".

2) For inch series bearings, the f_0 factor for calculating equivalent radial load is the same as the metric series.

Nominal dimensions			Basic load ratings		Factor ²⁾	Mass
<i>D</i> ₁	mm <i>a</i>	inch <i>b</i>	N dynamic <i>C</i> _r	lbf static <i>C</i> _{or}	<i>f</i> ₀	kg lb
38.1	1.98	1.5	9 600	4 600	12.8	0.12
1.500	0.078	0.059	2 160	1 030		0.24
38.1	1.98	1.5	9 600	4 600	12.8	0.11
1.500	0.078	0.059	2 160	1 030		0.23
38.1	1.98	1.5	9 600	4 600	12.8	0.10
1.500	0.078	0.059	2 160	1 030		0.20
44.6	2.38	1.5	12 800	6 650	13.2	0.17
1.756	0.094	0.059	2 890	1 500		0.33
49.73	2.38	1.5	14 000	7 850	13.9	0.17
1.958	0.094	0.059	3 150	1 770		0.46
59.61	3.18	2.05	19 500	11 300	13.8	0.44
2.347	0.125	0.081	4 400	2 540		0.42
68.81	3.18	2.05	25 700	15 300	13.8	0.39
2.709	0.125	0.081	5 750	3 450		0.67
76.81	3.18	2.05	29 100	17 800	14.0	0.65
3.024	0.125	0.081	6 550	4 000		0.63
						0.81
						0.49
						1.18
						1.05
						0.93
						0.81
						0.50
						1.15
						1.06

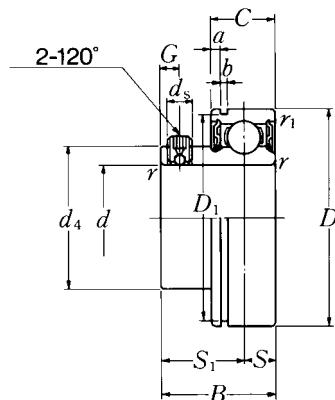


Shaft dia. mm inch	Bearing number ¹⁾	Nominal dimensions											
		d	D	B	C	r _s min.	r _{1s} min.	mm	inch	S	S ₁	G	ds
45 1 5/8 1 11/16 1 3/4	ASS209N	45	85	40	19	1.5	1.5	9.5	30.5	8	M8 × 1		57.5
	ASS209-110N	1.6250											
	ASS209-111N	1.6875	3.3465	1.5748	0.7480	0.059	0.059	0.374	1.201	0.315	5/16-24UNF		2.264
	ASS209-112N	1.7500											
50 1 13/16 1 7/8 1 15/16 2	ASS210N	50	90	42	20	1.5	1.5	10	32	9	M8 × 1		62.4
	ASS210-113N	1.8125											
	ASS210-114N	1.8750	3.5433	1.6535	0.7874	0.059	0.059	0.394	1.260	0.354	5/16-24UNF		2.457
	ASS210-115N	1.9375	2.0000										
	ASS210-200N												

Remarks: 1) If relubricatable type is needed, please order with suffix "D1".

2) For inch series bearings, the f_0 factor for calculating equivalent radial load is the same as the metric series.

Nominal dimensions			Basic load ratings		Factor ²⁾	Mass
<i>D₁</i>	mm <i>a</i>	inch <i>b</i>	N dynamic <i>C_r</i>	lbf static <i>C_{or}</i>	<i>f₀</i>	kg lb
81.81	3.18	2.05	32 500	20 400	14.1	0.56
3.221	0.125	0.081	7 350	4 600		1.41 1.34 1.26
86.79	3.18	2.85	35 000	23 200	14.4	0.67
3.417	0.125	0.112	7 900	5 200		1.70 1.61 1.52 1.43

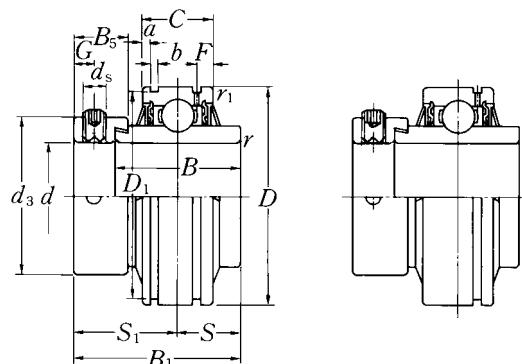

UELS···D1N


UELS···D1

Shaft dia. mm inch	Bearing number ¹⁾	Nominal dimensions										
		d	D	B ₁	B	mm	inch	r _s min.	r _{1s} min.	S	S ₁	G
20 $\frac{3}{4}$	UELS204LD1NW3 UELS204-012LD1NW3	20 0.7500	47 1.8504	43.7 1.720	34.2 1.3465	17 0.6693	1 0.039	0.6 0.024	17.1 0.673	26.6 1.047	4.8 0.189	
25 $\frac{13}{16}$ $\frac{7}{8}$ $\frac{15}{16}$	UELS205LD1NW3 UELS205-013LD1NW3 UELS205-014LD1NW3 UELS205-015LD1NW3 UELS205-100LD1NW3	25 0.8125	52 0.8750	44.4 2.0472	34.9 1.748	17 1.3740	1 0.6693	1 0.039	0.6 0.024	17.45 0.687	26.9 1.059	4.8 0.189
30 $1\frac{1}{16}$ $1\frac{1}{8}$ $1\frac{3}{16}$ $1\frac{1}{4}$	UELS206LD1NW3 UELS206-101LD1NW3 UELS206-102LD1NW3 UELS206-103LD1NW3 UELS206-104LD1NW3	30 1.0625	62 1.1250	48.4 2.4409	36.5 1.906	19 1.4370	1 0.7480	1 0.039	1 0.039	18.25 0.719	30.1 1.185	6 0.236
35 $1\frac{1}{4}$ $1\frac{5}{16}$ $1\frac{3}{8}$ $1\frac{7}{16}$	UELS207LD1NW3 UELS207-104LD1NW3 UELS207-105LD1NW3 UELS207-106LD1NW3 UELS207-107LD1NW3	35 1.2500	72 1.3125	51.1 2.8346	37.6 2.012	20 1.4803	1.5 0.7874	1.5 0.059	1.5 0.059	18.8 0.740	32.3 1.272	6.8 0.268
40 $1\frac{1}{2}$ $1\frac{9}{16}$	UELS208LD1NW3 UELS208-108LD1NW3 UELS208-109LD1NW3	40 1.5000	80 3.1496	56.3 2.217	42.8 1.6850	21 0.8268	1.5 0.059	1.5 0.059	21.4 0.843	34.9 1.374	6.8 0.268	
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UELS209LD1NW3 UELS209-110LD1NW3 UELS209-111LD1NW3 UELS209-112LD1NW3	45 1.6250	85 1.6875	56.3 3.3465	42.8 2.217	22 1.6850	1.5 0.8661	1.5 0.059	21.4 0.843	34.9 1.374	6.8 0.268	
50 $1\frac{13}{16}$ $1\frac{7}{8}$ $1\frac{15}{16}$ 2	UELS210LD1NW3 UELS210-113LD1NW3 UELS210-114LD1NW3 UELS210-115LD1NW3 UELS210-200LD1NW3	50 1.8125	90 1.8750	62.7 3.5433	49.2 2.469	24 1.9370	1.5 0.9449	1.5 0.059	24.6 0.969	38.1 1.500	6.8 0.268	

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

2) For inch series bearings, the f_0 factor for calculating equivalent radial load is the same as the metric series.

Nominal dimensions							Basic load ratings		Factor ²⁾	Mass
ds	d ₃	B ₅	mm inch D ₁	a	b	F	N dynamic C _r	lbf static C _{or}	f ₀	kg lb
M6 × 0.75	33	13.5	44.6	3.1	1.5	4	12 800	6 650	13.2	0.23
1/4-28UNF	1.299	0.531	1.756	0.122	0.059	0.157	2 890	1 500		0.45
M6 × 0.75	38	13.5	49.73	3.2	1.5	4.1	14 000	7 850		0.27
1/4-28UNF	1.496	0.531	1.958	0.126	0.059	0.161	3 150	1 770	13.9	0.61
										0.58
										0.55
										0.51
M8 × 1	44.5	15.9	59.61	3.2	2.05	4.2	19 500	11 300		0.41
5/16-24UNF	1.752	0.626	2.347	0.126	0.081	0.165	4 400	2 540	13.8	0.94
										0.89
										0.84
										0.80
M10 × 1.25	55.5	17.5	68.81	3.3	2.05	5	25 700	15 300		0.60
3/8-24UNF	2.185	0.689	2.709	0.130	0.081	0.197	5 750	3 450	13.8	1.45
										1.40
										1.35
										1.28
M10 × 1.25	60	18.3	76.81	3.4	2.05	5	29 100	17 800		0.79
3/8-24UNF	2.362	0.720	3.024	0.134	0.081	0.197	6 550	4 000	14.0	1.90
										1.82
M10 × 1.25	63.5	18.3	81.81	3.5	2.05	5.1	32 500	20 400		0.85
3/8-24UNF	2.500	0.720	3.221	0.138	0.081	0.201	7 350	4 600	14.1	2.05
										1.97
										1.88
M10 × 1.25	69.5	18.3	86.79	3.7	2.85	5.6	35 000	23 200		0.98
3/8-24UNF	2.736	0.720	3.417	0.146	0.112	0.220	7 900	5 200	14.4	2.46
										2.36
										2.25
										2.09

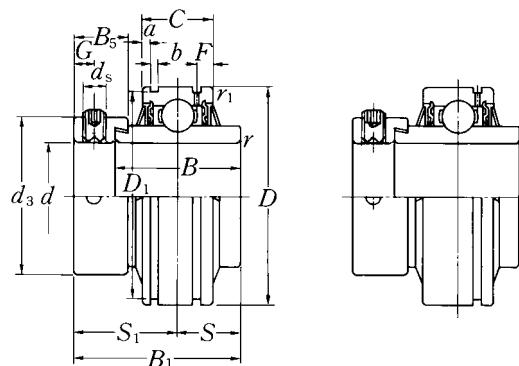

UELS···D1N


UELS···D1

Shaft dia. mm inch	Bearing number ¹⁾	Nominal dimensions									
		d	D	B ₁	B	mm	inch	r _s min.	r _{1s} min.	S	S ₁
55 2	UELS211LD1NW3	55	100	71.4	55.5	25	2	2	27.75	43.6	8
2 1/16	UELS211-200LD1NW3	2.0000									
2 1/8	UELS211-201LD1NW3	2.0625	3.9370	2.811	2.1850	0.9843	0.079	0.079	1.093	1.717	0.315
2 3/16	UELS211-202LD1NW3	2.1250									
	UELS211-203LD1NW3	2.1875									
60 2 1/4	UELS212LD1NW3	60	110	77.8	61.9	27	2	2	30.95	46.8	8
2 5/16	UELS212-204LD1NW3	2.2500									
2 3/8	UELS212-205LD1NW3	2.3125	4.3307	3.063	2.4370	1.0630	0.079	0.079	1.219	1.843	0.315
2 7/16	UELS212-206LD1NW3	2.3750									
	UELS212-207LD1NW3	2.4375									

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

2) For inch series bearings, the f_0 factor for calculating equivalent radial load is the same as the metric series.

Nominal dimensions								Basic load ratings		Factor ²⁾	Mass
ds	d ₃	B ₅	mm inch D ₁	a	b	F	N dynamic C _r	lbf static C _{or}	f ₀	kg lb	
M10 × 1.25	76	20.7	96.80	4.4	2.85	5.9	43 500	29 200		1.32	
										3.28	
3/8-24UNF	2.992	0.815	3.811	0.173	0.112	0.232	9 750	6 550	14.3	3.12	
										3.02	
										2.90	
M10 × 1.25	84	22.3	106.81	4.4	2.85	6	52 500	36 000		1.93	
										4.50	
3/8-24UNF	3.307	0.878	4.205	0.173	0.112	0.236	11 800	8 150	14.3	4.34	
										4.17	
										4.00	

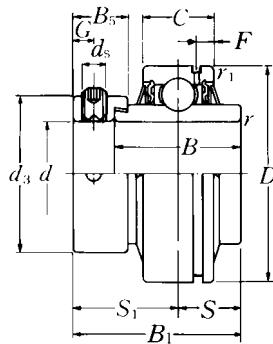


Shaft dia. mm inch	Bearing number ¹⁾	Nominal dimensions											
		d	D	B1	B	C	r _s min.	r _{1s} min.	S	S ₁	G	ds	
25 $\frac{13}{16}$ $\frac{7}{8}$ $\frac{15}{16}$ 1	UELS305D1W3	25	62	46.8	34.9	20	1.5	0.6	16.7	30.1	6	M8 × 1	
	UELS305-013D1W3	0.8125											
	UELS305-014D1W3	0.8750	2.4409	1.843	1.3740	0.7874	0.059	0.024	0.657	1.185	0.236	$\frac{5}{16}$ -24UNF	
	UELS305-015D1W3	0.9375											
	UELS305-100D1W3	1.0000											
30 $1\frac{1}{16}$ $1\frac{1}{8}$ $1\frac{3}{16}$	UELS306D1W3	30	72	50	36.5	23	1.5	1	17.5	32.5	6.7	M8 × 1	
	UELS306-101D1W3	1.0625											
	UELS306-102D1W3	1.1250	2.8346	1.969	1.4370	0.9055	0.059	0.039	0.689	1.280	0.264	$\frac{5}{16}$ -24UNF	
	UELS306-103D1W3	1.1875											
35 $1\frac{1}{4}$ $1\frac{5}{16}$ $1\frac{3}{8}$ $1\frac{7}{16}$	UELS307D1W3	35	80	51.6	38.1	25	2	1	18.3	33.3	6.7	M8 × 1	
	UELS307-104D1W3	1.2500											
	UELS307-105D1W3	1.3125	3.1496	2.031	1.5000	0.9843	0.079	0.039	0.720	1.311	0.264	$\frac{5}{16}$ -24UNF	
	UELS307-106D1W3	1.3750											
	UELS307-107D1W3	1.4375											
40 $1\frac{1}{2}$ $1\frac{3}{16}$	UELS308D1W3	40	90	57.1	41.3	27	2	1	19.8	37.3	8	M10 × 1.25	
	UELS308-108D1W3	1.5000	3.5433	2.248	1.6260	1.0630	0.079	0.039	0.780	1.469	0.315	$\frac{3}{8}$ -24UNF	
	UELS308-109D1W3	1.5625											
45 $1\frac{5}{8}$ $1\frac{11}{16}$ $1\frac{3}{4}$	UELS309D1W3	45	100	58.7	42.9	29	2	1	19.8	38.9	8	M10 × 1.25	
	UELS309-110D1W3	1.6250											
	UELS309-111D1W3	1.6875	3.9370	2.311	1.6890	1.1417	0.079	0.039	0.780	1.531	0.315	$\frac{3}{8}$ -24UNF	
	UELS309-112D1W3	1.7500											
50 $1\frac{13}{16}$ $1\frac{7}{8}$ $1\frac{15}{16}$	UELS310D1W3	50	110	66.6	49.2	32	2.5	1.5	24.6	42	8.7	M10 × 1.25	
	UELS310-113D1W3	1.8125											
	UELS310-114D1W3	1.8750	4.3307	2.622	1.9370	1.2598	0.098	0.059	0.969	1.654	0.343	$\frac{3}{8}$ -24UNF	
	UELS310-115D1W3	1.9375											
55 2 $2\frac{1}{16}$ $2\frac{1}{8}$ $2\frac{3}{16}$	UELS311D1W3	55	120	73	55.6	34	2.5	1.5	27.8	45.2	8.7	M10 × 1.25	
	UELS311-200D1W3	2.0000											
	UELS311-201D1W3	2.0625	4.7244	2.874	2.1890	1.3386	0.098	0.059	1.094	1.780	0.343	$\frac{3}{8}$ -24UNF	
	UELS311-202D1W3	2.1250											
	UELS311-203D1W3	2.1875											

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

2) For inch series bearings, the f_0 factor for calculating equivalent radial load is the same as the metric series.

Nominal dimensions			Basic load ratings		Factor ²⁾	Mass
<i>d₃</i>	mm <i>B₅</i>	inch <i>F</i>	N dynamic <i>C_r</i>	lbf static <i>C_{or}</i>	<i>f₀</i>	kg lb
42.8	15.9	4.3	21 200	10 900		0.45 1.13
1.685	0.626	0.169	4 750	2 460	12.6	1.09 1.05 1.00
50	17.5	5.1	26 700	15 000		0.71 1.62
1.969	0.689	0.201	6 000	3 400	13.3	1.56 1.50
55	17.5	5.3	33 500	19 100		0.83 1.99
2.165	0.689	0.209	7 500	4 300	13.1	1.91 1.84 1.76
63.5	20.6	5.6	40 500	24 000		1.12 2.67
2.500	0.811	0.220	9 150	5 400	13.2	2.58
70	20.6	5.8	53 000	32 000		1.50 3.26
2.756	0.811	0.228	11 900	7 200	13.1	3.37 3.26
76.2	22.2	6.3	62 000	38 500		1.93 4.55
3.000	0.874	0.248	13 900	8 600	13.2	4.44 4.30
83	22.2	6.5	71 500	45 000		2.42 5.76
3.268	0.874	0.256	16 100	10 100	13.2	5.57 5.43 5.26

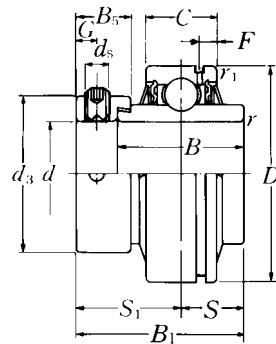


Shaft dia. mm inch	Bearing number ¹⁾	Nominal dimensions											
		d	D	B1	B	C	mm min.	inch min.	S	S1	G	ds	
60 $2\frac{1}{4}$	UELS312D1W3	60	130	79.4	61.9	36	2.5	1.5	30.95	48.45	8.7	M10 × 1.25	
	UELS312-204D1W3	2.2500											
	UELS312-205D1W3	2.3125		5.1181	3.126	2.4370	1.4173	0.098	0.059	1.219	1.907	0.343	
	UELS312-206D1W3	2.3750											
	UELS312-207D1W3	2.4375											
65 $2\frac{1}{2}$	UELS313D1W3	65	140	85.7	65.1	39	2.5	2	32.55	53.15	10.3	M12 × 1.5	
	UELS313-208D1W3	2.5000		5.5118	3.374	2.5630	1.5354	0.098	0.079	1.281	2.093	0.406	
	UELS313-209D1W3	2.5625											
70 $2\frac{5}{8}$	UELS314D1W3	70	150	92.1	68.3	41	2.5	2	34.15	57.95	10.3	M12 × 1.5	
	UELS314-210D1W3	2.6250											
	UELS314-211D1W3	2.6875		5.9055	3.626	2.6890	1.6142	0.098	0.079	1.344	2.281	0.406	
	UELS314-212D1W3	2.7500											
75 $2\frac{13}{16}$	UELS315D1W3	75	160	100	74.6	43	2.5	2	37.3	62.7	12.7	M16 × 1.5	
	UELS315-213D1W3	2.8125											
	UELS315-214D1W3	2.8750		6.2992	3.937	2.9370	1.6929	0.098	0.079	1.469	2.469	0.500	
	UELS315-215D1W3	2.9375											
	UELS315-300D1W3	3.0000											
80 $3\frac{1}{16}$	UELS316D1W3	80	170	106.4	81	45	2.5	2	40.5	65.9	12.7	M16 × 1.5	
	UELS316-301D1W3	3.0625											
	UELS316-302D1W3	3.1250		6.6929	4.189	3.1890	1.7717	0.098	0.079	1.594	2.594	0.500	
	UELS316-303D1W3	3.1875											
85 $3\frac{1}{4}$	UELS317D1W3	85	180	109.5	84.1	47	3	2.5	42.05	67.45	12.7	M16 × 1.5	
	UELS317-304D1W3	3.2500											
	UELS317-305D1W3	3.3125		7.0866	4.311	3.3110	1.8504	0.118	0.098	1.656	2.656	0.500	
	UELS317-307D1W3	3.4375											
90 $3\frac{7}{16}$	UELS318D1W3	90	190	115.9	87.3	49	3	2.5	43.65	72.25	14.3	M20 × 1.5	
	UELS318-307D1W3	3.4375		7.4803	4.563	3.4370	1.9291	0.118	0.098	1.719	2.844	0.563	
	UELS318-308D1W3	3.5000											

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

2) For inch series bearings, the f_0 factor for calculating equivalent radial load is the same as the metric series.

Nominal dimensions			Basic load ratings		Factor ²⁾	Mass
<i>d₃</i>	mm <i>B₅</i>	inch <i>F</i>	N dynamic <i>C_r</i>	lbf static <i>C_{or}</i>	<i>f₀</i>	kg lb
89	23.9	6.7	82 000	52 000		3.04 7.01
3.504	0.941	0.264	18 400	11 700	13.2	6.86 6.69 6.40
97	27	7.5	92 500	60 000		3.79
3.819	1.063	0.295	20 800	13 400	13.2	8.76 8.55
102	30.2	7.5	104 000	68 000		4.54 10.7 10.5 10.2
4.016	1.189	0.295	23 400	15 300	13.2	
113	31.8	7.7	113 000	77 000		5.50 13.5 13.2 13.0 12.9
4.449	1.252	0.303	25 500	17 400	13.2	
119	31.8	7.8	123 000	86 500		6.89 15.3 15.0 15.3
4.685	1.252	0.307	27 600	19 500	13.3	
127	31.8	8.2	133 000	97 000		8.21 18.2 17.9 17.2
5.000	1.252	0.323	29 800	21 800	13.3	
133	36.5	8.5	143 000	107 000		9.34 21.2 20.7
5.236	1.437	0.335	32 000	24 100	13.3	

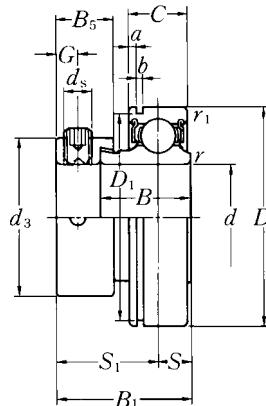

Shaft dia. mm inch	Bearing number ¹⁾	Nominal dimensions											
		d	D	B1	B	C	mm min.	inch min.	S	S1	G	ds	
12 $\frac{1}{2}$	AELS201NW3	12	40	28.6	19	12	0.6	0.6	6.5	22.1	4.8	M6 \times 0.75	
	AELS201-008NW3	0.5000	1.5748	1.126	0.7480	0.4724	0.024	0.024	0.256	0.870	0.189	$\frac{1}{4}$ -28UNF	
15 $\frac{9}{16}$ $\frac{5}{8}$	AELS202NW3	15	40	28.6	19	12	0.6	0.6	6.5	22.1	4.8	M6 \times 0.75	
	AELS202-009NW3	0.5625	1.5748	1.126	0.7480	0.4724	0.024	0.024	0.256	0.870	0.189	$\frac{1}{4}$ -28UNF	
	AELS202-010NW3	0.6250											
17 $\frac{11}{16}$	AELS203NW3	17	40	28.6	19	12	0.6	0.6	6.5	22.1	4.8	M6 \times 0.75	
	AELS203-011NW3	0.6875	1.5748	1.126	0.7480	0.4724	0.024	0.024	0.256	0.870	0.189	$\frac{1}{4}$ -28UNF	
20 $\frac{3}{4}$	AELS204NW3	20	47	31	21.5	14	1	0.6	7.5	23.5	4.8	M6 \times 0.75	
	AELS204-012NW3	0.7500	1.8504	1.220	0.8465	0.5512	0.039	0.024	0.295	0.925	0.189	$\frac{1}{4}$ -28UNF	
25 $\frac{13}{16}$ $\frac{7}{8}$ $\frac{15}{16}$	AELS205NW3	25	52	31	21.5	15	1	0.6	7.5	23.5	4.8	M6 \times 0.75	
	AELS205-013NW3	0.8125											
	AELS205-014NW3	0.8750	2.0472	1.220	0.8465	0.5906	0.039	0.024	0.295	0.925	0.189	$\frac{1}{4}$ -28UNF	
	AELS205-015NW3	0.9375											
1	AELS205-100NW3	1.0000											
30 $1\frac{1}{16}$	AELS206NW3	30	62	35.7	23.8	16	1	0.6	9	26.7	6	M8 \times 1	
	AELS206-101NW3	1.0625											
$1\frac{1}{8}$	AELS206-102NW3	1.1250	2.4409	1.406	0.9370	0.6299	0.039	0.024	0.354	1.051	0.236	$\frac{5}{16}$ -24UNF	
$1\frac{3}{16}$	AELS206-103NW3	1.1875											
$1\frac{1}{4}$	AELS206-104NW3	1.2500											
35 $1\frac{1}{4}$	AELS207NW3	35	72	38.9	25.4	17	1.5	0.6	9.5	29.4	6.8	M10 \times 1.25	
	AELS207-104NW3	1.2500											
$1\frac{5}{16}$	AELS207-105NW3	1.3125	2.8346	1.531	1.0000	0.6693	0.059	0.024	0.374	1.157	0.268	$\frac{3}{8}$ -24UNF	
$1\frac{1}{8}$	AELS207-106NW3	1.3750											
$1\frac{7}{16}$	AELS207-107NW3	1.4375											
40 $1\frac{1}{2}$	AELS208NW3	40	80	43.7	30.2	18	1.5	0.6	11	32.7	6.8	M10 \times 1.25	
	AELS208-108NW3	1.5000	3.1496	1.720	1.1890	0.7087	0.059	0.024	0.433	1.287	0.268	$\frac{3}{8}$ -24UNF	
$1\frac{9}{16}$	AELS208-109NW3	1.5625											
45 $1\frac{5}{8}$	AELS209NW3	45	85	43.7	30.2	19	1.5	1.5	11	32.7	6.8	M10 \times 1.25	
	AELS209-110NW3	1.6250											
$1\frac{11}{16}$	AELS209-111NW3	1.6875	3.3465	1.720	1.1890	0.7480	0.059	0.059	0.433	1.287	0.268	$\frac{3}{8}$ -24UNF	
$1\frac{3}{4}$	AELS209-112NW3	1.7500											

Remarks: 1) If relubricatable type is needed, please order with suffix "D1".


sale@technobearing.ru

For inch series bearings, the f_0 factor for calculating equivalent radii is the same as the metric series.

www.technobearing.ru

8 (800) 700-72-07 (бесплатно)

<i>d₃</i>	Nominal dimensions					Basic load ratings		Factor²⁾	Mass	
	<i>D₁</i>	<i>a</i>	<i>b</i>	<i>B₅</i>		<i>N</i> <i>C_r</i>	lbf static <i>C_{or}</i>		<i>kg</i>	<i>lb</i>
29 1.142	38.1 1.500	1.98 0.078	1.5 0.059	13.6 0.535		9 600 2 160	4 600 1 030	12.8	0.12 0.26	
29 1.142	38.1 1.500	1.98 0.078	1.5 0.059	13.6 0.535		9 600 2 160	4 600 1 030	12.8	0.11 0.26 0.24	
29 1.142	38.1 1.500	1.98 0.078	1.5 0.059	13.6 0.535		9 600 2 160	4 600 1 030	12.8	0.10 0.23	
33 1.299	44.6 1.756	2.38 0.094	1.5 0.059	13.5 0.531		12 800 2 890	6 650 1 500	13.2	0.17 0.35	
38 1.496	49.73 1.958	2.38 0.094	1.5 0.059	13.5 0.531		14 000 3 150	7 850 1 770	13.9	0.20 0.51 0.48 0.45 0.42	
44.5 1.752	59.61 2.347	3.18 0.125	2.05 0.081	15.9 0.626		19 500 4 400	11 300 2 540	13.8	0.31 0.74 0.73 0.66 0.61	
55.5 2.185	68.81 2.709	3.18 0.125	2.05 0.081	17.5 0.689		25 700 5 750	15 300 3 450	13.8	0.49 1.15 1.10 1.04 0.98	
60 2.362	76.81 3.024	3.18 0.125	2.05 0.081	18.3 0.720		29 100 6 550	17 800 4 000	14.0	0.66 1.41 1.34	
63.5 2.500	81.81 3.221	3.18 0.125	2.05 0.081	18.3 0.720		32 500 7 350	20 400 4 600	14.1	0.73 1.81 1.72 1.63	

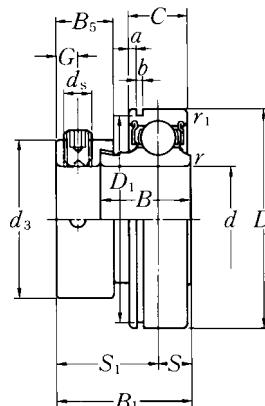


Shaft dia. mm inch	Bearing number ¹⁾	Nominal dimensions											
		d	D	B ₁	B	C	mm min.	inch min.	S	S ₁	G	ds	
50 $1\frac{13}{16}$	AELS210NW3	50	90	43.7	30.2	20	1.5	1.5	11	32.7	6.8	M10 × 1.25	
	AELS210-113NW3	1.8125											
$1\frac{7}{8}$	AELS210-114NW3	1.8750											
$1\frac{15}{16}$	AELS210-115NW3	1.9375											
2	AELS210-200NW3	2.0000											
55	AELS211NW3	55	100	48.4	32.5	21	2	1.5	12	36.4	8	M10 × 1.25	
2	AELS211-200NW3	2.0000											
$2\frac{1}{16}$	AELS211-201NW3	2.0625											
$2\frac{1}{8}$	AELS211-202NW3	2.1250											
$2\frac{3}{16}$	AELS211-203NW3	2.1875											
60	AELS212NW3	60	110	53.1	37.2	22	2	1.5	13.5	39.6	8	M10 × 1.25	
$2\frac{1}{4}$	AELS212-204NW3	2.2500											
$2\frac{5}{16}$	AELS212-205NW3	2.3125											
$2\frac{3}{8}$	AELS212-206NW3	2.3750											
$2\frac{7}{16}$	AELS212-207NW3	2.4375											

Remarks: 1) If relubricatable type is needed, please order with suffix "D1".

2) For inch series bearings, the f_0 factor for calculating equivalent radial load is the same as the metric series.

Nominal dimensions						Basic load ratings		Factor ²⁾	Mass		
<i>d</i> ₃	<i>D</i> ₁	mm	inch	<i>a</i>	<i>b</i>	<i>B</i> ₅	N dynamic <i>C</i> _r	lbf static <i>C</i> _{or}	<i>f</i> ₀	kg	lb
69.5	86.79	3.18	2.85	18.3			35 000	23 200		0.74	
										1.85	
2.736	3.417	0.125	0.112	0.720			7 900	5 200	14.4	1.76	
										1.68	
										1.59	
76	96.8	3.18	2.85	20.7			43 500	29 200		1.00	
										2.49	
2.992	3.811	0.125	0.112	0.815			9 750	6 550	14.3	2.38	
										2.27	
										2.16	
84	106.81	3.18	2.85	22.3			52 500	36 000		1.33	
										3.17	
3.307	4.205	0.125	0.112	0.878			11 800	8 150	14.3	3.04	
										2.91	
										2.78	

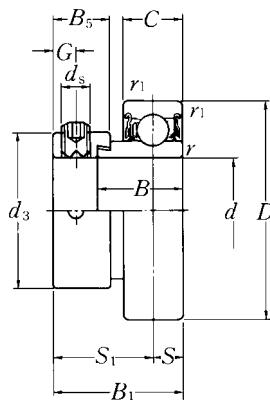


Shaft dia. mm inch	Bearing number ¹⁾	Nominal dimensions											
		d	D	B ₁	B	C	mm r _s min.	inch r _{1s} min.	S	S ₁	G	ds	
12 $\frac{1}{2}$	JELS201W3	12	40	28.6	19	13	0.6	0.4	6.5	22.1	4.8	M6 \times 0.75	
	JELS201-008W3	0.5000	1.5748	1.126	0.7480	0.5118	0.024	0.016	0.256	0.870	0.189	$\frac{1}{4}$ -28UNF	
15 $\frac{9}{16}$ $\frac{5}{8}$	JELS202W3	15	40	28.6	19	13	0.6	0.4	6.5	22.1	4.8	M6 \times 0.75	
	JELS202-009W3	0.5625	1.5748	1.126	0.7480	0.5118	0.024	0.016	0.256	0.870	0.189	$\frac{1}{4}$ -28UNF	
	JELS202-010W3	0.6250											
17 $\frac{11}{16}$	JELS203W3	17	40	28.6	19	13	0.6	0.4	6.5	22.1	4.8	M6 \times 0.75	
	JELS203-011W3	0.6875	1.5748	1.126	0.7480	0.5118	0.024	0.016	0.256	0.870	0.189	$\frac{1}{4}$ -28UNF	
20 $\frac{3}{4}$	JELS204W3	20	47	31	21.5	15	1	0.6	7.5	23.5	4.8	M6 \times 0.75	
	JELS204-012W3	0.7500	1.8504	1.220	0.8465	0.5906	0.039	0.024	0.295	0.925	0.189	$\frac{1}{4}$ -28UNF	
25 $\frac{13}{16}$ $\frac{7}{8}$ $\frac{15}{16}$	JELS205W3	25	52	31	21.5	15	1	0.6	7.5	23.5	4.8	M6 \times 0.75	
	JELS205-013W3	0.8125											
	JELS205-014W3	0.8750	2.0472	1.220	0.8465	0.5906	0.039	0.024	0.295	0.925	0.189	$\frac{1}{4}$ -28UNF	
	JELS205-015W3	0.9375											
1	JELS205-100W3	1.0000											
30 $1\frac{1}{16}$	JELS206W3	30	62	35.7	23.8	18	1	1	9	26.7	6	M8 \times 1	
	JELS206-101W3	1.0625											
$1\frac{1}{8}$	JELS206-102W3	1.1250	2.4409	1.406	0.9370	0.7087	0.039	0.039	0.354	1.051	0.236	$\frac{5}{16}$ -24UNF	
$1\frac{3}{16}$	JELS206-103W3	1.1875											
$1\frac{1}{4}$	JELS206-104W3	1.2500											
35 $1\frac{1}{4}$	JELS207W3	35	72	38.9	25.4	19	1.5	1.5	9.5	29.4	6.8	M10 \times 1.25	
	JELS207-104W3	1.2500											
$1\frac{5}{16}$	JELS207-105W3	1.3125	2.8346	1.531	1.0000	0.7480	0.059	0.059	0.374	1.157	0.268	$\frac{3}{8}$ -24UNF	
$1\frac{3}{8}$	JELS207-106W3	1.3750											
$1\frac{7}{16}$	JELS207-107W3	1.4375											
40 $1\frac{1}{2}$	JELS208W3	40	80	43.7	30.2	22	1.5	1.5	11	32.7	6.8	M10 \times 1.25	
	JELS208-108W3	1.5000	3.1496	1.720	1.1890	0.8661	0.059	0.059	0.433	1.287	0.268	$\frac{3}{8}$ -24UNF	
	JELS208-109W3	1.5625											
45 $1\frac{5}{8}$	JELS209W3	45	85	43.7	30.2	22	1.5	1.5	11	32.7	6.8	M10 \times 1.25	
	JELS209-110W3	1.6250											
$1\frac{11}{16}$	JELS209-111W3	1.6875	3.3465	1.720	1.1890	0.8661	0.059	0.059	0.433	1.287	0.268	$\frac{3}{8}$ -24UNF	
$1\frac{3}{4}$	JELS209-112W3	1.7500											

Remarks: 1) If relubricatable type is needed, please order with suffix "D1".

sale@technobearing.ru For inch series bearings, the f_0 factor for calculating equivalent radii is the same as the metric series.

www.technobearing.ru 8 (800) 700-72-07 (бесплатно)

Nominal dimensions		Basic load ratings		Factor ²⁾	Mass	
mm <i>d</i> ₃	inch <i>B</i> ₅	N dynamic <i>C</i> _r	lbf static <i>C</i> _{or}	<i>f</i> ₀	kg	lb
29 1.142	13.6 0.535	9 600 2 160	4 600 1 030	12.8	0.13 0.28	
29 1.142	13.6 0.535	9 600 2 160	4 600 1 030	12.8	0.13 0.26 0.24	
29 1.142	13.6 0.535	9 600 2 160	4 600 1 030	12.8	0.10 0.22	
33 1.299	13.5 0.531	12 800 2 890	6 650 1 500	13.2	0.18 0.42	
38 1.496	13.5 0.531	14 000 3 150	7 850 1 770	13.9	0.20 0.54 0.51 0.48 0.44	
44.5 1.752	15.9 0.626	19 500 4 400	11 300 2 540	13.8	0.34 0.84 0.79 0.75 0.70	
55.5 2.185	17.5 0.689	25 700 5 750	15 300 3 450	13.8	0.53 1.29 1.24 1.18 1.12	
60 2.362	18.3 0.720	29 100 6 550	17 800 4 000	14.0	0.71 1.64 1.57	
63.5 2.500	18.3 0.720	32 500 7 350	20 400 4 600	14.1	0.79 1.92 1.85 1.76	

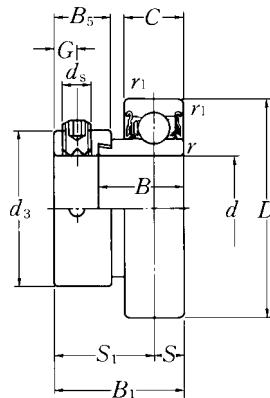


Shaft dia. mm inch	Bearing number ¹⁾	Nominal dimensions											
		d	D	B1	B	C	mm min.	inch min.	S	S1	G	ds	
50 $1\frac{13}{16}$	JELS210W3	50	90	43.7	30.2	22	1.5	1.5	11	32.7	6.8	M10 × 1.25	
	JELS210-113W3	1.8125											
$1\frac{7}{8}$	JELS210-114W3	1.8750											
$1\frac{15}{16}$	JELS210-115W3	1.9375											
2	JELS210-200W3	2.0000											
55	JELS211W3	55	100	48.4	32.5	24	2	2	12	36.4	8	M10 × 1.25	
2	JELS211-200W3	2.0000											
$2\frac{1}{16}$	JELS211-201W3	2.0625											
$2\frac{1}{8}$	JELS211-202W3	2.1250											
$2\frac{3}{16}$	JELS211-203W3	2.1875											
60 $2\frac{1}{4}$	JELS212W3	60	110	53.1	37.2	27	2	2	13.5	39.6	8	M10 × 1.25	
	JELS212-204W3	2.2500											
$2\frac{5}{16}$	JELS212-205W3	2.3125											
$2\frac{3}{8}$	JELS212-206W3	2.3750											
$2\frac{7}{16}$	JELS212-207W3	2.4375											

Remarks: 1) If relubricatable type is needed, please order with suffix "D1".

2) For inch series bearings, the f_0 factor for calculating equivalent radial load is the same as the metric series.


Nominal dimensions		Basic load ratings		Factor ²⁾	Mass	
mm <i>d</i> ₃	inch <i>B</i> ₅	N dynamic <i>C</i> _r	lbf static <i>C</i> _{or}	<i>f</i> ₀	kg	lb
69.5	18.3	35 000	23 200		0.87	
					2.14	
2.736	0.720	7 900	5 200	14.4	2.05	
					1.96	
					1.85	
76	20.7	43 500	29 200		1.16	
					2.84	
2.992	0.815	9 750	6 550	14.3	2.73	
					2.62	
					2.51	
84	22.3	52 500	36 000		1.52	
					3.59	
3.307	0.878	11 800	8 150	14.3	3.46	
					3.33	
					3.17	

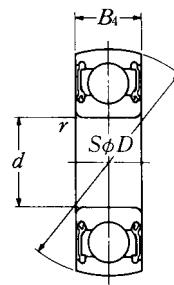

Shaft dia. mm	Bearing number	Nominal dimensions				Basic load ratings			Factor f_0	Mass kg lb
		d mm	D mm	B4 inch	r_s min.	dynamic C_r N	static C_{or} lbf			
10	CS200LLU	10 0.3937	30 1.1811	9 0.354	0.6 0.024	5 100 1 150	2 390 540	13.2	0.03 0.07	
12	CS201LLU	12 0.4724	32 1.2598	10 0.394	0.6 0.024	6 100 1 370	2 750 615	12.7	0.04 0.09	
15	CS202LLU	15 0.5906	35 1.3780	11 0.433	0.6 0.024	7 750 1 740	3 600 805	12.7	0.04 0.09	
17	CS203LLU	17 0.6693	40 1.5748	12 0.472	0.6 0.024	9 600 2 160	4 600 1 030	12.8	0.06 0.13	
20	CS204LLU	20 0.7874	47 1.8504	14 0.551	1 0.039	12 800 2 890	6 650 1 500	13.2	0.10 0.22	
25	CS205LLU	25 0.9843	52 2.0472	15 0.591	1 0.039	14 000 3 150	7 850 1 770	13.9	0.13 0.29	
30	CS206LLU	30 1.1811	62 2.4409	16 0.630	1 0.039	19 500 4 400	11 300 2 540	13.8	0.20 0.44	
35	CS207LLU	35 1.3780	72 2.8346	17 0.669	1.5 0.059	25 700 5 750	15 300 3 450	13.8	0.29 0.64	
40	CS208LLU	40 1.5748	80 3.1496	18 0.709	1.5 0.059	29 100 6 550	17 800 4 000	14.0	0.37 0.82	
45	CS209LLU	45 1.7717	85 3.3465	19 0.748	1.5 0.059	32 500 7 350	20 400 4 600	14.1	0.39 0.86	
50	CS210LLU	50 1.9685	90 3.5433	20 0.787	1.5 0.059	35 000 7 900	23 200 5 200	14.4	0.46 1.01	
55	CS211LLU	55 2.1654	100 3.9370	21 0.827	2 0.079	43 500 9 750	29 200 6 550	14.3	0.58 1.28	
60	CS212LLU	60 2.3622	110 4.3307	22 0.866	2 0.079	52 500 11 800	36 000 8 150	14.3	0.76 1.68	

Note: Symbols


 Δd_{mp} : Mean bore diameter deviation ΔB_s : Inner ring width deviation ΔC_s : Outer ring width deviation

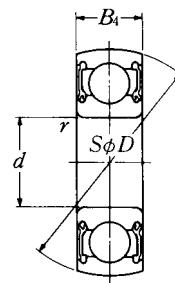

Shaft dia. mm	Bearing number	Nominal dimensions				Basic load ratings		Factor f_0	Mass kg lb
		d	mm D	inch B_4	r_s min.	dynamic C_r	static C_{or}		
25	CS305LLU	25 0.9843	62 2.4409	17 0.669	1.5 0.059	21 200 4 750	10 900 2 460	12.6	0.22 0.49
30	CS306LLU	30 1.1811	72 2.8346	19 0.748	1.5 0.059	26 700 6 000	15 000 3 400	13.3	0.34 0.75
35	CS307LLU	35 1.3780	80 3.1496	21 0.827	2 0.079	33 500 7 500	19 100 4 300	13.1	0.44 0.97
40	CS308LLU	40 1.5748	90 3.5433	23 0.906	2 0.079	40 500 9 150	24 000 5 400	13.2	0.62 1.37
45	CS309LLU	45 1.7717	100 3.9370	25 0.984	2 0.079	53 000 11 900	32 000 7 200	13.1	0.79 1.74
50	CS310LLU	50 1.9685	110 4.3307	27 1.063	2.5 0.098	62 000 13 900	38 500 8 600	13.2	1.06 2.34

Note: Symbols

 Δd_{imp} : Mean bore diameter deviation ΔB_s : Inner ring width deviation ΔC_o : Outer ring width deviation

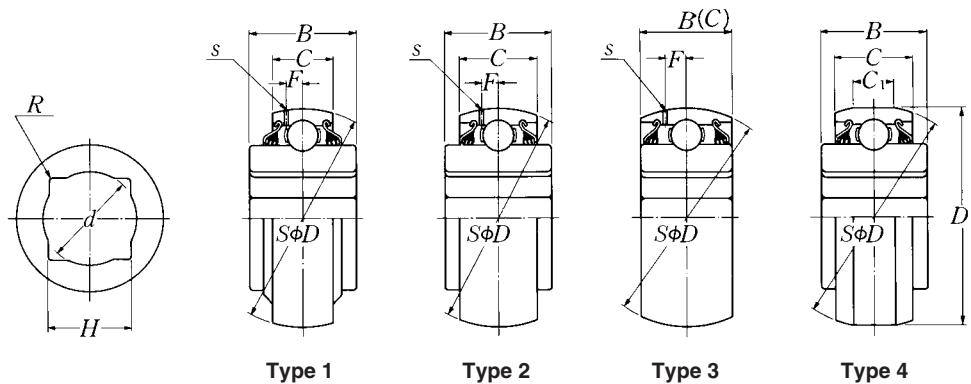


Shaft size inch	Bearing ¹⁾ number	Type	Nominal dimensions								
			H	d max.	R ²⁾ max.	mm		D	inch	C	B
$\frac{7}{8}$	1AS08- $\frac{7}{8}$	1	22.987 ± 0.127	24.4	2.25	80	0 -0.013	18	0 -0.12	36.5	0 -0.12
			0.9050 ± 0.0050	0.961	0.089	3.1496	0 -0.0005	0.7087	0 -0.0047	1.4370	0 -0.0047
$\frac{7}{8}$	4AS08- $\frac{7}{8}$	4	22.987 ± 0.127	24.4	2.25	87.338	0 -0.025	30.2	0 -0.12	36.5	0 -0.12
			0.9050 ± 0.0050	0.961	0.089	3.4385	0 -0.0010	1.1890	0 -0.0047	1.4370	0 -0.0047
1	1AS08-1	1	26.162 ± 0.127	27.8	2.25	80	0 -0.013	18	0 -0.12	36.5	0 -0.12
			1.0300 ± 0.0050	1.095	0.089	3.1496	0 -0.0005	0.7087	0 -0.0047	1.4370	0 -0.0047
1	2AS08-1D1	2	26.162 ± 0.127	27.8	2.25	80	0 -0.013	30.2	0 -0.12	36.5	0 -0.12
			1.0300 ± 0.0050	1.095	0.089	3.1496	0 -0.0005	1.1890	0 -0.0047	1.4370	0 -0.0047
1	4AS08-1	4	26.162 ± 0.127	27.8	2.25	87.338	0 -0.025	30.2	0 -0.12	36.5	0 -0.12
			1.0300 ± 0.0050	1.095	0.089	3.4385	0 -0.0010	1.1890	0 -0.0047	1.4370	0 -0.0047
$1\frac{1}{8}$	1AS08-1. $\frac{1}{8}$	1	29.972 ± 0.127	31.4	2.25	80	0 -0.013	18	0 -0.12	36.5	0 -0.12
			1.1800 ± 0.0050	1.236	0.089	3.1496	0 -0.0005	0.7087	0 -0.0047	1.4370	0 -0.0047
$1\frac{1}{8}$	2AS08-1. $\frac{1}{8}$ D1	2	29.972 ± 0.127	31.4	2.25	80	0 -0.013	30.2	0 -0.12	36.5	0 -0.12
			1.1800 ± 0.0050	1.236	0.089	3.1496	0 -0.0005	1.1890	0 -0.0047	1.4370	0 -0.0047

Remarks: 1) Bearings suffixed with D1 have oil holes on the outer ring.

2) R min.: 0.059 inch except 3AS14-2D1 R min.: 0.126 inch.

Nominal dimensions					Basic load ratings		Factor	Mass
	mm	inch	<i>s</i>	<i>F</i>	dynamic <i>C_r</i>	lbf static <i>C_{or}</i>	<i>f₀</i>	kg lb
—	—	—	—	—	29 100	17 800	14.0	0.73
—	—	—	—	—	6 550	4 000		1.61
85.750	0 — 0.025	16.6	—	—	29 100	17 800	14.0	0.93
3.3760	0 — 0.0010	0.6535	—	—	6 550	4 000		2.05
—	—	—	—	—	29 100	17 800	14.0	0.68
—	—	—	—	—	6 550	4 000		1.50
—	—	2.2	6.6		29 100	17 800	14.0	0.76
—	—	0.087	0.260		6 550	4 000		1.68
85.750	0 — 0.025	16.6	—	—	29 100	17 800	14.0	0.89
3.3760	0 — 0.0010	0.6535	—	—	6 550	4 000		1.96
—	—	—	—	—	29 100	17 800	14.0	0.60
—	—	—	—	—	6 550	4 000		1.32
—	—	2.2	6.6		29 100	17 800	14.0	0.70
—	—	0.087	0.260		6 550	4 000		1.54

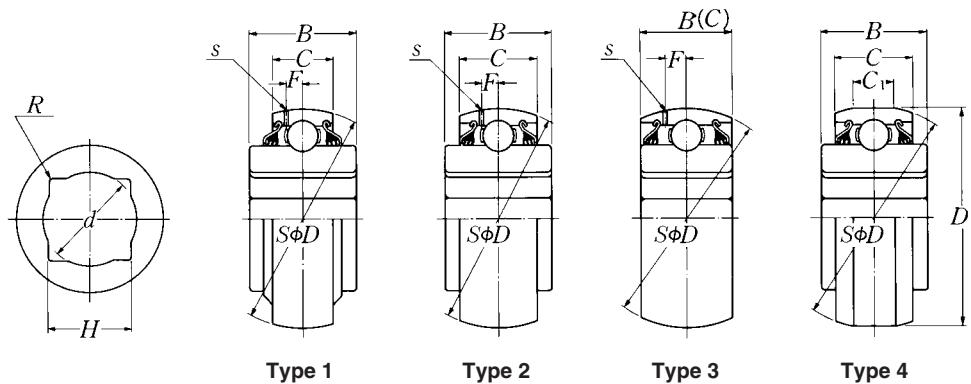


Shaft size inch	Bearing ¹⁾ number	Type	Nominal dimensions								
			H	d max.	R ²⁾ max.	mm	D	inch	C	B	
$1\frac{1}{8}$	4AS08-1. $\frac{1}{8}$	4	29.972 ± 0.127	31.4	2.25	87.338	0 -0.025	30.2	0 -0.12	36.5	0 -0.12
			1.1800 ± 0.0050	1.236	0.089	3.4385	0 -0.0010	1.1890	0 -0.0047	1.4370	0 -0.0047
$1\frac{5}{32}$	1AS08-1. $\frac{5}{32}D1$	1	30 ± 0.127	31.8	2.25	80	0 -0.013	21	0 -0.12	36.5	0 -0.12
			1.1811 ± 0.0050	1.252	0.089	3.1496	0 -0.0005	0.8268	0 -0.0047	1.4370	0 -0.0047
$1\frac{1}{4}$	2AS09-1. $\frac{1}{4}D1$	2	32.766 ± 0.127	34.8	2.25	85	0 -0.015	30.2	0 -0.120	36.5	0 -0.12
			1.2900 ± 0.0050	1.370	0.089	3.3465	0 -0.0006	1.1890	0 -0.0047	1.4370	0 -0.0047
$1\frac{1}{4}$	4AS09-1. $\frac{1}{4}$	4	32.766 ± 0.127	34.8	2.25	87.338	0 -0.025	30.2	0 -0.12	36.5	0 -0.12
			1.2900 ± 0.0050	1.370	0.089	3.4385	0 -0.0010	1.1890	0 -0.0047	1.4370	0 -0.0047
$1\frac{1}{8}$	2AS10-1. $\frac{1}{8}D1$	2	29.972 ± 0.127	31.4	2.25	90	0 -0.015	30.2	0 -0.12	36.5	0 -0.12
			1.1800 ± 0.0050	1.236	0.089	3.5433	0 -0.0006	1.1890	0 -0.0047	1.4370	0 -0.0047
$1\frac{1}{8}$	3AS10-1. $\frac{1}{8}D1$	3	29.972 ± 0.127	31.4	2.25	90	0 -0.015	30.2	0 -0.12	30.2	0 -0.12
			1.1800 ± 0.0050	1.236	0.089	3.5433	0 -0.0006	1.1890	0 -0.0047	1.1890	0 -0.0047
$1\frac{1}{2}$	1AS11-1. $\frac{1}{2}D1$	1	38.89 ± 0.127	41.2	2.25	100	0 -0.015	25	0 -0.15	44.45	0 -0.15
			1.5311 ± 0.0050	1.622	0.089	3.9370	0 -0.0006	0.9843	0 -0.0059	1.7500	0 -0.0059

Remarks: 1) Bearings suffixed with D1 have oil holes on the outer ring.

2) R min.: 0.059 inch except 3AS14-2D1 R min.: 0.126 inch.

Nominal dimensions					Basic load ratings		Factor	Mass
	mm <i>D</i> ₁	inch <i>C</i> ₁	<i>s</i>	<i>F</i>	N dynamic <i>C</i> _r	lbf static <i>C</i> _{or}	<i>f</i> ₀	kg lb
85.750	0 -0.025	16.6	—	—	29 100	17 800	14.0	0.90
3.3760	0 -0.0010	0.6535	—	—	6 550	4 000		1.99
—	—	2.2	6.6	—	29 100	17 800	14.0	0.64
—	—	0.087	0.260	—	6 550	4 000		1.41
—	—	2.2	6.7	—	32 500	20 400	14.1	0.77
—	—	0.087	0.264	—	7 350	4 600		1.70
85.750	0 -0.025	16.6	—	—	32 500	20 400	14.1	0.82
3.3760	0 -0.0010	0.6535	—	—	7 350	4 600		1.81
—	—	2.2	6.7	—	35 000	23 200	14.4	0.98
—	—	0.087	0.264	—	7 900	5 200		2.16
—	—	2.2	6.7	—	35 000	23 200	14.4	0.88
—	—	0.087	0.264	—	7 900	5 200		1.94
—	—	2.5	7.6	—	43 500	29 200	14.3	1.19
—	—	0.098	0.299	—	9 750	6 550		2.63

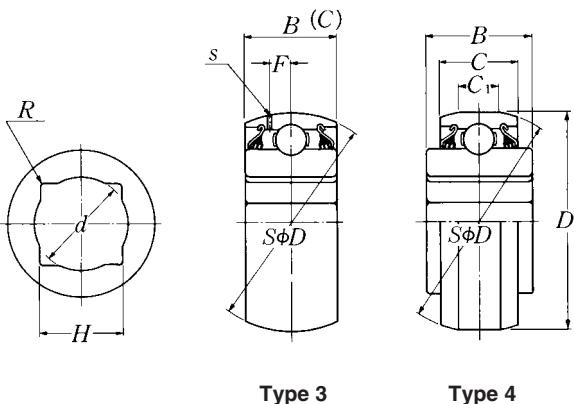
Ball bearing, square bore, spherical O.D.

Shaft size inch	Bearing ¹⁾ number	Type	Nominal dimensions								
			H	d max.	R ²⁾ max.	D mm	D inch	C	B		
$1\frac{1}{2}$	3AS11-1. $\frac{1}{2}$ D1	3	38.89 \pm 0.127	41.2	2.25	100	0 - 0.015	33.3	0 - 0.15	33.3	0 - 0.15
			1.5311 \pm 0.0050	1.622	0.089	3.9370	0 - 0.0006	1.3110	0 - 0.0059	1.3110	0 - 0.0059
$1\frac{1}{2}$	4AS11-1. $\frac{1}{2}$	4	38.89 \pm 0.127	41.2	2.25	104.725	0 - 0.025	36.5	0 - 0.15	44.45	0 - 0.15
			1.5311 \pm 0.0050	1.622	0.089	4.1230	0 - 0.0010	1.4370	0 - 0.0059	1.7500	0 - 0.0059
2	3AS14-2D1	3	52.2 \pm 0.127	54.9	4.0	125	0 - 0.020	39.69	0 - 0.15	39.69	0 - 0.15
			2.0551 \pm 0.0050	2.161	0.157	4.9213	0 - 0.0008	1.5626	0 - 0.0059	1.5626	0 - 0.0059

Remarks: 1) Bearings suffixed with D1 have oil holes on the outer ring.

2) R min.: 0.059 inch except 3AS14-2D1 R min.: 0.126 inch.

Nominal dimensions				Basic load ratings		Factor	Mass
D_1	mm C_1	inch s	F	N dynamic C_r	lbf static C_{or}	f_0	kg lb
—	—	2.5	7.6	43 500	29 200	14.3	1.10
—	—	0.098	0.299	9 750	6 550		2.43
103.556 — 0.025	15.9	—	—	43 500	29 200	14.3	1.48
4.0770 — 0.0010	0.6142	—	—	9 750	6 550		3.26
—	0.6260	3.0	9.4	62 000	44 000	14.5	1.90
—	—	0.118	0.370	14 000	9 900		4.19

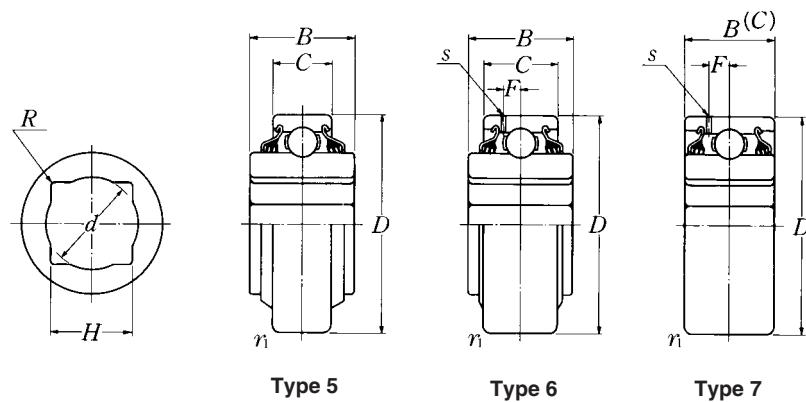


Shaft dia. inch	Bearing ¹⁾ number	Type	Nominal dimensions								
			H	d max.	R ²⁾ max.	mm		D	inch		C
1	5AS08-1	5	26.162 ± 0.127	27.8	2.25	80	0 - 0.013	18	0 - 0.12	36.5	0 - 0.12
			1.0300 ± 0.0050	1.095	0.089	3.1496	0 - 0.0005	0.7087	0 - 0.0047	1.4370	0 - 0.0047
1	6AS08-1D1	6	26.162 ± 0.127	27.8	2.25	80	0 - 0.013	30.2	0 - 0.12	36.5	0 - 0.12
			1.0300 ± 0.0050	1.095	0.089	3.1496	0 - 0.0005	1.1890	0 - 0.0047	1.4370	0 - 0.0047
1 1/8	5AS08-1. 1/8	5	29.972 ± 0.127	31.4	2.25	80	0 - 0.013	18	0 - 0.12	36.5	0 - 0.12
			1.1800 ± 0.0050	1.236	0.089	3.1496	0 - 0.0005	0.7087	0 - 0.0047	1.4370	0 - 0.0047
1 1/8	6AS08-1. 1/8D1	6	29.972 ± 0.127	31.4	2.25	80	0 - 0.013	30.2	0 - 0.12	36.5	0 - 0.12
			1.1800 ± 0.0050	1.236	0.089	3.1496	0 - 0.0005	1.1890	0 - 0.0047	1.4370	0 - 0.0047
1 1/8	7AS10-1. 1/8D1	7	29.972 ± 0.127	31.4	2.25	90	0 - 0.015	30.2	0 - 0.12	30.2	0 - 0.12
			1.1800 ± 0.0050	1.236	0.089	3.5433	0 - 0.0006	1.1890	0 - 0.0047	1.1890	0 - 0.0047
1 1/2	7AS11-1. 1/2D1	7	38.89 ± 0.127	41.2	2.25	100	0 - 0.015	33.3	0 - 0.15	33.3	0 - 0.15
			1.5311 ± 0.0050	1.622	0.089	3.9370	0 - 0.0006	1.3110	0 - 0.0059	1.3110	0 - 0.0059

Remarks: 1) Bearings suffixed with D1 have oil holes on the outer ring.

2) R min.: 0.059 inch.


Nominal dimensions			Basic load ratings		Factor	Mass
r_{1s} min.	s	inch F	N dynamic C_r	lbf static C_{or}	f_0	kg lb
0.6	—	—	29 100	17 800	14.0	0.66
0.024	—	—	6 550	4 000		1.46
1.5	2.2	6.6	29 100	17 800	14.0	0.78
0.059	0.087	0.260	6 550	4 000		1.72
0.6	—	—	29 100	17 800	14.0	0.61
0.024	—	—	6 550	4 000		1.35
1.5	2.2	6.6	29 100	17 800	14.0	0.73
0.059	0.087	0.260	6 550	4 000		1.61
1.5	2.2	6.7	35 000	23 200	14.4	0.90
0.059	0.087	0.264	7 900	5 200		1.99
2	2.5	7.6	43 500	29 200	14.3	1.12
0.079	0.098	0.299	9 750	6 550		2.47

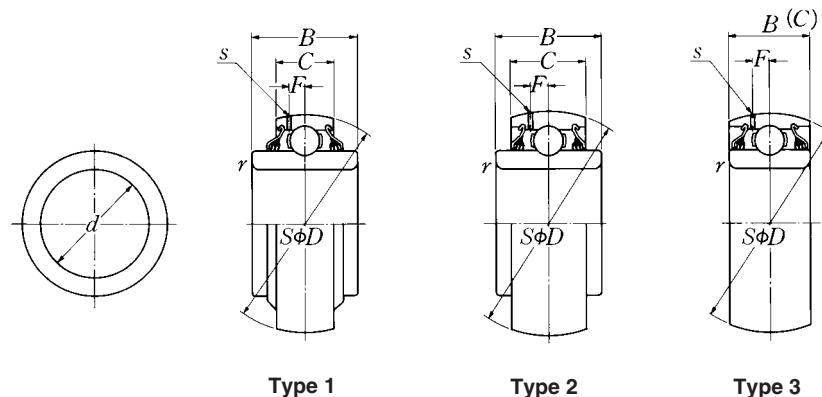

Shaft dia. inch	Bearing ¹⁾ number	Type	Nominal dimensions					
			d	D	mm	inch	C	B
$1\frac{3}{16}$	1AC08-1. $\frac{3}{16}$	1	30.175 ⁰ _{-0.013}	80	0 ⁰ _{-0.013}	18 ⁰ _{-0.12}	30.2 ⁰ _{-0.12}	0 ⁰ _{-0.12}
			1.1880 ⁰ _{-0.0005}	3.1496	0 ⁰ _{-0.0005}	0.7087 ⁰ _{-0.0047}	1.1890 ⁰ _{-0.0047}	0 ⁰ _{-0.0047}
1.7717	3AC09D1	3	45 ⁰ _{-0.013}	85	0 ⁰ _{-0.015}	30.2 ⁰ _{-0.12}	30.2 ⁰ _{-0.12}	0 ⁰ _{-0.12}
			1.7717 ⁰ _{-0.0005}	3.3465	0 ⁰ _{-0.0006}	1.1890 ⁰ _{-0.0047}	1.1890 ⁰ _{-0.0047}	0 ⁰ _{-0.0047}
$1\frac{1}{2}$	3AC09-1. $\frac{1}{2}$ D1	3	38.989 ⁰ _{-0.254}	85	0 ⁰ _{-0.015}	30.2 ⁰ _{-0.12}	30.2 ⁰ _{-0.12}	0 ⁰ _{-0.12}
			1.5350 ⁰ _{-0.0100}	3.3465	0 ⁰ _{-0.0006}	1.1890 ⁰ _{-0.0047}	1.1890 ⁰ _{-0.0047}	0 ⁰ _{-0.0047}
$1\frac{3}{4}$	3AC10-1. $\frac{3}{4}$ D1	3	45.339 ⁰ _{-0.254}	90	0 ⁰ _{-0.015}	30.2 ⁰ _{-0.12}	30.2 ⁰ _{-0.12}	0 ⁰ _{-0.12}
			1.7850 ⁰ _{-0.0100}	3.5433	0 ⁰ _{-0.0006}	1.1890 ⁰ _{-0.0047}	1.1890 ⁰ _{-0.0047}	0 ⁰ _{-0.0047}
$1\frac{15}{16}$	3AC10-1. $\frac{15}{16}$ D1	3	49.225 ⁰ _{-0.013}	90	0 ⁰ _{-0.015}	30.2 ⁰ _{-0.12}	30.2 ⁰ _{-0.12}	0 ⁰ _{-0.12}
			1.9380 ⁰ _{-0.0005}	3.5433	0 ⁰ _{-0.0006}	1.1890 ⁰ _{-0.0047}	1.1890 ⁰ _{-0.0047}	0 ⁰ _{-0.0047}
$2\frac{3}{16}$	3AC11-2. $\frac{3}{16}$ D1	3	55.575 ⁰ _{-0.015}	100	0 ⁰ _{-0.015}	33.3 ⁰ _{-0.15}	33.3 ⁰ _{-0.15}	0 ⁰ _{-0.0059}
			2.1880 ⁰ _{-0.0006}	3.9370	0 ⁰ _{-0.0006}	1.3110 ⁰ _{-0.0059}	1.3110 ⁰ _{-0.0059}	0 ⁰ _{-0.0059}

Remarks: 1) Bearings suffixed with D1 have oil holes on the outer ring.

Nominal dimensions			Basic load ratings		Factor	Mass
r_{1s} min.	s	inch F	N dynamic C_r	lbf static C_{or}	f_0	kg lb
1.5	—	—	29 100	17 800	14.0	0.61
0.059	—	—	6 550	4 000	14.0	1.35
1.5	2.2	6.7	32 500	20 400	14.1	0.59
0.059	0.087	0.264	7 350	4 600	14.1	1.30
1.5	2.2	6.7	32 500	20 400	14.1	0.68
0.059	0.087	0.264	7 350	4 600	14.1	1.50
1.5	2.2	6.7	35 000	23 200	14.4	0.70
0.059	0.087	0.264	7 900	5 200	14.4	1.54
1.5	2.2	6.7	35 000	23 200	14.4	0.65
0.059	0.087	0.264	7 900	5 200	14.4	1.43
2	2.5	7.6	43 500	29 200	14.3	0.87
0.079	0.098	0.299	9 750	6 550	14.3	1.92

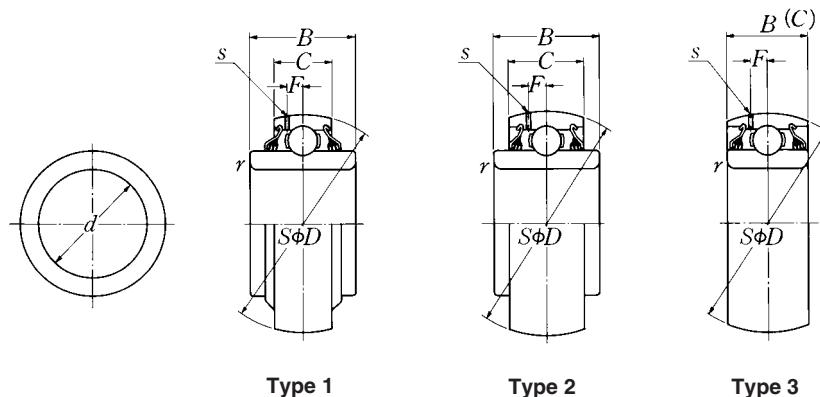

Type 1



Type 2

Type 3


Shaft dia. inch	Bearing ¹⁾ number	Type	Nominal dimensions					
			d	D	mm	inch	C	B
2.7559	3AC14D1	3	70 0 -0.015	125 0 -0.020	39.69 0 -0.15	1.5626 0 -0.0059	39.69 0 -0.15	1.5626 0 -0.0059
			2.7559 0 -0.0006	4.9213 0 -0.0008	1.5626 0 -0.0059	1.5626 0 -0.0059	1.5626 0 -0.0059	1.5626 0 -0.0059
$1\frac{15}{16}$	3AC14-1. $\frac{15}{16}$ D1	3	49.225 0 -0.015	125 0 -0.020	39.69 0 -0.15	1.5626 0 -0.0059	39.69 0 -0.15	1.5626 0 -0.0059
			1.9380 0 -0.0006	4.9213 0 -0.0008	1.5626 0 -0.0059	1.5626 0 -0.0059	1.5626 0 -0.0059	1.5626 0 -0.0059

Remarks: 1) Bearings suffixed with D1 have oil holes on the outer ring.

Nominal dimensions			Basic load ratings		Factor	Mass
r_{1s} min.	s	inch F	N dynamic C_r	lbf static C_{or}	f_0	kg lb
2	3.0	9.4	62 000	44 000	14.5	1.56
0.079	0.118	0.370	14 000	9 900		3.44
2	3.0	9.4	62 000	4 4000	14.5	2.20
0.079	0.118	0.370	14 000	9 900		4.85

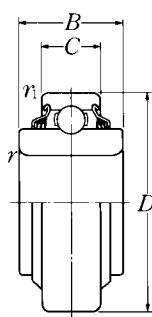

Type 5

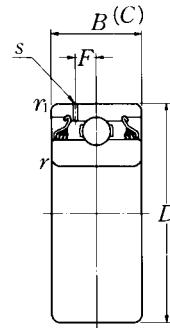


Type 7

Shaft dia. inch	Bearing number	Type	Nominal dimensions					
			d	D	mm	inch	C	B
1.1811	5AC06	5	30 0 -0.010 1.1811 0 -0.0004	62 0 -0.013 2.4409 0 -0.0005	16 0 -0.12 0.6299 0 -0.0047	25.4 0 -0.12 1.0000 0 -0.0047	0 -0.12 -0.0047	0 -0.12 -0.0047
1 15/16	5AC10-1. 15/16	5	49.225 0 -0.013 1.9380 0 -0.0005	90 0 -0.015 3.5433 0 -0.0006	20 0 -0.12 0.7874 0 -0.0047	49.2 0 -0.12 1.9370 0 -0.0047	0 -0.12 -0.0047	0 -0.12 -0.0047
1 13/32	7AC10-1. 13/32D1	7	35.725 0 -0.013 1.4065 0 -0.0005	90 0 -0.015 3.5433 0 -0.0006	30.2 0 -0.12 1.1890 0 -0.0047	30.2 0 -0.12 1.1890 0 -0.0047	0 -0.12 -0.0047	0 -0.12 -0.0047
1 15/16	7AC10-1. 15/16D1	7	49.225 0 -0.013 1.9380 0 -0.0005	90 0 -0.015 3.5433 0 -0.0006	30.2 0 -0.12 1.1890 0 -0.0047	30.2 0 -0.12 1.1890 0 -0.0047	0 -0.12 -0.0047	0 -0.12 -0.0047
2 3/16	7AC11-2. 3/16D1	7	55.575 0 -0.015 2.1880 0 -0.0006	100 0 -0.015 3.9370 0 -0.0006	33.3 0 -0.15 1.3110 0 -0.0059	33.3 0 -0.15 1.3110 0 -0.0059	0 -0.15 -0.0059	0 -0.15 -0.0059

Remarks: 1) Bearings suffixed with D1 have oil holes on the outer ring.


Nominal dimensions				Basic load ratings		Factor	Mass
r_s min.	mm min.	inch s	F	N dynamic C_r	lbf static C_{or}	f_0	kg lb
1	0.6	—	—	19 500	11 300	13.8	0.21
0.039	0.024	—	—	4 400	2 540		0.46
1.5	1.5	—	—	35 000	23 200	14.4	0.74
0.059	0.059	—	—	7 900	5 200		1.63
1.5	1.5	2.2	6.7	35 000	23 200	14.4	0.88
0.059	0.059	0.087	0.264	7 900	5 200		1.94
1.5	1.5	2.2	6.7	35 000	23 200	14.4	0.68
0.059	0.059	0.087	0.264	7 900	5 200		1.50
2	2	2.5	7.6	43 500	29 200	14.3	0.91
0.079	0.079	0.098	0.299	9 750	6 550		2.01

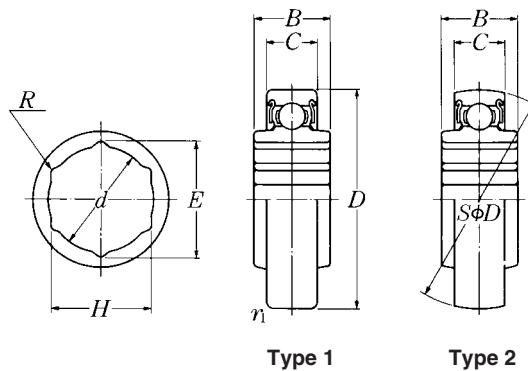

Shaft size inch	Bearing ¹⁾ number	Type	Nominal dimensions								
			H max.	d max.	R max.	E min.	mm	inch	D	C	
$\frac{9}{16}$	1AH03- $\frac{9}{16}$	1	14.3 0.5630	$+0.127$ $+0.0050$	14.7 0.579	0.25 0.010	16.435 0.6470	40 1.5748	0 0 -0.011 -0.0004	12 0.4724 -0.0047	0 0 -0.12 -0.0047
			0 0	0 0	0 0.713	0 0.010	0 0.7995	0 1.8504	0 0 -0.011 -0.0004	0 0.5512 -0.0047	0 0 -0.12 -0.0047
$\frac{11}{16}$	1AH04- $\frac{11}{16}$	1	17.653 0.6950	$+0.127$ $+0.0050$	18.1 0.713	0.25 0.010	20.307 0.7995	47 1.8504	0 0 -0.011 -0.0004	14 0.5512 -0.0047	0 0 -0.12 -0.0047
			0 0	0 0	0 0.898	0 0.010	0 1.0085	0 2.0472	0 0 -0.013 -0.0005	0 0.5906 -0.0047	0 0 -0.12 -0.0047
$\frac{7}{8}$	1AH05- $\frac{7}{8}$	1	22.250 0.8760	$+0.127$ $+0.0050$	22.8 0.898	0.25 0.010	25.615 1.0085	52 2.0472	0 0 -0.013 -0.0005	15 0.5906 -0.0047	0 0 -0.12 -0.0047
			0 0	0 0	0 0.898	0 0.010	0 1.1528	0 2.4409	0 0 -0.013 -0.0005	0 0.6299 -0.0047	0 0 -0.12 -0.0047
1	1AH06-1	1	25.425 1.0010	$+0.127$ $+0.0050$	26.1 1.028	0.25 0.010	29.281 1.1528	62 2.4409	0 0 -0.013 -0.0005	16 0.6299 -0.0047	0 0 -0.12 -0.0047
			0 0	0 0	0 0.898	0 0.010	0 1.0085	0 2.0472	0 0 -0.013 -0.0005	0 0.5906 -0.0047	0 0 -0.12 -0.0047
$\frac{7}{8}$	2AH05- $\frac{7}{8}$	2	22.25 0.8760	$+0.127$ $+0.0050$	22.8 0.898	0.25 0.010	25.615 1.0085	52 2.0472	0 0 -0.013 -0.0005	15 0.5906 -0.0047	0 0 -0.12 -0.0047
			0 0	0 0	0 0.898	0 0.010	0 1.0085	0 2.0472	0 0 -0.013 -0.0005	0 0.6299 -0.0047	0 0 -0.12 -0.0047
1	2AH06-1	2	25.425 1.0010	$+0.127$ $+0.0050$	26.1 1.028	0.25 0.010	29.281 1.1528	62 2.4409	0 0 -0.013 -0.0005	16 0.6299 -0.0047	0 0 -0.12 -0.0047
			0 0	0 0	0 0.898	0 0.010	0 1.0085	0 2.0472	0 0 -0.013 -0.0005	0 0.5906 -0.0047	0 0 -0.12 -0.0047
$1\frac{1}{8}$	2AH07-1. $\frac{1}{8}$	2	28.6 1.1260	$+0.127$ $+0.0050$	29.3 1.154	0.25 0.010	32.947 1.2971	72 2.8346	0 0 -0.013 -0.0005	17 0.6693 -0.0047	0 0 -0.12 -0.0047
			0 0	0 0	0 1.154	0 0.010	0 1.2971	0 2.8346	0 0 -0.013 -0.0005	0 0.6693 -0.0047	0 0 -0.12 -0.0047

Remarks: 1) Bearings suffixed with D1 have oil holes on the outer ring.

Nominal dimensions			Basic load ratings		Factor	Mass
	mm <i>B</i>	inch <i>r_{ls}</i> min.	N dynamic <i>C_d</i>	lbf static <i>C_{or}</i>	<i>f₀</i>	kg lb
20.3	0 - 0.12	0.6	9 600	4 600	12.8	0.08
0.7992	0 - 0.0047	0.024	2 160	1 030		0.18
21	0 - 0.12	0.6	12 800	6 650	13.2	0.13
0.8268	0 - 0.0047	0.024	2 890	1 500		0.29
25.4	0 - 0.12	0.6	14 000	7 850	13.9	0.16
1.0000	0 - 0.0047	0.024	3 150	1 770		0.35
24	0 - 0.12	0.6	19 500	11 300	13.8	0.24
0.9449	0 - 0.0047	0.024	4 400	2 540		0.53
25.4	0 - 0.12	—	14 000	7 850	13.9	0.16
1.0000	0 - 0.0047	—	3 150	1 770		0.35
24	0 - 0.12	—	19 500	11 300	13.8	0.24
0.9449	0 - 0.0047	—	4 400	2 540		0.53
37.7	0 - 0.12	—	25 700	15 300	13.8	0.45
1.4843	0 - 0.0047	—	5 750	3 450		0.99

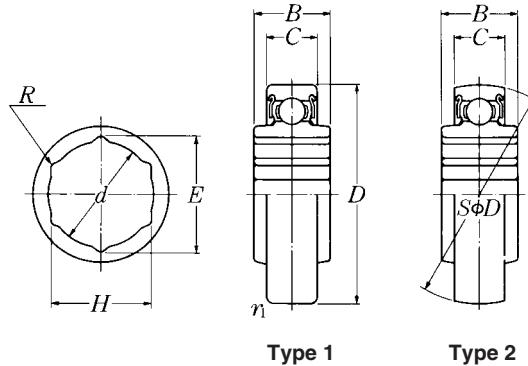

Shaft size inch	Bearing ¹⁾ number	Type	Nominal dimensions									
			H	d max.	R max.	E min.	mm	inch	D	C		
1½	2AH09-1.½	2	38.125 1.5010	+ 0.127 + 0.0050	39 1.535	0.25 0.010	43.946 1.7302	85 3.3465	0 0	- 0.015 - 0.0006	19 0.7480	0 - 0.0047

Remarks: 1) Bearings suffixed with D1 have oil holes on the outer ring.

Nominal dimensions		Basic load ratings		Factor	Mass	
mm <i>B</i>	inch <i>r_{ls}</i> min.	N dynamic <i>C_r</i>	lbf static <i>C_{or}</i>	<i>f₀</i>	kg	lb
30 — 0.12	—	32 500	20 400	14.1	0.54	
1.1811 — 0.0047	—	7 350	4 600		1.19	