


- DIN 863 T1
NFE 11-095
- Tungsten carbide tipped
- Plastic case
- Inspection report with a declaration of conformity
- Identification number
- 1 mm
- Max. 10 N
- Ø 6,5 mm
- Parallax-free vernier reading to 0,001 mm

ETALON MICRORAPID 226 with 1 mm Revolution

High precision micrometers – Fast, accurate reading – No reading error of the millimetre fractions – Barrel with scale to 1 mm – Thimble with 100 graduations and vernier reading to 0,001 mm.

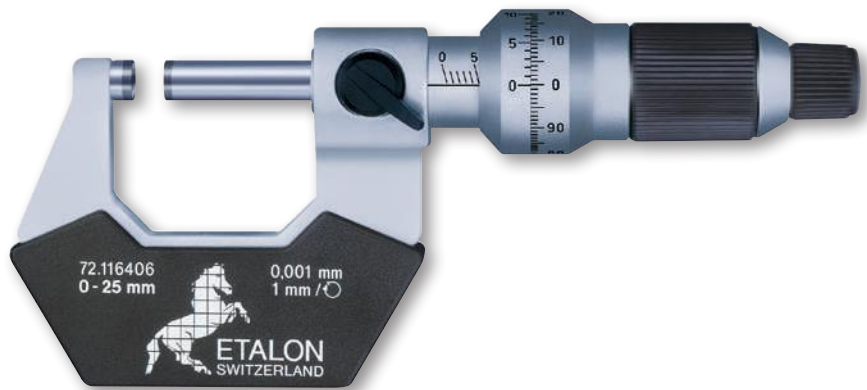

No				
	mm	µm		µm
072116406	0 ÷ 25	2		1
072116407	25 ÷ 50	2		1,5
072116408	50 ÷ 75	3		1,5
072116409	75 ÷ 100	3		1,5

- DIN 863 T1
NFE 11-095
- Tungsten carbide tipped
- Plastic case
- Measuring range 0 to 100 mm with inspection report and declaration of conformity
- Measuring range > 100 mm with a declaration of conformity
- Identification number
- 0,5 mm
- Max. 10 N
- ≤ 100 mm: Ø 6,5 mm,
> 100 ≤ 200 mm: Ø 8 mm
- 0 to 100 mm

ETALON 260 Standard Models with Analogue Indication

The knurled sleeve only needs to be reversed to render the friction drive built into the thimble inactive.



No					
	mm	mm	µm		µm
071115887	0 ÷ 25	0,002	2		2
071115888	25 ÷ 50	0,002	2		2
071115889	50 ÷ 75	0,002	3		3
071115890	75 ÷ 100	0,002	3		3
071115891	100 ÷ 125	0,01	4		3
071115892	125 ÷ 150	0,01	4		3
071115893	150 ÷ 175	0,01	5		4
071115894	175 ÷ 200	0,01	5		4

