




тип 3F

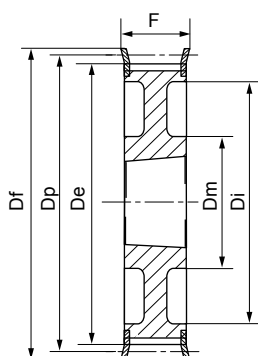


тип 3WF




тип 3W




тип 3A




тип 4F

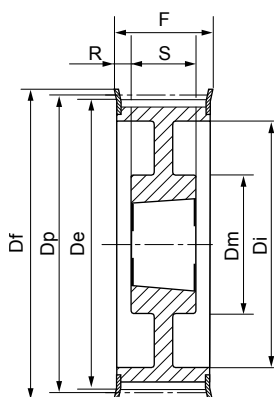


тип 4WF




тип 5F

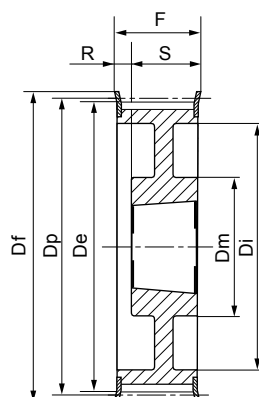


тип 5WF

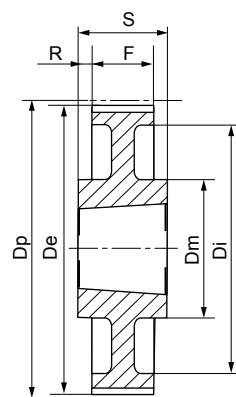


тип 7W

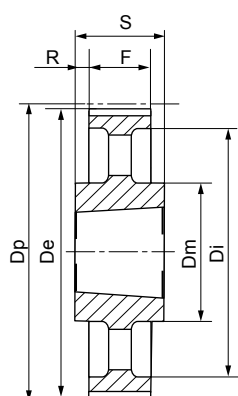


тип 7A

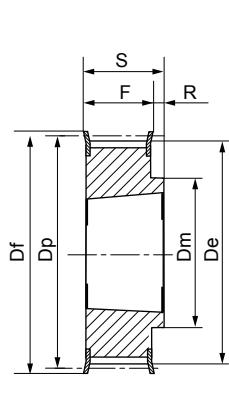


тип 8F

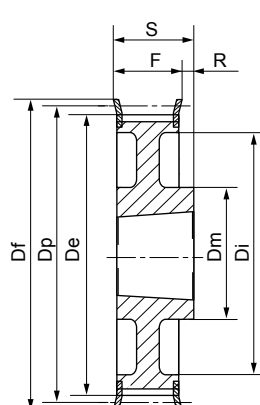

тип 8WF

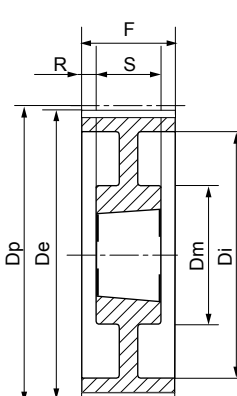

тип 9W

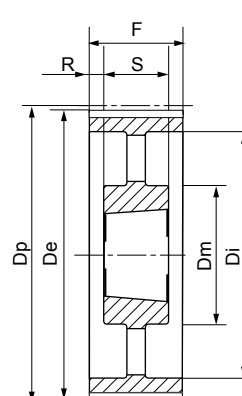

тип 9A

ХН 400 – 7/8" (22,225 мм)

Характеристики	Обозначение	КОД	Тип шкива	Тип-размер реборды	Втулка тапербуш	Диаметр максим. отверстия, мм	Dp, мм	De, мм	Df, мм	Dm, мм	Di, мм	F, мм	S, мм	R, мм	
Литейный чугун	С ребордами	18ХН400	ТХН4018	5F	F44	2517	60	127,34	124,55	140	–	95	119	45	74
		20ХН400	ТХН4020	5F	F49	2517	60	141,49	138,69	154	–	110	119	45	74
		22ХН400	ТХН4022	5F	F52	2517	60	155,64	152,84	168	–	120	119	45	74
		24ХН400	ТХН4024	5F	F55	3020	75	169,79	166,99	184	–	135	119	51	68
		26ХН400	ТХН4026	5F	F59	3020	75	183,94	181,14	200	–	150	119	51	68
		28ХН400	ТХН4028	5F	F61	3020	75	198,08	195,29	212	120	165	119	51	68
		30ХН400	ТХН4030	5F	F62	3020	75	212,23	209,44	226	120	180	119	51	68
		32ХН400	ТХН4032	5F	F64	3020	75	226,38	223,59	240	120	195	119	51	68
		40ХН400	ТХН4040	4WF	F70	3535	90	282,98	280,18	296	160	245	119	89	15
	Без реборд	48ХН400	ТХН4048	9W	–	3535	90	339,57	336,78	–	160	300	119	89	15
		60ХН400	ТХН4060	9A	–	4040	100	424,47	421,67	–	190	385	119	102	8,5
		72ХН400	ТХН4072	9A	–	4040	100	509,40	506,56	–	190	470	119	102	8,5
		84ХН400	ТХН4084	9A	–	4040	100	594,25	591,46	–	190	555	119	102	8,5
		96ХН400	ТХН4096	9A	–	4040	100	679,15	676,35	–	190	640	119	102	8,5
		120ХН4000	ТХН4120	9A	–	4040	100	848,93	846,14	–	190	810	119	102	8,5

