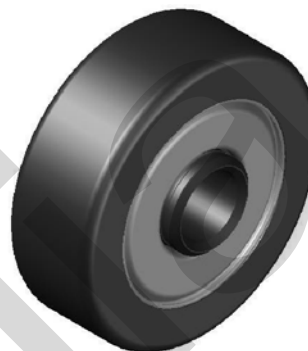
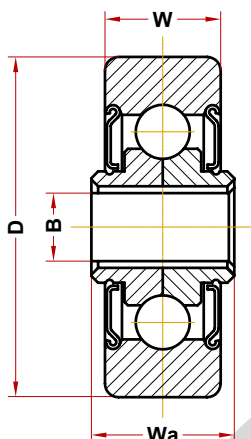
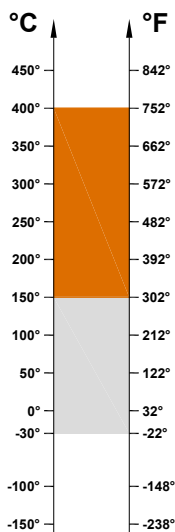


BTC ZZ CPG**Oven Bearing**

OPERATING RANGE: -30° / 150°C

ECONOMIC OPERATING RANGE: -30° / 150°C

SHORT-TIME OPERATING RANGE: 150° / 400°C

Designation	Bore (B)	Diam (D)	Widht (W, Wa)	Speed RPM/min (*)
BTC 40 B8 ZZ CPG	8	40	17-21	100
BTC 42 B8 ZZ CPG	8	42	17-21	100
BTC 47 B8 ZZ CPG	8	47	17-21	100
BTC 50 B8 ZZ CPG	8	50	17-21	100
BTC 58 B8 ZZ CPG	8	58	17-21	100
BTC 66 B8 ZZ CPG	8	66	17-21	100
BTC 30 B6 ZZ CPG	6	30	22-22	100
BTC 42 B10 ZZ CPG	10	42	15-18	100
BTC 45 B10 ZZ CPG	10	45	15-18	100
BTC 50 B10 ZZ CPG	10	50	17-21	100
BTC 52 B10 ZZ CPG	10	52	20-23	100
BTC 58 B10 ZZ CPG	10	58	17-21	100

OPERATING RANGE is the correct technical range in which can be used the bearing with good operating result.

ECONOMIC OPERATING RANGE is the range of temperature in which you can find, according to our study experience and know-how, the better relation price - quality life-time.

SHORT-TIME OPERATING RANGE is the range in which the bearing can be used for few minutes but not for permanent use.