


Select tungsten carbide gauge blocks

The tungsten carbide gauge blocks are available in all accuracy classes of ISO 3650. Only the most commonly used sizes can be found in this catalog. The gauge blocks are delivered with an inspection report or on request with a DAkkS certificate, UKAS acknowledged. Sets delivered in luxurious case. Special sizes and sets are available on request. High quality gauge blocks, can be very well wringed to make a combination size.

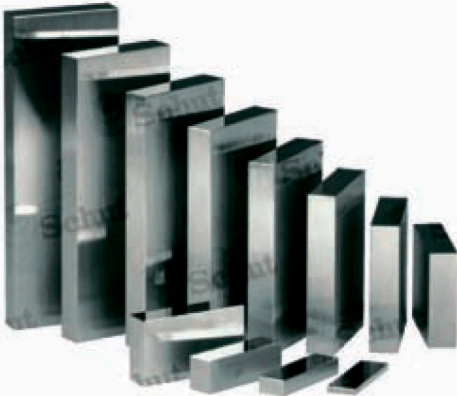

SELECT

Tungsten carbide gauge blocks, per piece

| Size mm | Increment mm |
|---------------|--------------|
| 0.5 | – |
| 1 | – |
| 1.0005 | – |
| 1.001 - 1.009 | 0.001 |
| 1.01 - 1.50 | 0.01 |
| 1.6 - 1.9 | 0.1 |
| 2.0 - 5.5 | 0.5 |
| 6.0 - 10.0 | 0.5 |
| 10.5 - 15.0 | 0.5 |
| 15.5 - 20.0 | 0.5 |
| 20.5 - 25.0 | 0.5 |
| 30 | – |
| 40 | – |
| 50 | – |
| 60 | – |
| 70 | – |
| 75 | – |
| 80 | – |
| 90 | – |
| 100 | – |

Tungsten carbide gauge blocks in sets

| Item No. | Class | Size mm | Increment mm | Pieces |
|--------------|-------|---------------|--------------|--------|
| M32: | | | | |
| 828.592 | 1 | 1.005 | – | 1 |
| 828.606 | 0 | 1.01 - 1.09 | 0.01 | 9 |
| | | 1.1 - 1.9 | 0.1 | 9 |
| | | 1 - 9 | 1 | 9 |
| | | 10 - 30 | 10 | 3 |
| | | 60 | – | 1 |
| M46: | | | | |
| 828.590 | 1 | 1.001 - 1.009 | 0.001 | 9 |
| 828.604 | 0 | 1.00 - 1.09 | 0.01 | 10 |
| | | 1.1 - 1.9 | 0.1 | 9 |
| | | 2 - 10 | 1 | 9 |
| | | 20 - 100 | 10 | 9 |
| M47: | | | | |
| 828.589 | 1 | 1.005 | – | 1 |
| 828.603 | 0 | 1.00 - 1.09 | 0.01 | 10 |
| | | 1.1 - 1.9 | 0.1 | 9 |
| | | 2 - 25 | 1 | 24 |
| | | 50 - 100 | 25 | 3 |
| M87: | | | | |
| 828.587 | 1 | 0.5 | – | 1 |
| 828.601 | 0 | 1.001 - 1.009 | 0.001 | 9 |
| | | 1.00 - 1.50 | 0.01 | 51 |
| | | 2.0 - 10.0 | 0.5 | 17 |
| | | 20 - 100 | 10 | 9 |
| M103: | | | | |
| 828.585 | 1 | 0.5 | – | 1 |
| 828.599 | 0 | 1.005 | – | 1 |
| | | 1.00 - 1.50 | 0.01 | 51 |
| | | 2.0 - 25.0 | 0.5 | 47 |
| | | 50 - 100 | 25 | 3 |
| M112: | | | | |
| 828.584 | 1 | 0.5 | – | 1 |
| 828.598 | 0 | 1.0005 | – | 1 |
| | | 1.001 - 1.009 | 0.001 | 9 |
| | | 1.00 - 1.50 | 0.01 | 51 |
| | | 2.0 - 25.0 | 0.5 | 47 |
| | | 50 - 100 | 25 | 3 |
| M122: | | | | |
| 828.583 | 1 | 0.5 | – | 1 |
| 828.597 | 0 | 1.0005 | – | 1 |
| | | 1.001 - 1.009 | 0.001 | 9 |
| | | 1.00 - 1.50 | 0.01 | 51 |
| | | 1.6 - 1.9 | 0.1 | 4 |
| | | 2.0 - 25.0 | 0.5 | 47 |
| | | 30 - 70 | 10 | 5 |
| | | 75 | – | 1 |
| | | 80 - 100 | 10 | 3 |