


### TESA VALUeline IP40

TESA VALUeline, a brand designed by TESA to meet the demands of users looking for affordable products, but not willing to compromise on TESA know-how. The Swiss technology at the heart of our products offers additional quality assurance.

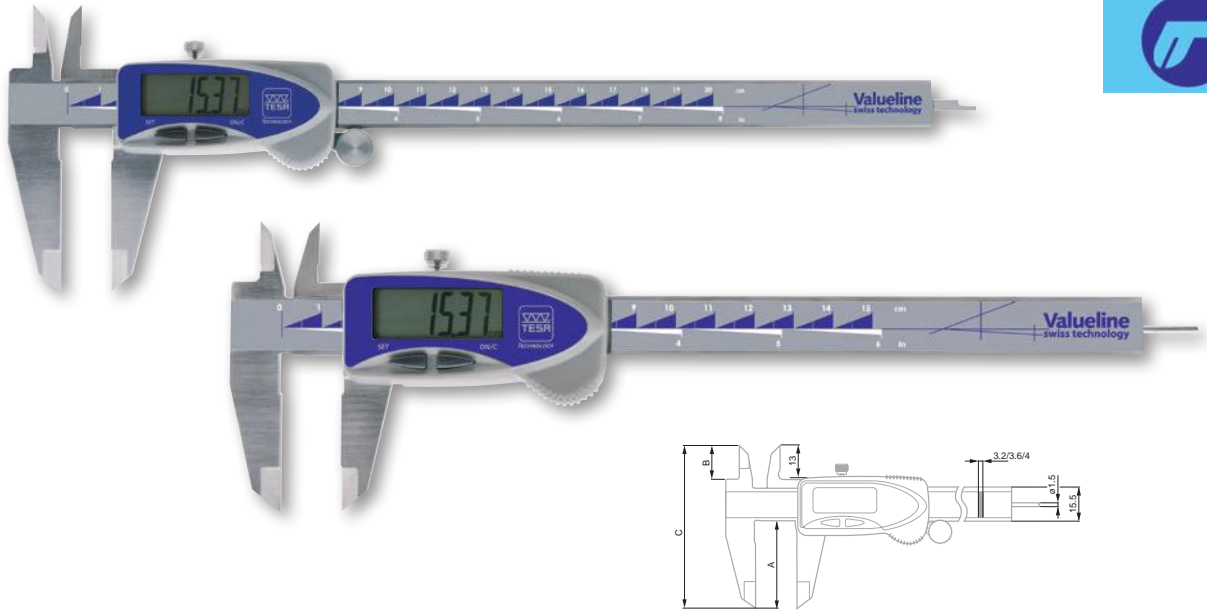

- ISO 13385-1
- 0,01 mm / 0.0005 in
- LCD, 11 mm
- Floating zero
- mm / in conversion
- ≤ 100 mm = 20 µm  
>100 mm = 30 µm
- 10 µm
- Scale with incremental divisions, capacitive
- 1,6 m/s
- Stainless steel
- 3V Lithium battery, CR2032
- 1.5 to 2 years
- Standby mode after 10 minutes, instrument retains zero. Automatic shut off after 2 hours. The instrument retains zero in ABS mode, but if the instrument is in DIFF mode, the zero must be reset.
- 10°C to 60°C
- 10°C to 40°C
- 80 %
- IP40
- 1907/2006/CE  
2004/108/CE  
2002/96/CE
- Plastic storage case
- Inspection report with declaration of conformity
- Serial number identification

No	mm	in	Drive system/ thumb roller	A mm	B mm	C mm	g	Depth rod
00539090	150	6	-	40	16	74	150	Square
00539091	150	6	-	40	16	74	150	Round
00539092	200	8	With	50	20	90	200	Square
00539093	300	12	With	64	22	106	280	Square

**OPTIONAL ACCESSORIES:**

01961000	Lithium battery, 3V, CR2032
00560013	Depth foot for calipers up to 150 mm

