


Шкивы для узких клиновидных ремней
SPA с коническим отверстием

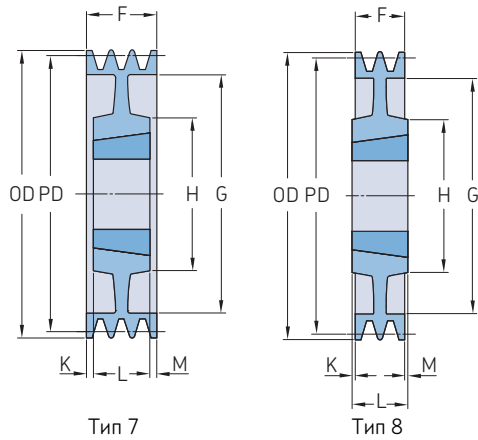

Тип 7

Тип 8

Профиль	Количество ручьев	Диаметр делительной окружности PD	Тип	Номер втулки	Размеры Наружный диаметр OD	В		F	G	K	L	M	H	Масса*	Обозначение		
						Мин.	Макс.										
		мм			мм											кг	
SPA	3	170	6	2517	175,5	16	60	50	138	5,0	45	-	-	5,0	PHP 3SPA170TB		
		180	6	2517	185,5	16	60	50	146	5,0	45	-	-	6,2	PHP 3SPA180TB		
		190	6	2517	195,5	16	60	50	158	5,0	45	-	-	7,0	PHP 3SPA190TB		
		200	7	2517	205,5	16	60	50	165	2,5	45	2,5	120	5,6	PHP 3SPA200TB		
		212	5	2517	217,5	16	60	50	177	2,5	45	2,5	120	6,6	PHP 3SPA212TB		
		224	5	2517	229,5	16	60	50	189	2,5	45	2,5	120	7,5	PHP 3SPA224TB		
	SPA	4	250	5	2517	255,5	16	60	50	215	2,5	45	2,5	120	8,6	PHP 3SPA250TB	
			280	5	2517	285,5	16	60	50	245	2,5	45	2,5	120	10,0	PHP 3SPA280TB	
			315	4	3020	320,5	25	75	50	280	0,5	51	0,5	160	12,8	PHP 3SPA315TB	
			355	4	3020	360,5	25	75	50	320	0,5	51	0,5	150	13,4	PHP 3SPA355TB	
			400	4	3020	405,5	25	75	50	365	-	51	1,0	150	15,9	PHP 3SPA400TB	
			450	4	3020	455,5	25	75	50	415	-	51	1,0	150	19,3	PHP 3SPA450TB	
			500	4	3020	505,5	25	75	50	465	-	51	1,0	150	22,6	PHP 3SPA500TB	
			560	4	3020	565,5	25	75	50	525	-	51	1,0	150	23,5	PHP 3SPA560TB	
			630	4	3020	635,5	25	75	50	595	-	51	1,0	150	27,5	PHP 3SPA630TB	
			800	4	3535	805,5	35	90	50	765	19,5	89	19,5	170	40,8	PHP 3SPA800TB	
			1 000	4	3535	1 005,5	35	90	50	965	19,5	89	19,5	178	50,0	PHP 3SPA1000TB	
			SPA	5	90	6	1615	95,5	14	42	65	64	27,0	38	-	-	1,2
95	6	1615			100,5	14	42	65	64	27,0	38	-	-	1,4	PHP 4SPA95TB		
100	2	1615			105,5	14	42	65	70	-	38	27,0	-	1,6	PHP 4SPA100TB		
106	6	2012			111,5	14	50	65	76	33,0	32	-	-	1,7	PHP 4SPA106TB		
112	6	2012			117,5	14	50	65	80	33,0	32	-	-	2,0	PHP 4SPA112TB		
118	2	2012			123,5	14	50	65	86	-	32	33,0	-	2,3	PHP 4SPA118TB		
125	2	2012			130,5	14	50	65	92	-	32	33,0	-	2,7	PHP 4SPA125TB		
132	2	2517			137,5	16	60	65	98	-	45	20,0	-	2,9	PHP 4SPA132TB		
140	2	2517			145,5	16	60	65	106	-	45	20,0	-	3,5	PHP 4SPA140TB		
150	2	2517			155,5	16	60	65	116	-	45	20,0	-	4,2	PHP 4SPA150TB		
160	2	2517			165,5	16	60	65	126	-	45	20,0	-	5,1	PHP 4SPA160TB		
170	2	2517			175,5	16	60	65	138	-	45	20,0	-	6,0	PHP 4SPA170TB		
180	2	2517			185,5	16	60	65	146	-	45	20,0	-	6,9	PHP 4SPA180TB		
190	2	2517			195,5	25	60	65	158	-	45	20,0	-	7,2	PHP 4SPA190TB		
200	2	3020			205,5	25	75	65	165	-	51	14,0	-	8,4	PHP 4SPA200TB		
212	2	3020			217,5	25	75	65	177	-	51	14,0	-	9,9	PHP 4SPA212TB		
224	2	3020			229,5	25	75	65	189	-	51	14,0	-	11,4	PHP 4SPA224TB		
250	5	3020			255,5	25	75	65	215	7,0	51	7,0	150	10,5	PHP 4SPA250TB		
280	5	3020	285,5	25	75	65	245	7,0	51	7,0	150	11,6	PHP 4SPA280TB				
315	5	3020	320,5	25	75	65	280	7,0	51	7,0	150	13,8	PHP 4SPA315TB				
355	5	3020	360,5	25	75	65	320	7,0	51	7,0	150	15,8	PHP 4SPA355TB				
400	5	3020	405,5	25	75	65	365	7,0	51	7,0	150	17,7	PHP 4SPA400TB				
450	5	3020	455,5	25	75	65	415	7,0	51	7,0	150	23,2	PHP 4SPA450TB				
500	5	3020	505,5	25	75	65	465	7,0	51	7,0	150	27,4	PHP 4SPA500TB				
560	4	3535	565,5	35	90	65	525	12,0	89	12,0	170	30,5	PHP 4SPA560TB				
630	4	4545	635,5	35	90	65	595	12,0	89	12,0	170	34,1	PHP 4SPA630TB				
800	4	3535	805,5	35	90	65	765	12,0	89	12,0	170	50,8	PHP 4SPA800TB				
1 000	4	4040	1 005,5	40	100	65	965	18,5	102	18,5	216	62,0	PHP 4SPA1000TB				
SPA	5	100	2	1615	105,5	14	42	80	70	-	38	42,0	-	1,9	PHP 5SPA100TB		
		106	6	2012	111,5	14	50	80	76	48,0	32	-	-	2,1	PHP 5SPA106TB		
		112	6	2012	117,5	14	50	80	80	48,0	32	-	-	2,4	PHP 5SPA112TB		
		118	2	2012	123,5	14	50	80	86	-	32	48,0	-	2,7	PHP 5SPA118TB		
		125	3	2012	130,5	14	50	80	92	24,0	32	24,0	-	3,1	PHP 5SPA125TB		
		132	3	2517	137,5	16	60	80	98	17,5	45	17,5	-	3,2	PHP 5SPA132TB		
		140	3	2517	145,5	16	60	80	106	17,5	45	17,5	-	3,9	PHP 5SPA140TB		
		150	3	2517	155,5	16	60	80	116	17,5	45	17,5	-	4,7	PHP 5SPA150TB		

* Масса без втулки.
Нефункциональные размеры могут незначительно изменяться.