


## ANGLE PROTRACTORS

### Angle Protractor with Digital Display

- Measuring ranges 1x 360°, 2x 180°, 4x 90°
- Large decimal or sexagesimal display
- 2 measuring directions
- Fine setting with adjustment screw
- Locking system
- Scale L = 200 mm (300 or 500 mm available as options)
- RS232 data output

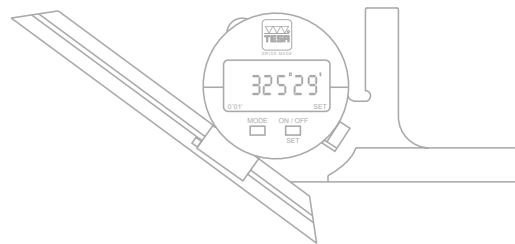

00630010	Angle protractor with digital display. Supplied with a scale of L = 200 mm
<b>OPTIONAL ACCESSORIES:</b>	
00660004	Scale 200 mm
00660005	Scale 300 mm
00660006	Scale 500 mm
00660007	Supporting base with 1 flat measuring face and 1 prismatic measuring face
00660008	Square for measuring sharp angles
01961000	Lithium battery, 3V, CR 2032
04761062	Opto-USB cable, duplex, bidirectional communication

- Measuring ranges: 1 x 360°, 2 x 180°, 4 x 90°
- LCD, 5 digits + sign
- 0,01° / 1 minute of arc
- 8,5 mm
- Max. perm. error.: 4 minutes of arc
- Stainless steel body, hardened
- Maximum rotation speed.: 1080°/s
- Preset to 0° or 180°
- RS232 opto-coupled
- 1x CR2032 3,0V
- 5000 hours
- +5°C to +40°C
- IP51 (CEI 529)
- 
- 410 g
- Wooden case (ISPM 15 and NIPM 15)
- Identification number
- Declaration of conformity

