


MICROMASTER AC Micrometers for Thread Measurement

Used for pitch diameter inspection. Anvil with adjustable holder for mounting a measuring insert with prismatic faces. Fine screw adjustment and locking device. The spindle has a fixing bore for a cone-shaped measuring insert.



No	mm	in
06030062	0 ÷ 25	0 ÷ 1
06030063	25 ÷ 50	1 ÷ 2
06030064	50 ÷ 75	2 ÷ 3
06030065	75 ÷ 100	3 ÷ 4
06030066	100 ÷ 125	4 ÷ 5
06030067	125 ÷ 150	5 ÷ 6

Note: Measuring inserts and setting standards must be ordered separately.

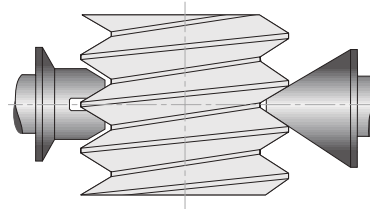

- DIN 863 T3 (Style D18)
- 0,001 mm / 0.00005 in
- Conversion mm/in
- Plastic case
- Inspection report with a declaration of conformity
- Identification number
- RS232
- Additional technical data: see appropriate standard
- Max. 10 N
- 30 mm measuring span

ISOMASTER AC Micrometers for Thread Measurement Models



No	mm
00210001	0 ÷ 25
00210002	25 ÷ 50
00210003	50 ÷ 75
00210004	75 ÷ 100

Measuring inserts and setting standards must be ordered separately.

- DIN 863 T3 (Style D 18) NFE 11-090
- Plastic case
- Declaration of conformity
- Identification number
- 0,5 mm
- Max. 10 N
- 0,01 mm