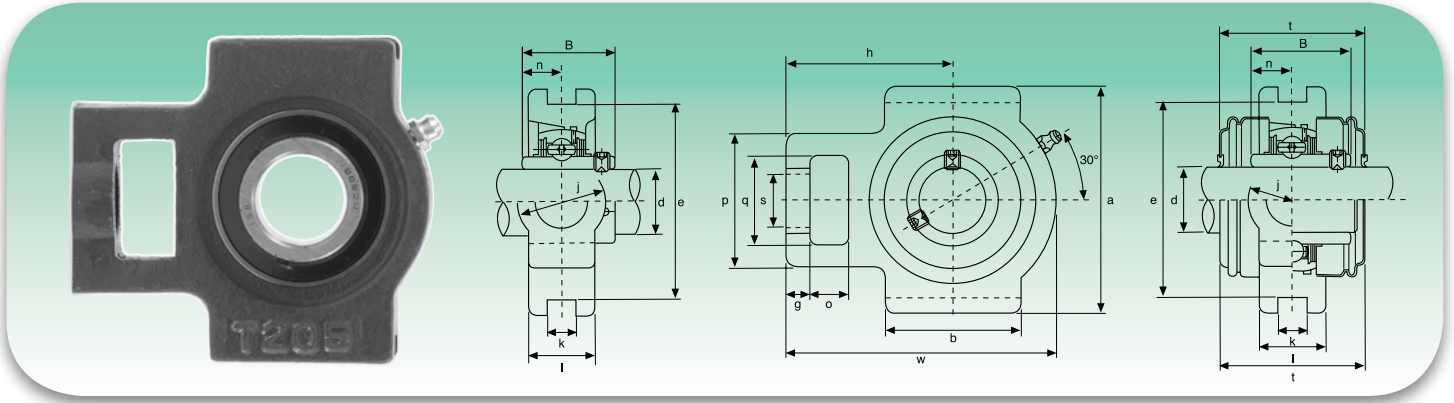


UCT2 Normale Reihe - Нормальная серия


Typ Тип	Abmessungen - Размеры																Tragzahlen (N) Коэффициент нагрузки (H)		Lager Подшипник	Gehäuse Корпус	Gewicht Вес		
	d	o	g	p	q	s	b	k	e	a	w	j	l	h	t	B	N	dynamisch C Динамическая C				statisch C _s Статическая C _s	kg
	mm/Zoll - мм/дюйм																						
UCT201	12	16	10	51	32	19	51	12	76	89	94	32	24	61	44,5	31	12,7	12160	6318	UCT201	T204	0,80	
UCT201-8	3/4	5/8	25/64	11/64	1 1/4	3/4	21/64	15/32	263/64	3 1/2	311/16	1 1/4	15/16	213/32	1 3/4	1,2205	0,500						0,79
UCT202	15	16	10	51	32	19	51	12	76	89	94	32	24	61	44,5	31	12,7	12160	6318	UCT202	T204	0,79	
UCT202-9	9/16	5/8	25/64	11/64	1 1/4	3/4	21/64	15/32	263/64	3 1/2	311/16	1 1/4	15/16	213/32	1 3/4	1,2205	0,500						0,79
UCT202-10	5/8	5/8	25/64	11/64	1 1/4	3/4	21/64	15/32	263/64	3 1/2	311/16	1 1/4	15/16	213/32	1 3/4	1,2205	0,500	0,79					
UCT203	17	16	10	51	32	19	51	12	76	89	94	32	24	61	44,5	31	12,7	12160	6318	UCT203	T204	0,78	
UCT203-11	11/16	5/8	25/64	11/64	1 1/4	3/4	21/64	15/32	263/64	3 1/2	311/16	1 1/4	15/16	213/32	1 3/4	1,2205	0,500						0,77
UCT204	20	16	10	51	32	19	51	12	76	89	94	32	24	61	44,5	31	12,7	12160	6318	UCT204	T204	0,76	
UCT204-12	3/4	5/8	25/64	11/64	1 1/4	3/4	21/64	15/32	263/64	3 1/2	311/16	1 1/4	15/16	213/32	1 3/4	1,2205	0,500						0,76
UCT205	25	16	10	51	32	19	51	12	76	89	97	32	24	62	48	34,1	14,3	13300	7457	UCT205	T205	0,81	
UCT205-13	13/16																						0,85
UCT205-14	7/8	5/8	25/64	11/64	1 1/4	3/4	21/64	15/32	263/64	3 1/2	313/16	1 1/4	15/16	27/16	17/8	1,3425	0,563						0,84
UCT205-15	15/16																						0,82
UCT205-16	1																	0,81					
UCT206	30	16	10	56	37	22	57	12	89	102	113	37	28	70	53	38,1	15,9	18525	10735	UCT206	T206	1,22	
UCT206-17	11/16																						1,23
UCT206-18	11/8	5/8	25/64	27/32	129/64	55/64	2 1/4	15/32	3 1/2	41/64	429/64	129/64	13/32	2 3/4	23/32	1,5000	0,626						1,24
UCT206-19	13/16																						1,22
UCT206-20	1 1/4																	1,21					
UCT207	35	16	13	64	37	22	64	12	89	102	129	37	30	78	59,5	42,9	17,5	24415	14630	UCT207	T207	1,44	
UCT207-20	1 1/4																						1,50
UCT207-21	15/16	5/8	33/64	233/64	129/64	55/64	233/64	15/32	3 1/2	41/64	55/64	129/64	13/16	35/64	211/32	1,6890	0,689						1,48
UCT207-22	13/8																						1,44
UCT207-23	17/16																	1,41					
UCT208	40	19	16	83	49	29	83	16	102	114	144	49	35	89	69	49,2	19	27645	16910	UCT208	T208	2,40	
UCT208-24	1 1/2	3/4	5/8	317/64	115/16	19/64	317/64	5/8	41/64	431/64	543/64	115/16	13/8	3 1/2	223/32	1,9370	0,748						2,44
UCT208-25	19/16																						2,41
UCT209	45	19	16	83	49	29	83	16	102	117	144	49	35	87	69	49,2	19	32395	20235	UCT209	T209	2,36	
UCT209-26	15/8																						2,46
UCT209-27	11/16	3/4	5/8	317/64	115/16	19/64	317/64	5/8	41/64	439/64	543/64	115/16	13/8	327/64	223/32	1,9370	0,748						2,42
UCT209-28	1 3/4																						2,38
UCT210	50	19	16	83	49	29	86	16	102	117	149	49	35	90	74,5	51,6	19	33345	22135	UCT210	T210	2,43	
UCT210-29	113/16																						2,55
UCT210-30	17/8	3/4	5/8	317/64	115/16	19/64	317/64	5/8	41/64	439/64	555/64	115/16	13/8	335/64	215/16	2,0315	0,748						2,50
UCT210-31	115/16																						2,45
UCT210-32	2																	2,41					
UCT211	55	25	19	102	64	35	95	22	130	146	171	64	41	106	76	55,6	22,2	41230	27930	UCT211	T211	4,11	
UCT211-32	2																						4,26
UCT211-33	21/16	63/64	3/4	41/64	21/32	13/8	3 3/4	55/64	51/8	5 3/4	647/64	233/64	15/8	411/64	3	2,1890	0,874						4,20
UCT211-34	21/8																						4,15
UCT211-35	23/16																						4,09
UCT212	60	32	19	102	64	35	102	22	130	146	194	64	46	119	89	65,1	25,4	49780	34390	UCT212	T212	4,97	
UCT212-36	2 1/4																						5,10
UCT212-37	25/16	117/64	3/4	41/64	21/32	13/8	41/64	55/64	51/8	5 3/4	741/64	233/64	113/16	411/16	3 1/2	2,5630	1,000						5,02
UCT212-38	23/8																						4,95
UCT212-39	27/16																						4,88
UCT213	65	32	21	111	70	41	121	26	151	167	224	70	51	137	89	65,1	25,4	54340	38095	UCT213	T213	6,65	
UCT213-40	2 1/2	117/64	53/64	43/8	2 3/4	139/64	449/64	11/32	515/16	637/64	813/16	2 3/4	2	525/64	3 1/2	2,5630	1,000						6,74
UCT213-41	29/16																						6,65
UCT214	70	32	21	111	70	41	121	26	151	167	224	70	46	137	-	74,6	30,2	59090	41895	UCT214	T214	7,05	
UCT214-42	25/8																						7,26
UCT214-43	21/16	117/64	53/64	43/8	2 3/4	139/64	449/64	11/32	515/16	637/64	813/16	2 3/4	113/16	525/64	-	2,9370	1,189						7,16
UCT214-44	2 3/4																						7,06
UCT215	75	32	21	111	70	41	121	26	151	167	232	70	48	140	-	77,8	33,3	64030	45885	UCT215	T215	7,41	
UCT215-45	213/16																						7,66
UCT215-46	27/8	117/64	53/64	43/8	2 3/4	139/64	449/64	11/32	515/16	637/64	99/64	2 3/4	157/64	533/64	-	3,0630	1,311						7,55
UCT215-47	215/16																						7,44
UCT215-48	3																						7,32
UCT216	80	32	21	111	70	41	121	26	165	184	235	70	51	140	-	82,6	33,3	69065	50350	UCT216	T216	8,30	
UCT216-49	31/16																						8,48
UCT216-50	31/8	117/64	53/64	43/8	2 3/4	139/64	449/64	11/32	6 1/2	7 1/4	9 1/4	2 3/4	2	533/64	-	3,2520	1,311						8,35
UCT216-51	33/16																						8,22
UCT217	85	38	29	124	73	48	157	30	173	189	260	73	54	162	-	85,7	34,1	79800	58805	UCT217	T217	11,00	
UCT217-52	3 1/4																						11,22
UCT217-53	35/16	1 1/2	19/64	47/8	27/8	157/64	63/16	13/16	613/16	751/64	1015/64	27/8	21/8	63/8	-	3,3740	1,343						11,09
UCT217-55	37/16																						10,80
UCT218	90	41	31	132	81	48	151	30	189	216	280	80	55	173	-	96	39,7	91295	67925	UCT218	T218	12,75	
UCT218-56	335/64	15/8	1,2205	513/64	36/32	157/64	561/64	13/16	751/64	8 1/2	1113/32	35/32	2,165	613/16	-	3,7795	118/32						10,62

Lieferbar aus rostfreiem Stahl Gehäuse: AISI 304 - Lager: AISI 440C - Поставляется в исполнении из нержавеющей стали Корпус: AISI 304
Auf Anfrage mit Lager SA (SAT.) lieferbar - На заказ поставляется с подшипником серии SA (SAT.)