

**FRENI ELETTRICI
MONODISCO
Serie FED**

**SINGLE PLATE
ELECTROMAGNETIC BRAKES
Model FED**

PRESTAZIONI (24 VCC) • PERFORMANCES (24VDC)


tipo size	coppia-torque (Nm)		giri/1' r.p.m. max	tempo-time(ms)		potenza-power (W)		peso-weight (Kg)
	M _d	M _s		inserzione engagement	disinserzione disengagement	20°	120°	
FED 100	18	30	5000	110	40	18	13	1,5
FED 130	35	55	5000	150	50	38	27	2,3
FED 145	40	70	5000	170	55	38	27	2,8
FED 170	60	100	4800	200	65	41	28	3,6
FED 210	100	160	4400	260	70	45	33	6,8
FED 255	200	320	3800	300	80	50	36	10
FED 310	400	640	2800	380	85	60	42	19
FED 390	600	950	1800	460	95	60	42	28

- Per inserzioni in movimento riferirsi ai valori di coppia dinamica M_d / for engagements in motion refer to dynamic torque M_d
 - Per frizione già inserita riferirsi ai valori di coppia statica M_s / for engaged clutch refer to static torque M_s

DIMENSIONI - DIMENSIONS (mm)

tipo size	A	B	C H8	D max	E	F	G	H max	K	L	M n°x Ø
FED 100	44	103	45	35	52	3	25	0,4	22,5	55	3x5,5
FED 130	59	129	52,4	40	64	4	27,5	0,4	35	60,3	8x4,5
FED 145	54,5	148	62	40	64	4	27,5	0,5	35	75	6x6,5
FED 170	58,5	168	75	40	64	4	27,5	0,5	35	89	6x6,5
FED 210	66	210	89	55	84	4	33	0,6	38	108	6x8,5
FED 255	72,5	255	136,6	75	108	4	36,5	0,8	44,5	155,5	6x8,5
FED 310	97	312	162	85	119	5	41	1,0	62	184	6x8,5
FED 390	112,5	390	228,6	100	143,5	6	44,5	1,2	76	247,5	12x8,5

DENOMINAZIONE PARTI - PARTS NAME

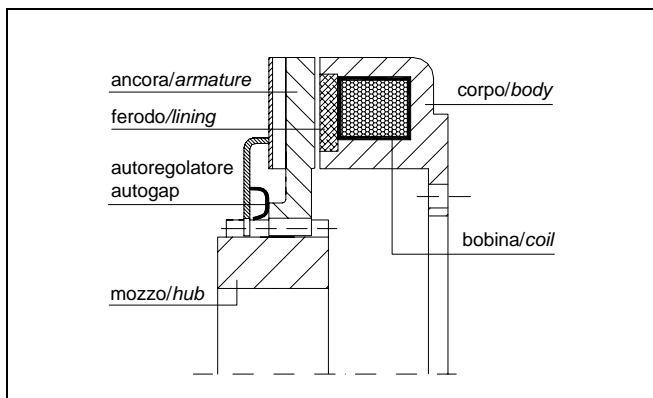

ESEMPIO MONTAGGIO - MOUNTING SAMPLE

