


Three-point internal micrometers


Three-point internal micrometers for accurately measuring (blind) bores.

- Measuring range: \varnothing 6-300 mm.
- Graduation: 0.001 mm (\varnothing 6- 12 mm),
0.005 mm (\varnothing 12-300 mm).
- Self-centering.
- Tungsten carbide measuring faces.
- Interchangeable measuring bolts from measuring range \varnothing 100-125 mm.
- Delivery in a case, incl. extension 150 mm (measuring range \varnothing 6-12 mm: 100 mm).
- Separate instruments within measuring range \varnothing 6-100 mm and the sets are delivered incl. setting ring(s).

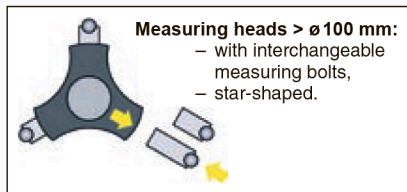

908.654

Item No.	Measuring range/mm	Setting ring \varnothing /mm	Accuracy mm	Length L/mm	Length A/mm
908.650	\varnothing 6- 8	6	± 0.004	55	0.7
908.651	\varnothing 8- 10	8	± 0.004	55	0.7
908.652	\varnothing 10- 12	10	± 0.004	55	0.7
908.653	\varnothing 12- 16	16	± 0.004	80	0.7
908.654	\varnothing 16- 20	16	± 0.004	80	0.7
908.655	\varnothing 20- 25	25	± 0.004	90	0.7
908.656	\varnothing 25- 30	25	± 0.004	90	0.7
908.657	\varnothing 30- 40	40	± 0.004	97	0.7
908.658	\varnothing 40- 50	40	± 0.005	97	0.7
908.659	\varnothing 50- 63	62	± 0.005	114	0.7
908.660	\varnothing 62- 75	62	± 0.005	114	0.7
908.661	\varnothing 75- 88	87	± 0.005	114	0.7
908.662	\varnothing 87-100	87	± 0.005	114	0.7
908.663	\varnothing 100-125	-	± 0.005	150	0.7
908.664	\varnothing 125-150	-	± 0.005	150	0.7
908.665	\varnothing 150-175	-	± 0.005	150	0.7
908.666	\varnothing 175-200	-	± 0.005	150	0.7
908.667	\varnothing 200-225	-	± 0.007	150	0.7
908.668	\varnothing 225-250	-	± 0.007	150	0.7
908.669	\varnothing 250-275	-	± 0.007	150	0.7
908.670	\varnothing 275-300	-	± 0.007	150	0.7



Item No.	Measuring range/mm	Setting rings \varnothing /mm	Extension mm	Number of instruments
908.671	\varnothing 6- 12	6, 8, 10	100	3
908.672	\varnothing 12- 20	16	150	2
908.673	\varnothing 20- 50	25, 40	150	4
908.674	\varnothing 50-100	62, 87	150	4