


A ( 2 : 1 )

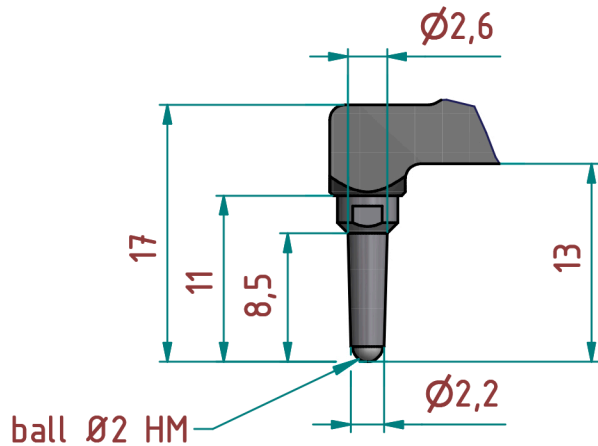

type: M200  
range: 100 - 150 mm  
range of indication: 99,5 - 150,5 mm  
digital step:  
scale interval: 0,050 mm  
measuring force: 0,9 - 1,9 N  
weight: 385 g

acceptable deviations  
VDI/VDE/DGQ 2618 Bl. 12.1/13.1)  
max. permissible errors "G": 0,050 mm  
repeatability "r": 0,025 mm  
reference temperature: 20° C  
operation temperature: 10° C - 30° C  
storage temperature: -10° C - 50° C

subject to technical alterations


scale: 1 : 2  
drawing-nr.: DAB-H4100\_KR\_en  
date of issue: 12.04.2013  
name: Lange  
revision status:  
revision date:

measuring capacity

		measuring range Meb [mm]													
		100	102	104	106	108	110	115	120	125	130	135	140	145	150
groove depth A [mm]	0	0 / 158	0 / 164	0 / 166	0 / 168	0 / 170	0 / 172	0 / 177	0 / 192	0 / 192	0 / 192	0 / 192	0 / 192	0 / 192	0 / 192
	1		2,5 / 163	2,5 / 165	2,5 / 167	2,5 / 169	2,5 / 171	2,5 / 176	2,5 / 183	2,5 / 192	2,5 / 192	2,5 / 192	2,5 / 192	2,5 / 192	2,5 / 192
	2			2,6 / 164	2,6 / 166	2,6 / 168	2,6 / 170	2,6 / 175	2,6 / 180	2,6 / 192	2,6 / 192	2,6 / 192	2,7 / 192	2,7 / 192	2,7 / 192
	3				2,7 / 164	2,6 / 166	2,6 / 168	2,6 / 173	2,7 / 178	2,7 / 192	2,8 / 192	2,8 / 192	2,8 / 192	2,9 / 192	2,9 / 192
	4					2,7 / 165	2,7 / 167	2,7 / 172	2,8 / 177	2,8 / 192	2,9 / 192	2,9 / 192	3,0 / 192	3,0 / 192	3,0 / 192
	5						2,7 / 166	2,8 / 171	2,9 / 176	2,9 / 183	3,0 / 192	3,1 / 192	3,2 / 192	3,2 / 192	3,3 / 192
<b>B / L</b>															

B = minimum groove width [mm]  
L = maximum usable arm length [mm]

Example: Meb = 106 B = 2,6  
A = 2 L = 166

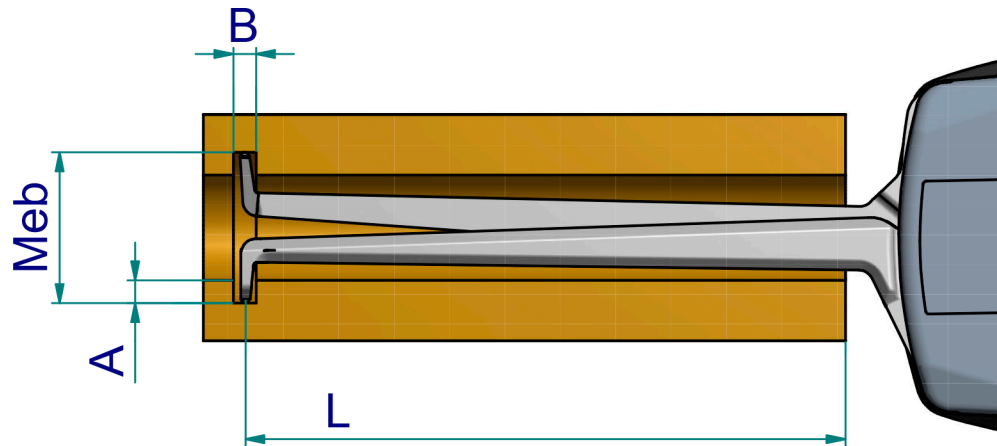

subject to technical alterations

drawing-nr.: DAB-H4100\_KR\_en  
 date of issue: 01.07.2013  
 name: Lange  
  
 revision status:  
 revision date: