


UCFB2 Normale Reihe - Нормальная серия

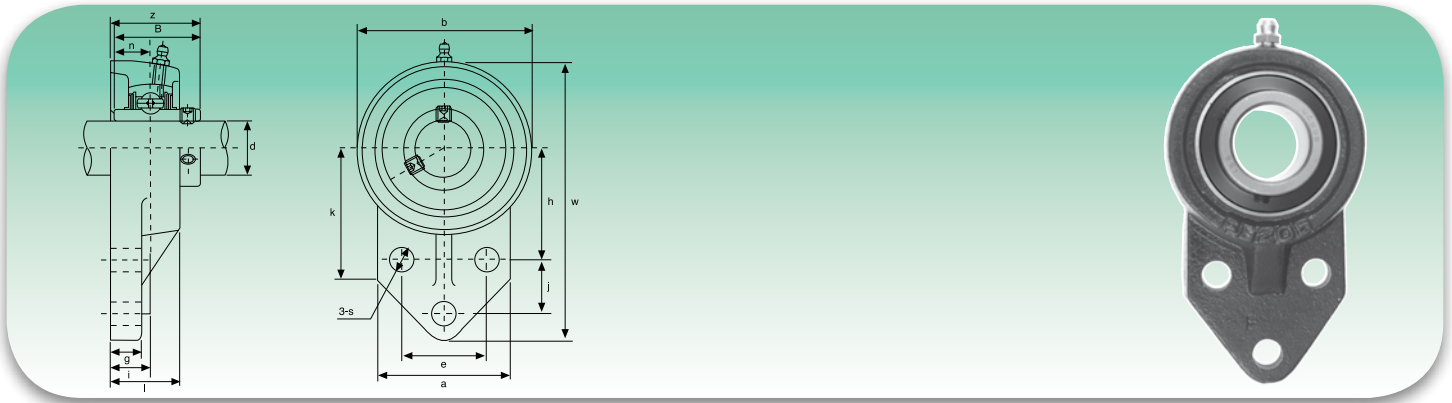

Typ Тип	Abmessungen - Размеры															Bef.Bolz. Креп. винт	Tragzahlen (N) Коэффициент нагрузки (H)		Lager Подшипник	Gehäuse Корпус	Gewicht Вес		
	d	w	b	k	a	l	s	g	h	j	e	i	z	B	n		dynamisch C	statisch C ₀				kg	
	mm/Zoll - мм/дюйм																динамическая C	Статическая C ₀					
UCFB201	12	110	62	52	52	25,5	10	13	42	27	32	15	33,3	31	12,7	M8	12160	6318	UC201	FB204	0,58		
UCFB201-8	3/4	4 11/32	27/16	21/16	21/16	1	25/64	1/2	121/32	11/16	117/64	19/32	15/16	1,2205	0,500	5/16			UC201-8		0,57		
UCFB202	15	110	62	52	52	25,5	10	13	42	27	32	15	33,3	31	12,7	M8	12160	6318	UC202	FB204	0,57		
UCFB202-9	9/16	4 11/32	27/16	21/16	21/16	1	25/64	1/2	121/32	11/16	117/64	19/32	15/16	1,2205	0,500	5/16			UC202-9		0,57		
UCFB202-10	5/8	4 11/32	27/16	21/16	21/16	1	25/64	1/2	121/32	11/16	117/64	19/32	15/16	1,2205	0,500	5/16			UC202-10		0,57		
UCFB203	17	110	62	52	52	25,5	10	13	42	27	32	15	33,3	31	12,7	M8	12160	6318	UC203	FB204	0,56		
UCFB203-11	11/16	4 11/32	27/16	21/16	21/16	1	25/64	1/2	121/32	11/16	117/64	19/32	15/16	1,2205	0,500	5/16			UC203-11		0,55		
UCFB204	20	110	62	52	52	25,5	10	13	42	27	32	15	33,3	31	12,7	M8	12160	6318	UC204	FB204	0,54		
UCFB204-12	3/4	4 11/32	27/16	21/16	21/16	1	25/64	1/2	121/32	11/16	117/64	19/32	15/16	1,2205	0,500	5/16			UC204-12		0,54		
UCFB205	25	116	68	52	56	27	10	13	45	27	34	16	35,8	34,1	14,3	M8	13300	7457	UC205	FB205	0,79		
UCFB205-13	13/16	4 9/16	211/16	21/16	27/32	11/16	25/64	1/2	149/64	11/16	111/32	5/8	113/32	1,3425	0,563	5/16			UC205-13		0,83		
UCFB205-14	7/8	4 9/16	211/16	21/16	27/32	11/16	25/64	1/2	149/64	11/16	111/32	5/8	113/32	1,3425	0,563	5/16			UC205-14		0,82		
UCFB205-15	15/16	4 9/16	211/16	21/16	27/32	11/16	25/64	1/2	149/64	11/16	111/32	5/8	113/32	1,3425	0,563	5/16			UC205-15		0,80		
UCFB205-16	1	4 9/16	211/16	21/16	27/32	11/16	25/64	1/2	149/64	11/16	111/32	5/8	113/32	1,3425	0,563	5/16			UC205-16		0,79		
UCFB206	30	130	78	55	65	31	10	13	50	29	40	18	40,2	38,1	15,9	M8	18525	10735	UC206	FB206	0,95		
UCFB206-17	11/16	5 1/8	31/16	25/32	29/16	17/32	25/64	1/2	131/32	19/64	137/64	45/64	119/32	1,5000	0,626	5/16			UC206-17		0,98		
UCFB206-18	11/8	5 1/8	31/16	25/32	29/16	17/32	25/64	1/2	131/32	19/64	137/64	45/64	119/32	1,5000	0,626	5/16			UC206-18		0,97		
UCFB206-19	13/16	5 1/8	31/16	25/32	29/16	17/32	25/64	1/2	131/32	19/64	137/64	45/64	119/32	1,5000	0,626	5/16			UC206-19		0,95		
UCFB206-20	1 1/4	5 1/8	31/16	25/32	29/16	17/32	25/64	1/2	131/32	19/64	137/64	45/64	119/32	1,5000	0,626	5/16			UC206-20		0,94		
UCFB207	35	144	90	62	70	34	10	15	55	32	46	19	44,4	42,9	17,5	M8	24415	14630	UC207	FB207	1,29		
UCFB207-20	1 1/4	5 7/8	35/16	27/16	31/16	17/16	15/16	3/4	111/32	25/64	19/32	211/64	117/64	113/16	3/4	1 1/4	1,6890	0,689	5/16		1,35		
UCFB207-21	15/16	5 7/8	35/16	27/16	31/16	17/16	15/16	3/4	111/32	25/64	19/32	211/64	117/64	113/16	3/4	1 1/4	1,6890	0,689	5/16		1,32		
UCFB207-22	13/8	5 7/8	35/16	27/16	31/16	17/16	15/16	3/4	111/32	25/64	19/32	211/64	117/64	113/16	3/4	1 1/4	1,6890	0,689	5/16		1,29		
UCFB207-23	17/16	5 7/8	35/16	27/16	31/16	17/16	15/16	3/4	111/32	25/64	19/32	211/64	117/64	113/16	3/4	1 1/4	1,6890	0,689	5/16		1,26		
UCFB208	40	164	100	72	78	36	12	16	60	41	50	21	51,2	49,2	19	M10	27645	16910	UC208	FB208	1,78		
UCFB208-24	1 1/2	6 1/2	32	315/16	227/32	31/16	113/32	15/32	5/8	223/64	139/64	131/32	53/64	21/64	1,9370	0,748	3/8			UC208-24		1,82	
UCFB208-25	19/16	6 1/2	32	315/16	227/32	31/16	113/32	15/32	5/8	223/64	139/64	131/32	53/64	21/64	1,9370	0,748	3/8			UC208-25		1,79	
UCFB209	45	174	106	76	80	38	12	18	65	43	54	22	52,2	49,2	19	M10	32395	20235	UC209	FB209	1,91		
UCFB209-26	15/8	6 1/4	33/16	27/16	31/16	19/16	15/16	3/4	127/32	23/32	29/16	111/16	21/8	55/64	21/16	1,9370	0,748	3/8			UC209-26		2,01
UCFB209-27	111/16	6 1/4	33/16	27/16	31/16	19/16	15/16	3/4	127/32	23/32	29/16	111/16	21/8	55/64	21/16	1,9370	0,748	3/8			UC209-27		1,97
UCFB209-28	1 3/4	6 1/4	33/16	27/16	31/16	19/16	15/16	3/4	127/32	23/32	29/16	111/16	21/8	55/64	21/16	1,9370	0,748	3/8			UC209-28		1,93
UCFB210	50	184	112	82	86	40	12	18	68	46	58	22	54,6	51,6	19	M10	33345	22135	UC210	FB210	2,36		
UCFB210-29	113/16	7 1/4	413/32	37/32	33/8	137/64	15/32	23/32	243/64	113/16	29/32	55/64	25/32	2,0315	0,748	3/8			UC210-29		2,48		
UCFB210-30	17/8	7 1/4	413/32	37/32	33/8	137/64	15/32	23/32	243/64	113/16	29/32	55/64	25/32	2,0315	0,748	3/8			UC210-30		2,43		
UCFB210-31	115/16	7 1/4	413/32	37/32	33/8	137/64	15/32	23/32	243/64	113/16	29/32	55/64	25/32	2,0315	0,748	3/8			UC210-31		2,38		
UCFA210-32	2	7 1/4	413/32	37/32	33/8	137/64	15/32	23/32	243/64	113/16	29/32	55/64	25/32	2,0315	0,748	3/8			UC210-32		2,34		
UCFB211	55	207	130	86	90	43	14	18	78	50	62	25	58,4	55,6	22,2	M12	41230	27930	UC211	FB211	3,15		
UCFB211-32	2	8 1/8	45/8	35/8	37/8	17/8	15/8	3/4	159/16	79/8	97/8	31/4	71/4	28,125	27,125	7/16			UC211-32		3,31		
UCFB211-33	21/16	8 1/8	45/8	35/8	37/8	17/8	15/8	3/4	159/16	79/8	97/8	31/4	71/4	28,125	27,125	7/16			UC211-33		3,25		
UCFB211-34	21/8	8 1/8	45/8	35/8	37/8	17/8	15/8	3/4	159/16	79/8	97/8	31/4	71/4	28,125	27,125	7/16			UC211-34		3,20		
UCFB211-35	23/16	8 1/8	45/8	35/8	37/8	17/8	15/8	3/4	159/16	79/8	97/8	31/4	71/4	28,125	27,125	7/16			UC211-35		3,14		
UCFB212	60	223	140	90	94	48	14	18	84	55	66	29	68,7	65,1	25,4	M12	49780	34390	UC212	FB212	3,99		
UCFB212-36	2 1/4	8 7/8	45/8	35/8	37/8	17/8	15/8	3/4	159/16	79/8	97/8	31/4	71/4	28,125	27,125	7/16			UC212-36		4,12		
UCFB212-37	25/16	8 7/8	45/8	35/8	37/8	17/8	15/8	3/4	159/16	79/8	97/8	31/4	71/4	28,125	27,125	7/16			UC212-37		4,04		
UCFB212-38	23/8	8 7/8	45/8	35/8	37/8	17/8	15/8	3/4	159/16	79/8	97/8	31/4	71/4	28,125	27,125	7/16			UC212-38		3,97		
UCFB212-39	27/16	8 7/8	45/8	35/8	37/8	17/8	15/8	3/4	159/16	79/8	97/8	31/4	71/4	28,125	27,125	7/16			UC212-39		3,90		
UCFB213	65	244	155	94	100	50	14	20	92	60	70	30	69,7	65,1	25,4	M12	54340	38095	UC213	FB213	-		
UCFB213-40	2 1/2	9 7/8	61/8	47/8	49/8	25/8	15/8	5/8	231/16	115/8	139/16	43/8	171/16	67/8	2,5630	1,000	7/16			UC213-40		-	
UCFB213-41	29/16	9 7/8	61/8	47/8	49/8	25/8	15/8	5/8	231/16	115/8	139/16	43/8	171/16	67/8	2,5630	1,000	7/16			UC213-41		-	

Lieferbar aus rostfreiem Stahl Gehäuse: AISI 304 - Lager: AISI 440C - Поставляется в исполнении из нержавеющей стали Корпус: AISI 304 - Подшипник: AISI 440C
 Auf Anfrage mit Lager SA (SAFB) lieferbar - На заказ поставляется с подшипником серии SA (SAFB)