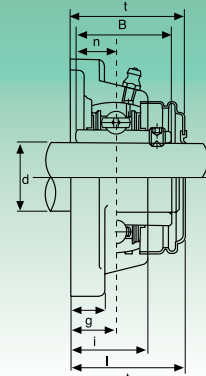

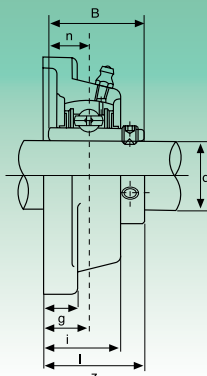


UCF2 Normale Reihe - Нормальная серия


Typ Тип	Abmessungen - Размеры											Bef.Bolz. Креп. винт	Tragzahlen (N) Коэффициент нагрузки (H)		Lager Подшипник	Gehäuse Корпус	Gewicht Вес	
	d	a	e	i	g	l	s	z	t	B	n		dynamisch C Динамическая C	statisch C ₀ Статическая C ₀				kg
	mm/Zoll - мм/дюйм												mm/Zoll - мм/дюйм	mm/Zoll - мм/дюйм				
UCF201	12	86	64	15	12	25,5	12	33,3	37,5	31	12,7	M10	12160	6318	UC201	F204	0,60	
UCF201-8	3/8	33/8	233/64	19/32	15/32	1	15/32	15/16	131/64	1,2205	0,500	3/8			UC201-8		0,59	
UCF202	15	86	64	15	12	25,5	12	33,3	37,5	31	12,7	M10	12160	6318	UC202	F204	0,59	
UCF202-9	9/16	33/8	233/64	19/32	15/32	1	15/32	15/16	131/64	1,2205	0,500	3/8			UC202-9		0,59	
UCF202-10	5/8	33/8	233/64	19/32	15/32	1	15/32	15/16	131/64	1,2205	0,500	3/8			UC202-10		0,59	
UCF203	17	86	64	15	12	25,5	12	33,3	37,5	31	12,7	M10	12160	6318	UC203	F204	0,58	
UCF203-11	11/16	33/8	233/64	19/32	15/32	1	15/32	15/16	131/64	1,2205	0,500	3/8			UC203-11		0,57	
UCF204	20	86	64	15	12	25,5	12	33,3	37,5	31	12,7	M10	12160	6318	UC204	F204	0,56	
UCF204-12	3/4	33/8	233/64	19/32	15/32	1	15/32	15/16	131/64	1,2205	0,500	3/8			UC204-12		0,56	
UCF205	25	95	70	16	14	27	12	35,8	40	34,1	14,3	M10	13300	7457	UC205	F205	0,80	
UCF205-13	13/16														UC205-13		0,84	
UCF205-14	7/8	3/4	2/4	5/8	35/64	11/16	15/32	113/32	19/16	1,3425	0,563	3/8			UC205-14		0,83	
UCF205-15	15/16														UC205-15		0,81	
UCF205-16	1														UC205-16		0,80	
UCF206	30	108	83	18	14	31	12	40,2	44,5	38,1	15,9	M10	18525	10735	UC206	F206	1,12	
UCF206-17	11/16														UC206-17		1,15	
UCF206-18	11/8	4/4	317/64	45/64	35/64	17/32	15/32	119/32	1/4	1,5000	0,626	3/8			UC206-18		1,14	
UCF206-19	13/15														UC206-19		1,12	
UCF206-20	1/4														UC206-20		1,11	
UCF207	35	117	92	19	16	34	14	44,4	48,5	42,9	17,5	M12	24415	14630	UC207	F207	1,46	
UCF207-20	1/4														UC207-20		1,52	
UCF207-21	15/16	439/64	35/8	3/4	5/8	111/32	35/64	1/4	129/32	1,6890	0,689	7/16			UC207-21		1,49	
UCF207-22	13/8														UC207-22		1,46	
UCF207-23	17/16														UC207-23		1,43	
UCF208	40	130	102	21	16	36	16	51,2	55,5	49,2	19	M14	27645	16910	UC208	F208	1,84	
UCF208-24	1/2	51/8	41/64	53/64	5/8	127/64	5/8	21/64	23/16	1,9370	0,748	1/2			UC208-24		1,88	
UCF208-25	19/16														UC208-25		1,85	
UCF209	45	137	105	22	18	38	16	52,2	56,5	49,2	19	M14	32395	20235	UC209	F209	2,15	
UCF209-26	15/8														UC209-26		2,25	
UCF209-27	111/16	513/32	49/64	55/64	23/32	1/2	5/8	21/16	27/32	1,9370	0,748	1/2			UC209-27		2,21	
UCF209-28	1/4														UC209-28		2,17	
UCF210	50	143	111	22	18	40	16	54,6	59,5	51,6	19	M14	33345	22135	UC210	F210	2,42	
UCF210-29	113/16														UC210-29		2,54	
UCF210-30	17/8	55/8	43/8	55/64	23/32	19/16	5/8	25/32	211/32	2,0315	0,748	1/2			UC210-30		2,49	
UCF210-31	115/16														UC210-31		2,44	
UCF210-32	2														UC210-32		2,40	
UCF211	55	162	130	25	20	43	19	58,4	63	55,6	22,2	M16	41230	27930	UC211	F211	3,31	
UCF211-32	2														UC211-32		3,46	
UCF211-33	21/16	63/8	51/8	63/64	25/32	111/16	3/4	15/16	231/64	2,1890	0,874	5/8			UC211-33		3,40	
UCF211-34	21/8														UC211-34		3,35	
UCF211-35	23/16														UC211-35		3,29	
UCF212	60	175	143	29	20	48	19	68,7	73,5	65,1	25,4	M16	49780	34390	UC212	F212	4,28	
UCF212-36	2/4														UC212-36		4,41	
UCF212-37	25/16	657/64	55/8	19/64	25/32	157/64	3/4	245/64	257/64	2,5630	1,000	5/8			UC212-37		4,33	
UCF212-38	23/8														UC212-38		4,26	
UCF212-39	27/16														UC212-39		4,19	
UCF213	65	187	149	30	22	50	19	69,7	74,5	65,1	25,4	M16	54340	38095	UC213	F213	4,99	
UCF213-40	2/2	723/64	555/64	13/16	55/64	131/32	3/4	2/4	215/16	2,5630	1,000	5/8			UC213-40		5,08	
UCF213-41	29/16														UC213-41		4,99	
UCF214	70	193	152	31	22	54	19	75,4	81,5	74,6	30,2	M16	59090	41895	UC214	F214	5,85	
UCF214-42	25/8														UC214-42		6,06	
UCF214-43	211/16	719/32	563/64	17/32	55/64	21/8	3/4	221/32	313/64	2,9370	1,189	5/8			UC214-43		5,96	
UCF214-44	2/4														UC214-44		5,86	
UCF215	75	200	159	34	22	56	19	78,5	83,5	77,8	33,3	M16	64030	45885	UC215	F215	6,91	
UCF215-45	213/16														UC215-45		7,16	
UCF215-46	27/8	77/8	617/64	111/32	55/64	27/32	3/4	33/32	39/32	3,0630	1,311	5/8			UC215-46		7,05	
UCF215-47	215/16														UC215-47		6,94	
UCF215-48	3														UC215-48		6,82	
UCF216	80	208	165	34	22	58	23	83,3	88,5	82,6	33,3	M20	69065	50350	UC216	F216	7,50	
UCF216-49	31/16														UC216-49		7,68	
UCF216-50	31/8	83/16	6/2	111/32	55/64	29/32	29/32	39/32	339/64	3,2520	1,311	3/4			UC216-50		7,55	
UCF216-51	33/16														UC216-51		7,42	
UCF217	85	220	175	36	24	63	23	87,6	92,6	85,7	34,1	M20	79800	58805	UC217	F217	9,66	
UCF217-52	3/4														UC217-52		9,88	
UCF217-53	35/6	821/33	657/64	127/64	15/16	215/32	29/32	37/16	341/64	3,3740	1,343	3/4			UC217-53		9,74	
UCF217-55	37/16														UC217-55		9,45	
UCF218	90	235	187	40	24	68	23	96,3	101,5	96	39,7	M20	91295	67925	UC218	F218	12,06	
UCF218-56	3/2	9/4	723/64	137/64	15/16	211/16	29/32	325/32	4	3,7795	1,5630	3/4			UC218-56		12,17	

Lieferbar aus rostfreiem Stahl Gehäuse: AISI 304 - Lager: AISI 440C - Поставляется в исполнении из нержавеющей стали Корпус: AISI 304 - Подшипник: AISI 440C
Auf Anfrage mit Lager SA (SAF.) lieferbar - На заказ поставляется с подшипником серии SA (SAF.)