


Шкивы для узких клиновых ремней  
SPA с коническим отверстием

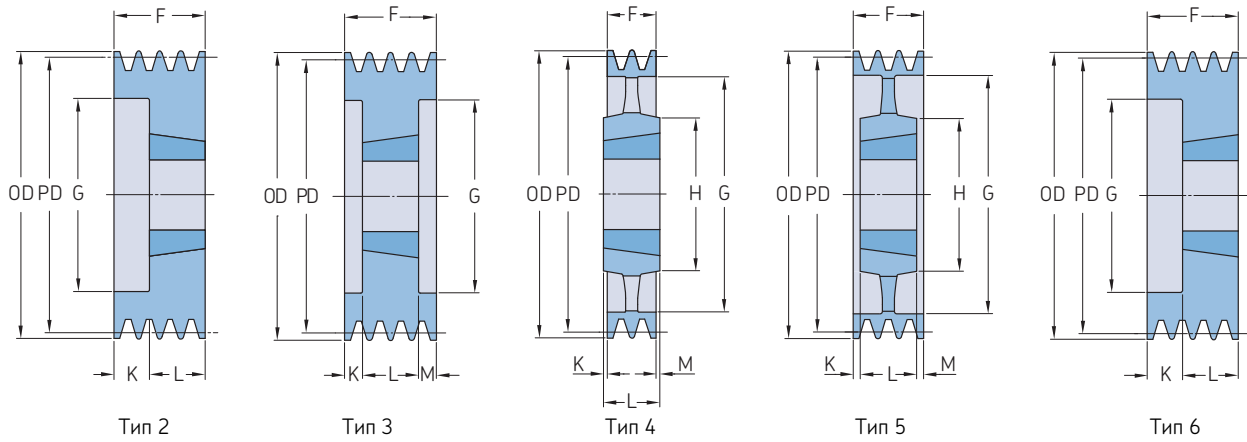

Профиль	Количество ручьев	Диаметр делительной окружности PD	Тип	Номер втулки	Размеры Наружный диаметр OD	B		F	G	K	L	M	H	Масса*	Обозначение		
						Мин.	Макс.										
		мм			мм											кг	
SPA	1	315	4	2012	320,5	14	50	20	280	-	32	12,0	112	7,2	PHP 1SPA315TB		
		355	4	2012	360,5	14	50	20	320	-	32	12,0	112	7,6	PHP 1SPA355TB		
		400	4	2012	405,5	14	50	20	365	-	32	12,0	112	7,9	PHP 1SPA400TB		
		450	4	2012	455,5	16	60	20	415	-	32	12,0	112	8,4	PHP 1SPA450TB		
	500	4	2517	505,5	16	60	20	465	-	45	12,0	112	9,4	PHP 1SPA500TB			
		630	4	2517	635,5	16	60	20	595	-	45	12,0	112	13,1	PHP 1SPA630TB		
	SPA	2	63	6	1008	68,5	9	28	35	33	13,0	22	-	-	0,6	PHP 2SPA63TB	
			67	6	1108	72,5	9	28	35	37	13,0	22	-	-	0,4	PHP 2SPA67TB	
			71	6	1108	76,5	9	28	35	40	13,0	22	-	-	0,5	PHP 2SPA71TB	
			75	6	1108	80,5	9	28	35	44	13,0	25	-	-	0,7	PHP 2SPA75TB	
80			6	1210	85,5	11	32	35	47	10,0	25	-	-	0,6	PHP 2SPA80TB		
85			6	1210	90,5	11	32	35	50	10,0	25	-	-	0,7	PHP 2SPA85TB		
90			6	1610	95,5	14	42	35	60	10,0	25	-	-	0,7	PHP 2SPA90TB		
95			6	1610	100,5	14	42	35	64	10,0	25	-	-	0,9	PHP 2SPA95TB		
100			6	1610	105,5	14	42	35	70	10,0	25	-	-	1,1	PHP 2SPA100TB		
106			6	1610	111,5	14	42	35	76	10,0	25	-	-	1,2	PHP 2SPA106TB		
		112	6	1610	117,5	14	42	35	80	10,0	25	-	-	1,4	PHP 2SPA112TB		
		118	6	1610	123,5	14	42	35	86	10,0	25	-	-	1,6	PHP 2SPA118TB		
		125	6	1610	130,5	14	42	35	90	10,0	25	-	-	1,9	PHP 2SPA125TB		
		132	6	2012	137,5	14	50	35	98	3,0	32	-	-	2,1	PHP 2SPA132TB		
		140	6	2012	145,5	14	50	35	106	3,0	32	-	-	2,6	PHP 2SPA140TB		
		150	6	2012	155,5	14	50	35	116	3,0	32	-	-	3,2	PHP 2SPA150TB		
		160	6	2012	165,5	14	50	35	125	3,0	32	-	-	3,8	PHP 2SPA160TB		
		170	6	2012	175,5	14	50	35	135	3,0	32	-	-	4,5	PHP 2SPA170TB		
		180	7	2012	185,5	14	50	35	148	2,0	32	2,0	100	5,2	PHP 2SPA180TB		
		190	7	2012	195,5	14	50	35	158	2,0	32	2,0	100	4,4	PHP 2SPA190TB		
		200	8	2517	205,5	16	60	35	165	5,0	45	5,0	120	4,9	PHP 2SPA200TB		
		212	4	2517	217,5	16	65	35	177	5,0	45	5,0	120	5,8	PHP 2SPA212TB		
		224	4	2517	229,5	16	60	35	189	-	45	10,0	120	6,6	PHP 2SPA224TB		
		250	4	2517	255,5	16	60	35	215	5,0	45	5,0	120	6,8	PHP 2SPA250TB		
		280	4	2517	285,5	16	60	35	245	-	45	10,0	120	8,3	PHP 2SPA280TB		
		315	4	2517	320,5	16	60	35	280	-	45	10,0	120	10,2	PHP 2SPA315TB		
		355	4	2517	360,5	16	60	35	320	-	45	10,0	120	10,5	PHP 2SPA355TB		
		400	4	2517	405,5	16	60	35	365	-	45	10,0	120	11,3	PHP 2SPA400TB		
		450	4	2517	455,5	16	60	35	465	-	45	10,0	120	15,0	PHP 2SPA450TB		
		500	4	2517	505,5	16	60	35	525	-	51	16,0	150	18,7	PHP 2SPA500TB		
	630	4	3020	635,5	25	75	35	595	8,0	51	8,0	150	22,0	PHP 2SPA630TB			
SPA	3	71	6	1108	76,5	9	28	50	40	28,0	22	-	-	0,7	PHP 3SPA71TB		
		75	6	1108	80,5	9	28	50	44	28,0	25	-	-	0,8	PHP 3SPA75TB		
		80	6	1210	85,5	11	32	50	47	25,0	25	-	-	0,9	PHP 3SPA80TB		
		85	6	1210	90,5	11	32	50	50	25,0	25	-	-	1,0	PHP 3SPA85TB		
		90	6	1610	95,5	14	42	50	60	25,0	25	-	-	1,0	PHP 3SPA90TB		
		95	6	1610	100,5	14	42	50	64	25,0	25	-	-	1,2	PHP 3SPA95TB		
		100	2	1610	105,5	14	42	50	70	-	25	25,0	-	1,3	PHP 3SPA100TB		
		106	2	1610	111,5	14	42	50	76	-	25	25,0	-	1,6	PHP 3SPA106TB		
		112	6	2012	117,5	14	50	50	83	18,0	32	-	-	1,6	PHP 3SPA112TB		
		118	2	2012	123,5	14	50	50	86	-	32	18,0	-	1,9	PHP 3SPA118TB		
		125	2	2012	130,5	14	50	50	92	-	32	18,0	-	2,3	PHP 3SPA125TB		
		132	2	2012	137,5	14	50	50	98	-	32	18,0	-	2,6	PHP 3SPA132TB		
		140	6	2517	145,5	16	60	50	106	5,0	45	-	-	2,9	PHP 3SPA140TB		
		150	6	2517	155,5	16	60	50	116	5,0	45	-	-	3,7	PHP 3SPA150TB		
		160	6	2517	165,5	16	60	50	126	5,0	45	-	-	4,5	PHP 3SPA160TB		

\* Масса без втулки.  
Нефункциональные размеры могут незначительно изменяться.